



Price List 2021

Bringing nature's  
balance indoors



heating & cooling solutions



## Editorial

Panasonic – leading the way in Heating and Cooling. With more than 50 years of experience, selling to more than 120 countries around the world, Panasonic is one of the leaders in the heating and cooling sector.


**Panasonic: Eco & smart ideas for a sustainable lifestyle.**

A better life, a better world. Panasonic is creating a safe and secure society with clean energy.




**A desire to create things of value.**

Panasonic has constantly added to its guarantee for innovation, taking tomorrow's technologies and applying them to today's needs.



**Bringing nature's balance indoors.**

nanoe™ X, technology with the benefits of hydroxyl radicals.

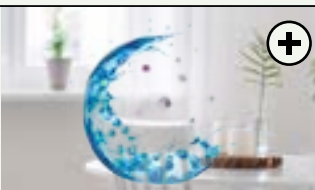

**PRO Club. The professional website of Panasonic.**

Panasonic has an impressive range of support services for designers, specifiers, engineers and distributors working in the heating and cooling markets.



## Commercial

The commercial range is constantly expanding so that you can always offer your clients the optimal solutions: high performance, silent machines and a complete range of ducts, cassettes and ceiling installations.

**New PACi NX Series.**

This new series has been developed with 3 wired method and communication. It makes it simple and easy to replace old systems with 3 wire connections, which is prevalent in many systems.



**nanoe™ X, improving protection 24/7.**

nanoe™ X technology brings nature's detergent – hydroxyl radicals – indoors, so that hard surfaces, soft furnishings, and the indoor environment can be a cleaner and pleasant place to be, whether at home, at work, or visiting, shops, restaurants etc.




**New adaptive ducted unit - PF3.**

New adaptive ducted - PF3 has been completely re-designed to provide better flexibility. The vertical installation is newly available with powerful external static pressure (maximum 150 Pa).



**CONEX. New devices and apps.**

CONEX provides comfort and control for varying user needs. Accessible, flexible and scalable with different controllers and apps. Perfectly meeting requirements of modern controls for end user, installer and service.




## Domestic

Panasonic has developed a range of domestic products designed for you and your clients.

**New Etherea: Welcome to your new home.**

Designed to produce the ultimate comfort and performance for homeowners, the new Etherea is a worthy addition to any indoor environment.

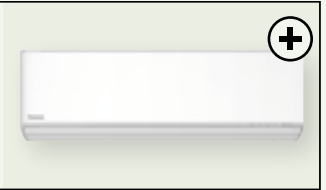


**nanoe™ X, improving protection 24/7.**

nanoe™ X technology brings nature's detergent – hydroxyl radicals – indoors, so that hard surfaces, soft furnishings, and the indoor environment can be a cleaner and pleasant place to be.



**Simple installation and easy maintenance.**

The whole domestic range has been meticulously designed for simple, stress-free installation and ongoing maintenance.



**Voice Control.**

Control without boundaries and get hands-free help to fully access the features of your air conditioners. Maximising your cooling comfort is now a breeze with our Network-Enabled Air Conditioners with Panasonic's Comfort Cloud and Voice Control.




## VRF Systems

The VRF industrial range considerably improves efficiency so even large buildings can benefit from a high-level of comfort with less energy consumption.

**New Mini ECOi LZ2 Series R32.**

The new Mini ECOi LZ2 Series utilizes environmentally friendly R32 refrigerant, reducing the total amount of refrigerant by 20 % and more, resulting in lower GWP, reduced by 75 %.




**nanoe™ X.**

Panasonic's nanoe™ X technology brings nature's detergent – hydroxyl radicals – indoors to help improve protection 24/7. Available in 4 way 90x90 cassette, floor console and new adaptive ducted unit.



**Refrigerant leak detector alarm.**

The optional leak detector supports direct connection to the Panasonic indoor units designed for R32 refrigerant. The compressors are stopped and indoor unit fans start to circulate air in order to meet the requirements of the regulations related to refrigerant.



**AC Cloud.**


Panasonic AC Smart Cloud provides building mapping, remote monitoring, error notification and schedule setting for site managers. Panasonic AC Service Cloud help maintenance companies to manage multiple sites with remote checking and advance failure prediction functions.



## Chiller

Panasonic introduces the new ECOi-W heat pumps and cooling only chiller series. These new series provides a wide variety of HVAC system solutions, to meet all of your residential, commercial and industrial needs.

**ECOi-W cooling only.**  
High seasonal efficiency with the line-up from 20 kW to 210 kW. Fully customisable design gives high flexibility for commercial applications.




**Explore the new range of fan coils.**  
Designed with user in mind, perfectly designed to adapt to any installation. Providing comfort to hotels, shops, restaurants, offices or residential applications.



**New fan coil controller.**  
Controller with sophisticated designs, provide a user friendly interface while enabling an easy and low cost integration to building management systems.




**BMS integration.**  
Modbus RTU is included as standard in full range and additional optional BMS connection by Modbus and BACnet is also available.




## Refrigeration

Panasonic condensing units with natural refrigerant. Panasonic is now introducing the environmentally friendly CO<sub>2</sub> condensing units for commercial refrigeration.


**Natural refrigerant CO<sub>2</sub>.**  
CO<sub>2</sub> is a very attractive refrigerant from an environmental perspective. Zero ODP and "GWP" (Global Warming Potential) = 1 means natural substance in the atmosphere.




**CO<sub>2</sub> Condensing units CR Series by trusted technology.**  
CR Series are made in Japan with an excellent quality control established by skilled factory team.



**New unit 7,5 kW MT Type.**  
Medium temperature operation (evaporation temperature set point range -20 ~ -5 °C). Maximum cooling capacity: 7,4 kW\* (ET -10 °C AT 32°). Slim & light unit with 1 fan. Heat recovery port available.



**Modbus compatibility with monitoring system.**  
Panasonic CO<sub>2</sub> condensing units can be supervised by major monitoring system such as CAREL, Eliwell and Danfoss.



## Conditions & Conversion

### Nominal and UK conditions

Nominal capacities (kW) specified in this price book are calculated under ISO-T1 (JIS) standard conditions as follows:

### Cooling

Indoor temperature 27°CDB, 19°CWB  
Outdoor temperature 35°CDB

### Heating

Indoor temperature 20°CDB  
Outdoor temperature 7°CDB, 6°CWB

UK cooling capacities (kW) specified in this price book are calculated under the following conditions:

Indoor temperature 23°CDB, 16° CWB  
Outdoor temperature 30°CDB

UK heating capacities (kW) specified in this price guide are calculated under the following conditions:

Indoor temperature: 20°CDB  
Outdoor temperature: 0°CWB

### Electrical

Information relating to local power supplies are shown for guidance only and must be subject to IEE regulations as well as site requirements. All three phase supplies to be TPNE.

### Energy labelling

All ENER - Lot 10 information is available at [http://www.panasonicproclub.com/GB\\_en/tools/energy-label-generator/](http://www.panasonicproclub.com/GB_en/tools/energy-label-generator/)

### Pipe size

1/4in = 6.35mm  
3/8in = 9.52mm  
1/2in = 12.70mm  
5/8in = 15.88mm  
3/4in = 19.05mm  
7/8in = 22.22mm  
11/8in = 28.58mm  
13/8 = 34.93mm

### Conversion data

kW x 3412 = btu/h  
°C x 1.8 + 32 = °F  
l/s x 3.6 = m<sup>3</sup>/h  
bar x 14.51 = psi  
m<sup>2</sup> x 10.76 = ft<sup>2</sup>



### Quality Management System Certificate



### Environmental Management System Certificate



# Panasonic: Eco & smart ideas for a sustainable lifestyle

A better life, a better world.

Panasonic is creating a safe and secure society with clean energy.



## Solar Power Generator

HIT solar cells achieve maximum output even on smaller roofs.

## Home AV

Panasonic offers a wide range of energy saving home equipment to fulfil a sustainable and comfortable lifestyle.

## Heat Pump

The Aquarea Heat Pump is part of a new generation of heating systems that use a renewable, free energy source: air, to heat or cool the home and to produce hot water.

## Fuel Cell

The Panasonic Fuel Cell is an energy-creating device, which generates electricity and heat at the same time with chemical reaction between hydrogen extracted from natural gas and oxygen.

## Solar Power Generator

Our mobility space can be connected to our HIT solar panels – with the help from our storage batteries.

## LED Lamps


Expertise gathered over years of research and development has enabled Panasonic to provide a renaissance in energy saving home LED lighting.

## Home Appliances

Panasonic is globally committed to develop products with minimised environmental impact. Panasonic delivers home appliances such as refrigerators and washing machines that incorporate the latest energy-efficient technology.

## Storage Battery

The battery stores the energy generated by a combination of solar power and fuel cells to ensure a constant supply of electricity on demand.

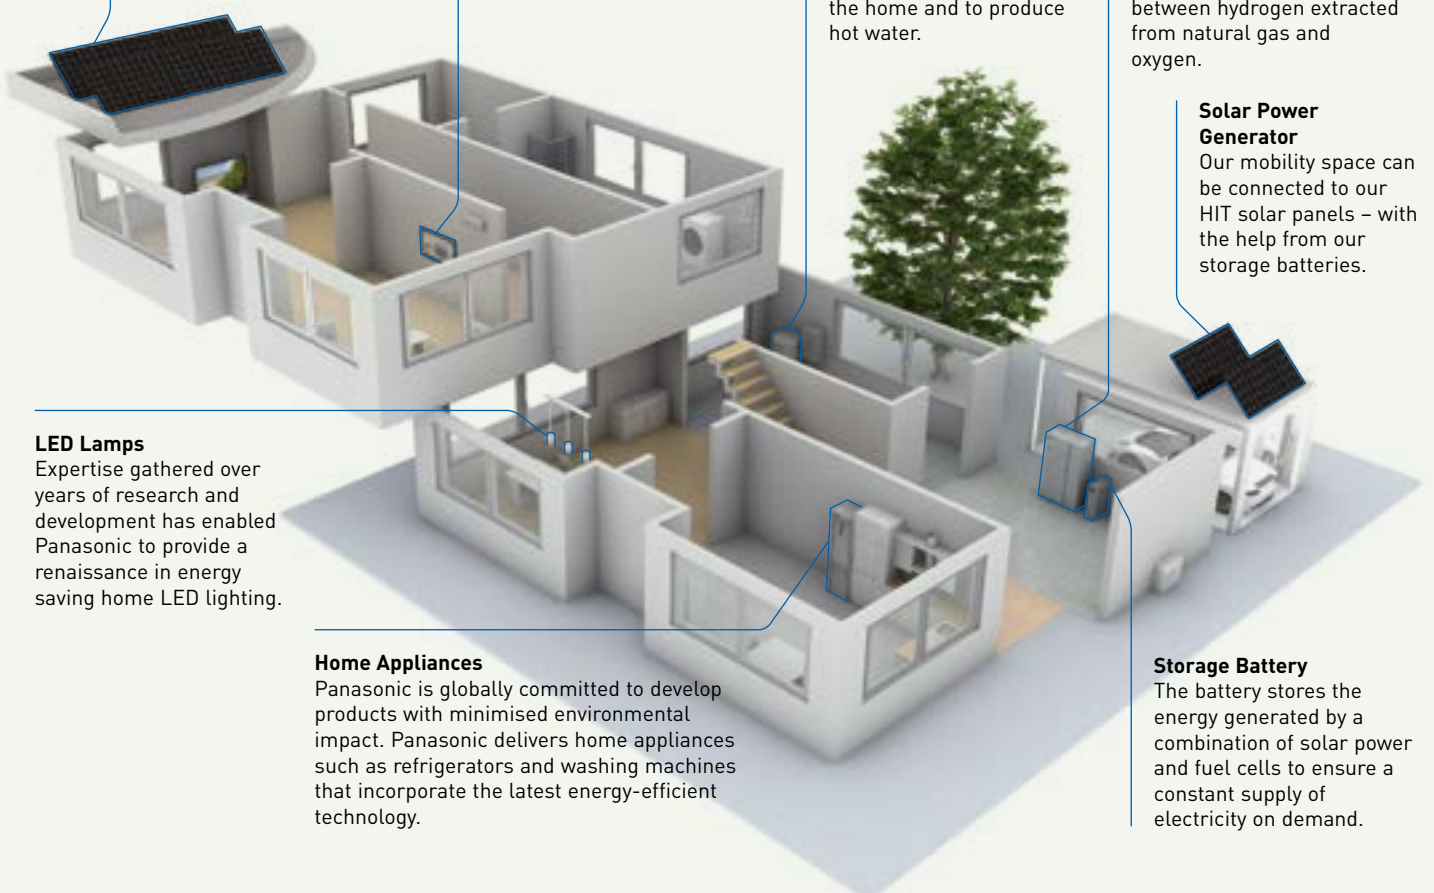



[www.future-living-berlin.com](http://www.future-living-berlin.com)

**FUTURE LIVING®  
BERLIN**



### Smart City Quarter Berlin

#### **A European Lighthouse Project for Smart Home & Connected Life. Future Living® Berlin.**

The building project Future Living® Berlin is a future model for interconnected urban district. Since 2013 GSW Sigmaringen and Unternehmensgruppe Krebs are developing a model for future living – based on their long term expertise in real estate business and in cooperation with leading international technology companies. In spring 2019 first residents will move into the new quarter. Future Living® Berlin is making use of the increasing possibility to interconnect products and services. Based on this chance smart and intelligent solutions for future living as well for the single apartments as for the quarter are developed. These solutions are enabling residents to use online services in their intelligent housing environment. Based on these opportunities a concept of living for daily routine is developed offering residents comfort, security and time saving.

A special enhancement of Future Living® Berlin is the pre-configuration for different apartments by experts that enable residents to move into a “ready to go” apartment and be directly supported in their daily routines in an intelligent way. By using one central app or native language single apartments can be steered, adopted and individually expanded by future smart products. Cross-linkage of products and technologies provides all residents with a simple access for an exclusive community

care sharing in the residential quarter which is, of course, based on e-mobility and part of an holistic energy concept containing photo-voltaic systems and battery storage. Cooperating with leading technology companies as project partners a continuous and technological progression is guaranteed in the future. Including residents and learning from their usage data participating partner a ready and enabled to improve the offered solutions pointedly further more.

Beside Future Living® Homes there is Future Living® Dialog offering extensive information and use cases for the general public. The project with it's innovative aims is also representing for sustainability and social solutions. Affordable rental and ancillary rental costs result in apartments available for many target groups. Future Living® Berlin is aiming for conceptional and architectural answers for some of the big challenges of our society as demographical changes, energy turnaround and changing mobility manners. With it's comprehensive solution approach it is unique in Europe.

**Demographic change, energy revolution and mobility change. We offer solutions for the challenges of our time.**

# A desire to create things of value

**"Recognising our responsibilities as industrialists, we will devote ourselves to the progress and development of society and the well-being of people through our business activities, thereby enhancing the quality of life throughout the world."**

Panasonic Corporation's Basic Management Objective, formulated in 1929 by the company's founder, Konosuke Matsushita.



Panasonic launches the first highly efficient air-to-water heat pump in Japan



Introduces world's first simultaneous 3-Pipe heating/cooling VRF System.



Starts production of absorption chillers.



1958

1971

1973

1975

1985

1989



Panasonic becomes one of the first Japanese air conditioner manufacturers in Europe.



First room air conditioner launched for domestic installation.



Introduces first GHP (gas heat pump) VRF air conditioner.

New Panasonic GHP units. The gas-driven VRF Systems are ideal for projects where power restrictions apply.



Panasonic introduces a new Chiller series which is named as ECOi-W.



World's first air conditioner equipped with nanoe™



New VRF Systems ECOi EX with extraordinary energy saving performance.



2008

2010

2012

2015

2016

2018

2019

Looking ahead



New Aquarea. Panasonic introduces Aquarea, an innovative new, low-energy system in Europe.



The first Hybrid System with VRF and GHP in Europe.



CO<sub>2</sub> condensing units in Europe. The ideal solution for supermarkets, shops and gas stations.



nanoe™ X, technology with the benefits of hydroxyl radicals. Improving protection 24/7.

# Bringing nature's balance indoors



## nanoe™ X, technology with the benefits of hydroxyl radicals.

In today's health-conscious world, we care about taking exercise, we care about what we eat and what we touch, we also care about what we breathe – and technology exists to bring good outdoor air, indoors.




**Abundant in nature, hydroxyl radicals (also known as OH radicals) have the capacity to inhibit pollutants, viruses, and bacteria to clean and deodorise. nanoe™ X, technology can bring these incredible benefits indoors so that hard surfaces, soft furnishings, and the indoor environment can be a cleaner and pleasant place to be, whether at home, at work, or visiting hotels, shops, restaurants etc.**

### Panasonic's nanoe™ X technology takes this a step further and brings nature's detergent – hydroxyl radicals – indoors to help create an ideal environment

Thanks to the nanoe™ X properties, several types of pollutants can be inhibited such as certain types of bacteria, viruses, mould, allergens, pollen and certain hazardous substances.



nanoe™ X reliably reaches pollutants.




Hydroxyl radicals denature pollutants' proteins.



Pollutants activity is inhibited.

### What is unique about nanoe™ X?

Hydroxyl radicals inhibit pollutants, certain types of viruses, and bacteria to clean and deodorise. Thanks to this advanced technology, even tightly woven fabrics can be treated using this solution, meaning that curtains, blinds, carpets and furniture can all benefit from this technology to inhibit hazardous substances – including on hard surfaces and, of course, the air that we breathe.



Microscopic Scale. At one billionth of a metre, nanoe™ X is much smaller than steam and can deeply penetrate cloth fabrics to deodorise.



Contained in tiny water particles, nanoe™ X has a longer lifespan to spread easily around the room.



nanoe™ X Generator Mark 2 produces 9.6 trillion hydroxyl radicals per second. Greater amounts of hydroxyl radicals contained in nanoe™ X lead to higher performance on inhibition of pollutants.



This image shows nanoe™ X Generator Mark 2.

No maintenance, no replacement required. nanoe™ X is a filter free solution that does not require maintenance, as its atomisation electrode is enveloped with water during its generation process and it is made with Titanium.



## 7 effects of nanoe™ X – Panasonic unique technology

### Deodorises



Odours

### Capacity to inhibit 5 types of pollutants



Bacteria and viruses



Mould



Allergens



Pollen



Hazardous substances



Skin and hair

\* Refer to <https://aircon.panasonic.eu> for more details and validation data.

## nanoe™ X, internationally-validated technology in testing facilities




The effectiveness of nanoe™ X technology has been tested by 3rd party laboratories in Germany, France, Denmark, Malaysia and Japan.

The nanoe™ X performance varies depending on the room size, environment and usage and it may take several hours to reach the full effect. nanoe™ X is not medical device, local regulations on building design and sanitary recommendations must be followed.

Test results conducted under controlled laboratory conditions. Performance of nanoe™ X might differ in real life environment.

	Tested contents		Result	Capacity	Time	Testing organisation	Report No.
AIRBORNE	Virus	Bacteriophage ̢X174	99,7 % inhibited	Approx. 25 m³	6 h	Kitasato Research Center for Environmental Science	24_0300_1
	Bacteria	Staphylococcus aureus	99,9 % inhibited	Approx. 25 m³	4 h	Kitasato Research Center for Environmental Science	2016_0279
ADHERED	Virus	SARS-CoV-2	99,9 % inhibited	45 L	2 h	Texcell (France)	1140-01 A1
		Feline Coronavirus	99,3 % inhibited	45 L	2 h	Yamaguchi University Faculty of Agriculture	
		Xenotropic murine leukemia virus	99,999 % inhibited	45 L	6 h	Charles River Biopharmaceutical Services GmbH	
		Influenza (H1N1 subtype)	99,9 % inhibited	1 m³	2 h	Kitasato Research Center for Environmental Science	21_0084_1
		Bacteriophage ̢X174	99,80% inhibited	25 m³	8 h	Japan Food Research Laboratories	13001265005-01
	Bacteria	Staphylococcus aureus	99,9 % inhibited	20 m³	8 h	Danish Technological Institute	868988
	Pollen	Ambrosia pollen	99,4 % inhibited	20 m³	8 h	Danish Technological Institute	868988
		Cedar	97 % inhibited	Approx. 23 m³	8 h	Panasonic Product Analysis Center	4AA33-151001-F01
Odours	Cigarette smoke odour	Odour intensity reduced by 2,4 levels	Approx. 23 m³	0,2 h	Panasonic Product Analysis Center	4AA33-160615-N04	

## First nanoe™ device was developed by Panasonic in 2003

Generator	nanoe™	nanoe™ X	
	2003	Mark 1 - 2016	Mark 2 - 2019
	480 billion hydroxyl radicals/sec	4,8 trillion hydroxyl radicals/sec	9,6 trillion hydroxyl radicals/sec
Ion particle structure		<b>10x times</b> 	<b>20x times</b> 

## Panasonic Heating & Cooling Solutions is incorporating nanoe™ technology in a wide range of equipment

### Home.

Split and Multi Split. Built-in nanoe X Generator Mark 2.



**Wall-mounted Etherea Z.**  
CS-(M)Z\*\*XKEW. 7 capacities: 1,6 - 7,1 kW.

**Wall-mounted Etherea XZ.**  
CS-XZ\*\*XKEW. 4 capacities: 2,0 - 5,0 kW.

Floor console. Built-in nanoe X Generator Mark 1.



**Floor console.**  
CS-Z\*\*UFEAW. 3 capacities: 2,5 - 5,0 kW.

### Commercial.

PACi. Built-in nanoe X Generator Mark 1.




**4 Way 90x90 cassette.**  
S-\*\*\*\*PU3E. 7 capacities: 3,5 - 14,0 kW.

PACi. Built-in nanoe X Generator Mark 2.



**Adaptive ducted unit.**  
S-\*\*\*\*PF3E. 7 capacities: 3,5 - 14,0 kW.



**Wall-mounted.**  
S-\*\*\*\*PK3E. 5 capacities: 3,5 - 10,0 kW.


VRF. Built-in nanoe™ X.



**nanoe X Generator Mark 1.**  
U2 Type 4 way 90x90 cassette.  
S-\*\*\*MU2E5B. 11 capacities:  
2,2 - 16,0 kW.



**nanoe X Generator Mark 2.**  
F3 Type adaptive duct.  
S-\*\*\*MF3E5B. 12  
capacities: 1,5 - 16,0 kW.



**nanoe X Generator Mark 1.**  
Floor console.  
S-\*\*MG1E5N. 5  
capacities: 2,2 - 5,6 kW.

## nanoe™ X: improving protection 24/7

# PRO Club. The professional website of Panasonic

Panasonic, a partner with the knowledge and experience to achieve your objectives and green needs.



Panasonic has an impressive range of support services for designers, specifiers, engineers and distributors working in the heating and cooling markets. Panasonic PRO Club is the online tool which makes your life easier! You just have to register and a lot of functionalities are freely available to you, where ever you are, from your computer or smartphone!

## VRF Designer

Building on the success of the ECOi VRF Designer software, this package provides air conditioning system designers, installers and dealers with a program to design and size projects for Panasonic's VRF ranges.



## Aquarea Designer

Panasonic provides bespoke software helping system designers, installers and dealers to very quickly design and size systems, create wiring diagrams and issue bills of quantities at the push of a button.



## Panasonic helps you to calculate the system label

From 26th September 2015, installers can be assured that all products manufactured after this date will be sold with the required ErP labels which will aid installers with their paperwork. While it is the manufacturer's responsibility to issue their products with the required labels, the installers will need to calculate and issue an efficiency label for the entire heating system. Whether installing a new heating system or installing new boilers, controls or renewables into an existing system, it is, and will continue to be, the installer's responsibility to calculate and issue efficiency labels. Calculators which assist installers with this process are available on the Panasonic Heating and Cooling Solutions website.



**PRO Club**  Download on [www.panasonicproclub.com](http://www.panasonicproclub.com) or connect simply with your smartphone to the PRO Club using this QR



## Integrated technology that permits better work, easy installation, high efficiency performance, and energy savings

Our main targets are the distributed services and B2B-integrated solutions.

Panasonic provides a single point of contact for the design and maintenance of your system, making things easy for you. Given our experience in processes, technologies and complex business models, we can offer you effective solutions that reduce costs, whilst also being efficient, user-friendly, reliable and innovative. Another advantage we offer to our clients is a support service for systems integration projects, which we provide through our wide range of services and solutions. As a global company, we have at our disposal the financial, logistical and technical resources to develop complex and wide-ranging solutions, both at country and international level by implementing them both on-time and on-budget.



Bulgaria's stand-out residential building with efficient HVAC solution. **Aquarea**



The Hotel Vincci Gala with efficiency class A, up to 70 % save energy. Barcelona, Spain. **ECOi - ECO G**



IKEA "Click and Collect" store in city centre. Birmingham, UK. **ECOi - ECO G**



9 high quality homes in Whittle-Le-Woods near Chorley, UK. **Aquarea**



Andalucia Technology Park. Offices of high energetic efficiency. Spain. **ECOi**



14 bubble style domes to bring a 180-degree transparent window to the nature. Belfast, Ireland. **Aquarea**



Madrid's hotel Only You Atocha. The hotel has 206 rooms distributed over seven floors. **ECO G**



LIAIGRE showroom, well-known as a luxury design architect in Paris, France. **ECOi**



Marina Village Greystones. 205 apartments and 153 houses. Ireland. **Aquarea**



ITK Engineering GmbH. An innovative office building located in Germany. **ECOi - PACi**



Zalando's solution for its warehouse office conversion at Grand Canal Quay, Dublin. **ECOi**



NHS Canford house clinic, Bournemouth, UK. **VRF**

To find out more: [www.aircon.panasonic.eu](http://www.aircon.panasonic.eu)



—ETHEREA—

## Panasonic domestic air to air heat pump

Panasonic has developed a range of products designed for you, better than ever before. Above all, it is also a range for air conditioning professionals, such as yourself, thanks to its broad range of products which are capable of conditioning rooms of all sizes – always with optimal efficiency and incomparable ease of installation.

Bringing nature's balance indoors → 14

Panasonic Comfort Cloud App. Convenient centralised control → 15

Voice Control. Words do more than actions → 15

Domestic air conditioner R32 range → 16

Super-compact design → 18

### Wall-mounted

FZ super-compact • R32 → 19

TZ super-compact • R32 → 21

Etherea • R32 → 23

Professional -20 °C • R32 → 24

### More options for your home

Floor console • R32 → 25

4 Way 60x60 cassette • R32 → 26

Low static pressure hide-away • R32 → 27

Multi Split and Free Multi System → 28

Compare solutions → 33

Control and connectivity → 34


Accessories and control → 35

# Bringing nature's balance indoors



## nanoe™ X, technology with the benefits of hydroxyl radicals.

Abundant in nature, hydroxyl radicals (also known as OH radicals) have the capacity to inhibit pollutants, viruses, and bacteria to clean and deodorise. nanoe™ X, technology can bring these incredible benefits indoors so that hard surfaces, soft furnishings, and the indoor environment can be a cleaner and pleasant place to be, whether at home, at work, or visiting hotels, shops, restaurants etc.

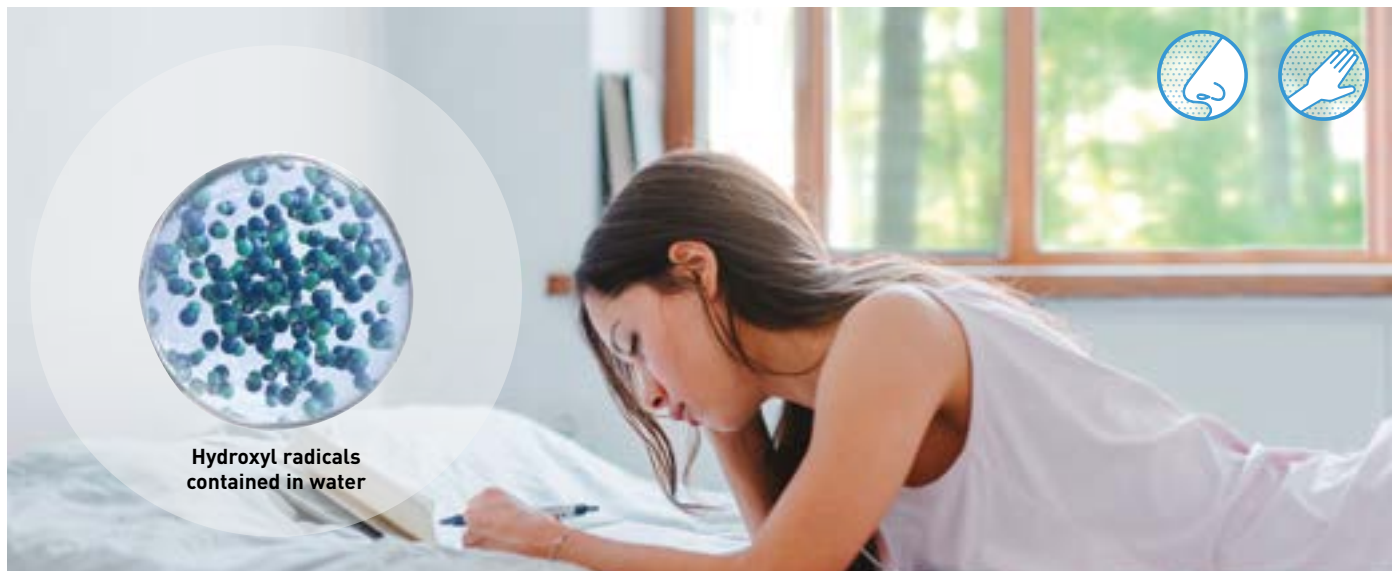

Hydroxyl radicals contained in water

### nanoe™ X, improving protection 24/7

#### Actively cleans your air and inhibits certain types of pollutants all day long.

nanoe™ X works together with heating or cooling function when you are at home and can work independently when you are away.

Give the air conditioning the strength to increase the protection at home with nanoe™ X technology and convenient control via the Panasonic Comfort Cloud App.



### Panasonic's nanoe™ X technology takes this a step further and brings nature's detergent – hydroxyl radicals – indoors to help create an ideal environment

Thanks to the nanoe™ X properties, several types of pollutants can be inhibited such as certain types of bacteria, viruses, mould, allergens, pollen and certain hazardous substances.

Deodorises	Capacity to inhibit 5 types of pollutants					Moisturises
Odours	Bacteria and viruses	Mould	Allergens	Pollen	Hazardous substances	Skin and hair
<p>The nanoe™ X performance varies depending on the room size, environment and usage and it may take several hours to reach the full effect. nanoe™ X is not medical device, local regulations on building design and sanitary recommendations must be followed.</p>						<p> REFER TO PAGE 9 FOR MORE DETAILS AND VALIDATION DATA</p>



### nanoe™ X: improving protection 24/7

#### Split and Multi Split. Built-in nanoe X Generator Mark 2.

Wall-mounted Etherea Z: CS-(M)Z\*\*XKEW. 7 capacities: 1.6 - 7.1 kW.

Wall-mounted Etherea XZ: CS-XZ\*\*XKEW. 4 capacities: 2.0 - 5.0 kW.

#### Floor console. Built-in nanoe X Generator Mark 1.

Floor console: CS-Z\*\*UFEAW. 3 capacities: 2.5 - 5.0 kW.



# Panasonic Comfort Cloud App. Convenient centralised control

Easily control and access all features of remote control anytime, anywhere.

## 1 Smart Control (In control of cooling comfort anytime, anywhere)

- **Connect & control operation:** 20 units per location and up to 10 different locations. Transform multiple remote controls into one device
- **Manage multiple units at once:** Turn on all AC units at the same time or by group settings. Set weekly timers for multiple units to cater to your daily routines

## 2 Smart Comfort (Easily manage your comfort and air quality)

- **Adjust set temperature:** Set temperature by monitoring real time indoor and outdoor temperatures
- **Pre-heat or cool:** Control your house or office comfort before you arrive!
- **nanoe™ X<sup>1)</sup>:** Activate nanoe™ X technology with the benefits of hydroxyl radicals

## 3 Smart Efficiency (More comfort with less wasted energy)

- **Energy usage analysis<sup>2)</sup>:** Monitor energy consumption based on different temperature settings
- **Energy usage comparison (day/week/month/year):** Compare energy usage history of AC units for better budget planning.


## 4 Smart Assist (Be informed of breakdowns)

- **Error codes notification and identification<sup>3)</sup>:** Launch the App to check error codes for effortless troubleshooting. Help technicians to easily identify the issues
- **User's control right:** Register multiple users. Set administrator rights and assign users access

1) nanoe™ X is available in certain series. 2) Estimated energy consumption data accuracy depends on power supply quantity. 3) Contact trained technicians to perform any repairing/service.



## Voice Control. Words do more than actions



Control without boundaries and get hands-free help to fully access the features of your air conditioners. Maximising your cooling comfort is now a breeze with our Network-Enabled Air Conditioners with Panasonic Comfort Cloud and Voice Control.



### Get multiple things done with your voice









Simplify your day with your personalised routine by grouping individual actions.

### Schedule your routine with your voice.

With the routine function, you can control multiple voice-controlled devices including our network-enabled air conditioners to help you with your personalised routine.







\* Google, Android, Google Play and Google Home are trademarks of Google LLC. Amazon, Alexa and all related logos are trademarks of Amazon.com, Inc. or its affiliates. Availability of Voice Assistant services varies depending on Country and Language. More information about set up procedures: <https://aircon.panasonic.com/connectivity/application.html>. Google Home and Alexa are compatible with the models shown in pages 16, 17.









# Domestic air conditioner R32 range

Page	Single split units	2.0 kW	2.5 kW	3.5 kW	4.2 kW	5.0 kW	6.0 kW	7.1 kW
P. 18	Wall-mounted FZ super-compact Inverter • R32 		CS-FZ25WKE CU-FZ25WKE	CS-FZ35WKE CU-FZ35WKE		CS-FZ50WKE CU-FZ50WKE	CS-FZ60WKE CU-FZ60WKE	
P. 20	Wall-mounted TZ super-compact Inverter • R32 	CS-TZ20WKEW CU-TZ20WKE	CS-TZ25WKEW CU-TZ25WKE	CS-TZ35WKEW CU-TZ35WKE	CS-TZ42WKEW CU-TZ42WKE	CS-TZ50WKEW CU-TZ50WKE	CS-TZ60WKEW CU-TZ60WKE	CS-TZ71WKEW CU-TZ71WKE
P. 22	<b>NEW</b> wall-mounted Etherea Inverter+ • R32 	CS-XZ20XKEW CU-Z20XKE	CS-XZ25XKEW CU-Z25XKE	CS-XZ35XKEW CU-Z35XKE		CS-XZ50XKEW CU-Z50XKE		
		CS-Z20XKEW CU-Z20XKE	CS-Z25XKEW CU-Z25XKE	CS-Z35XKEW CU-Z35XKE	CS-Z42XKEW CU-Z42XKE	CS-Z50XKEW CU-Z50XKE		CS-Z71XKEW CU-Z71XKE
P. 24	Wall-mounted Professional Inverter -20 °C • R32 		CS-Z25TKEA CU-Z25TKEA	CS-Z35TKEA CU-Z35TKEA	CS-Z42TKEA CU-Z42TKEA	CS-Z50TKEA CU-Z50TKEA		CS-Z71TKEA CU-Z71TKEA
P. 25	Floor console Inverter+ • R32 		CS-Z25UFEAW CU-Z25UBEA	CS-Z35UFEAW CU-Z35UBEA		CS-Z50UFEAW CU-Z50UBEA		
P. 26	4 Way 60x60 cassette Inverter • R32 		CS-Z25UB4EAW CZ-BT20EW CU-Z25UBEA	CS-Z35UB4EAW CZ-BT20EW CU-Z35UBEA		CS-Z50UB4EAW CZ-BT20EW CU-Z50UBEA	CS-Z60UB4EAW CZ-BT20EW CU-Z60UBEA	
P. 27	Low static pressure hide-away Inverter • R32 		CS-Z25UD3EAW CU-Z25UBEA	CS-Z35UD3EAW CU-Z35UBEA		CS-Z50UD3EAW CU-Z50UBEA	CS-Z60UD3EAW CU-Z60UBEA	





Page	Free Multi indoors	1.6 kW	2.0 kW	2.5 kW	3.5 kW	4.2 kW	5.0 kW	6.0 kW	7.1 kW
	<b>NEW</b> wall-mounted Etherea Inverter+								
P. 31			CS-XZ20XKEW	CS-XZ25XKEW	CS-XZ35XKEW		CS-XZ50XKEW		
		CS-MZ16XKE	CS-Z20XKEW	CS-Z25XKEW	CS-Z35XKEW	CS-Z42XKEW	CS-Z50XKEW		CS-Z71XKEW
	Wall-mounted TZ super-compact Inverter								
P. 31		CS-MTZ16WKE	CS-TZ20WKEW	CS-TZ25WKEW	CS-TZ35WKEW	CS-TZ42WKEW	CS-TZ50WKEW	CS-TZ60WKEW	CS-TZ71WKEW
	Floor console Inverter+								
P. 31			CS-MZ20UFEA	CS-Z25UFEAW	CS-Z35UFEAW		CS-Z50UFEAW		
	4 Way 60x60 cassette Inverter								
P. 31			CS-MZ20UB4EA CZ-BT20EW	CS-Z25UB4EAW CZ-BT20EW	CS-Z35UB4EAW CZ-BT20EW		CS-Z50UB4EAW CZ-BT20EW	CS-Z60UB4EAW CZ-BT20EW	
	Low static pressure hide-away Inverter								
P. 31			CS-MZ20UD3EA	CS-Z25UD3EAW	CS-Z35UD3EAW		CS-Z50UD3EAW	CS-Z60UD3EAW	

Page	Free Multi Outdoors	3.2 ~ 6.0 kW	3.2 ~ 6.0 kW	3.2 ~ 7.7 kW	4.5 ~ 9.5 kW	4.5 ~ 11.2 kW	4.5 ~ 11.5 kW	4.5 ~ 14.7 kW	4.5 ~ 18.3 kW
P. 30	Outdoor unit Free Multi System Z • R32								
		CU-2Z35TBE	CU-2Z41TBE	CU-2Z50TBE	CU-3Z52TBE	CU-3Z68TBE	CU-4Z68TBE	CU-4Z80TBE	CU-5Z90TBE

Page	Multi Wall TZ Outdoors	3.2~6.0 kW	3.2~7.7 kW	4.5 ~ 9.5 kW
P. 32	Outdoor unit Multi TZ for wall TZ indoors • R32			
		CU-2TZ41TBE	CU-2TZ50TBE	CU-3TZ52TBE


## Super-compact design

The unit's chassis has been carefully re-designed for simple, stress-free installation and ongoing maintenance.



### 1 Super-compact design

The compact design of the indoor units have a width of just 779mm. This allows for more installation possibilities, including the limited space above a door.

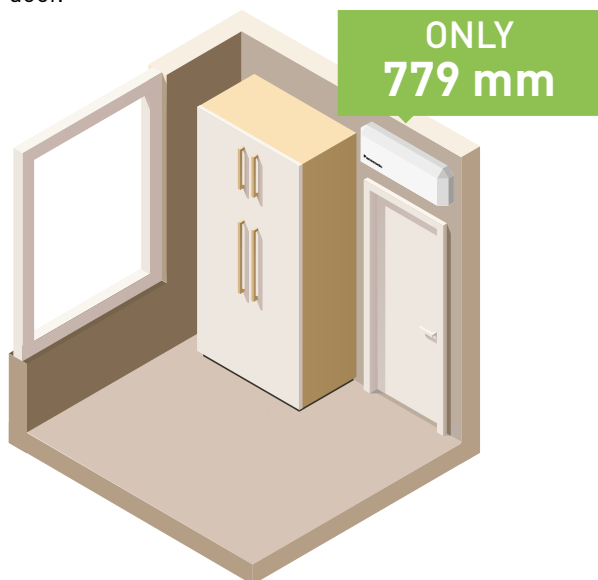

### 2 Simple installation

Thanks to advanced improvements, installation time has been dramatically decreased. The air conditioning models feature a reinforced installation plate, providing more stability and strength for a neatly fitted installation. With the newly built-in support, the unit is suitably designed for just one person to install. There is also a clear view and convenient access to the drain hose and cabling inserts. An increase of 13 mm has been achieved for piping so that installers can now easily ensure that the pipes and insulations are securely and neatly fitted.



### 3 Easy maintenance

Meticulously designed for both installer and user benefit, the unit features an easy to remove front grille for convenient access to the interior. The inner workings of the unit have also been redesigned to make maintenance quicker and easier. Electronics and wiring components are now on just one side of the unit to simplify maintenance.

### 4 Easy / hidden installation of the Wi-Fi adapter

The latest model features a dedicated space for a network adapter. Easy to plug in, the guided wire slots allow for clear, easy installation and can be neatly tucked away - simple and out of sight!

**Wall-mounted FZ super-compact Inverter • R32**

- Compact design with only 779 mm wide
- Cleaner air with PM2,5 Filter
- Super Quiet.
- Aerowings to control air draft direction
- High energy savings
- Cooling even at -10 °C
- Optional internet and voice control

Kit			KIT-FZ25-WKE	KIT-FZ35-WKE	KIT-FZ50-WKE	KIT-FZ60-WKE
Cooling capacity	Nominal (Min - Max)	kW	2.50 [0.85 - 3.00]	3.40 [0.85 - 3.90]	5.00 [0.98 - 5.40]	6.00 [0.98 - 6.50]
UK Cooling	[Total - Sensible]	kW	2.46 - 2.08	3.45 - 2.66	4.75 - 3.47	5.80 - 3.85
EER <sup>1)</sup>	Nominal (Min - Max)	W/W	3.68 [4.05 - 3.33]	3.18 [3.54 - 3.05]	3.03 [3.92 - 2.90]	3.03 [3.92 - 2.83]
<b>SEER <sup>2)</sup></b>			<b>6.20 A++</b>	<b>6.10 A++</b>	<b>6.50 A++</b>	<b>6.30 A++</b>
P <sub>design</sub> (cooling)		kW	2.50	3.40	5.00	6.00
Input power cooling	Nominal (Min - Max)	kW	0.68 [0.21 - 0.90]	1.07 [0.24 - 1.28]	1.65 [0.25 - 1.86]	1.98 [0.25 - 2.30]
Annual energy consumption <sup>3)</sup>		kWh/a	141	195	269	333
Heating capacity	Nominal (Min - Max)	kW	3.15 [0.80 - 3.60]	3.84 [0.80 - 4.40]	5.40 [0.98 - 7.50]	6.80 [0.98 - 8.00]
UK Heating	[Total - Sensible]	kW	2.17	2.74	4.50	4.80
Heating capacity at -7 °C		kW	2.14	2.60	4.58	5.10
COP <sup>1)</sup>	Nominal (Min - Max)	W/W	4.04 [4.21 - 3.46]	3.66 [4.10 - 3.41]	3.42 [4.67 - 3.06]	3.15 [4.26 - 3.02]
<b>SCOP <sup>2)</sup></b>			<b>4.20 A+</b>	<b>4.20 A+</b>	<b>4.10 A+</b>	<b>4.00 A+</b>
P <sub>design</sub> at -10 °C		kW	1.90	2.40	4.00	4.40
Input power heating	Nominal (Min - Max)	kW	0.78 [0.19 - 1.04]	1.05 [0.20 - 1.29]	1.58 [0.21 - 2.45]	2.16 [0.23 - 2.65]
Annual energy consumption <sup>3)</sup>		kWh/a	633	800	1366	1540
<b>Indoor unit</b>			<b>CS-FZ25WKE</b>	<b>CS-FZ35WKE</b>	<b>CS-FZ50WKE</b>	<b>CS-FZ60WKE</b>
Power source		V	230	230	230	230
Suggested fuse		A	10	10	16	16
Connection indoor / outdoor		mm <sup>2</sup>	4x1.5	4x1.5	4x2.5	4x2.5
Air flow	Cool / Heat	m <sup>3</sup> /min	10.5/11.1	10.8/11.3	12.5/13.2	12.7/13.6
Moisture removal volume		L/h	1.5	2.0	2.8	3.3
Sound pressure <sup>4)</sup>	Cool (Hi / Lo / Q-Lo)	dB(A)	37/26/20	38/30/20	44/37/34	45/37/34
	Heat (Hi / Lo / Q-Lo)	dB(A)	37/27/24	38/33/25	44/37/34	45/37/34
Dimension	H x W x D	mm	290 x 779 x 209	290 x 779 x 209	290 x 779 x 209	290 x 779 x 209
Net weight		kg	8	8	8	9
<b>Outdoor unit</b>			<b>CU-FZ25WKE</b>	<b>CU-FZ35WKE</b>	<b>CU-FZ50WKE</b>	<b>CU-FZ60WKE</b>
Air flow	Cool / Heat	m <sup>3</sup> /min	30.4/30.4	31.1/31.1	32.7/32.7	42.6/41.5
Sound pressure <sup>4)</sup>	Cool / Heat (Hi)	dB(A)	48/49	48/50	48/49	50/50
Dimension <sup>5)</sup>	H x W x D	mm	542 x 780 x 289	542 x 780 x 289	619 x 824 x 299	695 x 875 x 320
Net weight		kg	24	25	36	43
Pipe diameter	Liquid pipe	Inch (mm)	1/4 (6.35)	1/4 (6.35)	1/4 (6.35)	1/4 (6.35)
	Gas pipe	Inch (mm)	3/8 (9.52)	3/8 (9.52)	1/2 (12.70)	1/2 (12.70)
Pipe length range		m	3~15	3~15	3~15	3~30
Elevation difference (in/out) <sup>6)</sup>		m	15	15	15	15
Pipe length for additional gas		m	7.5	7.5	7.5	7.5
Additional gas amount		g/m	10	10	15	15
Refrigerant (R32) / CO <sub>2</sub> Eq.		kg / T	0.54/0.365	0.67/0.452	1.14/0.770	1.11/0.749
Operating range	Cool Min ~ Max	°C	-10 ~ +43	-10 ~ +43	-10 ~ +43	-10 ~ +43
	Heat Min ~ Max	°C	-15 ~ +24	-15 ~ +24	-15 ~ +24	-15 ~ +24
<b>Kit RRP</b>		€	<b>828</b>	<b>981</b>	<b>1271</b>	<b>1822</b>
<b>Indoor unit RRP</b>		€	317	369	496	684
<b>Outdoor unit RRP</b>		€	511	612	775	1138

Accessories		RRP €
<b>CZ-TACG1</b>	Wi-Fi adapter for smart control via Panasonic Comfort Cloud App	<b>120</b>
<b>CZ-CAPRA1</b>	RAC interface adapter for integration into P-Link	<b>190</b>

Accessories		RRP €
<b>CZ-RD514C</b>	Wired remote controller for wall-mounted and floor console	<b>125</b>

1) EER and COP calculation is based in accordance to EN14511. 2) Energy Label Scale from A+++ to D. 3) The annual energy consumption is calculated in accordance to EU/626/2011. 4) The sound pressure of the indoor unit shows the value measured of a position 1 m in front of the main body and 0,8 m below the unit. For outdoor unit 1 m in front and 1 m in rear side of main body. The sound pressure is measured in accordance with JIS C 9612. Q-Lo: Quiet mode. Lo: The lowest set fan speed. 5) Add 70 mm for piping port. 6) When installing the outdoor unit at a higher position than the indoor unit.



SEER and SCOP: For KIT-FZ50-WKE. SUPER QUIET: For KIT-FZ25-WKE and KIT-FZ35-WKE. INTERNET CONTROL: Optional.

Rating Conditions: Cooling Indoor 27 °C DB / 19 °C WB. Cooling Outdoor 35 °C DB / 24 °C WB. Heating Indoor 20 °C DB. Heating Outdoor 7 °C DB / 6 °C WB. [DB: Dry Bulb; WB: Wet Bulb]. Specifications subject to change without notice. For detailed information about ErP / Energy Labelling, please visit our websites [www.aircon.panasonic.eu](http://www.aircon.panasonic.eu) or [www.ptc.panasonic.eu](http://www.ptc.panasonic.eu).

# Wall-mounted TZ super-compact


The perfect air conditioner for the smallest spaces in your home.  
TZ with R32 refrigerant powerful and efficient.



An "excellent design" indicated by Good Design Award is a design which focusses on humanity, honesty, innovation, aesthetics and ethics. Panasonic's award-winning TZ proves to be a worthy addition to any home.

## 1 Super-compact design

The compact design of the indoor units have a width of just 779mm. This allows for more installation possibilities, including the limited space above a door.

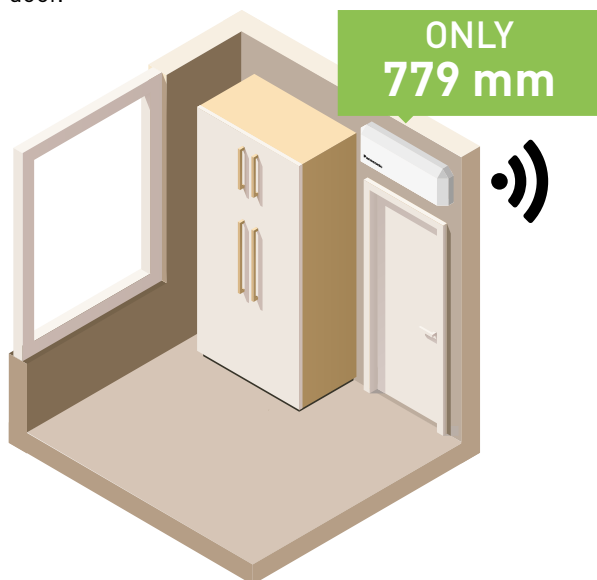

## 2 Built-in Wi-Fi and compatible with Voice Assistant

The unit is ready to connect to the internet and to be controlled by smartphone with Panasonic Comfort Cloud App. Control, monitor, and schedule with easy interface.

By connecting Panasonic Comfort Cloud the unit can be managed by Google Assistant and Amazon Alexa\*.

\* Amazon, Alexa and all related logos are trademarks of Amazon.com, Inc. or its affiliates. Google, Android, Google Play and Google Home are trademarks of Google LLC.

## 3 PM2,5

Particulate matter (PM2,5) can be found suspended in the air, including dust, dirt, smoke and liquid droplets. The filter can catch PM2,5 particles including hazardous pollutants as well as house dust and pollen and is able to maintain the air quality of the room.


## 4 Stylish infrared control

Enjoy innovative design at your fingertips with the new stylish and sleek Backlit Sky Controller. Bigger screen and easier to use.

## Silent ambient and relaxing atmosphere 20 dB(A)

We have succeeded in making one of the most silent air conditioners on the market. Panasonic Inverter air conditioner's indoor operating noise has been reduced as the Inverter constantly varies its output power to enable more precise temperature control.

\* KIT-TZ20-WKE, KIT-TZ25-WKE and KIT-TZ35-WKE: In the Quiet Mode during cooling operation with low fan speed.

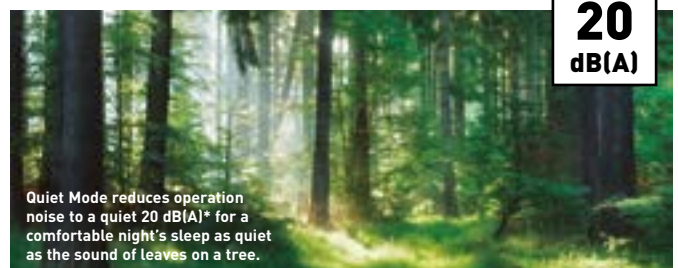

Quiet Mode reduces operation noise to a quiet 20 dB(A)\* for a comfortable night's sleep as quiet as the sound of leaves on a tree.

**Wall-mounted TZ super-compact • R32**

- Compact and elegant design only 779 mm wide (up to 5.0kW)
- Built-in Wi-Fi for instant connectivity via Panasonic Comfort Cloud App
- Compatible with Google Assistant and Amazon Alexa
- Stylish Sky remote controller
- Cleaner air with PM2,5 filter
- Super Quiet.
- Aerowings to control air draft direction
- High energy savings

Kit			KIT-TZ20-WKE	KIT-TZ25-WKE	KIT-TZ35-WKE	KIT-TZ42-WKE	KIT-TZ50-WKE	KIT-TZ60-WKE	KIT-TZ71-WKE
Cooling capacity	Nominal (Min - Max)	kW	2.00 [0.75 - 2.40]	2.50 [0.85 - 3.00]	3.50 [0.85 - 3.90]	4.20 [0.85 - 4.60]	5.00 [0.98 - 5.60]	6.00 [0.98 - 6.60]	7.10 [0.98 - 8.20]
UK Cooling	[Total - Sensible]	kW	1.98 - 1.72	2.48 - 2.09	3.47 - 2.65	4.17 - 2.87	4.97 - 3.83	5.90 - 4.47	7.00 - 4.80
EER <sup>1)</sup>	Nominal (Min - Max)	W/W	4.08 [4.17 - 4.00]	3.85 [4.05 - 3.41]	3.57 [3.62 - 3.36]	3.36 [3.62 - 2.80]	3.13 [3.92 - 2.95]	3.24 [3.92 - 2.87]	3.17 [2.33 - 2.98]
<b>SEER <sup>2)</sup></b>			<b>7.00 A++</b>	<b>7.00 A++</b>	<b>6.80 A++</b>	<b>6.40 A++</b>	<b>6.90 A++</b>	<b>6.80 A++</b>	<b>6.20 A++</b>
P <sub>design</sub> (cooling)		kW	2.00	2.50	3.50	4.20	5.00	6.00	7.10
Input power cooling	Nominal (Min - Max)	kW	0.49 [0.18 - 0.60]	0.65 [0.21 - 0.88]	0.98 [0.24 - 1.16]	1.25 [0.24 - 1.64]	1.60 [0.25 - 1.90]	1.85 [0.25 - 2.30]	2.24 [0.42 - 2.75]
Annual energy consumption <sup>3)</sup>		kWh/a	100	125	180	230	254	309	401
Heating capacity	Nominal (Min - Max)	kW	2.70 [0.70 - 3.60]	3.30 [0.80 - 4.10]	4.00 [0.80 - 5.10]	5.00 [0.80 - 6.80]	5.80 [0.98 - 7.50]	7.00 [0.98 - 8.20]	8.60 [0.98 - 9.90]
UK Heating	[Total - Sensible]	kW	2.21	2.47	3.18	3.43	4.55	5.00	5.34
Heating capacity at -7 °C		kW	2.14	2.70	3.30	3.90	4.62	4.90	6.13
COP <sup>1)</sup>	Nominal (Min - Max)	W/W	4.15 [4.24 - 3.53]	4.18 [4.21 - 3.66]	4.04 [4.10 - 3.70]	3.73 [4.10 - 3.33]	3.41 [4.67 - 3.26]	3.68 [4.67 - 3.57]	3.51 [2.45 - 3.47]
<b>SCOP <sup>2)</sup></b>			<b>4.60 A++</b>	<b>4.60 A++</b>	<b>4.60 A++</b>	<b>4.00 A+</b>	<b>4.50 A+</b>	<b>4.30 A+</b>	<b>4.00 A+</b>
P <sub>design</sub> at -10 °C		kW	1.90	2.40	2.80	3.60	4.00	4.40	5.50
Input power heating	Nominal (Min - Max)	kW	0.65 [0.17 - 1.02]	0.79 [0.19 - 1.12]	0.99 [0.20 - 1.38]	1.34 [0.20 - 2.04]	1.70 [0.21 - 2.30]	1.90 [0.21 - 2.30]	2.45 [0.40 - 2.85]
Annual energy consumption <sup>3)</sup>		kWh/a	578	730	852	1260	1244	1433	1925
<b>Indoor unit</b>			<b>CS-TZ20WKEW</b>	<b>CS-TZ25WKEW</b>	<b>CS-TZ35WKEW</b>	<b>CS-TZ42WKEW</b>	<b>CS-TZ50WKEW</b>	<b>CS-TZ60WKEW</b>	<b>CS-TZ71WKEW</b>
Power source		V	230	230	230	230	230	230	230
Suggested fuse		A	10	10	10	13	16	16	20
Connection indoor / outdoor		mm <sup>2</sup>	4x1.5	4x1.5	4x1.5	4x1.5	4x2.5	4x2.5	4x2.5
Air flow	Cool / Heat	m <sup>3</sup> /min	10.3/10.8	11.0/11.5	11.8/12.3	12.5/13.2	12.5/13.2	20.9/21.9	22.1/22.9
Moisture removal volume		L/h	1.3	1.5	2.0	2.4	2.8	3.3	4.1
Sound pressure <sup>4)</sup>	Cool (Hi / Lo / Q-Lo)	dB(A)	37/25/20	40/26/20	42/30/20	44/31/29	44/37/33	45/37/34	47/38/35
	Heat (Hi / Lo / Q-Lo)	dB(A)	38/26/22	40/27/22	42/33/22	44/35/28	44/37/33	45/37/34	47/38/35
Dimension	H x W x D	mm	290 x 779 x 209	290 x 779 x 209	290 x 779 x 209	290 x 779 x 209	290 x 779 x 209	302 x 1102 x 244	302 x 1102 x 244
Net weight		kg	8	8	8	8	8	13	13
<b>Outdoor unit</b>			<b>CU-TZ20WKE</b>	<b>CU-TZ25WKE</b>	<b>CU-TZ35WKE</b>	<b>CU-TZ42WKE</b>	<b>CU-TZ50WKE</b>	<b>CU-TZ60WKE</b>	<b>CU-TZ71WKE</b>
Air flow	Cool / Heat	m <sup>3</sup> /min	29.7/29.7	30.0/28.9	28.7/29.7	30.4/30.8	32.7/32.7	34.0/34.0	44.7/45.9
Sound pressure <sup>4)</sup>	Cool / Heat (Hi)	dB(A)	46/47	47/48	48/50	49/51	48/49	49/51	52/54
Dimension <sup>5)</sup>	H x W x D	mm	542 x 780 x 289	542 x 780 x 289	542 x 780 x 289	542 x 780 x 289	619 x 824 x 299	619 x 824 x 299	695 x 875 x 320
Net weight		kg	24	25	31	31	36	36	50
Pipe diameter	Liquid pipe	Inch (mm)	1/4 [6.35]	1/4 [6.35]	1/4 [6.35]	1/4 [6.35]	1/4 [6.35]	1/4 [6.35]	1/4 [6.35]
	Gas pipe	Inch (mm)	3/8 [9.52]	3/8 [9.52]	3/8 [9.52]	1/2 [12.70]	1/2 [12.70]	1/2 [12.70]	5/8 [15.88]
Pipe length range		m	3~15	3~15	3~15	3~15	3~20	3~30	3~30
Elevation difference (in/out) <sup>6)</sup>		m	15	15	15	15	15	15	20
Pipe length for additional gas		m	7.5	7.5	7.5	7.5	7.5	10	10
Additional gas amount		g/m	10	10	10	10	15	15	25
Refrigerant (R32) / CO <sub>2</sub> Eq.		kg / T	0.54/0.365	0.67/0.452	0.77/0.520	0.79/0.533	1.14/0.770	1.22/0.824	1.32/0.891
Operating range	Cool Min ~ Max	°C	-10 ~ +43	-10 ~ +43	-10 ~ +43	-10 ~ +43	-10 ~ +43	-10 ~ +43	-10 ~ +43
	Heat Min ~ Max	°C	-15 ~ +24	-15 ~ +24	-15 ~ +24	-15 ~ +24	-15 ~ +24	-15 ~ +24	-15 ~ +24
<b>Kit RRP</b>		€	<b>996</b>	<b>1085</b>	<b>1257</b>	<b>1404</b>	<b>1551</b>	<b>2354</b>	<b>2393</b>
<b>Indoor unit RRP</b>		€	389	416	473	539	604	970	1040
<b>Outdoor unit RRP</b>		€	607	669	784	865	947	1384	1353

Accessories		RRP €
<b>CZ-CAPRA1</b>	RAC interface adapter for integration into P-Link	<b>190</b>

Accessories		RRP €
<b>CZ-RD514C</b>	Wired remote controller for wall-mounted and floor console	<b>125</b>

1) EER and COP calculation is based in accordance to EN14511. 2) Energy Label Scale from A+++ to D. 3) The annual energy consumption is calculated in accordance to EU/626/2011. 4) The sound pressure of the indoor unit shows the value measured of a position 1 m in front of the main body and 0,8 m below the unit. For outdoor unit 1 m in front and 1 m in rear side of main body. The sound pressure is measured in accordance with JIS C 9612. Q-Lo: Quiet mode. Lo: The lowest set fan speed. 5) Add 70 mm for piping port. 6) When installing the outdoor unit at a higher position than the indoor unit.



SEER and SCOP: For KIT-TZ20-WKE and KIT-TZ25-WKE. SUPER QUIET: For KIT-TZ20-WKE, KIT-TZ25-WKE and KIT-TZ35-WKE. INTERNET CONTROL: Built-in Wi-Fi.

Rating Conditions: Cooling Indoor 27 °C DB / 19 °C WB. Cooling Outdoor 35 °C DB / 24 °C WB. Heating Indoor 20 °C DB. Heating Outdoor 7 °C DB / 6 °C WB. [DB: Dry Bulb; WB: Wet Bulb]. Specifications subject to change without notice. For detailed information about ErP / Energy Labelling, please visit our websites [www.aircon.panasonic.eu](http://www.aircon.panasonic.eu) or [www.ptc.panasonic.eu](http://www.ptc.panasonic.eu).

# New Etherea: Welcome to your new home

ETHEREA

The new Etherea with nanoe™ X technology improves protection 24/7. With a new sleek design, an outstanding efficiency A+++, advanced smart control that allows to connect with voice assistant, Aerowings 2.0 for the ultimate comfort and designed to allow for simple installation and easy maintenance.



## 1 nanoe™ X technology to improve protection 24/7

This advanced technology utilises hydroxyl radicals (also known as OH radicals), which inhibit the growth of certain pollutants such as allergens, bacteria, viruses, moulds, odours, and certain hazardous substances. This naturally occurring process has major benefits indoors and improves the protection inside a room 24/7.

The nanoe™ X performance varies depending on the room size, environment and usage and it may take several hours to reach the full effect. nanoe™ X is not medical device, local regulations on building design and sanitary recommendations must be followed.



## 2 Sleek design with easy-to-use remote controller

Panasonic has meticulously designed a new chassis for the Etherea indoor unit for a sleek and stylish solution to blend with any interior. Its elegant monolithic design is robust and allows for a high-performance air conditioner, with a large air discharge area to optimal performance. The new controller intuitive design provides easy operation with five quick access keys for convenient use.



## 3 Advanced smart control and voice assistant

The Etherea is compatible with Panasonic's Comfort Cloud App, which is designed to manage all functions of the systems with a smart device. Control, monitor, and schedule with easy interface. Through the Panasonic Comfort Cloud App, Etherea units can also be connected to Google Assistant and Amazon Alexa\*.

\* Amazon, Alexa and all related logos are trademarks of Amazon.com, Inc. or its affiliates. Google, Android, Google Play and Google Home are trademarks of Google LLC.

## 4 The ultimate comfort with high energy savings

Etherea produces the highest level of comfort thanks to Aerowings 2.0, creating a pleasant environment in any setting, with a low energy cost.



**NEW 2021**

Available Mar 21



Silver

**NEW wall-mounted Etherea Inverter+ • R32**

- nanoe™ X technology to improve protection 24/7 (nanoe X Generator Mark 2).
- New sleek and stylish design
- Improved SEER/SCOP to achieve top class energy efficiency
- Aerowings 2.0 for the ultimate comfort
- New easy-to-use remote controller
- Built-in Wi-Fi for instant connectivity via Panasonic Comfort Cloud App
- Compatible with Google Assistant and Amazon Alexa
- Chassis and parts designed for easier installation

Kit Silver			KIT-XZ20-XKE	KIT-XZ25-XKE	KIT-XZ35-XKE	—	KIT-XZ50-XKE	—
Kit Pure White Matt			KIT-Z20-XKE	KIT-Z25-XKE	KIT-Z35-XKE	KIT-Z42-XKE	KIT-Z50-XKE	KIT-Z71-XKE
Cooling capacity	Nominal (Min - Max)	kW	2.05 (0.75 - 2.65)	2.50 (0.85 - 3.50)	3.50 (0.85 - 4.20)	4.20 (0.85 - 5.00)	5.00 (0.98 - 6.00)	7.10 (0.98 - 8.50)
UK Cooling	(Total - Sensible)	kW						
EER <sup>1)</sup>	Nominal (Min - Max)	W/W	4.56 (4.69 - 3.96)	4.90 (5.00 - 3.89)	4.12 (4.25 - 3.62)	3.39 (3.62 - 3.18)	3.68 (3.92 - 3.16)	3.17 (2.33 - 2.83)
<b>SEER <sup>2)</sup></b>			<b>8.10 A++</b>	<b>9.40 A+++</b>	<b>9.50 A+++</b>	<b>7.00 A++</b>	<b>8.50 A+++</b>	<b>6.50 A++</b>
Pdesign (cooling)		kW	2.1	2.5	3.5	4.2	5.0	7.1
Input power cooling	Nominal (Min - Max)	kW	0.45 (0.16 - 0.67)	0.51 (0.17 - 0.90)	0.85 (0.20 - 1.16)	1.24 (0.24 - 1.57)	1.36 (0.25 - 1.90)	2.24 (0.42 - 3.00)
Annual energy consumption <sup>3)</sup>		kWh/a	91	93	129	210	206	382
Heating capacity	Nominal (Min - Max)	kW	2.80 (0.75 - 4.00)	3.40 (0.80 - 4.80)	4.00 (0.80 - 5.50)	5.30 (0.80 - 6.80)	5.80 (0.98 - 8.00)	8.20 (0.98 - 10.20)
UK Heating	(Total - Sensible)	kW						
Heating capacity at -7 °C		kW	2.38	2.80	3.20	4.11	4.8	6.31
COP <sup>1)</sup>	Nominal (Min - Max)	W/W	4.52 (4.69 - 4.26)	4.86 (5.00 - 4.07)	4.44 (4.44 - 3.77)	3.68 (4.21 - 3.66)	4.14 (4.26 - 3.35)	3.69 (2.45 - 3.29)
<b>SCOP <sup>2)</sup></b>			<b>4.80 A++</b>	<b>5.20 A+++</b>	<b>5.20 A+++</b>	<b>4.20 A+</b>	<b>4.80 A++</b>	<b>4.20 A+</b>
Pdesign at -10 °C		kW	2.1	2.4	2.8	3.6	4.2	5.5
Input power heating	Nominal (Min - Max)	kW	0.62 (0.16 - 0.94)	0.70 (0.16 - 1.18)	0.90 (0.18 - 1.46)	1.44 (0.19 - 1.86)	1.40 (0.23 - 2.39)	2.22 (0.40 - 3.10)
Annual energy consumption <sup>3)</sup>		kWh/a	613	646	754	1200	1225	1833
<b>Indoor unit Silver</b>			<b>CS-XZ20XKEW</b>	<b>CS-XZ25XKEW</b>	<b>CS-XZ35XKEW</b>	—	<b>CS-XZ50XKEW</b>	—
<b>Indoor unit Pure White Matt</b>			<b>CS-Z20XKEW</b>	<b>CS-Z25XKEW</b>	<b>CS-Z35XKEW</b>	<b>CS-Z42XKEW</b>	<b>CS-Z50XKEW</b>	<b>CS-Z71XKEW</b>
Power source		V	230	230	230	230	230	230
Suggested fuse		A	10	10	10	13	16	20
Connection indoor / outdoor		mm <sup>2</sup>	4x1.5	4x1.5	4x1.5	4x1.5	4x2.5	4x2.5
Air flow	Cool / Heat	m <sup>3</sup> /min	11.7/13.0	12.7/14.1	12.7/14.7	14.4/15.4	17.0/18.9	18.6/19.5
Moisture removal volume		L/h	1.3	1.5	2	2.4	2.8	4.1
Sound pressure <sup>4)</sup>	Cool (Hi / Lo / Q-Lo)	dB(A)	37/24/19	39/25/19	42/28/19	43/31/25	44/37/30	47/38/30
	Heat (Hi / Lo / Q-Lo)	dB(A)	38/25/19	41/27/19	43/33/19	43/35/29	44/37/30	47/38/30
Dimension	H x W x D	mm	295 x 870 x 229	295 x 870 x 229	295 x 870 x 229	295 x 870 x 229	295 x 1040 x 244	295 x 1040 x 244
Net weight		kg	10	10	11	10	12	13
nanoe X Generator			Mark 2	Mark 2	Mark 2	Mark 2	Mark 2	Mark 2
<b>Outdoor unit</b>			<b>CU-Z20XKE</b>	<b>CU-Z25XKE</b>	<b>CU-Z35XKE</b>	<b>CU-Z42XKE</b>	<b>CU-Z50XKE</b>	<b>CU-Z71XKE</b>
Air flow	Cool / Heat	m <sup>3</sup> /min	27.4/26.7	28.7/27.2	29.8/30.6	29.8/30.9	39.8/36.9	44.7/45.8
Sound pressure <sup>4)</sup>	Cool / Heat (Hi)	dB(A)	45/46	46/47	48/50	49/51	47/47	52/54
Dimension <sup>5)</sup>	H x W x D	mm	542 x 780 x 289	542 x 780 x 289	542 x 780 x 289	542 x 780 x 289	695 x 875 x 320	695 x 875 x 320
Net weight		kg	25	27	30	30	40	50
Pipe diameter	Liquid pipe	Inch (mm)	1/4 (6.35)	1/4 (6.35)	1/4 (6.35)	1/4 (6.35)	1/4 (6.35)	1/4 (6.35)
	Gas pipe	Inch (mm)	3/8 (9.52)	3/8 (9.52)	3/8 (9.52)	1/2 (12.70)	1/2 (12.70)	5/8 (15.88)
Pipe length range		m	3 ~ 15	3 ~ 15	3 ~ 15	3 ~ 15	3 ~ 30	3 ~ 30
Elevation difference (in/out) <sup>6)</sup>		m	15	15	15	15	15	20
Pipe length for additional gas		m	7.5	7.5	7.5	7.5	7.5	10
Additional gas amount		g/m	10	10	10	10	15	25
Refrigerant (R32) / CO <sub>2</sub> Eq.		kg / T	0.67/0.45	0.80/0.54	0.89/0.60	0.95/0.64	1.13/0.76	1.35/0.91
Operating range	Cool Min ~ Max	°C	-10 ~ +43	-10 ~ +43	-10 ~ +43	-10 ~ +43	-10 ~ +43	-10 ~ +43
	Heat Min ~ Max	°C	-15 ~ +24	-15 ~ +24	-15 ~ +24	-15 ~ +24	-15 ~ +24	-15 ~ +24
<b>Kit Silver RRP</b>		€	<b>1214</b>	<b>1302</b>	<b>1508</b>	-	<b>1879</b>	-
Indoor unit Silver RRP		€	449	500	567	-	774	-
<b>Kit Pure White Matt RRP</b>		€	<b>1161</b>	<b>1256</b>	<b>1455</b>	<b>1559</b>	<b>1775</b>	<b>3475</b>
Indoor unit Pure White Matt RRP		€	396	454	514	536	670	1355
Outdoor unit RRP		€	765	802	941	1023	1105	2120

Final data

Accessories		RRP €	Accessories		RRP €
<b>CZ-CAPRA1</b>	RAC interface adapter for integration into P-Link	<b>190</b>	<b>CZ-RD514C</b>	Wired remote controller for wall-mounted and floor console	<b>125</b>
<b>PAW-SMSCONTROL</b>	Control by SMS (need additional SIM card)	<b>293</b>			

1) EER and COP calculation is based in accordance to EN14511. 2) Energy Label Scale from A+++ to D. 3) The annual energy consumption is calculated in accordance to EU/626/2011. 4) The sound pressure of the indoor unit shows the value measured of a position 1 m in front of the main body and 0,8 m below the unit. For outdoor unit 1 m in front and 1 m in rear side of main body. The sound pressure is measured in accordance with JIS C 9612. Q-Lo: Quiet mode. Lo: The lowest set fan speed. 5) Add 70 mm for piping port. 6) When installing the outdoor unit at a higher position than the indoor unit.



SEER and SCOP: For KIT-XZ35-XKE and KIT-Z35-XKE. SUPER QUIET: For KIT-XZ20-XKE, KIT-XZ25-XKE, KIT-XZ35-XKE, KIT-Z20-XKE, KIT-Z25-XKE and KIT-Z35-XKE.

Rating Conditions: Cooling Indoor 27 °C DB / 19 °C WB. Cooling Outdoor 35 °C DB / 24 °C WB. Heating Indoor 20 °C DB. Heating Outdoor 7 °C DB / 6 °C WB. [DB: Dry Bulb; WB: Wet Bulb]. Specifications subject to change without notice. For detailed information about ErP / Energy Labelling, please visit our websites www.aircon.panasonic.eu or www.ptc.panasonic.eu.



### Wall-mounted Professional Inverter -20 °C • R32

- Aerowings to control air draft direction
- Designed for 24h/7d a week operation
- Up to A+++ in cooling
- Highly efficient even at -20 °C
- High durability rolling bearings
- Additional piping sensors to prevent freezing
- Automatic restart

Kit			KIT-Z25-TKEA	KIT-Z35-TKEA	KIT-Z42-TKEA	KIT-Z50-TKEA	KIT-Z71-TKEA
Cooling capacity	Nominal (Min - Max)	kW	2.50[0.85 - 3.00]	3.50[0.85 - 4.00]	4.20[0.98 - 5.00]	5.00[0.98 - 6.00]	7.10[0.98 - 8.10]
UK Cooling	(Total - Sensible)	kW	2.49 - 1.90	3.48 - 2.66	4.18 - 3.19	4.66 - 4.25	6.55 - 5.20
EER <sup>1)</sup>	Nominal (Min - Max)	W/W	4.90[5.00 - 4.29]	4.07[5.00 - 3.64]	3.82[4.90 - 3.25]	3.60[3.50 - 3.09]	3.17[2.33 - 3.03]
<b>SEER <sup>2)</sup></b>			<b>8.50 A+++</b>	<b>8.50 A+++</b>	<b>8.50 A+++</b>	<b>8.50 A+++</b>	<b>6.10 A++</b>
Pdesign		kW	2.50	3.50	4.20	5.00	7.10
Input power cooling	Nominal (Min - Max)	kW	0.51[0.17 - 0.70]	0.86[0.17 - 1.10]	1.10[0.20 - 1.54]	1.39[0.28 - 1.94]	2.24[0.42 - 2.67]
Annual energy consumption <sup>3)</sup>		kWh/a	103	144	173	206	407
Heating capacity	Nominal (Min - Max)	kW	3.40[0.85 - 5.40]	4.00[0.85 - 6.60]	5.40[0.98 - 7.25]	5.80[0.98 - 8.00]	8.60[0.98 - 9.90]
UK Heating	(Total - Sensible)	kW	3.78	4.62	5.04	5.62	6.94
Heating capacity at -7 °C		kW	3.33	4.07	4.30	5.00	6.13
COP <sup>1)</sup>	Nominal (Min - Max)	W/W	4.86[5.15 - 4.12]	4.35[5.15 - 3.63]	4.00[4.45 - 3.37]	4.03[2.88 - 3.20]	3.51[2.45 - 3.47]
<b>SCOP <sup>2)</sup></b>			<b>4.50 A+</b>	<b>4.40 A+</b>	<b>4.30 A+</b>	<b>4.40 A+</b>	<b>4.00 A+</b>
Pdesign at -10 °C		kW	2.80	3.60	3.80	4.40	5.50
Input power heating	Nominal (Min - Max)	kW	0.70[0.17 - 1.31]	0.92[0.17 - 1.82]	1.35[0.22 - 2.15]	1.44[0.34 - 2.50]	2.45[0.40 - 2.85]
Annual energy consumption <sup>3)</sup>		kWh/a	871	1145	1237	1400	1925
<b>Indoor unit</b>			<b>CS-Z25TKEA</b>	<b>CS-Z35TKEA</b>	<b>CS-Z42TKEA</b>	<b>CS-Z50TKEA</b>	<b>CS-Z71TKEA</b>
Power source		V	230	230	230	230	230
Recommended fuse		A	13	13	13	16	20
Connection indoor / outdoor		mm <sup>2</sup>	4x1.5	4x1.5	4x1.5	4x2.5	4x2.5
Air flow	Cool / Heat	m <sup>3</sup> /min	10.4/11.7	10.7/12.4	18.2/20.2	19.2/21.3	20.2/21.0
Moisture removal volume		L/h	1.5	2.0	2.4	2.8	4.1
Sound pressure <sup>4)</sup>	Cool (Hi / Lo / Q-Lo)	dB(A)	39/25/21	42/28/21	43/32/29	44/37/30	47/38/35
	Heat (Hi / Lo / Q-Lo)	dB(A)	41/27/22	43/30/22	44/35/29	44/37/30	47/38/35
Dimension	HxWxD	mm	295x919x194	295x919x194	302x1120x236	302x1120x236	302x1120x236
Net weight		kg	9	10	12	12	13
<b>Outdoor unit</b>			<b>CU-Z25TKEA</b>	<b>CU-Z35TKEA</b>	<b>CU-Z42TKEA</b>	<b>CU-Z50TKEA</b>	<b>CU-Z71TKEA</b>
Sound pressure <sup>4)</sup>	Cool / Heat (Hi)	dB(A)	46/48	48/50	48/50	48/50	52/54
Dimension <sup>5)</sup>	HxWxD	mm	619x824x299	619x824x299	619x824x299	695x875x320	695x875x320
Net weight		kg	37	38	38	43	49
Pipe diameter	Liquid pipe	Inch (mm)	1/4(6.35)	1/4(6.35)	1/4(6.35)	1/4(6.35)	1/4(6.35)
	Gas pipe	Inch (mm)	3/8(9.52)	3/8(9.52)	1/2(12.70)	1/2(12.70)	5/8(15.88)
Pipe length range		m	3~20	3~20	3~20	3~30	3~30
Elevation difference (in/out) <sup>6)</sup>		m	15	15	15	15	20
Pipe length for additional gas		m	7.5	7.5	7.5	7.5	10
Additional gas amount		g/m	10	10	10	15	25
Refrigerant (R32) / CO <sub>2</sub> Eq.		kg / T	0.96/0.648	1.00/0.675	1.08/0.729	1.15/0.776	1.32/0.891
Operating range	Cool Min ~ Max	°C	-20~+43	-20~+43	-20~+43	-20~+43	-20~+43
	Heat Min ~ Max	°C	-15~+24	-15~+24	-15~+24	-15~+24	-15~+24
<b>Kit RRP</b>		€	<b>1216</b>	<b>1394</b>	<b>1587</b>	<b>1763</b>	<b>2386</b>
<b>Indoor unit RRP</b>		€	401	451	530	630	868
<b>Outdoor unit RRP</b>		€	815	943	1057	1133	1518

Accessories	RRP €
<b>CZ-TACG1*</b> Wi-Fi adapter for smart control via Panasonic Comfort Cloud App	<b>120</b>
<b>CZ-CAPRA1*</b> RAC interface adapter for integration into P-Link	<b>190</b>
<b>PAW-SERVER-PKEA*</b> PCB for installation in server rooms with security	<b>223</b>

Accessories	RRP €
<b>PAW-WTRAY</b> Tray for condenser water compatible with outdoor elevation platform	<b>152</b>
<b>PAW-GRDBSE20</b> Outdoor base ground support for noise and vibration absorption	<b>152</b>
<b>PAW-GRDSTD40</b> Outdoor elevation platform 400x900x400 mm	<b>152</b>


1) EER and COP calculation is based in accordance to EN14511. 2) Energy Label Scale from A+++ to D. 3) The annual energy consumption is calculated in accordance to EU/626/2011. 4) The sound pressure of the indoor unit shows the value measured of a position 1 m in front of the main body and 0,8 m below the unit. For outdoor unit 1 m in front and 1 m in rear side of main body. The sound pressure is measured in accordance with JIS C 9612. Q-Lo: Quiet mode. Lo: The lowest set fan speed. 5) Add 70 mm for piping port. 6) When installing the outdoor unit at a higher position than the indoor unit.

\* Only one of these can be used at a time.



SEER and SCOP: For KIT-Z25-TKEA. SUPER QUIET: For KIT-Z25-TKEA. INTERNET CONTROL: Optional.

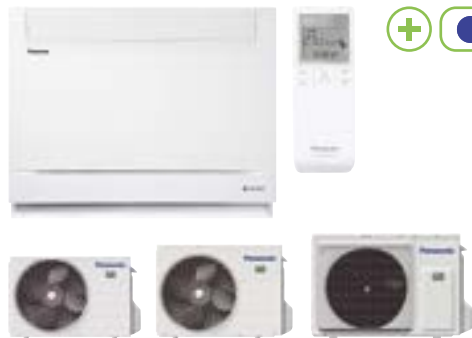

**Floor console Inverter+ • R32**

- nanoe™ X technology to improve protection 24/7 (nanoe X Generator Mark 1)
- Stylish Sky remote controller
- A breakthrough design that integrates perfectly with the most modern environments
- High energy efficiency class A++ SEER and A++ SCOP
- Optional internet and voice control

Kit			KIT-Z25-UFE	KIT-Z35-UFE	KIT-Z50-UFE
Cooling capacity	Nominal (Min - Max)	kW	2.50 [0.85 - 3.40]	3.50 [0.85 - 3.80]	5.00 [0.90 - 5.70]
UK Cooling	[Total - Sensible]	kW	2.36 - 2.19	3.31 - 2.84	4.73 - 3.48
EER <sup>1)</sup>	Nominal (Min - Max)	W/W	4.81 [3.54 - 3.78]	4.07 [3.54 - 3.73]	3.60 [3.53 - 3.15]
<b>SEER <sup>2)</sup></b>			<b>7.90 A++</b>	<b>8.10 A++</b>	<b>6.70 A++</b>
P <sub>design</sub> (cooling)		kW	2.50	3.50	5.00
Input power cooling	Nominal (Min - Max)	kW	0.52 [0.24 - 0.90]	0.86 [0.24 - 1.02]	1.39 [0.26 - 1.81]
Annual energy consumption <sup>3)</sup>		kWh/a	111	151	261
Heating capacity	Nominal (Min - Max)	kW	3.40 [0.85 - 5.00]	4.30 [0.85 - 6.00]	5.80 [0.90 - 8.10]
UK Heating	[Total - Sensible]	kW	3.46	4.13	5.68
Heating capacity at -7 °C		kW	2.88	3.37	5.03
COP <sup>1)</sup>	Nominal (Min - Max)	W/W	4.47 [3.54 - 3.70]	3.98 [3.54 - 3.43]	3.74 [3.46 - 3.12]
<b>SCOP <sup>2)</sup></b>			<b>4.60 A++</b>	<b>4.60 A++</b>	<b>4.30 A+</b>
P <sub>design</sub> at -10 °C		kW	2.70	3.20	4.40
Input power heating	Nominal (Min - Max)	kW	0.76 [0.24 - 1.35]	1.08 [0.24 - 1.75]	1.55 [0.26 - 2.60]
Annual energy consumption <sup>3)</sup>		kWh/a	822	974	1433
<b>Indoor unit</b>			<b>CS-Z25UFEAW</b>	<b>CS-Z35UFEAW</b>	<b>CS-Z50UFEAW</b>
Air flow	Cool / Heat	m <sup>3</sup> /min	9.6/9.9	9.9/10.1	11.6/13.2
Moisture removal volume		L/h	1.5	2.0	2.8
Sound pressure <sup>4)</sup>	Cool (Hi / Lo / Q-Lo)	dB(A)	38/25/20	39/26/20	44/31/27
	Heat (Hi / Lo / Q-Lo)	dB(A)	38/25/19	39/26/19	46/33/29
Dimension	HxWxD	mm	600x750x207	600x750x207	600x750x207
Net weight		kg	13	13	13
nanoe X Generator			Mark 1	Mark 1	Mark 1
<b>Outdoor unit</b>			<b>CU-Z25UBEA</b>	<b>CU-Z35UBEA</b>	<b>CU-Z50UBEA</b>
Power source		V	230	230	230
Suggested fuse		A	10	13	16
Connection indoor / outdoor		mm <sup>2</sup>	—	—	—
Air flow	Cool / Heat	m <sup>3</sup> /min	28.7/27.2	34.3/33.5	39.7/38.6
Sound pressure <sup>4)</sup>	Cool / Heat (Hi)	dB(A)	46/47	48/48	48/48
Dimension <sup>5)</sup>	HxWxD	mm	542x780x289	619x824x299	695x875x320
Net weight		kg	33	35	43
Pipe diameter	Liquid pipe	Inch (mm)	1/4 [6.35]	1/4 [6.35]	1/4 [6.35]
	Gas pipe	Inch (mm)	3/8 [9.52]	3/8 [9.52]	1/2 [12.70]
Pipe length range		m	3~20	3~20	3~30
Elevation difference (in/out) <sup>6)</sup>		m	15	15	20
Pipe length for additional gas		m	7.5	7.5	7.5
Additional gas amount		g/m	10	10	15
Refrigerant (R32) / CO <sub>2</sub> Eq.		kg / T	0.88/0.594	0.93/0.628	1.13/0.763
Operating range	Cool Min ~ Max	°C	-10 ~ +43	-10 ~ +43	-10 ~ +43
	Heat Min ~ Max	°C	-15 ~ +24	-15 ~ +24	-15 ~ +24
<b>Kit RRP</b>		€	<b>1608</b>	<b>1705</b>	<b>2081</b>
<b>Indoor unit RRP</b>		€	875	958	1138
<b>Outdoor unit RRP</b>		€	733	747	943

Accessories		RRP €
<b>CZ-TACG1</b>	Wi-Fi adapter for smart control via Panasonic Comfort Cloud App	120
<b>CZ-CAPRA1</b>	RAC interface adapter for integration into P-Link	190

Accessories		RRP €
<b>CZ-RD514C</b>	Wired remote controller for wall-mounted and floor console	125

1) EER and COP calculation is based in accordance to EN14511. 2) Energy Label Scale from A+++ to D. 3) The annual energy consumption is calculated in accordance to EU/626/2011. 4) The sound pressure of the units shows the value measured of a position 1 m in front of the main body and 1 m above floor. The sound pressure is measured in accordance with JIS C 9612. Q-Lo: Quiet mode. Lo: The lowest set fan speed. 5) Add 70 mm for piping port. 6) When installing the outdoor unit at a higher position than the indoor unit.



SEER and SCOP: For KIT-Z35-UFE. SUPER QUIET: For KIT-Z25-UFE and KIT-Z35-UFE. INTERNET CONTROL: Optional. iF DESIGN AWARD 2019: Floor console awarded with the prestigious IF Design Award 2019.

Rating Conditions: Cooling Indoor 27 °C DB / 19 °C WB. Cooling Outdoor 35 °C DB / 24 °C WB. Heating Indoor 20 °C DB. Heating Outdoor 7 °C DB / 6 °C WB. [DB: Dry Bulb; WB: Wet Bulb]. Specifications subject to change without notice. For detailed information about ErP / Energy Labelling, please visit our websites [www.aircon.panasonic.eu](http://www.aircon.panasonic.eu) or [www.ptc.panasonic.eu](http://www.ptc.panasonic.eu).



MORE 4 WAY 60x60 CASSETTES IN PACi SECTION

RAL9010 panel for 4 way 60x60 cassette. CZ-BT20EW



#### 4 Way 60x60 cassette Inverter • R32

- Cassettes can be controlled by KNX and Modbus
- Designed for easy installation in the standard european 60x60 ceiling grid
- Ultra compact outdoor units for easy installation
- High pressure selector in case of high ceilings (higher than 2,7 m)
- Drain pump included (maximum 750 mm high)
- Air fresh entry available on the cassette

Kit*			KIT-Z25-UB4	KIT-Z35-UB4	KIT-Z50-UB4	KIT-Z60-UB4
Cooling capacity	Nominal (Min - Max)	kW	2.50 (0.85 - 3.20)	3.50 (0.85 - 4.00)	5.00 (0.90 - 5.80)	6.00 (0.90 - 6.35)
UK Cooling	(Total - Sensible)	kW	2.41 - 2.32	3.26 - 2.67	4.70 - 3.35	5.58 - 3.78
EER <sup>1)</sup>	Nominal (Min - Max)	W/W	4.55 (3.54 - 3.90)	3.89 (3.54 - 3.39)	3.25 (3.53 - 3.09)	2.93 (3.53 - 2.89)
SEER <sup>2)</sup>			<b>6.30 A++</b>	<b>6.50 A++</b>	<b>6.40 A++</b>	<b>6.20 A++</b>
Pdesign [cooling]		kW	2.50	3.50	5.00	6.00
Input power cooling	Nominal (Min - Max)	kW	0.55 (0.24 - 0.82)	0.90 (0.24 - 1.18)	1.54 (0.26 - 1.88)	2.05 (0.26 - 2.20)
Annual energy consumption <sup>3)</sup>		kWh/a	139	188	273	339
Heating capacity	Nominal (Min - Max)	kW	3.20 (0.85 - 4.80)	4.50 (0.85 - 5.60)	5.60 (0.90 - 7.10)	7.00 (0.90 - 8.00)
UK Heating	(Total - Sensible)	kW	3.35	3.91	4.98	5.64
Heating capacity at -7 °C		kW	2.88	3.37	4.40	5.10
COP <sup>1)</sup>	Nominal (Min - Max)	W/W	4.05 (3.70 - 3.64)	3.31 (3.70 - 3.20)	3.03 (3.46 - 2.95)	2.92 (3.46 - 2.91)
SCOP <sup>2)</sup>			<b>4.30 A+</b>	<b>4.20 A+</b>	<b>4.30 A+</b>	<b>4.20 A+</b>
Pdesign at -10 °C		kW	2.70	3.00	3.80	4.00
Input power heating	Nominal (Min - Max)	kW	0.79 (0.23 - 1.32)	1.36 (0.23 - 1.75)	1.85 (0.26 - 2.41)	2.40 (0.26 - 2.75)
Annual energy consumption <sup>3)</sup>		kWh/a	879	1000	1237	1333
<b>Indoor unit</b>			<b>CS-Z25UB4EAW</b>	<b>CS-Z35UB4EAW</b>	<b>CS-Z50UB4EAW</b>	<b>CS-Z60UB4EAW</b>
<b>Panel</b>			<b>CZ-BT20EW</b>	<b>CZ-BT20EW</b>	<b>CZ-BT20EW</b>	<b>CZ-BT20EW</b>
Air flow	Cool / Heat	m <sup>3</sup> /min	10.5/10.8	10.5/10.8	11.5/11.8	12.4/13.5
Moisture removal volume		L/h	1.5	2.0	2.8	3.3
Sound pressure <sup>4)</sup>	Cool (Hi / Lo / Q-Lo)	dB(A)	34/25/22	34/26/23	37/28/25	42/32/29
	Heat (Hi / Lo / Q-Lo)	dB(A)	35/28/25	35/28/25	38/29/26	43/32/29
Dimension (HxWxD)	Indoor	mm	260x575x575	260x575x575	260x575x575	260x575x575
	Panel	mm	51x700x700	51x700x700	51x700x700	51x700x700
Net weight	Indoor / Panel	kg	18/2.5	18/2.5	18/2.5	18/2.5
<b>Outdoor unit</b>			<b>CU-Z25UBEA</b>	<b>CU-Z35UBEA</b>	<b>CU-Z50UBEA</b>	<b>CU-Z60UBEA</b>
Power source		V	230	230	230	230
Suggested fuse		A	10	13	16	16
Connection indoor / outdoor		mm <sup>2</sup>	—	—	—	—
Air flow	Cool / Heat	m <sup>3</sup> /min	28.7/27.2	34.3/33.5	39.7/38.6	42.6/41.5
Sound pressure <sup>4)</sup>	Cool / Heat (Hi)	dB(A)	46/47	48/48	48/48	49/50
Dimension <sup>5)</sup>	HxWxD	mm	542x780x289	619x824x299	695x875x320	695x875x320
Net weight		kg	33	35	43	43
Pipe diameter	Liquid pipe	Inch (mm)	1/4 (6.35)	1/4 (6.35)	1/4 (6.35)	1/4 (6.35)
	Gas pipe	Inch (mm)	3/8 (9.52)	3/8 (9.52)	1/2 (12.70)	1/2 (12.70)
Pipe length range		m	3~20	3~20	3~30	3~30
Elevation difference (in/out) <sup>6)</sup>		m	15	15	20	20
Pipe length for additional gas		m	7.5	7.5	7.5	7.5
Additional gas amount		g/m	10	10	15	15
Refrigerant (R32) / CO <sub>2</sub> Eq.		kg / T	0.88/0.594	0.93/0.628	1.13/0.763	1.13/0.763
Operating range	Cool Min ~ Max	°C	-10 ~ +43	-10 ~ +43	-10 ~ +43	-10 ~ +43
	Heat Min ~ Max	°C	-15 ~ +24	-15 ~ +24	-15 ~ +24	-15 ~ +24
<b>Kit RRP (includes panel CZ-BT20EW)</b>		€	<b>1500</b>	<b>1735</b>	<b>2056</b>	<b>2295</b>
<b>Indoor unit RRP</b>		€	601	822	947	1026
<b>Outdoor unit RRP</b>		€	733	747	943	1103


Accessories		RRP €
<b>CZ-TACG1</b>	Wi-Fi adapter for smart control via Panasonic Comfort Cloud App	<b>120</b>

Accessories		RRP €
<b>CZ-CAPRA1</b>	RAC interface adapter for integration into P-Link	<b>190</b>
<b>CZ-RD52CP</b>	Wired remote controller for cassette	<b>96</b>

1) EER and COP calculation is based in accordance to EN14511. 2) Energy Label Scale from A+++ to D. 3) The annual energy consumption is calculated in accordance to EU/626/2011. 4) The sound pressure of the indoor unit shows the value measured of a position 1,5 m below the unit. For outdoor unit 1 m in front and 1 m in rear side of main body. The sound pressure is measured in accordance with JIS C 9612. Q-Lo: Quiet mode. Lo: The lowest set fan speed. 5) Add 70 mm for piping port. 6) When installing the outdoor unit at a higher position than the indoor unit. \* This product will be discontinued in Autumn 2021.



SEER and SCOP: For KIT-Z35-UB4. SUPER QUIET: For KIT-Z25-UB4. INTERNET CONTROL: Optional.

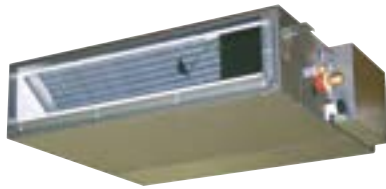

MORE DUCT TYPE SOLUTIONS IN PACI SECTION

Optional wireless control kit. CZ-RL511D



### Low static pressure hide-away Inverter • R32

- Duct type can be controlled by KNX and Modbus
- Eco mode for 20 % energy saving
- Extremely compact indoor units without losing static pressure (only 200 mm high)
- Weekly timer, 42 settings per week
- Easy check mode for failure detection
- Drain pump included

Kit			KIT-Z25-UD3	KIT-Z35-UD3	KIT-Z50-UD3	KIT-Z60-UD3
Cooling capacity	Nominal (Min - Max)	kW	2.50 [0.85 - 3.20]	3.50 [0.85 - 4.00]	5.10 [0.90 - 5.70]	6.00 [0.90 - 6.50]
UK Cooling	[Total - Sensible]	kW	2.30 - 2.29	3.09 - 2.77	3.63 - 2.92	4.25 - 3.42
EER <sup>1)</sup>	Nominal (Min - Max)	W/W	4.31 [3.54 - 3.76]	3.85 [3.54 - 3.36]	3.27 [3.53 - 3.20]	2.94 [3.53 - 2.83]
<b>SEER <sup>2)</sup></b>			<b>5.90 A+</b>	<b>5.80 A+</b>	<b>5.90 A+</b>	<b>5.60 A+</b>
P <sub>design</sub> (cooling)		kW	2.50	3.50	5.10	6.00
Input power cooling	Nominal (Min - Max)	kW	0.58 [0.24 - 0.85]	0.91 [0.24 - 1.19]	1.56 [0.26 - 1.78]	2.04 [0.26 - 2.30]
Annual energy consumption <sup>3)</sup>		kWh/a	148	211	303	375
Heating capacity	Nominal (Min - Max)	kW	3.20 [0.85 - 4.60]	4.20 [0.85 - 5.10]	6.10 [0.90 - 7.20]	7.00 [0.90 - 8.00]
UK Heating	[Total - Sensible]	kW	3.17	3.54	5.06	5.64
Heating capacity at -7 °C		kW	2.60	3.00	4.50	5.10
COP <sup>1)</sup>	Nominal (Min - Max)	W/W	4.00 [3.70 - 3.68]	3.82 [3.70 - 3.59]	3.35 [3.46 - 3.27]	3.24 [3.46 - 3.08]
<b>SCOP <sup>2)</sup></b>			<b>4.20 A+</b>	<b>4.10 A+</b>	<b>4.10 A+</b>	<b>4.10 A+</b>
P <sub>design</sub> at -10 °C		kW	2.60	2.80	4.00	4.60
Input power heating	Nominal (Min - Max)	kW	0.80 [0.23 - 1.25]	1.10 [0.23 - 1.42]	1.82 [0.26 - 2.20]	2.16 [0.26 - 2.60]
Annual energy consumption <sup>3)</sup>		kWh/a	867	956	1366	1571
<b>Indoor unit</b>			<b>CS-Z25UD3EAW</b>	<b>CS-Z35UD3EAW</b>	<b>CS-Z50UD3EAW</b>	<b>CS-Z60UD3EAW</b>
External static pressure <sup>4)</sup>	Min - Max	Pa	15 - 45	15 - 45	15 - 50	15 - 50
Air flow	Cool / Heat	m <sup>3</sup> /min	10.5/10.5	11.2/11.2	15.3/15.3	15.7/15.7
Moisture removal volume		L/h	1.5	2.0	2.8	3.3
Sound pressure <sup>5)</sup>	Cool (Hi / Lo / Q-Lo)	dB(A)	33/27/24	33/27/24	39/29/26	41/30/27
	Heat (Hi / Lo / Q-Lo)	dB(A)	35/27/24	35/27/24	39/30/27	41/32/29
Dimension	H x W x D	mm	200 x 750 x 640	200 x 750 x 640	200 x 750 x 640	200 x 750 x 640
Net weight		kg	19	19	19	19
<b>Outdoor unit</b>			<b>CU-Z25UBEA</b>	<b>CU-Z35UBEA</b>	<b>CU-Z50UBEA</b>	<b>CU-Z60UBEA</b>
Power source		V	230	230	230	230
Recommended fuse		A	10	10	13	16
Connection indoor / outdoor		mm <sup>2</sup>	4 x 1.5 - 2.5	4 x 1.5 - 2.5	4 x 1.5 - 2.5	—
Air flow	Cool / Heat	m <sup>3</sup> /min	28.7/27.2	34.3/33.5	39.7/38.6	42.6/41.5
Sound pressure <sup>5)</sup>	Cool / Heat (Hi)	dB(A)	46/47	48/48	48/48	49/50
Dimension <sup>6)</sup>	H x W x D	mm	542 x 780 x 289	619 x 824 x 299	695 x 875 x 320	695 x 875 x 320
Net weight		kg	33	35	43	43
Pipe diameter	Liquid pipe	Inch (mm)	1/4 (6.35)	1/4 (6.35)	1/4 (6.35)	1/4 (6.35)
	Gas pipe	Inch (mm)	3/8 (9.52)	3/8 (9.52)	1/2 (12.70)	1/2 (12.70)
Pipe length range		m	3 - 20	3 - 20	3 - 30	3 - 30
Elevation difference (in/out) <sup>7)</sup>		m	15	15	20	20
Pipe length for additional gas		m	7.5	7.5	7.5	7.5
Additional gas amount		g/m	10	10	15	15
Refrigerant (R32) / CO <sub>2</sub> Eq.		kg / T	0.88/0.594	0.93/0.628	1.13/0.763	1.13/0.763
Operating range	Cool Min ~ Max	°C	-10 ~ +43	-10 ~ +43	-10 ~ +43	-10 ~ +43
	Heat Min ~ Max	°C	-15 ~ +24	-15 ~ +24	-15 ~ +24	-15 ~ +24
<b>Kit RRP</b>		€	<b>1579</b>	<b>1640</b>	<b>2013</b>	<b>2220</b>
<b>Indoor unit RRP</b>		€	846	893	1070	1117
<b>Outdoor unit RRP</b>		€	733	747	943	1103

Accessories		RRP €
<b>CZ-TACG1</b>	Wi-Fi adapter for smart control via Panasonic Comfort Cloud App	<b>120</b>

Accessories		RRP €
<b>CZ-CAPRA1</b>	RAC interface adapter for integration into P-Link	<b>190</b>
<b>CZ-RL511D</b>	Optional wireless control kit	<b>118</b>

1) EER and COP calculation is based in accordance to EN14511. 2) Energy Label Scale from A+++ to D. 3) The annual energy consumption is calculated in accordance to EU/626/2011. 4) The specification listed on the table indicates values under the condition of 25Pa (2,5 mmAq) which are applied for factory default setting. Change switch on PCB from Hi to S-Hi to have more than 6,0 mmAq. 5) The sound pressure of the indoor unit shows the value measured at a position of 1,5 m below the unit with 1 m duct on the suction side and 2 m duct on the discharge side. For outdoor unit 1 m in front and 1 m in rear side of main body. The sound pressure is measured in accordance with JIS C 9612. 6) Add 100 mm for indoor unit or 70 mm for outdoor unit for piping port. 7) When installing the outdoor unit at a higher position than the indoor unit.



SEER and SCOP: For KIT-Z25-UD3. INTERNET CONTROL: Optional.

Rating Conditions: Cooling Indoor 27 °C DB / 19 °C WB. Cooling Outdoor 35 °C DB / 24 °C WB. Heating Indoor 20 °C DB. Heating Outdoor 7 °C DB / 6 °C WB. (DB: Dry Bulb; WB: Wet Bulb). Specifications subject to change without notice. For detailed information about ErP / Energy Labelling, please visit our websites [www.aircon.panasonic.eu](http://www.aircon.panasonic.eu) or [www.ptc.panasonic.eu](http://www.ptc.panasonic.eu).

# Multi Split and Free Multi System





If air conditioning requirements exceed the ambit of a single room, Panasonic offers an extensive range of possibilities with up to 5 indoor units connected to a single outdoor unit.

**Panasonic offers widest range in Multi Split systems**

Two different ranges of Multi split outdoor units. to meet the needs of your project. From 3.5 to 9.0 kW. up to 5 indoor units connectable to a single outdoor unit.

Free Multi Z	Multi wall-mounted TZ super-compact
Full flexibility up to 9.0 kW and up to 5 ports with wide range of indoor units including high performance Etherea indoor units. reaching up to A+++ / A++	From 4.1 to 5.2 kW for TZ super-compact unit. reaches A++ / A+

Line up	Capacities	Indoor unit ports	Efficiency up to	Indoor units				
				Etherea	TZ super-compact	Floor console	Cassette	Hide-away
<b>Multi Z</b>	8 units (3.5 ~ 9.0 kW)	2~5	<b>A+++ / A++</b>	Yes	Yes	Yes	Yes	Yes
<b>Multi TZ</b>	3 units (4.1 ~ 5.2 kW)	2~3	<b>A++ / A+</b>		Yes			

**Multi Split solutions**

Day and Night	Simultaneous
Ideal for 2 day and night areas. Simultaneous use possible.	When indoor units are most time working at same time.

**Why a Multi Split is better than several separate split units**

**Up to 5 indoor units with a single outdoor unit.**

- Just one compact outdoor unit
- Increased comfort in the house since every room has its own indoor unit for heating or cooling
- Much more powerful than a single split



- More efficient since the units are always operating at full capacity
- You can connect all types of indoor units, such as wall types and consoles, depending on what suits your house best

**Solution with single split.**


One indoor unit is connected to one outdoor unit. The indoor unit is placed in the main hallway and heats the entire house. Certain rooms may not be perfectly heated, which causes inadequate comfort.

**Solution with Multi Split.**

With one outdoor unit, you can connect up to five indoor units. There is one indoor unit per room or area. It gives an extreme increase in comfort levels. On the roof, there is only one outdoor unit.

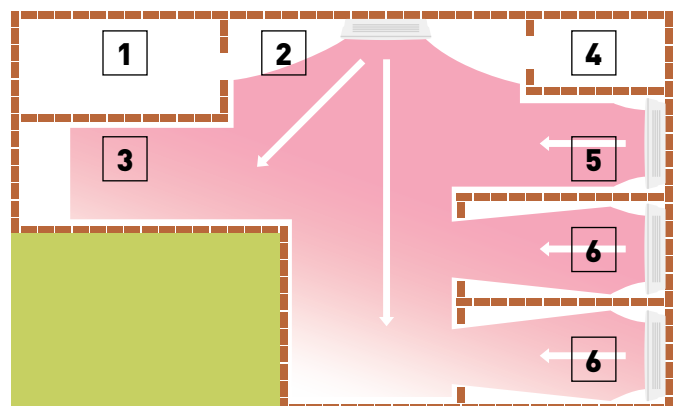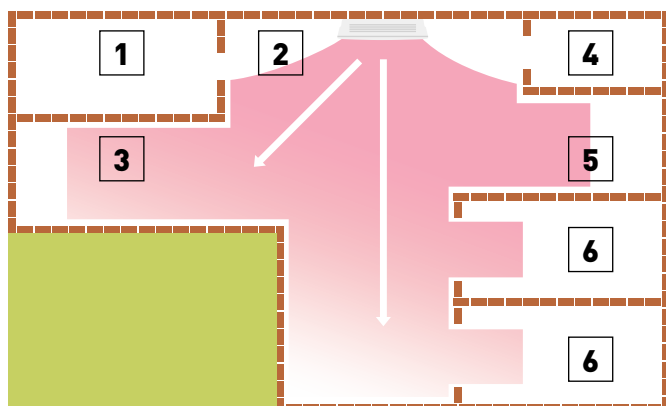

1. Laundry room. 2. Entrance. 3. Kitchen/dining area. 4. Bathroom. 5. Living room. 6. Bedroom.



Outdoor unit Free Multi System Z • R32

Technical specification table for Outdoor unit Free Multi System Z • R32. Columns include Indoor nominal capacity (Min - Max), Unit, Cooling capacity, EER, SEER, Pdesign [cooling], Input power cooling, Annual energy consumption, Heating capacity, COP, SCOP, Pdesign at -10 °C, Input power heating, Annual energy consumption, Current, Power source, Recommended fuse, Recommended power cable section, Sound pressure, Dimension, Net weight, Pipe diameter, Pipe length range total, Pipe length range to one unit, Elevation difference, Pipe length for additional gas, Additional gas amount, Refrigerant [R32] / CO2 Eq., Operating range, and Outdoor unit RRP. Rows are categorized by capacity: 3.2~6.0 kW, 3.2~7.7 kW, 4.5~9.5 kW, 4.5~11.2 kW, 4.5~14.7 kW, and 4.5~18.3 kW.

1) EER and COP calculation is based in accordance to EN14511. 2) Energy Label Scale from A+++ to D. 3) The annual energy consumption is calculated in accordance to EU/626/2011. 4) The sound pressure of the units shows the value measured of a position 1 m in front and 1 m in rear side of the main body. The sound pressure is measured in accordance with JIS C 9612. 5) Add 70 or 95 mm for piping port. 6) Minimum piping length is 3 meters per indoor unit.

Possible outdoor / indoor units combinations • R32


Compatibility matrix table for Possible outdoor / indoor units combinations • R32. Columns include Rooms, Model, Indoor capacity connected (Min - Max), Wall-mounted Etherea, Wall-mounted TZ super-compact, Floor console\*, 4 Way 60x60 cassette, and Low Static Pressure Hide-away. Rows correspond to capacity ranges from 3.2-6.0 kW to 4.5-18.3 kW.

1) A CZ-MA1P pipe reducer is needed on the 42 and 50, a CZ-MA2P pipe expander is needed on the 60 and 71, and CZ-MA3P pipe reducer on the 71. 2) Only for Pure White Matt model. \* Compatible only with 2 ports R32 outdoor CU-2Z35TBE / CU-2Z41TBE / CU-2Z50TBE. Minimum quantity of connection: 2 indoor units. Floor console indoor unit is compatible with R410A outdoors with 3, 4 or 5 ports: CU-3E18PBE, CU-3E23SBE, CU-4E23PBE, CU-4E27PBE and CU-5E34PBE.

Outdoor Multi combination model

Table for Outdoor Multi combination model. Columns include Model and a list of indoor unit models (e.g., CS-MZ16XKEW, CS-TZ20WKEW, CS-MZ20UFEA, CS-MZ20UB4EA, CS-MZ20UD3EA, CS-XZ25XKKEW, CS-Z25XKKEW, CS-TZ25WKEW, CS-Z25UFEAW, CS-Z25UB4EAW, CS-Z25UD3EAW, CS-XZ35XKKEW, CS-Z35XKKEW, CS-TZ35WKEW, CS-Z35UFEAW, CS-Z35UB4EAW, CS-Z35UD3EAW, CS-Z42XKKEW, CS-TZ42WKEW, CS-XZ50XKKEW, CS-Z50XKKEW, CS-TZ50WKEW, CS-Z50UFEAW, CS-Z50UB4EAW, CS-Z50UD3EAW, CS-TZ60WKEW, CS-Z60UB4EAW, CS-Z60UD3EAW, CS-Z71XKKEW, CS-TZ71WKEW). The Model column lists CU-2Z35TBE, CU-2Z41TBE, CU-2Z50TBE, CU-3Z52TBE, CU-3Z68TBE, CU-4Z68TBE, CU-4Z80TBE, and CU-5Z90TBE.

\* For CZ-MA3P necessary to use adaptor CZ-MA2P too.

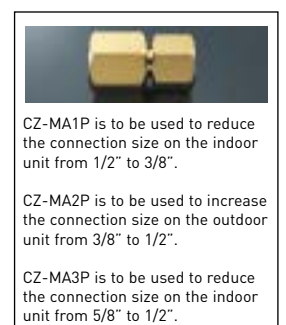

CZ-MA1P is to be used to reduce the connection size on the indoor unit from 1/2" to 3/8". CZ-MA2P is to be used to increase the connection size on the outdoor unit from 3/8" to 1/2". CZ-MA3P is to be used to reduce the connection size on the indoor unit from 5/8" to 1/2".



Optional wired remote controller. CZ-RD514C



Wall-mounted Etherea	Indoor unit Silver	Indoor unit Pure White Matt	Cooling capacity	Heating capacity	Connection in. / out.	Sound pressure <sup>1)</sup>		Dimension / Net weight		Piping connections	Silver RRP	White RRP
						Cool — Heat (Hi/Lo/S-Lo)	dB(A)	H x W x D	mm / kg			
1.6 kW	—	CS-MZ16XKE	1.60	2.60	4x1.5	38/26/21 — 39/27/21	37	295 x 870 x 229 / 10	295	1/4 (6.35) / 3/8 (9.52)	—	378
2.0 kW	CS-XZ20XKEW	CS-Z20XKEW	2.00	3.20	4x1.5	39/26/21 — 40/27/21	39	295 x 870 x 229 / 10	295	1/4 (6.35) / 3/8 (9.52)	449	396
2.5 kW	CS-XZ25XKEW	CS-Z25XKEW	2.50	3.60	4x1.5	41/27/21 — 43/29/21	41	295 x 870 x 229 / 10	295	1/4 (6.35) / 3/8 (9.52)	500	454
3.5 kW	CS-XZ35XKEW	CS-Z35XKEW	3.20	4.50	4x1.5	44/30/21 — 45/35/21	44	295 x 870 x 229 / 11	295	1/4 (6.35) / 3/8 (9.52)	567	514
4.2 kW	—	CS-Z42XKEW	4.00	5.60	4x1.5	44/33/27 — 45/37/31	44	295 x 870 x 229 / 10	295	1/4 (6.35) / 1/2 (12.70)	—	536
5.0 kW	CS-XZ50XKEW	CS-Z50XKEW	5.00	6.80	4x1.5	44/39/32 — 46/39/32	44	295 x 1040 x 244 / 12	295	1/4 (6.35) / 1/2 (12.70)	774	670
7.1 kW	—	CS-Z71XKEW	7.10	8.60	—	49/40/32 — 49/40/32	49	295 x 1040 x 244 / 13	295	1/4 (6.35) / 5/8 (15.88)	—	1355



Optional wired remote controller. CZ-RD514C



Wall-mounted TZ super-compact	Indoor unit	Cooling capacity	Heating capacity	Connection in. / out.	Sound pressure <sup>1)</sup>		Dimension / Net weight		Piping connections	RRP
					Cool — Heat (Hi/Lo/S-Lo)	dB(A)	H x W x D	mm / kg		
1.6 kW*	CS-MTZ16WKE	1.60	2.60	4x1.5	38/27/22 — 39/28/24	37	290 x 779 x 209 / 8	290	1/4 (6.35) / 3/8 (9.52)	380
2.0 kW	CS-TZ20WKEW	2.00	2.70	4x1.5	37/25/20 — 38/26/22	37	290 x 779 x 209 / 8	290	1/4 (6.35) / 3/8 (9.52)	389
2.5 kW	CS-TZ25WKEW	2.50	3.30	4x1.5	40/26/20 — 40/27/22	40	290 x 779 x 209 / 8	290	1/4 (6.35) / 3/8 (9.52)	416
3.5 kW <sup>2)</sup>	CS-TZ35WKEW	3.50	4.00	4x1.5	42/30/20 — 42/33/22	42	290 x 779 x 209 / 8	290	1/4 (6.35) / 3/8 (9.52)	473
4.2 kW	CS-TZ42WKEW	4.20	5.00	4x1.5	44/31/29 — 44/35/34	44	290 x 779 x 209 / 8	290	1/4 (6.35) / 1/2 (12.70)	539
5.0 kW	CS-TZ50WKEW	5.00	5.80	4x2.5	44/37/33 — 44/37/33	44	290 x 779 x 209 / 8	290	1/4 (6.35) / 1/2 (12.70)	604
6.0 kW	CS-TZ60WKEW	6.00	7.00	4x2.5	45/37/34 — 45/37/34	45	302 x 1102 x 244 / 13	302	1/4 (6.35) / 1/2 (12.70)	970
7.1 kW	CS-TZ71WKEW	7.10	8.60	4x2.5	47/38/35 — 47/38/35	47	302 x 1102 x 244 / 13	302	1/4 (6.35) / 5/8 (15.88)	1041



Optional wired remote controller. CZ-RD514C



Floor Console <sup>3)</sup>	Indoor unit	Cooling capacity	Heating capacity	Connection in. / out.	Sound pressure <sup>4)</sup>		Dimension / Net weight		Piping connections	RRP
					Cool — Heat (Hi/Lo/S-Lo)	dB(A)	H x W x D	mm / kg		
2.0 kW	CS-MZ20UFEA	2.00	3.20	4x1.5	39/27/22 — 39/27/21	39	600 x 750 x 207 / 13	600	1/4 (6.35) / 3/8 (9.52)	643
2.5 kW	CS-Z25UFEAW	2.50	3.60	4x1.5	40/27/22 — 40/27/21	40	600 x 750 x 207 / 13	600	1/4 (6.35) / 3/8 (9.52)	875
3.5 kW <sup>2)</sup>	CS-Z35UFEAW	3.50	4.50	4x1.5	41/28/22 — 41/28/21	41	600 x 750 x 207 / 13	600	1/4 (6.35) / 3/8 (9.52)	958
5.0 kW	CS-Z50UFEAW	5.00	5.30	4x1.5	44/33/29 — 48/35/31	44	600 x 750 x 207 / 13	600	1/4 (6.35) / 1/2 (12.70)	1138



RAL9010 panel for 4 way 60x60 cassette (sold separately). CZ-BT20EW

Optional wired remote controller. CZ-RD52CP



4 Way 60x60 cassette	Indoor unit (Panel CZ-BT20EW)	Cooling capacity	Heating capacity	Connection in. / out.	Sound pressure <sup>6)</sup>		Dimension / Net weight		Piping connections	Indoor RRP	Panel RRP
					Cool — Heat (Hi/Lo/S-Lo)	dB(A)	Indoor H x W x D	Panel H x W x D			
2.0 kW	CS-MZ20UB4EA	2.00	3.20	4x1.5	35/27/24 — 36/30/27	35	260x575x575/18	51x700x700/2.5	1/4 (6.35) / 3/8 (9.52)	166	515
2.5 kW	CS-Z25UB4EAW	2.50	3.60	4x1.5	36/27/24 — 37/30/27	36	260x575x575/18	51x700x700/2.5	1/4 (6.35) / 3/8 (9.52)	166	601
3.5 kW <sup>2)</sup>	CS-Z35UB4EAW	3.50	4.50	4x1.5	36/28/25 — 37/30/27	36	260x575x575/18	51x700x700/2.5	1/4 (6.35) / 3/8 (9.52)	166	822
5.0 kW <sup>5)</sup>	CS-Z50UB4EAW	5.00	6.80	4x1.5	39/30/27 — 40/31/28	39	260x575x575/18	51x700x700/2.5	1/4 (6.35) / 1/2 (12.70)	166	947
6.0 kW	CS-Z60UB4EAW	6.00	8.50	4x1.5	44/34/31 — 45/34/31	44	260x575x575/18	51x700x700/2.5	1/4 (6.35) / 1/2 (12.70)	166	1026



Optional wireless kit. CZ-RL511D



Low static pressure hide-away	Indoor unit	Cooling capacity	Heating capacity	Connection in. / out.	Sound pressure <sup>7)</sup>		Dimension / Net weight		Piping connections	RRP
					Cool — Heat (Hi/Lo/S-Lo)	dB(A)	H x W x D	mm / kg		
2.0 kW	CS-MZ20UD3EA	2.00	3.20	4x1.5	34/29/26 — 36/29/26	34	200 x 750 x 640 / 19	200	1/4 (6.35) / 3/8 (9.52)	664
2.5 kW	CS-Z25UD3EAW	2.50	3.60	4x1.5	35/29/26 — 37/29/26	35	200 x 750 x 640 / 19	200	1/4 (6.35) / 3/8 (9.52)	846
3.5 kW <sup>2)</sup>	CS-Z35UD3EAW	3.50	4.50	4x1.5	35/29/26 — 37/29/26	35	200 x 750 x 640 / 19	200	1/4 (6.35) / 3/8 (9.52)	893
5.0 kW <sup>5)</sup>	CS-Z50UD3EAW	5.00	6.80	4x1.5	41/31/28 — 41/32/29	41	200 x 750 x 640 / 19	200	1/4 (6.35) / 1/2 (12.70)	1070
6.0 kW	CS-Z60UD3EAW	6.00	8.50	4x1.5	43/32/29 — 43/34/31	43	200 x 750 x 640 / 19	200	1/4 (6.35) / 1/2 (12.70)	1117

1) The sound pressure of the indoor unit shows the value measured of a position 1 m in front of the main body and 0.8 m below the unit. The sound pressure is measured in accordance with JIS C 9612. Q-Lo: Quiet mode. Lo: The lowest set fan speed. 2) The heating capacity is 4.2 kW connected to a CU-Z235TBE. 3) Compatible only with 2 ports R32 outdoor CU-Z235TBE / CU-Z241TBE / CU-Z250TBE. Minimum quantity of connection: 2 indoor units. Floor console indoor unit is compatible with R410A outdoors with 3, 4 or 5 ports: CU-3E18PBE, CU-3E23SBE, CU-4E23PBE, CU-4E27PBE and CU-5E34PBE. 4) The sound pressure of the units shows the value measured of a position 1 m in front of the main body and 1 m above floor. The sound pressure is measured in accordance with JIS C 9612. Q-Lo: Quiet mode. Lo: The lowest set fan speed. 5) The heating capacity is 5.3 kW connected to a CU-Z250TBE. 6) The sound pressure of the indoor unit shows the value measured of a position 1.5 m below the unit. The sound pressure is measured in accordance with JIS C 9612. Q-Lo: Quiet mode. Lo: The lowest set fan speed. 7) The sound pressure of the indoor unit shows the value measured of a position of 1.5 m below the unit with 1 m duct on the suction side and 2 m duct on the discharge side. The sound pressure is measured in accordance with JIS C 9612. \* Tentative data.

**Outdoor unit Multi Wall TZ • R32**

Indoor nominal capacity (Min - Max)			3.2 ~ 6.0 kW	3.2 ~ 7.7 kW	4.5 ~ 9.5 kW
Unit			CU-2TZ41TBE	CU-2TZ50TBE	CU-3TZ52TBE
Cooling capacity	Nominal (Min - Max)	kW	4.10 (1.50 - 4.70)	5.00 (1.50 - 5.40)	5.20 (1.80 - 6.60)
EER <sup>1)</sup>	Nominal (Min - Max)	W/W	4.14 (5.56 - 3.41)	3.85 (5.56 - 3.33)	4.52 (3.67 - 5.00)
<b>SEER <sup>2)</sup></b>			<b>7.10 A++</b>	<b>7.00 A++</b>	<b>7.60 A++</b>
Pdesign (cooling)		kW	4.10	5.00	5.20
Input power cooling	Nominal (Min - Max)	kW	0.99 (0.27 - 1.38)	1.30 (0.27 - 1.62)	1.15 (0.36 - 1.80)
Annual energy consumption <sup>3)</sup>		kWh/a	202	250	239
Heating capacity	Nominal (Min - Max)	kW	4.40 (1.10 - 6.30)	5.70 (1.10 - 6.40)	6.80 (1.60 - 7.50)
Heating capacity at -7 °C		kW	—	—	—
COP <sup>1)</sup>	Nominal (Min - Max)	W/W	4.44 (5.00 - 3.54)	4.35 (5.00 - 3.62)	4.28 (3.87 - 5.00)
<b>SCOP <sup>2)</sup></b>			<b>4.30 A+</b>	<b>4.20 A+</b>	<b>4.20 A+</b>
Pdesign at -10 °C		kW	3.50	4.50	5.00
Input power heating	Nominal (Min - Max)	kW	0.99 (0.22 - 1.78)	1.31 (0.22 - 1.77)	1.59 (0.32 - 1.94)
Annual energy consumption <sup>3)</sup>		kWh/a	1139	1500	1667
Current	Cool / Heat	A	4.60 / 4.60	6.00 / 6.00	5.30 / 7.30
Power source		V	230	230	230
Sound pressure <sup>4)</sup>	Cool / Heat (Hi)	dB(A)	48 / 50	50 / 52	48 / 48
Dimension <sup>5)</sup>	H x W x D	mm	542 x 780 x 289	542 x 780 x 289	795 x 875 x 320
Net weight		kg	35	35	71
Pipe diameter	Liquid pipe	Inch (mm)	1/4 (6.35)	1/4 (6.35)	1/4 (6.35)
	Gas pipe	Inch (mm)	3/8 (9.52)	3/8 (9.52)	3/8 (9.52)
Pipe length range total		m	6 ~ 30	6 ~ 30	6 ~ 50
Pipe length range to one unit		m	3 ~ 20	3 ~ 20	3 ~ 25
Elevation difference (in/out)		m	10	10	15
Pipe length for additional gas		m	20	20	30
Additional gas amount		g/m	15	15	20
Refrigerant (R32) / CO <sub>2</sub> Eq.		kg / T	0.9 / 0.6075	0.9 / 0.6075	2.1 / 1.4175
Operating range	Cool Min ~ Max	°C	-10 ~ +46	-10 ~ +46	-10 ~ +46
	Heat Min ~ Max	°C	-15 ~ +24	-15 ~ +24	-15 ~ +24
<b>Outdoor unit RRP</b>		€	<b>1172</b>	<b>1331</b>	<b>1606</b>

1) EER and COP calculation is based in accordance to EN14511. 2) Energy Label Scale from A+++ to D. 3) The annual energy consumption is calculated in accordance to EU/626/2011. 4) The sound pressure of the units shows the value measured of a position 1 m in front and 1 m in rear side of the main body. The sound pressure is measured in accordance with JIS C 9612. 5) Add 70 or 95 mm for piping port.

**Possible outdoor / indoor units combinations • R32**

Rooms	Model	Indoor capacity connected (Min - Max)	Wall-mounted TZ super-compact					
			16	20	25	35	42	50
2	CU-2TZ41TBE	3.2 ~ 6.0 kW	✓	✓	✓	✓		
	CU-2TZ50TBE	3.2 ~ 7.7 kW	✓	✓	✓	✓	✓	✓
3	CU-3TZ52TBE	4.5 ~ 9.5 kW	✓	✓	✓	✓	✓	✓

Minimum quantity of connection: 2 indoor units.



Optional wired remote controller.  
CZ-RD514C

INTERNET CONTROL: Built-in Wi-Fi.



















Wall-mounted TZ super-compact	Indoor unit	Cooling capacity	Heating capacity	Connection in. / out.	Sound pressure <sup>1)</sup>		Dimension / Net weight	Piping connections	RRP
					Cool — Heat (Hi/Lo/S-Lo)	dB(A)			
		kW	kW	mm <sup>2</sup>			H x W x D	Liquid / Gas pipe	€
							mm / kg	Inch (mm)	
1.6 kW*	CS-MTZ16WKE	1.60	2.60	4 x 1.5	38 / 27 / 22 — 39 / 28 / 24		290 x 779 x 209 / 8	1/4 (6.35) / 3/8 (9.52)	<b>380</b>
2.0 kW	CS-TZ20WKEW	2.00	2.70	4 x 1.5	37 / 25 / 20 — 38 / 26 / 22		290 x 779 x 209 / 8	1/4 (6.35) / 3/8 (9.52)	<b>389</b>
2.5 kW	CS-TZ25WKEW	2.50	3.30	4 x 1.5	40 / 26 / 20 — 40 / 27 / 22		290 x 779 x 209 / 8	1/4 (6.35) / 3/8 (9.52)	<b>416</b>
3.5 kW	CS-TZ35WKEW	3.50	4.00	4 x 1.5	42 / 30 / 20 — 42 / 33 / 22		290 x 779 x 209 / 8	1/4 (6.35) / 3/8 (9.52)	<b>473</b>
4.2 kW	CS-TZ42WKEW	4.20	5.00	4 x 1.5	44 / 31 / 29 — 44 / 35 / 34		290 x 779 x 209 / 8	1/4 (6.35) / 1/2 (12.70)	<b>539</b>
5.0 kW	CS-TZ50WKEW	5.00	5.80	4 x 2.5	44 / 37 / 33 — 44 / 37 / 33		290 x 779 x 209 / 8	1/4 (6.35) / 1/2 (12.70)	<b>604</b>

1) The sound pressure of the indoor unit shows the value measured of a position 1 m in front of the main body and 0.8 m below the unit. The sound pressure is measured in accordance with JIS C 9612. Q-Lo: Quiet mode. Lo: The lowest set fan speed. \* Tentative data.





# Compare solutions

			Indoor unit dimension	Efficiency <sup>1)</sup>	Indoor air quality		Comfort		Connectivity
<b>Wall-mounted Etherea</b> 	Silver / Pure White Matt	2.0 to 7.1 kW	295 x 870 x 229 (295 x 1040 x 244 wide model)	A+++ A+++	 nanoeX Generator Mark 2	-10 °C in cooling mode -15 °C in heating mode	Aerowings 2.0	 19 dB(A)	Built-in Wi-Fi
<b>Wall-mounted TZ super-compact</b> 	Matte white	2.0 to 7.1 kW	290 x 779 x 209 (295 x 1040 x 244 wide model)	A++ A++	PM2.5 Filter	-10 °C in cooling mode -15 °C in heating mode	Aerowings	 20 dB(A)	Built-in Wi-Fi
<b>Wall-mounted FZ super-compact</b> 	Matte white	2.5 to 6.0 kW	290 x 779 x 209	A++ A+	PM2.5 Filter	-10 °C in cooling mode -15 °C in heating mode	Aerowings	 20 dB(A)	Optional Wi-Fi CZ-TACG1
<b>Wall-mounted Professional -20 °C</b> 	Matte white	2.5 to 7.1 kW	295 x 919 x 194 (302 x 1120 x 236 wide model)	A+++ A+	Air filter	-20 °C in cooling mode -15 °C in heating mode	Aerowings	 21 dB(A)	Optional Wi-Fi CZ-TACG1
<b>Floor console</b> 	White	2.5 to 5.0 kW	600 x 750 x 207	A++ A++	 nanoeX Generator Mark 1	-10 °C in cooling mode -15 °C in heating mode	Double airflow	 20 dB(A)	Optional Wi-Fi CZ-TACG1
<b>4 Way 60x60 cassette</b> 		2.5 to 6.0 kW	260 x 700 x 700	A++ A+	Air filter	-10 °C in cooling mode -15 °C in heating mode	Air fresh entry	 22 dB(A)	Optional Wi-Fi CZ-TACG1
<b>Low static pressure hide-away</b> 		2.5 to 6.0 kW	200 x 750 x 640	A+ A+	Air filter	-10 °C in cooling mode -15 °C in heating mode		 24 dB(A)	Optional Wi-Fi CZ-TACG1

1) Energy efficiency class in 2.5 kW references. \* All data in this chart is applicable in most of the models in each line up. check product specifications to confirm.

# Control and connectivity


Panasonic offers its customers cutting-edge technology, specially designed to ensure our air conditioning systems deliver even higher performance. You can properly manage the air conditioning and perform comprehensive monitoring and control, with all of the features the remote controller provides at home, from anywhere in the world thanks to the internet applications Panasonic has created for you.

## Domestic integration to P-Link - CZ-CAPRA1

Can connect RAC range to P-Link. Full control is now possible.

### Integrates any unit in big system control.

- TKEA server room integration
- Small offices with domestic indoors
- Tender for refurbishment (old system domestic and VRF in one installation)

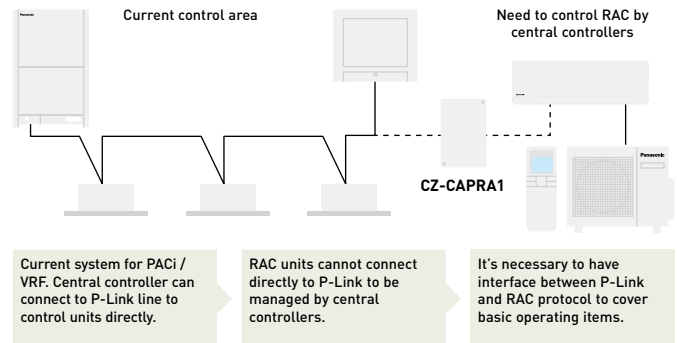

**Basic operation items:** ON/OFF, Mode select, Temperature setting, Fan speed, Flap setting, Remote control prohibit.  
**External input:** ON/OFF control signal, Abnormal stop signal.  
**External output for Relay <sup>1)</sup>:** Operation status (ON/OFF), Alarm status output.

1) Because current CN-CNT connector can not provide the power for external output relay, additional Input power for external relay is necessary.

## Connectivity. Control by BMS

Great flexibility for integration into your KNX, Modbus and BACnet projects allows fully bi-directional monitoring and control of all the functioning parameters.

Reference	KNX <sup>®</sup> PAW-AC-KNX-1i	Modbus <sup>®</sup> PAW-AC-MBS-1	BACnet <sup>™</sup> PAW-AC-BAC-1 <sup>1)</sup>
Quick installation and possibility of hidden installation	✓	✓	✓
External power not required	✓	✓	✓
Direct connection to the AC indoor unit	✓ (Split or Multi Split)	✓ (Split or Multi Split)	✓
Control and monitoring of the internal variables of the indoor unit and error codes and indication	✓ Fully compatible	✓ Fully compatible	
Use the AC ambient temperature or the one measured by external sensor	✓	✓	
AC unit can be controlled simultaneously by the remote controller of the AC unit and interface devices	✓	✓	
Advanced control functions	✓	✓	
4 binary inputs. They work as standard interface binary inputs as well as being used to control the AC directly	✓	✓	
Total Control and Supervision. Real states of the AC unit's internal variables			✓

1) This interface allows a complete and natural integration of Panasonic air conditioners into either BACnet IP or MS/TP networks. Is a BTL certified device.

### PAW-AC-DIO

Dry contact ON/OFF Interface. Panasonic has developed for hotels applications a dry contact PCB which works with Etherea, RE, UE and YE indoor units in order to control simply the unit centrally.

- ON/OFF signal by 3rd party BMS
- PCB connected to CN-RMT port on indoor unit PCB










Model name	Interface
CZ-TACG1	Wi-Fi adapter for smart control via Panasonic Comfort Cloud App
CZ-CAPRA1	RAC interface adapter for integration into P-Link, plus external input and alarm/status output
PAW-AC-KNX-1i	This interface can be used with all models which have a CN-CNT connector
PAW-AC-MBS-1	This interface can be used with all models which have a CN-CNT connector

Model name	Interface
PAW-AC-BAC-1	This interface can be used with all models which have a CN-CNT connector
PAW-AC-HEAT-1	Heating only PCB for Etherea, 4-Way 60x60 cassette and Low static pressure hide away
PAW-AC-DIO	This interface can be used with all models which have a CN-RMT connector
PAW-SMSCONTROL	Control of the Etherea, Flagship and Heatcharge by SMS (need additional SIM card)



# Accessories and control

## Connectivity

 <p><b>Wi-Fi adapter for smart control via Panasonic Comfort Cloud App.</b></p> <p>----- CZ-TACG1 ----- 120 €</p>	 <p><b>RAC interface adapter for integration into P-Link, plus external input and alarm/status output.</b></p> <p>----- CZ-CAPRA1 ----- 190 €</p>	 <p><b>This interface can be used with all models which have a CN-CNT connector.</b></p> <p>----- PAW-AC-KNX-1i ----- 386 €</p>
 <p><b>This interface can be used with all models which have a CN-CNT connector.</b></p> <p>----- PAW-AC-MBS-1 ----- 386 €</p>	 <p><b>This interface can be used with all models which have a CN-CNT connector.</b></p> <p>----- PAW-AC-BAC-1 ----- 559 €</p>	 <p><b>This interface can be used with all models which have a CN-RMT connector.</b></p> <p>----- PAW-AC-DIO ----- 187 €</p>
 <p><b>Heating only PCB for Etherea, 4 way 60x60 cassette and hide-away.</b></p> <p>----- PAW-AC-HEAT-1 ----- 161 €</p>	 <p><b>Control of the Etherea, Flagship and Heatcharge by SMS (need additional SIM card).</b></p> <p>----- PAW-SMSCONTROL ----- 293 €</p>	 <p><b>Redundancy of 2 units TKEA.</b></p> <p>----- PAW-SERVER-PKEA ----- 223 €</p>

## Individual controls

 <p><b>Wired remote controller for wall-mounted.</b></p> <p>----- CZ-RD514C ----- 125 €</p>	 <p><b>Wired remote controller for cassette.</b></p> <p>----- CZ-RD52CP ----- 96 €</p>	 <p><b>Infrared remote controller Sky Remote. 2 m cable length of infrared receiver for hide-away.</b></p> <p>----- CZ-RL511D ----- 118 €</p>
--	---	--

## Panel

## Pipe reducer

 <p><b>RAL9010 panel for 4 way 60x60 cassette.</b></p> <p>----- CZ-BT20EW ----- 166 €</p>	 <p><b>Is to be used to reduce the connection size on the indoor unit from 1/2" to 3/8".</b></p> <p>----- CZ-MA1P ----- 19 €</p>	 <p><b>Is to be used to increase the connection size on the outdoor unit from 3/8" to 1/2".</b></p> <p>----- CZ-MA2P ----- 27 €</p>	 <p><b>Is to be used to reduce the connection size on the indoor unit from 5/8" to 1/2".</b></p> <p>----- CZ-MA3P ----- 27 €</p>
--	--	---	--

*PACi*



## Panasonic Commercial air to air

Here are some of your new air conditioner's major features.

Panasonic has developed an impressive range of highly efficient Commercial Air Conditioners. This range confirms our commitment to the environment, with our highly efficient inverter compressor technology to optimise performance.

PACi outdoor units. Energy saving concept	→ 38
Bringing nature's balance indoors	→ 40
New Adaptive ducted unit - PF3	→ 41
CONEX. New devices and apps	→ 42
Commercial Wi-Fi Adaptor	→ 43
Low Temperature Applications	→ 44
<b>Commercial units PACi NX R32 range</b>	<b>→ 46</b>
Standard - Elite wall-mounted • R32	→ 48 - 51
Standard - Elite 4 way 90x90 cassette • R32	→ 52 - 55
Standard - Elite ceiling • R32	→ 56 - 59
Standard - Elite adaptive ducted unit • R32	→ 60 - 63
<b>Commercial units PACi R32 range</b>	<b>→ 64</b>
Standard - Elite wall-mounted • R32	→ 66 - 69
Standard - Elite 4 way 60x60 cassette • R32	→ 70 - 71
Standard - Elite 4 way 90x90 cassette • R32	→ 72 - 75
Standard - Elite ceiling • R32	→ 76 - 79
Standard - Elite adaptive ducted unit • R32	→ 80 - 83
High static pressure hide-away 20.0-25.0 kW • R32	→ 84
<b>Commercial PACi and PACi NX Multi</b>	<b>→ 86</b>
Single, twin, triple and double-twin system • R32	→ 88
<b>Hydronic PACi</b>	
PRO-HT Tank DHW	→ 92
PRO-HT Tank heating and cooling	→ 93
PACi with water heat exchanger • R32	→ 94
<b>Other commercial</b>	
Solutions for server rooms	→ 96
Panasonic ventilation solutions	→ 98
Accessories and control	→ 100



## PACi outdoor units. Energy saving concept

Product quality and safety. All Panasonic air conditioners undergo strict quality and safety tests before sale. This rigorous process includes obtaining all necessary safety approvals, to ensure that all air conditioners we sell are not only built to the highest market standards, but are also completely safe.



### Professional air conditioners with R32 refrigerant

Panasonic recommends R32, with Global Warming Potential (GWP). Compared to R22 and R410A, R32 has a very low potential impact on global warming.

Panasonic takes action for the environment. In line with the European countries participating in the Montreal Protocol, protecting the ozone layer and preventing global warming, Panasonic is leading the switch to R32.

### 1 Installation innovation

- Extremely easy to install, practically the same as R410A
- Single substance refrigerant, which makes it easier to recycle and reuse

### 2 Environmental innovation

- Zero impact on the ozone layer
- 75 % less impact on global warming


### 3 Economic and energy consumption innovation

- Lower cost and greater savings
- Higher energy efficiency than R410A


### PACi NX Series - Standard range, for absolute ease of refurbishment

This new series has been developed with 3 wired method and communication. It makes it simple and easy to replace old systems with 3 wire connections, which is prevalent in many systems.

PACi PZ2/PZH2:  
2 wire method.



New PACi NX Series:  
3 wire method.



**PACi and PACi NX Elite: Top-tier commercial air conditioning**

Outstanding performance at extreme ambient temperatures with very high energy efficiency both in heating and cooling. Fans, fan motors, compressors and heat exchangers engineered for maximum savings result in higher seasonal efficiencies, which ranks as one of the best in the industry, ensuring reduced CO<sub>2</sub> emissions, energy consumption and operating costs.

**From 3.6 to 14.0 kW.**

- Meeting all necessary safety approvals to ensure quality and safety
- Top class SEER: A+++ / SCOP: A+++ at 3.6 kW (in 90x90 cassette)

- Cooling operation is possible when outdoor temperature as high as 48 °C (for PACi NX 7.1 kW and higher capacities)
- Precise control with DC inverter technology for even more energy saving
- Cooling operation at -20 °C (10.0 kW to 14.0 kW with 30 m maximum pipe length)
- Heating operation at ambient temperature as low as -20 °C
- Compact outdoor units
- Auto restart after power outage
- Twin, triple and double-twin connections

**PACi and PACi NX Standard: For economy and value**

With high quality design and engineering, the PACi and PACi NX Standard are the perfect solutions for projects which demand quality on a limited budget. In addition, compact and lightweight design makes them ideal for installations with limited space including small commercial and residential applications. The slim and lightweight outdoor unit design enables installation even at very challenging locations.

**From 3.6 to 14.0 kW.**

- PACi starting from 6.0 kW and PACi NX starting from 3.6 kW
- Good balance of system cost vs performance
- Top class SEER/SCOP in the standard inverter category SEER: A++ / SCOP: A++ up to 7.1 kW (in 90x90 cassette)
- Variety of individual and central controllers which provides full flexibility
- Compact outdoor units, small footprint and lightweight
- Twin connection possible
- Cooling operation down to -10 °C and heating operation down to -15 °C

**Big PACi Elite R32**

20.0 – 25.0 kW is ideally suited for small and mid retail applications.

In addition to its lightweight, split-able, compact body, the newly designed hide-away unit enables easy installation and pipe work within a narrow void.

**Panasonic Big PACi : Environmental friendly, strong and flexible.**

- High efficiency with Panasonic compressor as the driving force

- Compact and light indoor body
- Easy pipe work with split-able hide-away indoor design
- Separable indoor unit allows for flexible installation to fit in narrow void
- Water heat exchanger and AHU connection compatibility
- Bluefin anti-corrosion coating of the heat exchanger as standard
- Wide range of controls including Cloud Control compatibility



# Bringing nature's balance indoors



## nanoe™ X, technology with the benefits of hydroxyl radicals.

Abundant in nature, hydroxyl radicals (also known as OH radicals) have the capacity to inhibit pollutants, viruses, and bacteria to clean and deodorise. nanoe™ X, technology can bring these incredible benefits indoors so that hard surfaces, soft furnishings, and the indoor environment can be a cleaner and pleasant place to be, whether at home, at work, or visiting hotels, shops, restaurants etc.



### A naturally occurring process

Hydroxyl radicals are unstable molecules looking to react with other elements like hydrogen, capturing it. Thanks to this reaction, hydroxyl radicals have the potential to inhibit the growth of pollutants such as bacteria, viruses, moulds, and odours, breaking them down and neutralising the unpleasant effects. This naturally occurring process has major benefits to improve indoor environments.


**Panasonic's nanoe™ X technology takes this a step further and brings nature's detergent – hydroxyl radicals – indoors to help create an ideal environment.**

### Panasonic's nanoe™ X technology takes this a step further and brings nature's detergent – hydroxyl radicals – indoors to help create an ideal environment

Thanks to the nanoe™ X properties, several types of pollutants can be inhibited such as certain types of bacteria, viruses, mould, allergens, pollen and certain hazardous substances.



nanoe™ X reliably reaches pollutants.



Hydroxyl radicals denature pollutants' proteins.



Pollutants activity is inhibited.



### nanoe™ X: improving protection 24/7

#### Built-in nanoe X Generator Mark 1.

4 Way 90x90 cassette: S-\*\*\*\*PU3E. 7 capacities:  
3.6 - 14.0 kW.

#### Built-in nanoe X Generator Mark 2.

Adaptive ducted unit: S-\*\*\*\*PF3E. 7 capacities:  
3.6- 14.0 kW.

Wall-mounted: S-\*\*\*\*PK3E. 5 capacities: 3.6 - 10.0 kW.





# Adaptive ducted unit - PF3

New adaptive ducted - PF3 has been completely re-designed to provide better flexibility. The vertical installation is newly available with powerful external static pressure (maximum 150 Pa).



<https://www.youtube.com/watch?v=LBiRrs0aqXo>

**1 Highly flexible installation**  
· 2 installation possibilities (horizontal / vertical)

**2 High seasonal performance with slim body**  
· Maximum SEER/SCOP: A++/A++

**3 Comfort operation**  
· Super quiet operation, minimum 22 dB(A)\*

\* 3,6 kW model and when operating with external static pressure 50 Pa in low fan mode.


## 2 installation possibilities (horizontal / vertical)

Vertical installation is newly available. External static pressure 150 Pa, sufficient for remotely installing units away from the rooms.



## Improved drain pan design

Just one drain pan for both horizontal and vertical installations. No need to modify the unit.



## Selectable inlet air position

Inlet air position may be adjusted by means of a removable panel, to allow rear or bottom entry, depending on the duct installation.



## Maximum efficiency

	kW	3,6	5,0	6,0	7,1	10,0		12,5	14,0
Elite	SEER	A++	A++	A++	A++	A++	Ɖsc	281.7%	275.9%
	SCOP	A+	A+	A++	A++	A+	Ɖsh	170.0%	171.0%
Standard	SEER	—	—	A++	A++	A++	Ɖsc	257.5%	252.6%
	SCOP	—	—	A++	A+	A	Ɖsh	144.2%	140.8%

## Compact body

· Only 250 mm high  
· Light units from 25 to 39 kg

Conventional model	New adaptive ducted
33 kg	30 kg
290 mm	250 mm

## New adaptive ducted




## Better indoor air quality with nanoe™ X



The performance of nanoe™ X technology is maintained, even with 10 m long ducts\*. The effect of improved air quality is sufficient to allow for numerous duct shapes to fit the application.

\* Panasonic internal survey.

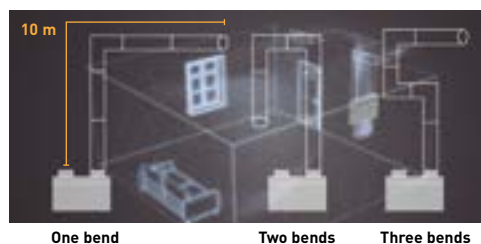


As the experiments demonstrate, up to a duct length of 10 m, effectiveness of nanoe™ X is maintained even if the duct is bended 3 times.

## nanoe™ X effect against odour proven in large space

In a room of 139 m<sup>2</sup>, tobacco odour is reduced by a factor of 0,7 when compared to natural reduction over a period of 2 hours.


### Tobacco deodorisation ratio.

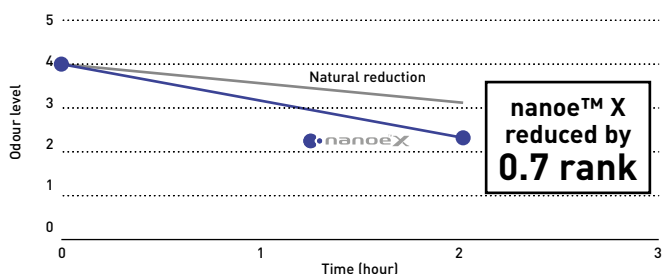

### Test ambient.


3rd party international testing institute KAKEN<sup>1)</sup> conducted the performance experiment of Adaptive ducted equipped with nanoe X Generator Mark 2 device removing tobacco odour.

1) KAKEN TEST CENTER General Incorporated Foundation in Japan, international testing institute.

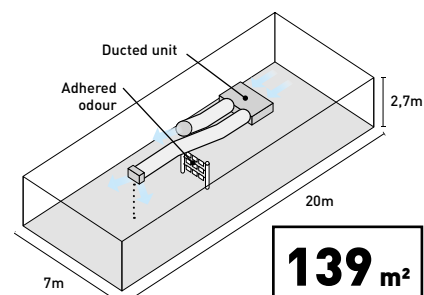

# CONEX. New devices and apps

CONEX provides comfort and control for varying user needs. Accessible, flexible and scalable with different controllers and apps. Perfectly meeting requirements of modern controls for end user, installer and service. With nanoe™ X function, technology with the benefits of hydroxyl radicals.

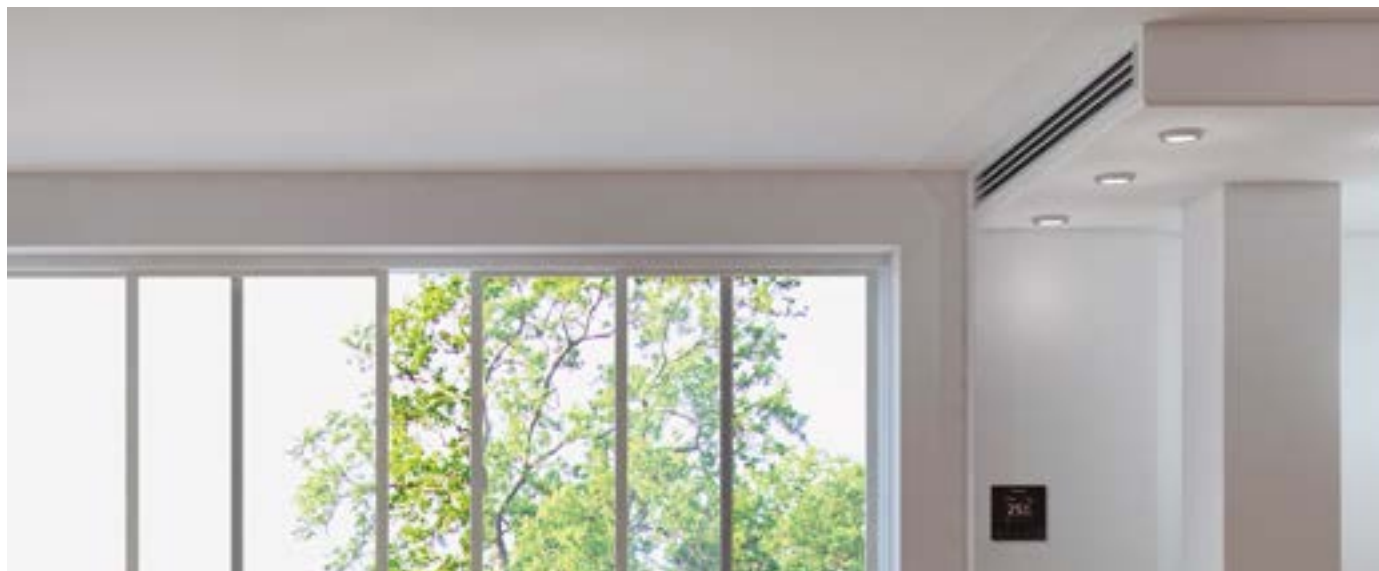

## 1 Intuitive control with stylish design

- Simple operation at a glance
- Clean face with full flat & black LCD display
- Compact body, only 86x86 mm

## 2 Control comfort with your smartphone

- Flexible control options with IoT integration
- New Panasonic H&C Control App for daily remote control operation
- Panasonic Comfort Cloud App for remote operation 24/7/365

## 3 Easy maintenance with service support app

- Quick and easy app set-up for system setting
- Panasonic H&C Diagnosis App enables the user to obtain detailed system operation data

\* The use of apps depends on the remote controller model.


### CONEX with IoT integration



The new wired remote controller series is fully integrated with IoT solutions developed by Panasonic. Detailed operation, maintenance setting and service operation are all possible with smartphone or tablet.



[https://www.youtube.com/watch?v=\\_USzG\\_9f6bk&feature=youtu.be](https://www.youtube.com/watch?v=_USzG_9f6bk&feature=youtu.be)

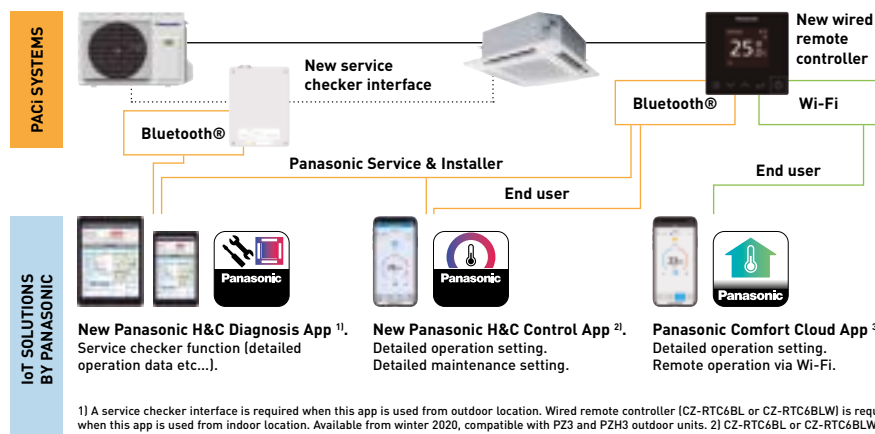

Model	CZ-RTC6	CZ-RTC6BL	CZ-RTC6BLW
Wired connection compatible with	PACi, PACi NX, ECOi, GHP	PACi, PACi NX, ECOi, GHP	PACi NX only
Wireless functions	No wireless capability	Bluetooth®	Bluetooth® + Wi-Fi
<b>App compatibility</b>			
Panasonic Comfort Cloud App	—	—	✓
Panasonic H&C Control App	—	✓ PACi, PACi NX, ECOi, GHP	✓ PACi NX only
Panasonic H&C Diagnosis App	—	✓ PACi NX only*	✓ PACi NX only*
Outdoor unit settings (remote controller connected to indoor unit)	✓ PACi NX only*	✓ PACi NX only*	✓ PACi NX only*

\* When connected to PACi NX indoor and outdoor unit combination.



# Commercial Wi-Fi Adaptor

Panasonic CZ-CAPWFC1 interface adaptor, allows connection of one or a group of indoor units to Panasonic Comfort Cloud App, which provides control, monitoring, scheduling and error alerts.



## Advanced smartphone control

Control PACi, ECOi and ECO G units with your smartphone from wherever and whenever you are, by using Panasonic Comfort Cloud App and Commercial Wi-Fi Adaptor. This scalable solution is ideal for one system, one site or multiple locations. Coupling the adaptor with the already feature rich systems, makes it an ideal solution for residential and commercial applications.

## Cloud control is available for all indoor units with P-link

Compatible indoor units type: Model code starting with "S-" (excludes S-80/125MW1E5).  
 Incompatible indoor units type: Model code starting with "PAW-", "FY-" and S-80/125MW1E5.

**1 From 1 to 200 units**  
 User can control up to 10 different sites, with up to 20 units / groups per site. Additionally, one adaptor can be connected to 1 indoor or to a group of maximum 8 indoors.

**2 Voice control compatible**  
 When registering the unit to Panasonic Comfort Cloud App it makes compatible with most popular voice assistants.

**3 Multi user**  
 The Panasonic Comfort Cloud App allows multi-user access control. Restrict user access to specific units.

**4 Easy scheduling**  
 Complex weekly scheduling made simple. Not only for one unit, but across multiple sites and from a smartphone.


**5 Energy monitor**  
 See the estimated power consumption and compare with other periods, to see how energy consumption can be reduced even more. Check list of units that provides consumption\*.

**6 Error codes**  
 Error code notification through the App, provides early notification and allows for faster repair.

\* Function available depending on the model.

## Connection Diagram

Commercial Wi-Fi Adaptor wiring length is 1.9 m and connects to indoor unit thru T10 connector and R1/R2 terminal connectors.

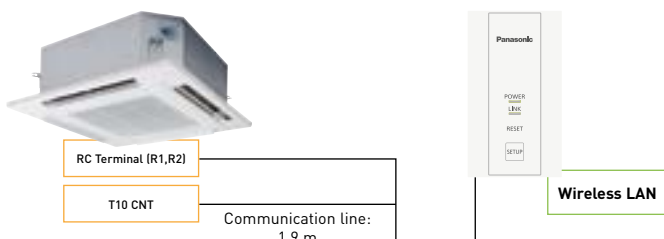

Input Voltage	DC 12V (supplied from T10 connector)
Power Consumption	Maximum 2.4W
Size (H x W x D)	120 x 70 x 25 mm
Weight	190g (including communications lines)
Interface	1 x Wireless LAN
Wireless LAN Standard	IEEE 802.11 b/g/n
Frequency Range	2,4GHz band
Operation range	0 ~ 55 °C, 20 ~ 80RH%
Connectable indoor unit	1 unit
Length of communication line	1.9 m (included in the shipment)

Download free app:



Panasonic Comfort Cloud App.

Other hardware requirements: Router and Internet (purchase and subscribe separately).

# Low Temperature Applications

Panasonic PACi Elite offers a high quality and efficient solution for low temperature applications



## Overview

The Panasonic PACi Elite range of semi-industrial systems has been developed to lead the way in quality air conditioning for commercial environments. The Elite line is prevalent in low temperature applications, including wine cellars, server rooms and food storage areas, thanks to its ErP-approved units, and exceptional cooling capabilities.

The range boasts a wide range of features that make it the perfect solution to the needs of challenging commercial and seasonal demands. The units provide continuous cooling when outside temperatures are between  $-15^{\circ}\text{C}$  and  $46^{\circ}\text{C}$ .

## Solutions for cold rooms, wine cellars and special low temperature rooms

Boasting exceptional energy performance, the system ranks among the best in its class (SEER A++) and its inverter technology reduces power consumption and operating costs by 20%. This, combined with the use of R32 gas to reduce the unit CO2 emissions, ensures Panasonic PACi solutions offer market-leading efficiency.

The latest models in the series are not only built to the highest industry standards to ensure optimum efficiency, they are also lightweight, with a slim and compact design, making these units easy to install.

There is a complete range from 3.60 to 22.00kW.


Just like all the indoor units in the PACi range, these units can be monitored via the internet, generating an alarm if there is a breakdown.

One of the main features of the PACi series is the possibility of adjusting the product for special applications, not just for regular heating and cooling applications. The PACi Elite range caters special applications that require cooling to maintain rooms between  $8^{\circ}\text{CWB}$  and  $24^{\circ}\text{CWB}$  ( $10^{\circ}\text{CDB}$ - $30^{\circ}\text{CDB}$ ).

## The perfect solution for:

- Wine cellars
- Ice cream factories
- Flower shops
- Supermarkets
- Grain stores
- Food storage
- Food processing
- Food distribution
- Lunchrooms
- Vegetable processing

## Range of temperature for wine cellar

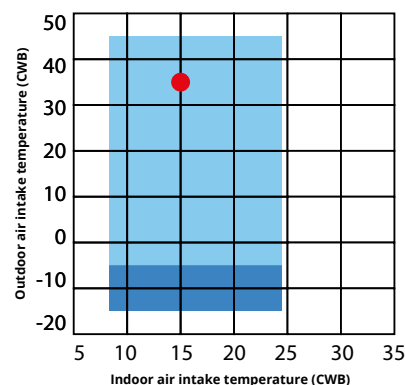



## Low Temperature Compatible Unit Configurations

The PACi Elite range caters special applications that require cooling to maintain rooms between 8°CWB and 24°CWB (10°CDB 30°CDB). In order adjust the product for low temperature applications, in terms of enthalpy, the indoor unit needs to be over-dimensioned and certain parameters need to be adjustable. Below are the compatible configurations for each of the PACi Elite range.



### Wall Mounted (PK)

	low temp.36	low temp.50	low temp.60	low temp.71	low temp.100	low temp.125	low temp.140	low temp. 200	low temp. 250
<b>Kit</b>	KIT-NXLT36PK3	KIT-NXLT50PK3	KIT-NXLT60PK3	KIT-NXLT71PK3 / -3PH	KIT-NXLT100PK3 / -3PH	KIT-NXLT125PK3 / -3PH	KIT-NXLT140PK3 / -3PH	N/A	N/A
<b>Indoor Unit</b>	S-6010PK3E	S-6010PK3E	S-6010PK3E	S-6010PK3Ex2	S-6010PK3Ex2	S-6010PK3Ex2	S-6010PK3Ex2	N/A	N/A
<b>Outdoor Unit</b>	U-36PZH3E5	U-50PZH3E5	U-60PZH3E5	U-71PZH3E5/8	U-100PZH3E5/8	U-125PZH3E5/8	U-140PZH3E5/8	N/A	N/A
<b>€</b>	<b>2509</b>	<b>2715</b>	<b>2768</b>	<b>4314 / 4476</b>	<b>4925 / 4970</b>	<b>5015 / 5210</b>	<b>5851 / 6233</b>	-	-

### Ceiling Suspended (PT3)

	low temp. 36	low temp. 50	low temp. 60	low temp. 71	low temp. 100	low temp.125	low temp.140	low temp.200	low temp.250
<b>Kit</b>	KIT-NXLT36PT3	KIT-NXLT50PT3	KIT-NXLT60PT3	KIT-NXLT71PT3 / -3PH	KIT-NXLT100PT3 / -3PH	KIT-NXLT125PT3 / -3PH	KIT-NXLT140PT3 / -3PH	KIT-NX-LT200PT3-3PH	KIT-NX-LT250PT3-3PH
<b>Indoor Unit</b>	S-6071PT3E	S-6071PT3E	S-1014PT3E	S-1014PT3E	S-1014PT3E	S-1014PT3E	S-1014PT3Ex2	S-1014PT3Ex2	S-1014PT3Ex2
<b>Outdoor Unit</b>	U-36PZH3E5	U-50PZH3E5	U-60PZH3E5	U-71PZH3E5/8	U-100PZH3E5/8	U-125PZH3E5/8	U-140PZH3E5/8	U-200PZH2E8	U-250PZH2E8
<b>€</b>	<b>2412</b>	<b>2618</b>	<b>3036</b>	<b>3312 / 3472</b>	<b>3921 / 3966</b>	<b>4011 / 4206</b>	<b>6387/ 6769</b>	<b>6992</b>	<b>7365</b>

### 4 Way 90 x 90 Cassette (PU)

	low temp. 36	low temp. 50	low temp. 60	low temp. 71	low temp. 100	low temp.125	Low temp.140	low temp.200	low temp.250
<b>Kit</b>	KIT-NXLT36PU3	KIT-NXLT50PU3	KIT-NXLT60PU3	KIT-NXLT71PU3 / -3PH	KIT-NXLT100PU3 / -3PH	KIT-NXLT125PU3 / -3PH	KIT-NXLT140PU3 / -3PH	KIT-NXLT-200PU3-3PH	KIT-NXLT-250PU3-3PH
<b>Indoor Unit</b>	S-6071PU3E	S-6071PU3E	S-6071PU3E	S-1014PU3E	S-1014PU3E	S-1014PU3E	S-1014PU3Ex2	S-1014PU3Ex2	S-1014PU3Ex2
<b>Outdoor Unit</b>	U-36PZH3E5	U-50PZH3E5	U-60PZH3E5	U-71PZH3E5/8	U-100PZH3E5/8	U-125PZH3E5/8	U-140PZH3E5/8	U-200PZH2E8	U-250PZH2E8
<b>€</b>	<b>2478</b>	<b>2684</b>	<b>2737</b>	<b>3398 / 3588</b>	<b>4007 / 4052</b>	<b>4097 / 4292</b>	<b>6343 / 6725</b>	<b>6948</b>	<b>7321</b>

### High Static Pressure Hide Away (PF)

	low temp.36	low temp.50	low temp.60	low temp.71	low temp.100	low temp.125	low temp.140	low temp. 200	low temp. 250
<b>Kit</b>	KIT-NXLT36PF3	KIT-NXLT50PF3	KIT-NXLT60PF3	KIT-NXLT71PF3 / -3PH	KIT-NXLT100PF3 / -3PH	KIT-NXLT125PF3 / -3PH	KIT-NXLT140PF3 / -3PH	N/A	N/A
<b>Indoor Unit</b>	S-6071PF3E	S-6071PF3E	S-6071PF3E	S-1014PF3E	S-1014PF3E	S-1014PF3E	S-1014PF3Ex2	N/A	N/A
<b>Outdoor Unit</b>	U-36PZH3E5	U-50PZH3E5	U-60PZH3E5	U-71PZH3E5/8	U-100PZH3E5/8	U-125PZH3E5/8	U-140PZH3E5/8	N/A	N/A
<b>€</b>	<b>2354</b>	<b>2560</b>	<b>2613</b>	<b>3228 / 3388</b>	<b>3837 / 3882</b>	<b>3927 / 4122</b>	<b>6219 / 6601</b>	-	-





















Accessories		RRP €
<b>PAW-WTRAY</b>	Tray for condenser water compatible with outdoor elevation platform	152
<b>PAW-GRDBSE20</b>	Outdoor base ground support for noise and vibration absorption	152
<b>PAW-GRDSTD40</b>	Outdoor elevation platform 400x900x400 mm	152

Accessories		RRP €
<b>CZ-CENSC1</b>	Econavi energy savings sensor	159
<b>CZ-56DAF2</b>	Air outlet plenum for S-3650PF3E	135
<b>CZ-90DAF2</b>	Air outlet plenum for S-6071PF3E	203
<b>CZ-160DAF2</b>	Air outlet plenum for S-1014PF3E	271

All pricing includes the CZ-RTCSB remote controller. All PU model pricing includes the CZ-KPU3W panel. Branch pipes are included in the pricing on systems with multiple indoors.

# Commercial units PACi NX R32 range

**NEW  
2021**

Page	Indoor units	3.6 kW	4.5 kW <sup>1)</sup>	5.0 kW	6.0 kW
P. 50	<b>NEW</b> wall-mounted Inverter+ • R32	 S-3650PK3E	 S-3650PK3E	 S-3650PK3E	 S-6010PK3E
P. 54	<b>NEW</b> 4 way 90x90 cassette Inverter+ • R32	 S-3650PU3E	 S-3650PU3E	 S-3650PU3E	 S-6071PU3E
P. 58	<b>NEW</b> ceiling Inverter+ • R32	 S-3650PT3E	 S-3650PT3E	 S-3650PT3E	 S-6071PT3E
P. 62	<b>NEW</b> adaptive ducted Inverter+ • R32	 S-3650PF3E	 S-3650PF3E	 S-3650PF3E	 S-6071PF3E
<b>Outdoor units</b>		<b>3.6 kW</b>		<b>5.0 kW</b>	<b>6.0 kW</b>
PACi NX Elite • R32		 U-36PZH3E5		 U-50PZH3E5	 U-60PZH3E5
PACi NX Standard • R32		 U-36PZ3E5		 U-50PZ3E5	 U-60PZ3E5A

1) The 4.5 kW indoor unit are only available only for twin, triple and double-twin combinations. \* U-\_\_E5 Single phase / U-\_\_E8 Three phase.



OPTIONAL UNITS ON VENTILATION SECTION

7.1 kW	10.0 kW	12.5 kW	14.0 kW
			
S-6010PK3E	S-6010PK3E		
			
S-6071PU3E	S-1014PU3	S-1014PU3	S-1014PU3
			
S-6071PT3E	S-1014PT3E	S-1014PT3E	S-1014PT3E
			
S-6071PF3E	S-1014PF3E	S-1014PF3E	S-1014PF3E

7.1 kW	10.0 kW	12.5 kW	14.0 kW]
			
U-71PZH3E5	U-100PZH3E5 / U-100PZH3E8	U-125PZH3E5 / U-125PZH3E8	U-140PZH3E5 / U-140PZH3E8
			
U-71PZ3E5A	U-100PZ3E5 / U-100PZ3E8	U-125PZ3E5 / U-125PZ3E8	U-140PZ3E5 / U-140PZ3E8

NEW  
2021Available  
Mar 21

nanoe™ X as a standard.

## NEW PACi NX Series Standard wall-mounted Inverter+ • R32

The wall-mounted units with stylish matt color can be offered for many applications such as studios, gyms, high ceiling areas and even computer server rooms.

The compact design and flat face ensure discreet installation, even in a small space.



		Single phase					
			3.6 kW	5.0 kW	6.0 kW	7.1 kW	10.0 kW
Kit			KIT-36PK3Z5	KIT-50PK3Z5	KIT-60PK3Z5	KIT-71PK3Z5	KIT-100PK3Z5
<b>Remote controller</b>			<b>CZ-RTC5B</b>	<b>CZ-RTC5B</b>	<b>CZ-RTC5B</b>	<b>CZ-RTC5B</b>	<b>CZ-RTC5B</b>
Cooling capacity	Nominal (Min - Max)	kW	3.6(1.5 - 4.0)	5.0(1.5 - 5.6)	6.1(2.0 - 7.1)	7.1(2.6 - 7.7)	9.0(3.0 - 9.7)
UK Cooling	(Total - Sensible)	kW	3.4 - 2.4	4.8 - 3.2	6.0 - 4.0	6.7 - 4.4	9.0 - 5.6
EER <sup>1)</sup>		W/W	4.14	3.52	3.67	3.16	3.47
<b>SEER <sup>2)</sup></b>			<b>7.6 A++</b>	<b>7.4 A++</b>	<b>7.0 A++</b>	<b>5.6 A+</b>	<b>6.5 A++</b>
Pdesign		kW	3.6	5.0	6.1	7.1	9.0
Input power cooling		kW	0.87	1.42	1.66	2.25	2.59
Annual energy consumption <sup>3)</sup>		kWh/a	166	237	3.05	444	485
Heating capacity	Nominal (Min - Max)	kW	3.6(1.5 - 4.6)	5.0(1.5 - 6.4)	6.1(1.8 - 7.0)	7.1(2.1 - 8.1)	9.0(3.0 - 10.5)
UK Heating	(Total - Sensible)	kW	3.9	5.6	6.1	6.9	9.6
COP <sup>1)</sup>		W/W	4.62	4.20	4.39	4.23	3.93
<b>SCOP <sup>2)</sup></b>			<b>4.5 A+</b>	<b>4.4 A+</b>	<b>4.7 A++</b>	<b>4.4 A+</b>	<b>3.9 A</b>
Pdesign at -10 °C		kW	2.8	4.0	4.6	5.2	9.0
Input power heating		kW	0.78	1.19	1.39	1.68	2.29
Annual energy consumption <sup>3)</sup>		kWh/a	872	1273	1370	1653	3231
<b>Indoor unit</b>			<b>S-3650PK3E</b>	<b>S-3650PK3E</b>	<b>S-6010PK3E</b>	<b>S-6010PK3E</b>	<b>S-6010PK3E</b>
Air flow	Hi / Med / Lo	m <sup>3</sup> /min	13.0/11.0/9.0	16.0/13.5/11.0	20.0/17.5/14.5	20.0/17.5/14.5	22.0/18.5/15.0
Moisture removal volume		L/h	0.9	1.8	2.0	3.0	4.3
Sound pressure <sup>4)</sup>	Hi / Med / Lo	dB(A)	35/31/27	40/36/32	47/44/40	47/44/40	49/45/41
Sound power	Hi / Med / Lo	dB(A)	51/47/43	56/52/48	63/60/56	63/60/56	65/61/57
Dimension	HxWxD	mm	302x1120x236	302x1120x236	302x1120x236	302x1120x236	302x1120x236
Net weight		kg	13	13	14	14	14
nanoe X Generator			Mark 2	Mark 2	Mark 2	Mark 2	Mark 2
<b>Outdoor unit</b>			<b>U-36PZ3E5</b>	<b>U-50PZ3E5</b>	<b>U-60PZ3E5A</b>	<b>U-71PZ3E5A</b>	<b>U-100PZ3E5</b>
Power source	(to outdoor)	V	220 - 230 - 240	220 - 230 - 240	220 - 230 - 240	220 - 230 - 240	220 - 230 - 240
Recommended Fuse		A	15	15	20	20	35
Current	Cool	A	4.05 - 3.85 - 3.70	6.60 - 6.30 - 6.05	7.70 - 7.35 - 7.05	10.4 - 10.00 - 9.55	12.9 - 12.4 - 11.9
	Heat	A	3.65 - 3.50 - 3.35	5.60 - 5.35 - 5.10	6.45 - 6.15 - 5.90	7.80 - 7.45 - 7.15	11.4 - 10.9 - 10.5
Air flow	Cool / Heat	m <sup>3</sup> /min	33.6/34.0	32.7/31.9	42.6/41.5	44.7/45.9	73.0/73.0
Sound pressure	Cool / Heat (Hi)	dB(A)	46/47	46/46	47/48	48/49	52/52
Sound power	Cool / Heat (Hi)	dB(A)	64/66	64/64	64/65	66/68	70/70
Dimension	HxWxD	mm	619x824x299	619x824x299	695x875x320	695x875x320	996x980x370
Net weight		kg	32	35	42	50	83
Pipe diameter	Liquid pipe	Inch (mm)	1/4(6.35)	1/4(6.35)	1/4(6.35) <sup>5)</sup>	1/4(6.35) <sup>5)</sup>	3/8(9.52)
	Gas pipe	Inch (mm)	1/2(12.70)	1/2(12.70)	1/2(12.70) <sup>6)</sup>	5/8(15.88) <sup>6)</sup>	5/8(15.88)
Pipe length range		m	3 - 15	3 - 20	3 - 40	3 - 40	3 - 50
Elevation difference (in/out) <sup>7)</sup>		m	15/15 <sup>8)</sup>	15/15 <sup>8)</sup>	15/30 <sup>8)</sup>	20/30 <sup>8)</sup>	15/30 <sup>8)</sup>
Pipe length for additional gas		m	7.5	7.5	7.5	10	30
Additional gas amount		g/m	10	15	15	17	45
Refrigerant (R32)/ CO <sub>2</sub> , Eq.		kg / T	0.87/0.59	1.14/0.77	1.15/0.78	1.32/0.89	2.4/1.62
Operating range	Cool Min ~ Max	°C	-10 ~ +43	-10 ~ +43	-10 ~ +43	-10 ~ +43	-10 ~ +43
	Heat Min ~ Max	°C	-15 ~ +24	-15 ~ +24	-15 ~ +24	-15 ~ +24	-15 ~ +24
<b>Kit RRP</b>		€	<b>1907</b>	<b>2092</b>	<b>2420</b>	<b>2679</b>	<b>3050</b>
Indoor unit RRP		€	1021	1021	1139	1139	1139
Outdoor unit RRP		€	757	942	1152	1411	1782
Wired control RRP		€	129	129	129	129	129

### Technical focus

- Modern design with flat face and compact size
- DC fan for better efficiency and control
- Six directional piping outlet
- Wired remote control CZ-RTC6BL allows easy system setting via Bluetooth®
- Easy connection and control of external fan or ERV using the connector PAW-FDC on the indoor unit PCB. The external device can be controlled by the remote control of the Panasonic indoor unit

### Closed discharge port

When the unit is turned OFF, the flap closes completely to prevent dust getting into the unit and to keep the equipment clean.

### Quiet operation

These units are among the quietest in the industry, making them ideal for hotels and hospitals.

### Piping outlet in six directions

Piping outlet is possible in the six directions of right, right rear, right bottom, left, left rear and left bottom, making the installation work easier.





COMPATIBLE WITH ALL PANASONIC CONNECTIVITY SOLUTIONS. FOR DETAILED INFORMATION GO TO THE CONTROL SYSTEMS SECTION



CZ-RTC5B



CONEX



Optional controller. CONEX wired remote controller. CZ-RTC6 - CZ-RTC6BL - CZ-RTC6BLW



Optional controller. Infrared remote controller. CZ-RWS3



Optional Econavi sensor. CZ-CENSC1

			Three phase
			10.0 kW
			KIT-100PK3Z8
			CZ-RTC5B
<b>Kit</b>			
<b>Remote controller</b>			
Cooling capacity	Nominal (Min - Max)	kW	9.0 (3.0 - 9.7)
UK Cooling	[Total - Sensible]	kW	9.0 - 5.6
EER <sup>1)</sup>		W/W	3.47
<b>SEER <sup>2)</sup></b>			<b>6.5 A++</b>
Pdesign		kW	9.0
Input power cooling		kW	2.59
Annual energy consumption <sup>3)</sup>		kWh/a	485
Heating capacity	Nominal (Min - Max)	kW	9.0 (3.0 - 10.5)
UK Heating	[Total - Sensible]	kW	9.6
COP <sup>1)</sup>		W/W	3.93
<b>SCOP <sup>2)</sup></b>			<b>3.9 A</b>
Pdesign at -10 °C		kW	9.0
Input power heating		kW	2.29
Annual energy consumption <sup>3)</sup>		kWh/a	3231
<b>Indoor unit</b>			<b>S-6010PK3E</b>
Air flow	Hi / Med / Lo	m <sup>3</sup> /min	22.0/18.5/15.0
Moisture removal volume		L/h	4.3
Sound pressure <sup>4)</sup>	Hi / Med / Lo	dB(A)	49/45/41
Sound power	Hi / Med / Lo	dB(A)	65/61/57
Dimension	HxWxD	mm	302x1120x236
Net weight		kg	14
nanoe X Generator			Mark 2
<b>Outdoor unit</b>			<b>U-100PZ3E8</b>
Power source	[to outdoor]	V	380 - 400 - 415
Recommended Fuse		A	15
Current	Cool	A	4.10 - 3.90 - 3.75
	Heat	A	3.15 - 3.00 - 2.90
Air flow	Cool / Heat	m <sup>3</sup> /min	73.0/73.0
Sound pressure	Cool / Heat (Hi)	dB(A)	52/52
Sound power	Cool / Heat (Hi)	dB(A)	70/70
Dimension	HxWxD	mm	996x980x370
Net weight		kg	83
Pipe diameter	Liquid pipe	Inch (mm)	3/8(9.52)
	Gas pipe	Inch (mm)	5/8(15.88)
Pipe length range		m	5 - 50
Elevation difference (in/out) <sup>7)</sup>		m	15/30 <sup>8)</sup>
Pipe length for additional gas		m	30
Additional gas amount		g/m	45
Refrigerant (R32) / CO <sub>2</sub> Eq.		kg / T	2.4 / 1.62
Operating range	Cool Min ~ Max	°C	-10 ~ +43
	Heat Min ~ Max	°C	-15 ~ +24
<b>Kit RRP</b>		€	<b>3202</b>
Indoor unit RRP		€	1139
Outdoor unit RRP		€	1934
Wired control RRP		€	129

Accessories		RRP €
<b>CZ-RTC6</b>	CONEX wired remote controller (non-wireless)	148
<b>CZ-RTC6BL</b>	CONEX wired remote controller with Bluetooth®	177
<b>CZ-RTC6BLW</b>	CONEX wired remote controller with Wi-Fi and Bluetooth®	250
<b>CZ-RTC5B</b>	Wired remote controller with Econavi function and datanavi	129
<b>CZ-RWS3</b>	Infrared remote controller	119
<b>CZ-CAPWFC1</b>	Commercial Wi-Fi Adaptor	264

Accessories		RRP €
<b>PAW-PACR3</b>	Interfaces to run 3 units on Backup and alternative run	1905
<b>PAW-WTRAY</b>	Tray for condenser water compatible with outdoor elevation platform	152
<b>PAW-GRDBSE20</b>	Outdoor base ground support for noise and vibration absorption	152
<b>PAW-GRDSTD40</b>	Outdoor elevation platform 400x900x400 mm	152
<b>CZ-CENSC1</b>	Econavi energy savings sensor	159

1) EER and COP calculation is based in accordance to EN14511. 2) Energy Label Scale from A+++ to D. For models below 12 kW, the SEER and SCOP is calculated based on values of EU/626/2011. For models above 12 kW, the SEER and SCOP is calculated based on values of EU/2281/2016. 3) The annual energy consumption is calculated in accordance to EU/626/2011. 4) The sound pressure of the units shows the value measured of the position 1 m in front of the main body and 1 m below the unit. The sound pressure is measured in accordance with Eurovent 6/C/006-97 specification. 5) When installing the outdoor unit at a higher position than the indoor unit. 6) Outdoor unit located lower / outdoor unit located higher. \* Recommended fuse for the indoor 3 A. \*\* Above values are in the case of nanoe™ X OFF.



SEER: For S-3650PK3E + U-36PZ3E5. SCOP: For S-6010PK3E + U-60PZ3E5A. INTERNET CONTROL: Optional.

Rating Conditions: Cooling Indoor 27 °C DB / 19 °C WB. Cooling Outdoor 35 °C DB / 24 °C WB. Heating Indoor 20 °C DB. Heating Outdoor 7 °C DB / 6 °C WB. (DB: Dry Bulb; WB: Wet Bulb). Specifications subject to change without notice. For detailed information about ErP / Energy Labelling, please visit our websites www.aircon.panasonic.eu or www.ptc.panasonic.eu.

NEW  
2021Available  
Mar 21

nanoe™ X as a standard.

## NEW PACi NX Series Elite wall-mounted Inverter+ • R32

The wall-mounted units with stylish matt color can be offered for many applications such as studios, gyms, high ceiling areas and even computer server rooms. The compact design and flat face ensure discreet installation, even in a small space.



		Single phase					
		3.6 kW	5.0 kW	6.0 kW	7.1 kW	10.0 kW	
Kit		KIT-36PK3ZH5	KIT-50PK3ZH5	KIT-60PK3ZH5	KIT-71PK3ZH5	KIT-100PK3ZH5	
Remote controller		CZ-RTC5B	CZ-RTC5B	CZ-RTC5B	CZ-RTC5B	CZ-RTC5B	
Cooling capacity	Nominal (Min - Max)	kW	3.6(1.2 - 4.0)	5.0(1.2 - 5.6)	6.1(1.2 - 7.1)	7.1(2.2 - 9.0)	9.5(3.1 - 10.5)
UK Cooling	(Total - Sensible)	kW	3.5 - 2.4	4.9 - 3.4	6.0 - 4.0	8.1 - 5.1	9.6 - 5.9
EER <sup>1)</sup>		W/W	4.93(5.45 - 4.49)	4.24(5.45 - 3.61)	3.86(5.45 - 3.02)	3.50(5.79 - 2.69)	3.26(5.34 - 3.09)
SEER <sup>2)</sup>			8.4 A++	8.0 A++	7.2 A++	6.8 A++	6.4 A++
Pdesign		kW	3.6	5.0	6.1	7.1	9.5
Input power cooling		kW	0.73(0.20 - 8.90)	1.18(0.20 - 1.55)	1.58(0.20 - 2.35)	2.03(0.38 - 3.35)	2.91(0.58 - 3.40)
Annual energy consumption <sup>3)</sup>		kWh/a	150	219	297	365	520
Heating capacity	Nominal (Min - Max)	kW	4.0(1.2 - 5.0)	5.6(1.2 - 6.5)	7.0(1.2 - 8.0)	8.0(2.0 - 9.0)	9.5(3.1 - 11.5)
UK Heating	(Total - Sensible)	kW	4.34	5.6	6.92	8.55	10.45
COP <sup>1)</sup>		W/W	4.82(5.45 - 4.17)	4.15(5.45 - 3.55)	4.10(5.45 - 3.40)	4.00(5.56 - 3.16)	3.97(5.54 - 3.43)
SCOP <sup>2)</sup>			4.9 A++	4.7 A++	4.8 A++	4.7 A++	4.1 A+
Pdesign at -10 °C		kW	3.6	4.5	4.6	5.2	8.0
Input power heating		kW	0.83(0.20 - 1.20)	1.35(0.20 - 1.83)	1.67(0.20 - 2.35)	2.00(0.36 - 2.85)	2.39(0.56 - 3.35)
Annual energy consumption <sup>3)</sup>		kWh/a	1029	1341	1342	1549	2732
<b>Indoor unit</b>			<b>S-3650PK3E</b>	<b>S-3650PK3E</b>	<b>S-6010PK3E</b>	<b>S-6010PK3E</b>	<b>S-6010PK3E</b>
Air flow	Hi / Med / Lo	m <sup>3</sup> /min	13.0/11.0/9.0	16.0/13.5/11.0	20.0/17.5/14.5	20.0/17.5/14.5	22.0/18.5/15.0
Moisture removal volume		L/h	0.9	1.8	2.0	3.0	4.8
Sound pressure <sup>4)</sup>	Hi / Med / Lo	dB(A)	35/31/27	40/36/32	47/44/40	47/44/40	49/45/41
Sound power	Hi / Med / Lo	dB(A)	51/47/43	56/52/48	63/60/56	63/60/56	65/61/57
Dimension	HxWxD	mm	302x1120x236	302x1120x236	302x1120x236	302x1120x236	302x1120x236
Net weight		kg	13	13	14	14	14
nanoe X Generator			Mark 2	Mark 2	Mark 2	Mark 2	Mark 2
Recommended Fuse		A	20	20	25	25	35
<b>Outdoor unit</b>			<b>U-36PZH3E5</b>	<b>U-50PZH3E5</b>	<b>U-60PZH3E5</b>	<b>U-71PZH3E5</b>	<b>U-100PZH3E5</b>
Power source		V	220 - 230 - 240	220 - 230 - 240	220 - 230 - 240	220 - 230 - 240	220 - 230 - 240
Current	Cool	A	3.60 - 3.45 - 3.30	5.60 - 5.35 - 5.10	7.40 - 7.10 - 6.80	10.0 - 9.60 - 9.20	14.40 - 13.80 - 13.20
	Heat	A	4.05 - 3.90 - 3.70	6.40 - 6.10 - 5.85	7.75 - 7.40 - 7.10	9.65 - 9.35 - 8.95	11.70 - 11.30 - 10.80
Air flow	Cool / Heat	m <sup>3</sup> /min	34.1/36.4	42.0/42.0	42.0/42.0	61.0/60.0	118.0/108.0
Sound pressure	Cool / Heat (Hi)	dB(A)	43/44	46/48	47/50	48/50	52/52
Sound power	Cool / Heat (Hi)	dB(A)	62/64	64/67	65/69	65/67	69/69
Dimension	HxWxD	mm	695x875x320	695x875x320	695x875x320	996x940x340	1416x940x340
Net weight		kg	42	42	43	65	98
Pipe diameter	Liquid pipe	Inch (mm)	1/4(6.35)	1/4(6.35)	1/4(6.35) <sup>5)</sup>	3/8(9.52)	3/8(9.52)
	Gas pipe	Inch (mm)	1/2(12.70)	1/2(12.70)	1/2(12.70) <sup>6)</sup>	5/8(15.88)	5/8(15.88)
Pipe length range		m	3 - 40	3 - 40	3 - 40	5 - 50	5 - 85
Elevation difference (in/out) <sup>7)</sup>		m	15/30 <sup>8)</sup>	15/30 <sup>8)</sup>	15/30 <sup>8)</sup>	15/30 <sup>8)</sup>	15/30 <sup>8)</sup>
Pipe length for additional gas		m	30	30	30	30	30
Additional gas amount		g/m	15	15	15	45	45
Refrigerant (R32)/ CO <sub>2</sub> , Eq.		kg / T	1.13/0.76	1.13/0.76	1.15/0.78	1.95/1.32	3.05/2.06
Operating range	Cool Min ~ Max	°C	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +48	-20 ~ +48 <sup>9)</sup>
	Heat Min ~ Max	°C	-20 ~ +24	-20 ~ +24	-20 ~ +24	-20 ~ +24	-20 ~ +24
<b>Kit RRP</b>		€	<b>2391</b>	<b>2597</b>	<b>2768</b>	<b>3044</b>	<b>3653</b>
Indoor unit RRP		€	1021	1021	1139	1139	1139
Outdoor unit RRP		€	1241	1447	1500	1776	2385
Wired control RRP		€	129	129	129	129	129

### Technical focus

- Modern design with flat face and compact size
- DC fan for better efficiency and control
- Six directional piping outlet
- Wired remote control CZ-RTC6BL allows easy system setting via Bluetooth®
- Easy connection and control of external fan or ERV using the connector PAW-FDC on the indoor unit PCB. The external device can be controlled by the remote control of the Panasonic indoor unit

### Closed discharge port

When the unit is turned OFF, the flap closes completely to prevent dust getting into the unit and to keep the equipment clean.

### Quiet operation

These units are among the quietest in the industry, making them ideal for hotels and hospitals.

### Piping outlet in six directions

Piping outlet is possible in the six directions of right, right rear, right bottom, left, left rear and left bottom, making the installation work easier.



CZ-RTC5B



CONEX



Optional controller.  
CONEX wired remote controller.  
CZ-RTC6 - CZ-RTC6BL  
- CZ-RTC6BLW



Optional controller.  
Infrared remote controller.  
CZ-RWS3



Optional Econavi sensor.  
CZ-CENSC1

COMPATIBLE WITH ALL PANASONIC CONNECTIVITY SOLUTIONS. FOR DETAILED INFORMATION GO TO THE CONTROL SYSTEMS SECTION

Three phase

				7.1 kW	10.0 kW
				KIT-71PK3ZH8	KIT-100PK3ZH8
				CZ-RTC5B	CZ-RTC5B
<b>Kit</b>					
<b>Remote controller</b>					
Cooling capacity	Nominal (Min - Max)	kW		7.1 (2.2 - 9.0)	9.5 (3.1 - 10.5)
UK Cooling	[Total - Sensible]	kW		8.1 - 5.1	9.6 - 5.9
EER <sup>1)</sup>		W/W		3.50	3.26
<b>SEER <sup>2)</sup></b>				<b>6.7 A++</b>	<b>6.3 A++</b>
Pdesign		kW		7.1	9.5
Input power cooling		kW		2.03	2.91
Annual energy consumption <sup>3)</sup>		kWh/a		370	526
Heating capacity	Nominal (Min - Max)	kW		8.0 (2.0 - 9.0)	9.5 (3.1 - 11.5)
UK Heating	[Total - Sensible]	kW		8.55	10.45
COP <sup>1)</sup>		W/W		4.00	3.97
<b>SCOP <sup>2)</sup></b>				<b>4.7 A++</b>	<b>4.1 A+</b>
Pdesign at -10 °C		kW		5.2	8.0
Input power heating		kW		2.00	2.39
Annual energy consumption <sup>3)</sup>		kWh/a		1549	2732
<b>Indoor unit</b>				<b>S-6010PK3E</b>	<b>S-6010PK3E</b>
Air flow	Hi / Med / Lo	m <sup>3</sup> /min		20.0/17.5/14.5	22.0/18.5/15.0
Moisture removal volume		L/h		3.0	4.8
Sound pressure <sup>4)</sup>	Hi / Med / Lo	dB(A)		47/44/40	49/45/41
Sound power	Hi / Med / Lo	dB(A)		63/60/56	65/61/57
Dimension	H x W x D	mm		302 x 1120 x 236	302 x 1120 x 236
Net weight		kg		14	14
nanoe X Generator				Mark 2	Mark 2
Recommended Fuse		A		TBC	TBC
<b>Outdoor unit</b>				<b>U-71PZH3E8</b>	<b>U-100PZH3E8</b>
Power source		V		380 - 400 - 415	380 - 400 - 415
Current	Cool	A		3.40 - 3.25 - 3.15	4.85 - 4.60 - 4.40
	Heat	A		3.30 - 3.15 - 3.05	4.00 - 3.80 - 3.60
Air flow	Cool / Heat	m <sup>3</sup> /min		61.0/60.0	118.0/108.0
Sound pressure	Cool / Heat (Hi)	dB(A)		48/50	52/52
Sound power	Cool / Heat (Hi)	dB(A)		65/67	69/69
Dimension	H x W x D	mm		996 x 940 x 340	1416 x 940 x 340
Net weight		kg		65	98
Pipe diameter	Liquid pipe	Inch (mm)		3/8 (9.52)	3/8 (9.52)
	Gas pipe	Inch (mm)		5/8 (15.88)	5/8 (15.88)
Pipe length range		m		5 - 50	5 - 85
Elevation difference (in/out) <sup>7)</sup>		m		15/30 <sup>8)</sup>	15/30 <sup>8)</sup>
Pipe length for additional gas		m		30	30
Additional gas amount		g/m		45	45
Refrigerant (R32) / CO <sub>2</sub> Eq.		kg / T		1.95/1.32	3.05/2.06
Operating range	Cool Min ~ Max	°C		-15 ~ +48	-20 ~ +48 <sup>9)</sup>
	Heat Min ~ Max	°C		-20 ~ +24	-20 ~ +24
<b>Kit RRP</b>		€		<b>3204</b>	<b>3698</b>
Indoor unit RRP		€		1139	1139
Outdoor unit RRP		€		1936	2430
Wired control RRP		€		129	129

Accessories		RRP €
<b>CZ-RTC6</b>	CONEX wired remote controller (non-wireless)	148
<b>CZ-RTC6BL</b>	CONEX wired remote controller with Bluetooth®	177
<b>CZ-RTC6BLW</b>	CONEX wired remote controller with Wi-Fi and Bluetooth®	250
<b>CZ-RTC5B</b>	Wired remote controller with Econavi function and datanavi	129
<b>CZ-RWS3</b>	Infrared remote controller	119
<b>CZ-CAPWFC1</b>	Commercial Wi-Fi Adaptor	264

Accessories		RRP €
<b>PAW-PACR3</b>	Interfaces to run 3 units on Backup and alternative run	1905
<b>PAW-WTRAY</b>	Tray for condenser water compatible with outdoor elevation platform	152
<b>PAW-GRDBSE20</b>	Outdoor base ground support for noise and vibration absorption	152
<b>PAW-GRDSTD40</b>	Outdoor elevation platform 400 x 900 x 400 mm	152
<b>CZ-CENSC1</b>	Econavi energy savings sensor	159

1) EER and COP calculation is based in accordance to EN14511. 2) Energy Label Scale from A+++ to D. For models below 12 kW, the SEER and SCOP is calculated based on values of EU/626/2011. For models above 12 kW, the SEER and SCOP is calculated based on values of EU/2281/2016. 3) The annual energy consumption is calculated in accordance to EU/626/2011. 4) The sound pressure of the units shows the value measured of the position 1 m in front of the main body and 1 m below the unit. The sound pressure is measured in accordance with Eurovent 6/C/006-97 specification. 5) Connect the liquid socket tube (Ø6,35-Ø9,52) to the liquid tubing side indoor unit. 6) Connect the gas socket tube (Ø12,70-Ø15,88) to the gas tubing side indoor unit. 7) When installing the outdoor unit at a higher position than the indoor unit. 8) Outdoor unit located lower / outdoor unit located higher. 9) For models 100 ~ 140PZH3E5(8), it is possible to operate the lowest -20 °C in the computer rooms with the piping length of 30 m or less. \* Recommended fuse for the indoor 3 A. \*\* Above values are in the case of nanoe™ X OFF.



SEER and SCOP: For S-3650PK3E + U-36PZH3E5. INTERNET CONTROL: Optional.

Rating Conditions: Cooling Indoor 27 °C DB / 19 °C WB. Cooling Outdoor 35 °C DB / 24 °C WB. Heating Indoor 20 °C DB. Heating Outdoor 7 °C DB / 6 °C WB. [DB: Dry Bulb; WB: Wet Bulb]. Specifications subject to change without notice. For detailed information about ErP / Energy Labelling, please visit our websites www.aircon.panasonic.eu or www.ptc.panasonic.eu.



## NEW PACi NX Series Standard 4 way 90x90 cassette Inverter+ • R32

### New 4 way 90x90 cassette - PU3.

Powerful turbo fan and intelligent Econavi sensor ensure high energy efficiency, and nanoe™ X which is equipped as standard provides an exceptional level of indoor air quality.

			Single phase						
			3.6 kW	5.0 kW	6.0 kW	7.1 kW	10.0 kW	12.5 kW	14.0 kW
Kit			KIT-36PU3Z5	KIT-50PU3Z5	KIT-60PU3Z5	KIT-71PU3Z5	KIT-100PU3Z5	KIT-125PU3Z5	KIT-140PU3Z5
Remote controller			CZ-RTC5B	CZ-RTC5B	CZ-RTC5B	CZ-RTC5B	CZ-RTC5B	CZ-RTC5B	CZ-RTC5B
Cooling capacity	Nominal (Min - Max)	kW	3.6(1.5 - 4.0)	5.0(1.5 - 5.6)	6.0(2.0 - 7.1)	7.1(2.6 - 7.7)	10.0(3.0 - 11.5)	12.5(3.2 - 13.5)	14.0(3.3 - 15.0)
UK Cooling	(Total - Sensible)	kW	3.4 - 2.6	4.8 - 3.3	5.9 - 4.1	6.7 - 4.4	10.7 - 7.6	12.6 - 8.4	13.9 - 9.2
EER <sup>1)</sup>	Nominal (Min - Max)	W/W	4.34	3.91	3.73	3.27	3.82(5.36 - 2.88)	3.58(5.33 - 2.81)	3.23(5.32 - 2.73)
SEER <sup>2)</sup>			<b>8.1 A++</b>	<b>8.0 A++</b>	<b>7.8 A++</b>	<b>6.8 A++</b>	<b>6.8 A++</b>	<b>6.8</b>	<b>6.5</b>
Pdesign		kW	3.6	5.0	6.0	7.1	10.0	12.5	14.0
Input power cooling		kW	0.83	1.28	1.61	2.17	2.62(0.60 - 4.00)	3.49(0.60 - 4.80)	4.34(0.60 - 5.50)
Annual energy consumption <sup>3)</sup>		kWh/a	156	219	269	365	515	—	—
Heating capacity	Nominal (Min - Max)	kW	3.6(1.5 - 4.6)	5.0(1.5 - 6.4)	6.0(1.8 - 7.0)	7.1(2.1 - 8.1)	10.0(3.0 - 14.0)	12.5(3.3 - 15.0)	14.0(3.4 - 16.0)
UK Heating		kW	3.9	5.6	6.2	6.9	12.68	14.7	15.22
COP <sup>1)</sup>	Nominal (Min - Max)	W/W	5.07	4.63	4.48	4.23	4.93(3.59 - 5.36)	4.43(3.57 - 5.50)	4.18(3.33 - 5.48)
SCOP <sup>2)</sup>			<b>4.8 A++</b>	<b>4.7 A++</b>	<b>4.9 A++</b>	<b>4.6 A++</b>	<b>4.4 A+</b>	<b>4.0</b>	<b>3.9</b>
Pdesign at -10 °C		kW	2.8	4.0	4.6	5.2	10.0	12.5	14.0
Input power heating	Nominal (Min - Max)	kW	0.71	1.08	1.34	1.68	2.03(0.56 - 3.90)	2.82(0.60 - 4.20)	3.35(0.62 - 4.80)
Annual energy consumption <sup>3)</sup>		kWh/a	817	1191	1314	1583	3182	—	—
<b>Indoor unit</b>			<b>S-3650PU3E</b>	<b>S-3650PU3E</b>	<b>S-6071PU3E</b>	<b>S-6071PU3E</b>	<b>S-1014PU3E</b>	<b>S-1014PU3E</b>	<b>S-1014PU3E</b>
Air flow	Hi / Med / Lo	m <sup>3</sup> /min	14.5/13.0/11.5	16.5/13.5/11.5	21.0/16.0/13.0	22.0/16.0/13.0	36.0/26.0/18.0	37.0/27.0/19.0	38.0/29.0/20.0
Moisture removal volume		L/h	0.7	1.6	1.7	2.5	2.7	4.8	6.0
Sound pressure <sup>4)</sup>	Hi / Med / Lo	dB(A)	30/28/27	32/29/27	36/31/28	37/31/28	45/38/32	46/39/33	47/40/34
Sound power	Hi / Med / Lo	dB(A)	45/43/42	47/44/42	51/46/43	52/46/43	60/53/47	61/54/48	62/55/49
Dimension	Indoor (H x W x D)	mm	256 x 840 x 840	256 x 840 x 840	256 x 840 x 840	256 x 840 x 840	319 x 840 x 840	319 x 840 x 840	319 x 840 x 840
	Panel (H x W x D)	mm	33.5 x 950 x 950	33.5 x 950 x 950	33.5 x 950 x 950	33.5 x 950 x 950	33.5 x 950 x 950	33.5 x 950 x 950	33.5 x 950 x 950
Net weight	Indoor / Panel	kg	19/5	19/5	20/5	20/5	25/5	25/5	25/5
nanoe X Generator			Mark 1	Mark 1	Mark 1	Mark 1	Mark 1	Mark 1	Mark 1
<b>Outdoor unit</b>			<b>U-36PZ3E5</b>	<b>U-50PZ3E5</b>	<b>U-60PZ3E5A</b>	<b>U-71PZ3E5A</b>	<b>U-100PZ3E5</b>	<b>U-125PZ3E5</b>	<b>U-140PZ3E5</b>
Power source	(to outdoor)	V	220 - 230 - 240	220 - 230 - 240	220 - 230 - 240	220 - 230 - 240	220 - 230 - 240	220 - 230 - 240	220 - 230 - 240
Recommended Fuse		A	15A / *	15A / *	20A / *	20A / *	35A / *	40A / *	40A / *
0Current	Cool	A	3.85 - 3.70 - 3.55	5.95 - 5.70 - 5.45	7.45 - 7.15 - 6.85	10.00 - 9.65 - 9.25	13.10 - 12.50 - 12.00	16.90 - 16.10 - 15.40	21.00 - 20.00 - 19.20
	Heat	A	3.35 - 3.20 - 3.05	5.05 - 4.85 - 4.65	6.20 - 5.95 - 5.70	7.80 - 7.45 - 7.15	10.10 - 9.70 - 9.30	13.60 - 13.00 - 12.50	15.60 - 14.90 - 14.30
Air flow	Cool / Heat	m <sup>3</sup> /min	33.6/34.0	32.7/31.9	42.6/41.5	44.7/45.9	76/70	86/78	89/83
Sound pressure	Cool / Heat (Hi)	dB(A)	46/47	46/46	47/48	48/49	52/52	55/55	56/56
Sound power	Cool / Heat (Hi)	dB(A)	64/66	64/64	64/65	66/68	70/70	73/73	74/74
Dimension	H x W x D	mm	619 x 824 x 299	619 x 824 x 299	695 x 875 x 320	695 x 875 x 320	996 x 980 x 370	996 x 980 x 370	996 x 980 x 370
Net weight		kg	32	35	42	50	83	87	87
Pipe diameter	Liquid pipe	Inch (mm)	1/4(6.35)	1/4(6.35)	1/4(6.35) <sup>5)</sup>	1/4(6.35) <sup>5)</sup>	3/8(9.52)	3/8(9.52)	3/8(9.52)
	Gas pipe	Inch (mm)	1/2(12.70)	1/2(12.70)	1/2(12.70) <sup>6)</sup>	5/8(15.88)	5/8(15.88)	5/8(15.88)	5/8(15.88)
Pipe length range		m	3 - 15	3 - 20	3 - 40	3 - 40	5 - 50	5 - 50	5 - 50
Elevation difference (in/out) <sup>7)</sup>		m	15/15 <sup>8)</sup>	15/15 <sup>8)</sup>	15/30 <sup>8)</sup>	20/30 <sup>8)</sup>	15 / 30	15 / 30	15 / 30
Pipe length for additional gas		m	7.5	7.5	7.5	10	30	30	30
Additional gas amount		g/m	10	15	15	17	45	45	45
Refrigerant (R32) / CO <sub>2</sub> Eq.		kg / T	0.87/0.59	1.14/0.77	1.15/0.78	1.32/0.89	2.40/1.76	2.80/2.01	2.80/2.01
Operating range	Cool Min - Max	°C	-10 ~ +43	-10 ~ +43	-10 ~ +43	-10 ~ +43	-10 ~ +43	-10 ~ +43	-10 ~ +43
	Heat Min - Max	°C	-15 ~ +24	-15 ~ +24	-15 ~ +24	-15 ~ +24	-15 ~ +24	-15 ~ +24	-15 ~ +24
<b>Kit RRP</b>		€	<b>1830</b>	<b>2015</b>	<b>2389</b>	<b>2648</b>	<b>3404</b>	<b>3788</b>	<b>4602</b>
Indoor unit RRP		€	728	728	892	892	1277	1277	1277
Outdoor unit RRP		€	757	942	1152	1411	1782	2166	2980
Panel RRP		€	216	216	216	216	216	216	216
Wired control RRP		€	129	129	129	129	129	129	129

### Technical focus

- High performance turbo fan, path system for heat exchanger
- Econavi: An optional intelligent sensor to reduce waste of energy
- nanoe™ X (Generator Mark 1= 4,8 trillion hydroxyl radicals/ sec) as standard for better indoor air quality, indoor unit internal cleaning with nanoe™ X and dry operation
- Lower noise in slow fan operation
- Light weight, easy piping and integrated drain pump for quick installation
- Wired remote control CZ-RTC6BL allows easy system setting via Bluetooth®
- High volume fresh air input with optional air-intake plenum and chamber (CZ-FDU3+CZ-ATU2)



Standard panel.  
CZ-KPU3W

CZ-RTC5B



Optional Econavi panel (CZ-RTC5B is required).  
CZ-KPU3AW

CONEX



Optional controller. CONEX wired remote controller.  
CZ-RTC6 - CZ-RTC6BL - CZ-RTC6BLW



Optional remote controller. Infrared remote controller.  
CZ-RWS3 + CZ-RWRU3W

COMPATIBLE WITH ALL PANASONIC CONNECTIVITY SOLUTIONS. FOR DETAILED INFORMATION GO TO THE CONTROL SYSTEMS SECTION



			Three phase		
			10.0 kW	12.5 kW	14.0 kW
Kit			KIT-100PU3Z8	KIT-125PU3Z8	KIT-140PU3Z8
Remote controller			CZ-RTC5B	CZ-RTC5B	CZ-RTC5B
Cooling capacity	Nominal (Min - Max)	kW	10.0 (3.0 - 11.5)	12.5 (3.2 - 13.5)	14.0 (3.3 - 15.0)
UK Cooling	(Total - Sensible)	kW	10.7 - 7.6	12.6 - 8.4	13.9 - 9.2
EER <sup>1)</sup>	Nominal (Min - Max)	W/W	3.82 (5.36 - 2.88)	3.58 (5.33 - 2.81)	3.23 (5.32 - 2.73)
SEER <sup>2)</sup>			6.7 A++	6.7	6.5
Pdesign		kW	10.0	12.5	14.0
Input power cooling		kW	2.62 (0.60 - 4.00)	3.49 (0.60 - 4.80)	4.34 (0.60 - 5.50)
Annual energy consumption <sup>3)</sup>		kWh/a	521	—	—
Heating capacity	Nominal (Min - Max)	kW	10.0 (3.0 - 14.0)	12.5 (3.3 - 15.0)	14.0 (3.4 - 16.0)
UK Heating		kW	12.6	14.7	15.22
COP <sup>1)</sup>	Nominal (Min - Max)	W/W	4.93 (3.59 - 5.36)	4.43 (3.57 - 5.50)	4.18 (3.33 - 5.48)
SCOP <sup>2)</sup>			4.4 A+	4.0	3.9
Pdesign at -10 °C		kW	10.0	12.5	14.0
Input power heating	Nominal (Min - Max)	kW	2.03 (0.56 - 3.90)	2.82 (0.60 - 4.20)	3.35 (0.62 - 4.80)
Annual energy consumption <sup>3)</sup>		kWh/a	3182	—	—
Indoor unit			S-1014PU3E	S-1014PU3E	S-1014PU3E
Air flow	Hi / Med / Lo	m <sup>3</sup> /min	36.0/26.0/18.0	37.0/27.0/19.0	38.0/29.0/20.0
Moisture removal volume		L/h	2.7	4.8	6.0
Sound pressure <sup>4)</sup>	Hi / Med / Lo	dB(A)	45/38/32	46/39/33	47/40/34
Sound power	Hi / Med / Lo	dB(A)	60/53/47	61/54/48	62/55/49
Dimension	Indoor (H x W x D)	mm	319 x 840 x 840	319 x 840 x 840	319 x 840 x 840
	Panel (H x W x D)	mm	33.5 x 950 x 950	33.5 x 950 x 950	33.5 x 950 x 950
Net weight	Indoor / Panel	kg	25/5	25/5	25/5
nanoe X Generator			Mark 1	Mark 1	Mark 1
Outdoor unit			U-100PZ3E8	U-125PZ3E8	U-140PZ3E8
Power source	(to outdoor)	V	380 - 400 - 415	380 - 400 - 415	380 - 400 - 415
Recommended Fuse		A	15	20	20
Current	Cool	A	4.35 - 4.15 - 4.00	5.65 - 5.35 - 5.15	7.00 - 6.65 - 6.40
	Heat	A	3.40 - 3.20 - 3.10	4.55 - 4.35 - 4.15	5.40 - 5.15 - 4.95
Air flow	Cool / Heat	m <sup>3</sup> /min	76/70	86/78	89/83
Sound pressure	Cool / Heat (Hi)	dB(A)	52/52	55/55	56/56
Sound power	Cool / Heat (Hi)	dB(A)	70/70	73/73	74/74
Dimension	H x W x D	mm	996 x 980 x 370	996 x 980 x 370	996 x 980 x 370
Net weight		kg	90	94	94
Pipe diameter	Liquid pipe	Inch (mm)	3/8 (9.52)	3/8 (9.52)	3/8 (9.52)
	Gas pipe	Inch (mm)	5/8 (15.88)	5/8 (15.88)	5/8 (15.88)
Pipe length range		m	5 ~ 50	5 ~ 50	5 ~ 50
Elevation difference (in/out) <sup>7)</sup>		m	15 / 30	15 / 30	15 / 30
Pipe length for additional gas		m	30	30	30
Additional gas amount		g/m	45	45	45
Refrigerant (R32) / CO <sub>2</sub> Eq.		kg / T	2.60/1.76	2.98/2.01	2.98/2.01
Operating range	Cool Min ~ Max	°C	-10 ~ +43	-10 ~ +43	-10 ~ +43
	Heat Min ~ Max	°C	-15 ~ +24	-15 ~ +24	-15 ~ +24
Kit RRP		€	3556	3899	4946
Indoor unit RRP		€	1277	1277	1277
Outdoor unit RRP		€	1934	2277	3324
Panel RRP		€	216	216	216
Wired control RRP		€	129	129	129

Accessories		RRP €
CZ-RTC6	CONEX wired remote controller (non-wireless)	148
CZ-RTC6BL	CONEX wired remote controller with Bluetooth®	177
CZ-RTC6BLW	CONEX wired remote controller with Wi-Fi and Bluetooth®	250
CZ-RTC5B	Wired remote controller with Econavi function and datanavi	129
CZ-RWS3 + CZ-RWRU3W	Infrared remote controller	292

Accessories		RRP €
CZ-CAPWFC1	Commercial Wi-Fi Adaptor	264
CZ-KPU3AW	Econavi exclusive panel	270
PAW-WTRAY	Tray for condenser water compatible with outdoor elevation platform	152
PAW-GRDBSE20	Outdoor base ground support for noise and vibration absorption	152
PAW-GRDSTD40	Outdoor elevation platform 400 x 900 x 400 mm	152
CZ-FDU3+CZ-ATU2	Fresh air-intake kit	663

1) EER and COP calculation is based in accordance to EN14511. 2) Energy Label Scale from A+++ to D. For models below 12 kW, the SEER and SCOP is calculated based on values of EU/626/2011. For models above 12 kW, the SEER and SCOP is calculated based on values of EU/2281/2016. 3) The annual energy consumption is calculated in accordance to EU/626/2011. 4) The sound pressure of the units shows the value measured of the position 1,5 m below the unit. The sound pressure is measured in accordance with Eurovent 6/C/006-97 specification. 5) Connect the liquid socket tube (Ø6,35-Ø9,52) to the liquid tubing side indoor unit. 6) Connect the gas socket tube (Ø12,70-Ø15,88) to the gas tubing side indoor unit. 7) When installing the outdoor unit at a higher position than the indoor unit. 8) Outdoor unit located lower / outdoor unit located higher. \* Recommended fuse for the indoor 3 A. \*\* Above values are in the case of nanoe™ X OFF.



SEER: For S-3650PU3E + U-36PZ3E5. SCOP: For S-3650PU3E + U-60PZ3E5A. ECONAVI and INTERNET CONTROL: Optional.

Rating Conditions: Cooling Indoor 27 °C DB / 19 °C WB. Cooling Outdoor 35 °C DB / 24 °C WB. Heating Indoor 20 °C DB. Heating Outdoor 7 °C DB / 6 °C WB. (DB: Dry Bulb; WB: Wet Bulb). Specifications subject to change without notice. For detailed information about ErP / Energy Labelling, please visit our websites www.aircon.panasonic.eu or www.ptc.panasonic.eu.



## NEW PACi NX Series Elite 4 way 90x90 cassette Inverter+ • R32


### New 4 way 90x90 cassette - PU3.

Powerful turbo fan and intelligent Econavi sensor ensure high energy efficiency, and nanoe™ X which is equipped as standard provides an exceptional level of indoor air quality.

			Single phase						
			3.6 kW	5.0 kW	6.0 kW	7.1 kW	10.0 kW	12.5 kW	14.0 kW
Kit			KIT-36PU3ZH5	KIT-50PU3ZH5	KIT-60PU3ZH5	KIT-71PU3ZH5	KIT-100PU3ZH5	KIT-125PU3ZH5	KIT-140PU3ZH5
<b>Remote controller</b>			<b>CZ-RTC5B</b>	<b>CZ-RTC5B</b>	<b>CZ-RTC5B</b>	<b>CZ-RTC5B</b>	<b>CZ-RTC5B</b>	<b>CZ-RTC5B</b>	<b>CZ-RTC5B</b>
Cooling capacity	Nominal (Min - Max)	kW	3.6(1.2 - 4.0)	5.0(1.2 - 5.6)	6.0(1.2 - 7.1)	7.1(2.2 - 9.0)	10.0(3.1 - 12.5)	12.5(3.2 - 14.0)	14.0(3.3 - 16.0)
UK Cooling	(Total - Sensible)	kW	3.5 - 2.6	4.9 - 3.4	5.9 - 4.1	8.4 - 5.4	11.4 - 7.9	12.8 - 8.5	14.6 - 9.6
EER <sup>1)</sup>		W/W	5.45	4.31	4.05	4.06	4.41	3.80	3.41
<b>SEER<sup>2)</sup></b>			<b>8.9 A+++</b>	<b>8.6 A+++</b>	<b>8.0 A++</b>	<b>7.7 A++</b>	<b>7.8 A++</b>	<b>7.7</b>	<b>7.2</b>
Pdesign		kW	3.6	5.0	6.0	7.1	10.0	12.5	14.0
Input power cooling		kW	0.66	1.16	1.48	1.75	2.27	3.29	4.11
Annual energy consumption <sup>3)</sup>		kWh/a	142	203	263	323	449	—	—
Heating capacity	Nominal (Min - Max)	kW	4.0(1.2 - 5.0)	5.6(1.2 - 6.5)	7.0(1.2 - 8.0)	8.0(2.0 - 9.0)	11.2(3.1 - 14.0)	14.0(3.2 - 16.0)	16.0(3.3 - 18.0)
UK Heating		kW	4.34	5.6	6.92	8.55	12.65	14.5	16.35
COP <sup>1)</sup>		W/W	5.41	4.24	4.02	4.30	5.00	4.61	4.30
<b>SCOP<sup>2)</sup></b>			<b>5.1 A+++</b>	<b>4.9 A++</b>	<b>4.8 A++</b>	<b>4.8 A++</b>	<b>4.9 A++</b>	<b>4.7</b>	<b>4.6</b>
Pdesign at -10 °C		kW	3.6	4.5	4.7	5.2	8.0	9.5	10.6
Input power heating		kW	0.74	1.32	1.74	1.86	2.24	3.04	3.72
Annual energy consumption <sup>3)</sup>		kWh/a	988	1286	1371	1517	2286	—	—
<b>Indoor unit</b>			<b>S-3650PU3E</b>	<b>S-3650PU3E</b>	<b>S-6071PU3E</b>	<b>S-6071PU3E</b>	<b>S-1014PU3E</b>	<b>S-1014PU3E</b>	<b>S-1014PU3E</b>
Air flow	Hi / Med / Lo	m <sup>3</sup> /min	14.5/13.0/11.5	16.5/13.5/11.5	21.0/16.0/13.0	22.0/16.0/13.0	36.0/26.0/18.0	37.0/27.0/19.0	38.0/29.0/20.0
Moisture removal volume		L/h	0.7	1.6	1.7	2.5	2.7	4.8	6.0
Sound pressure <sup>4)</sup>	Hi / Med / Lo	dB(A)	30/28/27	32/29/27	36/31/28	37/31/28	45/38/32	46/39/33	47/40/34
Sound power	Hi / Med / Lo	dB(A)	45/43/42	47/44/42	51/46/43	52/46/43	60/53/47	61/54/48	62/55/49
Dimension	Indoor (H x W x D)	mm	256 x 840 x 840	256 x 840 x 840	256 x 840 x 840	256 x 840 x 840	319 x 840 x 840	319 x 840 x 840	319 x 840 x 840
	Panel (H x W x D)	mm	33.5 x 950 x 950	33.5 x 950 x 950	33.5 x 950 x 950	33.5 x 950 x 950	33.5 x 950 x 950	33.5 x 950 x 950	33.5 x 950 x 950
Net weight	Indoor / Panel	kg	19/5	19/5	20/5	20/5	25/5	25/5	25/5
nanoe X Generator			Mark 1	Mark 1	Mark 1	Mark 1	Mark 1	Mark 1	Mark 1
<b>Outdoor unit</b>			<b>U-36PZH3E5</b>	<b>U-50PZH3E5</b>	<b>U-60PZH3E5</b>	<b>U-71PZH3E5</b>	<b>U-100PZH3E5</b>	<b>U-125PZH3E5</b>	<b>U-140PZH3E5</b>
Power source	(to outdoor)	V	220 - 230 - 240	220 - 230 - 240	220 - 230 - 240	220 - 230 - 240	220 - 230 - 240	220 - 230 - 240	220 - 230 - 240
Recommended Fuse		A	20	20	25	25	35	35	40
Current	Cool	A	3.25 - 3.10 - 3.00	5.50 - 5.25 - 5.05	6.95 - 6.65 - 6.35	8.65 - 8.25 - 7.95	11.20 - 10.70 - 10.30	16.10 - 15.40 - 14.70	20.10 - 19.20 - 18.40
	Heat	A	3.60 - 3.45 - 3.30	6.25 - 6.00 - 5.75	8.05 - 7.70 - 7.40	9.00 - 8.70 - 8.35	10.90 - 10.60 - 10.10	14.90 - 14.20 - 13.60	18.20 - 17.40 - 16.70
Air flow	Cool / Heat	m <sup>3</sup> /min	34.1/36.4	42.0/42.0	42.0/42.0	61.0/60.0	118.0/108.0	125.0/112.0	129.0/116.0
Sound pressure	Cool / Heat (Hi)	dB(A)	43/44	46/48	47/50	48/50	52/52	53/53	54/54
Sound power	Cool / Heat (Hi)	dB(A)	62/64	64/67	65/69	65/67	69/69	70/70	71/71
Dimension	H x W x D	mm	695 x 875 x 320	695 x 875 x 320	695 x 875 x 320	996 x 940 x 340	1416 x 940 x 340	1416 x 940 x 340	1416 x 940 x 340
Net weight		kg	42	42	43	65	98	98	98
Pipe diameter	Liquid pipe	Inch (mm)	1/4 (6.35)	1/4 (6.35)	1/4 (6.35) <sup>5)</sup>	3/8 (9.52)	3/8 (9.52)	3/8 (9.52)	3/8 (9.52)
	Gas pipe	Inch (mm)	1/2 (12.70)	1/2 (12.70)	1/2 (12.70) <sup>6)</sup>	5/8 (15.88)	5/8 (15.88)	5/8 (15.88)	5/8 (15.88)
Pipe length range		m	3 - 40	3 - 40	3 - 40	5 - 50	5 - 85	5 - 85	5 - 85
Elevation difference (in/out) <sup>7)</sup>		m	15/30 <sup>8)</sup>	15/30 <sup>8)</sup>	15/30 <sup>8)</sup>	15/30 <sup>8)</sup>	15/30 <sup>8)</sup>	15/30 <sup>8)</sup>	15/30 <sup>8)</sup>
Pipe length for additional gas		m	30	30	30	30	30	30	30
Additional gas amount		g/m	15	15	15	45	45	45	45
Refrigerant (R32)/ CO <sub>2</sub> Eq.		kg / T	1.13/0.76	1.13/0.76	1.15/0.78	1.95/1.32	3.05/2.06	3.05/2.06	3.05/2.06
Operating range	Cool Min - Max	°C	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +48	-20 ~ +48 <sup>9)</sup>	-20 ~ +48 <sup>9)</sup>	-20 ~ +48 <sup>9)</sup>
	Heat Min - Max	°C	-20 ~ +24	-20 ~ +24	-20 ~ +24	-20 ~ +24	-20 ~ +24	-20 ~ +24	-20 ~ +24
<b>Kit RRP</b>		€	<b>2314</b>	<b>2520</b>	<b>2737</b>	<b>3013</b>	<b>4007</b>	<b>4097</b>	<b>4933</b>
Indoor unit RRP		€	728	728	892	892	1277	1277	1277
Outdoor unit RRP		€	1241	1447	1500	1776	2385	2475	3311
Panel RRP		€	216	216	216	216	216	216	216
Wired control RRP		€	129	129	129	129	129	129	129

### Technical focus

- High performance turbo fan, path system for heat exchanger
- Econavi: An optional intelligent sensor to reduce waste of energy
- nanoe™ X (Generator Mark 1 = 4,8 trillion hydroxyl radicals/ sec) as standard for better indoor air quality, indoor unit internal cleaning with nanoe™ X and dry operation
- Lower noise in slow fan operation
- Light weight, easy piping and integrated drain pump for quick installation
- Wired remote control CZ-RTC6BL allows easy system setting via Bluetooth®
- High volume fresh air input with optional air-intake plenum and chamber (CZ-FDU3+CZ-ATU2)



Standard panel.  
CZ-KPU3W



CZ-RTC5B



Optional Econavi panel (CZ-RTC5B is required).  
CZ-KPU3AW



Optional controller. CONEX wired remote controller.  
CZ-RTC6 - CZ-RTC6BL - CZ-RTC6BLW



Optional remote controller. Infrared remote controller.  
CZ-RWS3 + CZ-RWRU3W

COMPATIBLE WITH ALL PANASONIC CONNECTIVITY SOLUTIONS. FOR DETAILED INFORMATION GO TO THE CONTROL SYSTEMS SECTION

Three phase

		Three phase				
		7.1 kW	10.0 kW	12.5 kW	14.0 kW	
Kit		KIT-71PU3ZH8	KIT-100PU3ZH8	KIT-125PU3ZH8	KIT-140PU3ZH8	
Remote controller		CZ-RTC5B	CZ-RTC5B	CZ-RTC5B	CZ-RTC5B	
Cooling capacity	Nominal (Min - Max)	kW	7.1 [2.2 - 9.0]	10.0 [3.1 - 12.5]	12.5 [3.2 - 14.0]	14.0 [3.3 - 16.0]
UK Cooling	(Total - Sensible)	kW	8.4 - 5.4	11.4 - 7.9	12.8 - 8.5	14.6 - 9.6
EER <sup>1)</sup>		W/W	4.06	4.41	3.80	3.41
SEER <sup>2)</sup>			<b>7.6 A++</b>	<b>7.7 A++</b>	<b>7.7</b>	<b>7.2</b>
Pdesign		kW	7.1	10.0	12.5	14.0
Input power cooling		kW	1.75	2.27	3.29	4.11
Annual energy consumption <sup>3)</sup>		kWh/a	327	455	—	—
Heating capacity	Nominal (Min - Max)	kW	8.0 [2.0 - 9.0]	11.2 [3.1 - 14.0]	14.0 [3.2 - 16.0]	16.0 [3.3 - 18.0]
UK Heating		kW	8.55	12.65	14.5	16.35
COP <sup>1)</sup>		W/W	4.30	5.00	4.61	4.30
SCOP <sup>2)</sup>			<b>4.8 A++</b>	<b>4.9 A++</b>	<b>4.7</b>	<b>4.6</b>
Pdesign at -10 °C		kW	5.2	8.0	9.5	10.6
Input power heating		kW	1.86	2.24	3.04	3.72
Annual energy consumption <sup>3)</sup>		kWh/a	1517	2286	—	—
Indoor unit		S-6071PU3E	S-1014PU3E	S-1014PU3E	S-1014PU3E	
Air flow	Hi / Med / Lo	m <sup>3</sup> /min	22.0/16.0/13.0	36.0/26.0/18.0	37.0/27.0/19.0	38.0/29.0/20.0
Moisture removal volume		L/h	2.5	2.7	4.8	6.0
Sound pressure <sup>4)</sup>	Hi / Med / Lo	dB(A)	37/31/28	45/38/32	46/39/33	47/40/34
Sound power	Hi / Med / Lo	dB(A)	52/46/43	60/53/47	61/54/48	62/55/49
Dimension	Indoor (H x W x D)	mm	256 x 840 x 840	319 x 840 x 840	319 x 840 x 840	319 x 840 x 840
	Panel (H x W x D)	mm	33.5 x 950 x 950	33.5 x 950 x 950	33.5 x 950 x 950	33.5 x 950 x 950
Net weight	Indoor / Panel	kg	20/5	25/5	25/5	25/5
nanoe X Generator			Mark 1	Mark 1	Mark 1	Mark 1
Outdoor unit		U-71PZH3E8	U-100PZH3E8	U-125PZH3E8	U-140PZH3E8	
Power source	(to outdoor)	V	380 - 400 - 415	380 - 400 - 415	380 - 400 - 415	380 - 400 - 415
Recommended Fuse		A	15	15	15	15
Current	Cool	A	2.90 - 2.80 - 2.70	3.80 - 3.60 - 3.45	5.45 - 5.15 - 5.00	6.80 - 6.45 - 6.20
	Heat	A	3.05 - 2.95 - 2.85	3.75 - 3.55 - 3.40	5.10 - 4.80 - 4.65	6.20 - 5.90 - 5.65
Air flow	Cool / Heat	m <sup>3</sup> /min	61.0/60.0	118.0/108.0	125.0/112.0	129.0/116.0
Sound pressure	Cool / Heat (Hi)	dB(A)	48/50	52/52	53/53	54/54
Sound power	Cool / Heat (Hi)	dB(A)	65/67	69/69	70/70	71/71
Dimension	H x W x D	mm	996 x 940 x 340	1416 x 940 x 340	1416 x 940 x 340	1416 x 940 x 340
Net weight		kg	65	98	98	98
Pipe diameter	Liquid pipe	Inch (mm)	3/8 (9.52)	3/8 (9.52)	3/8 (9.52)	3/8 (9.52)
	Gas pipe	Inch (mm)	5/8 (15.88)	5/8 (15.88)	5/8 (15.88)	5/8 (15.88)
Pipe length range		m	5 - 50	5 - 85	5 - 85	5 - 85
Elevation difference (in/out) <sup>7)</sup>		m	15/30 <sup>8)</sup>	15/30 <sup>8)</sup>	15/30 <sup>8)</sup>	15/30 <sup>8)</sup>
Pipe length for additional gas		m	30	30	30	30
Additional gas amount		g/m	45	45	45	45
Refrigerant (R32) / CO <sub>2</sub> , Eq.		kg / T	1.95/1.32	3.05/2.06	3.05/2.06	3.05/2.06
Operating range	Cool Min ~ Max	°C	-15 ~ +48	-20 ~ +48 <sup>9)</sup>	-20 ~ +48 <sup>9)</sup>	-20 ~ +48 <sup>9)</sup>
	Heat Min ~ Max	°C	-20 ~ +24	-20 ~ +24	-20 ~ +24	-20 ~ +24
Kit RRP		€	<b>3173</b>	<b>4052</b>	<b>4292</b>	<b>5315</b>
Indoor unit RRP		€	892	1277	1277	1277
Outdoor unit RRP		€	1936	2430	2670	3693
Panel RRP		€	216	216	216	216
Wired control RRP		€	129	129	129	129

Accessories		RRP €
CZ-RTC6	CONEX wired remote controller (non-wireless)	148
CZ-RTC6BL	CONEX wired remote controller with Bluetooth®	177
CZ-RTC6BLW	CONEX wired remote controller with Wi-Fi and Bluetooth®	250
CZ-RTC5B	Wired remote controller with Econavi function and datanavi	129
CZ-RWS3 + CZ-RWRU3W	Infrared remote controller	292

Accessories		RRP €
CZ-CAPWFC1	Commercial Wi-Fi Adaptor	264
CZ-KPU3AW	Econavi exclusive panel	
PAW-WTRAY	Tray for condenser water compatible with outdoor elevation platform	152
PAW-GRDBSE20	Outdoor base ground support for noise and vibration absorption	152
PAW-GRDSTD40	Outdoor elevation platform 400 x 900 x 400 mm	152
CZ-FDU3+CZ-ATU2	Fresh air-intake kit	663

1) EER and COP calculation is based in accordance to EN14511. 2) Energy Label Scale from A+++ to D. For models below 12 kW, the SEER and SCOP is calculated based on values of EU/626/2011. For models above 12 kW, the SEER and SCOP is calculated based on values of EU/2281/2016. 3) The annual energy consumption is calculated in accordance to EU/626/2011. 4) The sound pressure of the units shows the value measured of the position 1,5 m below the unit. The sound pressure is measured in accordance with Eurovent 6/C/006-97 specification. 5) Connect the liquid socket tube [Ø6,35-Ø9,52] to the liquid tubing side indoor unit. 6) Connect the gas socket tube [Ø12,70-Ø15,88] to the gas tubing side indoor unit. 7) When installing the outdoor unit at a higher position than the indoor unit. 8) Outdoor unit located lower / outdoor unit located higher. 9) For models 100 - 140PZH3E5(8), it is possible to operate the lowest -20 °C in the computer rooms with the piping length of 30 m or less. \* Recommended fuse for the indoor 3 A. \*\* Above values are in the case of nanoe™ X OFF.



SEER and SCOP: For S-3650PU3E + U-36PZH3E5. ECONAVI and INTERNET CONTROL: Optional.  
Rating Conditions: Cooling Indoor 27 °C DB / 19 °C WB, Cooling Outdoor 35 °C DB / 24 °C WB, Heating Indoor 20 °C DB, Heating Outdoor 7 °C DB / 6 °C WB. [DB: Dry Bulb; WB: Wet Bulb].  
Specifications subject to change without notice. For detailed information about ErP / Energy Labelling, please visit our websites www.aircon.panasonic.eu or www.ptc.panasonic.eu.

NEW  
2021Available  
Mar 21

  
nanoe™ X as a standard.


## NEW PACi NX Series Standard ceiling Inverter+ • R32

**Ceiling mounted units provide large and wide air distribution which is good for big rooms.**

The height and depth of all capacities are the same for unified appearance in mixed installations.

		Single phase							
Kit			3.6 kW	5.0 kW	6.0 kW	7.1 kW	10.0 kW	12.5 kW	14.0 kW
Remote controller			KIT-36PT3Z5	KIT-50PT3Z5	KIT-60PT3Z5	KIT-71PT3Z5	KIT-100PT3Z5	KIT-125PT3Z5	KIT-140PT3Z5
			CZ-RTC5B	CZ-RTC5B	CZ-RTC5B	CZ-RTC5B	CZ-RTC5B	CZ-RTC5B	CZ-RTC5B
Cooling capacity	Nominal (Min - Max)	kW	3.5(1.5 - 4.0)	5.0(1.5 - 5.2)	6.0(2.0 - 7.1)	6.8(2.6 - 7.7)	10.0(3.0 - 11.5)	12.5(3.2 - 13.5)	14.0(3.3 - 15.0)
UK Cooling	(Total - Sensible)	kW	3.3 - 2.4	4.8 - 3.2	5.9 - 4.0	6.5 - 4.3	10.7 - 7.1	12.6 - 8.2	13.9 - 8.9
EER <sup>1)</sup>		W/W	4.14	3.03	3.59	3.24	3.64	3.32	2.98
SEER <sup>2)</sup>			<b>7.2 A++</b>	<b>6.7 A++</b>	<b>7.3 A++</b>	<b>5.9 A+</b>	<b>6.6 A++</b>	<b>6.1</b>	<b>5.8</b>
Pdesign		kW	3.5	5.0	6.0	6.8	10.0	12.5	14.0
Input power cooling		kW	0.85	1.65	1.67	2.10	2.75	3.76	4.70
Annual energy consumption <sup>3)</sup>		kWh/a	171	262	288	404	531	—	—
Heating capacity	Nominal (Min - Max)	kW	3.5(1.5 - 4.6)	5.0(1.5 - 6.4)	6.0(1.8 - 7.0)	6.8(2.1 - 8.1)	10.0(3.0 - 14.0)	12.5(3.3 - 15.0)	14.0(3.4 - 16.0)
UK Heating		kW	3.9	5.6	6.1	6.9	12.68	14.7	15.22
COP <sup>1)</sup>		W/W	4.61	3.73	4.11	4.20	4.24	3.89	3.70
SCOP <sup>2)</sup>			<b>4.4 A+</b>	<b>4.1 A+</b>	<b>4.6 A++</b>	<b>4.3 A+</b>	<b>4.2 A+</b>	<b>3.8</b>	<b>3.7</b>
Pdesign at -10 °C		kW	2.8	4.0	4.6	4.7	10.0	12.5	13.6
Input power heating		kW	0.76	1.34	1.46	1.62	2.36	3.21	3.78
Annual energy consumption <sup>3)</sup>		kWh/a	891	1365	1399	1529	3331	—	—
<b>Indoor unit</b>			<b>S-3650PT3E</b>	<b>S-3650PT3E</b>	<b>S-6071PT3E</b>	<b>S-6071PT3E</b>	<b>S-1014PT3E</b>	<b>S-1014PT3E</b>	<b>S-1014PT3E</b>
Air flow	Hi / Med / Lo	m <sup>3</sup> /min	14.0/12.0/10.5	15.0/12.5/10.5	20.0/17.0/14.5	21.0/18.0/15.5	30.0/25.0/23.0	34.0/28.0/24.0	35.0/29.0/25.0
Moisture removal volume		L/h	0.8	2.0	2.1	2.7	4.1	5.7	6.9
Sound pressure <sup>4)</sup>	Hi / Med / Lo	dB(A)	36/32/28	37/33/28	38/34/29	39/35/30	42/37/34	46/40/35	47/41/36
Sound power	Hi / Med / Lo	dB(A)	54/50/46	55/51/46	56/52/47	57/53/48	60/55/52	64/58/53	65/59/54
Dimension	HxWxD	mm	235x960x690	235x960x690	235x1275x690	235x1275x690	235x1590x690	235x1590x690	235x1590x690
Net weight		kg	26	26	34	34	40	40	40
nanoe X Generator			Mark 2	Mark 2	Mark 2	Mark 2	Mark 2	Mark 2	Mark 2
<b>Outdoor unit</b>			<b>U-36PZ3E5</b>	<b>U-50PZ3E5</b>	<b>U-60PZ3E5A</b>	<b>U-71PZ3E5A</b>	<b>U-100PZ3E5</b>	<b>U-125PZ3E5</b>	<b>U-140PZ3E5</b>
Power source	(to outdoor)	V	220 - 230 - 240	220 - 230 - 240	220 - 230 - 240	220 - 230 - 240	220 - 230 - 240	220 - 230 - 240	220 - 230 - 240
Recommended Fuse		A	15	15	20	20	35	40	40
Current	Cool	A	3.90 - 3.75 - 3.60	7.65 - 7.30 - 7.00	7.75 - 7.40 - 7.10	9.75 - 9.30 - 8.95	13.70 - 13.10 - 12.60	18.20 - 17.40 - 16.70	22.70 - 21.70 - 20.80
	Heat	A	3.65 - 3.40 - 3.25	6.30 - 6.00 - 5.75	6.75 - 6.50 - 6.20	7.50 - 7.20 - 6.90	11.80 - 11.30 - 10.80	15.50 - 14.80 - 14.20	18.30 - 17.50 - 16.80
Air flow	Cool / Heat	m <sup>3</sup> /min	33.6/34.0	32.7/31.9	42.6/41.5	44.7/45.9	73.0/43.0	82.0/80.0	84.0/82.0
Sound pressure	Cool / Heat (Hi)	dB(A)	46/47	46/46	47/48	48/49	52/52	55/55	56/56
Sound power	Cool / Heat (Hi)	dB(A)	64/66	64/64	64/65	66/68	70/70	73/73	74/74
Dimension	HxWxD	mm	619x824x299	619x824x299	695x875x320	695x875x320	996x980x370	996x980x370	996x980x370
Net weight		kg	32	35	42	50	83	87	87
Pipe diameter	Liquid pipe	Inch (mm)	1/4(6.35)	1/4(6.35)	1/4(6.35) <sup>5)</sup>	1/4(6.35) <sup>5)</sup>	3/8(9.52)	3/8(9.52)	3/8(9.52)
	Gas pipe	Inch (mm)	1/2(12.70)	1/2(12.70)	1/2(12.70) <sup>6)</sup>	5/8(15.88)	5/8(15.88)	5/8(15.88)	5/8(15.88)
Pipe length range		m	3 - 15	3 - 20	3 - 40	3 - 40	5 - 50	5 - 50	5 - 50
Elevation difference (in/out) <sup>7)</sup>		m	15/15 <sup>8)</sup>	15/15 <sup>8)</sup>	15/30 <sup>8)</sup>	20/30 <sup>8)</sup>	15/30 <sup>8)</sup>	15/30 <sup>8)</sup>	15/30 <sup>8)</sup>
Pipe length for additional gas		m	7.5	7.5	7.5	10	30	30	30
Additional gas amount		g/m	10	15	15	17	45	45	45
Refrigerant (R32) / CO <sub>2</sub> Eq.		kg / T	0.87/0.59	1.14/0.77	1.15/0.78	1.32/0.89	2.40/1.62	2.80/1.89	2.80/1.89
Operating range	Cool Min - Max	°C	-10 ~ +43	-10 ~ +43	-10 ~ +43	-10 ~ +43	-10 ~ +43	-10 ~ +43	-10 ~ +43
	Heat Min - Max	°C	-15 ~ +24	-15 ~ +24	-15 ~ +24	-15 ~ +24	-15 ~ +24	-15 ~ +24	-15 ~ +24
<b>Kit RRP</b>		€	<b>1648</b>	<b>1833</b>	<b>2323</b>	<b>2582</b>	<b>3318</b>	<b>3702</b>	<b>4516</b>
Indoor unit RRP		€	762	762	1042	1042	1407	1407	1407
Outdoor unit RRP		€	757	942	1152	1411	1782	2166	2980
Wired control RRP		€	129	129	129	129	129	129	129

## Technical focus

- Wide air distribution for large rooms
- Horizontal air flow reaches maximum 9,5 m
- Fresh air connection available on the unit
- Slim design with 235 m height fits narrow space
- Silent operation
- Wired remote control CZ-RTC6BL allows easy system setting via Bluetooth®
- Twin, Triple and Double-twin split options
- Easy connection and control of external fan or ERV using the connector PAW-FDC on the indoor unit PCB. The external device can be controlled by the remote control of the Panasonic indoor unit

## Further comfort improvement with airflow distribution

Horizontal air flow reaches maximum 9.5 m. This is ideal for wide rooms.

The wide air discharge opening expands the air flow to the left and the right. The unpleasant feeling caused when the air flow directly hits the human body is prevented by the "Draft prevention position", which changes the swing width, so that the degree of comfort is increased.

nanoe™ X (Generator Mark 2= 9,6 trillion hydroxyl radicals/sec) as standard for better indoor air quality, indoor unit internal cleaning with nanoe™ X and dry operation





CZ-RTC5B



COMPATIBLE WITH ALL PANASONIC CONNECTIVITY SOLUTIONS. FOR DETAILED INFORMATION GO TO THE CONTROL SYSTEMS SECTION



CONEX



Optional controller. CONEX wired remote controller. CZ-RTC6 - CZ-RTC6BL - CZ-RTC6BLW



Optional controller. Infrared remote controller. CZ-RWS3 + CZ-RWRT3



Optional Econavi sensor. CZ-CENSC1

			Three phase		
			10.0 kW	12.5 kW	14.0 kW
Kit			KIT-100PT3Z8	KIT-125PT3Z8	KIT-140PT3Z8
Remote controller			CZ-RTC5B	CZ-RTC5B	CZ-RTC5B
Cooling capacity	Nominal (Min - Max)	kW	10.0 (3.0 - 11.5)	12.5 (3.2 - 13.5)	14.0 (3.3 - 15.0)
UK Cooling	(Total - Sensible)	kW	10.7 - 7.1	12.6 - 8.2	13.9 - 8.9
EER <sup>1)</sup>		W/W	3.64	3.32	2.98
SEER <sup>2)</sup>			6.5 A++	6.1	5.8
Pdesign		kW	10.0	12.5	14.0
Input power cooling		kW	2.75	3.76	4.70
Annual energy consumption <sup>3)</sup>		kWh/a	537	—	—
Heating capacity	Nominal (Min - Max)	kW	10.0 (3.0 - 14.0)	12.5 (3.3 - 15.0)	14.0 (3.4 - 16.0)
UK Heating		kW	12.68	14.7	15.22
COP <sup>1)</sup>		W/W	4.24	3.89	3.70
SCOP <sup>2)</sup>			4.2 A+	3.8	3.7
Pdesign at -10 °C		kW	10.0	12.5	13.6
Input power heating		kW	2.36	3.21	3.78
Annual energy consumption <sup>3)</sup>		kWh/a	3331	—	—
Indoor unit			S-1014PT3E	S-1014PT3E	S-1014PT3E
Air flow	Hi / Med / Lo	m <sup>3</sup> /min	30.0/25.0/23.0	34.0/28.0/24.0	35.0/29.0/25.0
Moisture removal volume		L/h	4.1	5.7	6.9
Sound pressure <sup>4)</sup>	Hi / Med / Lo	dB(A)	42/37/34	46/40/35	47/41/36
Sound power	Hi / Med / Lo	dB(A)	60/55/52	64/58/53	65/59/54
Dimension	HxWxD	mm	235 x 1590 x 690	235 x 1590 x 690	235 x 1590 x 690
Net weight		kg	40	40	40
Outdoor unit			U-100PZ3E8	U-125PZ3E8	U-140PZ3E8
Power source	(to outdoor)	V	380 - 400 - 415	380 - 400 - 415	380 - 400 - 415
Recommended Fuse		A	15	20	20
Current	Cool	A	4.60 - 4.35 - 4.20	6.10 - 5.75 - 5.55	7.60 - 7.20 - 6.95
	Heat	A	3.95 - 3.75 - 3.60	5.20 - 4.95 - 4.75	6.10 - 5.80 - 5.60
Air flow	Cool / Heat	m <sup>3</sup> /min	73.0/73.0	82.0/80.0	84.0/82.0
Sound pressure	Cool / Heat (Hi)	dB(A)	52/52	55/55	56/56
Sound power	Cool / Heat (Hi)	dB(A)	70/70	73/73	74/74
Dimension	HxWxD	mm	996 x 980 x 370	996 x 980 x 370	996 x 980 x 370
Net weight		kg	83	87	87
Pipe diameter	Liquid pipe	Inch (mm)	3/8 (9.52)	3/8 (9.52)	3/8 (9.52)
	Gas pipe	Inch (mm)	5/8 (15.88)	5/8 (15.88)	5/8 (15.88)
Pipe length range		m	5 - 50	5 - 50	5 - 50
Elevation difference (in/out) <sup>7)</sup>		m	15/30 <sup>8)</sup>	15/30 <sup>8)</sup>	15/30 <sup>8)</sup>
Pipe length for additional gas		m	30	30	30
Additional gas amount		g/m	45	45	45
Refrigerant (R32) / CO <sub>2</sub> Eq.		kg / T	2.40/1.62	2.8/1.89	2.8/1.89
Operating range	Cool Min ~ Max	°C	-10 ~ +43	-10 ~ +43	-10 ~ +43
	Heat Min ~ Max	°C	-15 ~ +24	-15 ~ +24	-15 ~ +24
Kit RRP		€	3470	3813	4860
Indoor unit RRP		€	1407	1407	1407
Outdoor unit RRP		€	1934	2277	3324
Wired control RRP		€	129	129	129

Accessories		RRP €
CZ-RTC6	CONEX wired remote controller (non-wireless)	148
CZ-RTC6BL	CONEX wired remote controller with Bluetooth®	177
CZ-RTC6BLW	CONEX wired remote controller with Wi-Fi and Bluetooth®	250
CZ-RTC5B	Wired remote controller with Econavi function and datanavi	129
CZ-RWS3 + CZ-RWRT3	Infrared remote controller	304

Accessories		RRP €
CZ-CAPWFC1	Commercial Wi-Fi Adaptor	264
PAW-WTRAY	Tray for condenser water compatible with outdoor elevation platform	152
PAW-GRDBSE20	Outdoor base ground support for noise and vibration absorption	152
PAW-GRDSTD40	Outdoor elevation platform 400 x 900 x 400 mm	152
CZ-CENSC1	Econavi energy savings sensor	159

1) EER and COP calculation is based in accordance to EN14511. 2) Energy Label Scale from A+++ to D. For models below 12 kW, the SEER and SCOP is calculated based on values of EU/626/2011. For models above 12 kW, the SEER and SCOP is calculated based on values of EU/2281/2016. 3) The annual energy consumption is calculated in accordance to EU/626/2011. 4) The sound pressure of the units shows the value measured of the position 1 m in front of the main body and 1 m below the unit. The sound pressure is measured in accordance with Eurovent 6/C/006-97 specification. 5) Connect the liquid socket tube (Ø6,35-Ø9,52) to the liquid tubing side indoor unit. 6) Connect the gas socket tube (Ø12,70-Ø15,88) to the gas tubing side indoor unit. 7) When installing the outdoor unit at a higher position than the indoor unit. 8) Outdoor unit located lower / outdoor unit located higher. \* Recommended fuse for the indoor 3 A.



SEER and SCOP: For S-6071PT3E + U-60PZ3E5A. INTERNET CONTROL: Optional.

Rating Conditions: Cooling Indoor 27 °C DB / 19 °C WB. Cooling Outdoor 35 °C DB / 24 °C WB. Heating Indoor 20 °C DB. Heating Outdoor 7 °C DB / 6 °C WB. (DB: Dry Bulb; WB: Wet Bulb). Specifications subject to change without notice. For detailed information about ErP / Energy Labelling, please visit our websites www.aircon.panasonic.eu or www.ptc.panasonic.eu.

**NEW  
2021**

 Available  
Mar 21


  
nanoe™ X as a standard.

**NEW PACi NX Series Elite ceiling Inverter+ • R32**
**Ceiling mounted units provide large and wide air distribution which is good for big rooms.**

The height and depth of all capacities are the same for unified appearance in mixed installations.

		Single phase													
		3.6 kW		5.0 kW		6.0 kW		7.1 kW		10.0 kW		12.5 kW		14.0 kW	
Kit		KIT-36PT3ZH5		KIT-50PT3ZH5		KIT-60PT3ZH5		KIT-71PT3ZH5		KIT-100PT3ZH5		KIT-125PT3ZH5		KIT-140PT3ZH5	
Remote controller		CZ-RTC5B		CZ-RTC5B		CZ-RTC5B		CZ-RTC5B		CZ-RTC5B		CZ-RTC5B		CZ-RTC5B	
Cooling capacity	Nominal (Min - Max)	kW	3.5(1.2 - 4.0)	5.0(1.2 - 5.6)	6.0(1.2 - 7.1)	6.8(2.2 - 9.0)	9.5(3.1 - 12.5)	12.1(3.2 - 14.0)	13.4(3.3 - 16.0)						
UK Cooling	(Total - Sensible)	kW	3.4 - 2.5	4.9 - 3.3	5.9 - 4.0	8.1 - 5.2	11.4 - 7.5	12.8 - 8.3	14.6 - 9.2						
EER <sup>1)</sup>		W/W	4.86	4.03	3.82	3.91	4.15	3.51	3.21						
SEER <sup>2)</sup>			<b>7.7 A++</b>	<b>7.4 A++</b>	<b>7.5 A++</b>	<b>7.3 A++</b>	<b>7.3 A++</b>	<b>7.0</b>	<b>6.7</b>						
Pdesign		kW	3.5	5.0	6.0	6.8	9.5	12.1	13.4						
Input power cooling		kW	0.720	1.24	1.57	1.74	2.29	3.45	4.17						
Annual energy consumption <sup>3)</sup>		kWh/a	160	237	280	326	456	—	—						
Heating capacity	Nominal (Min - Max)	kW	4.0(1.2 - 5.0)	5.6(1.2 - 6.5)	7.0(1.2 - 8.0)	8.0(2.0 - 9.0)	11.2(3.1 - 14.0)	14.0(3.2 - 16.0)	16.0(3.3 - 18.0)						
UK Heating		kW	4.34	5.6	6.92	8.55	12.65	14.5	16.35						
COP <sup>1)</sup>		W/W	5.00	4.03	4.14	3.96	4.09	3.78	3.48						
SCOP <sup>2)</sup>			<b>4.9 A++</b>	<b>4.8 A++</b>	<b>4.8 A++</b>	<b>4.7 A++</b>	<b>4.7 A++</b>	<b>4.6</b>	<b>4.5</b>						
Pdesign at -10 °C		kW	3.1	4.0	4.6	4.7	7.8	9.5	10.2						
Input power heating		kW	0.80	1.39	1.69	2.02	2.74	3.70	4.60						
Annual energy consumption <sup>3)</sup>		kWh/a	886	1167	1342	1400	2323	—	—						
Indoor unit			S-3650PT3E	S-3650PT3E	S-6071PT3E	S-6071PT3E	S-1014PT3E	S-1014PT3E	S-1014PT3E						
Air flow	Hi / Med / Lo	m <sup>3</sup> /min	14.0/12.0/10.5	15.0/12.5/10.5	20.0/17.0/14.5	21.0/18.0/15.5	30.0/25.0/23.0	34.0/28.0/24.0	35.0/29.0/25.0						
Moisture removal volume		L/h	0.8	2.0	2.1	2.7	3.6	5.4	6.4						
Sound pressure <sup>4)</sup>	Hi / Med / Lo	dB(A)	36/32/28	37/33/28	38/34/29	39/35/30	42/37/34	46/40/35	47/41/36						
Sound power	Hi / Med / Lo	dB(A)	54/50/46	55/51/46	56/52/47	57/53/48	60/55/52	64/58/53	65/59/54						
Dimension	HxWxD	mm	235x960x690	235x960x690	235x1275x690	235x1275x690	235x1590x690	235x1590x690	235x1590x690						
Net weight		kg	26	26	34	34	40	40	40						
nanoe X Generator			Mark 2	Mark 2	Mark 2	Mark 2	Mark 2	Mark 2	Mark 2						
Outdoor unit			U-36PZH3E5	U-50PZH3E5	U-60PZH3E5	U-71PZH3E5	U-100PZH3E5	U-125PZH3E5	U-140PZH3E5						
Power source	(to outdoor)	V	220 - 230 - 240	220 - 230 - 240	220 - 230 - 240	220 - 230 - 240	220 - 230 - 240	220 - 230 - 240	220 - 230 - 240						
Recommended Fuse		A	20	20	25	25	35	40	40						
Current	Cool	A	3.55 - 3.40 - 3.25	5.85 - 5.60 - 5.40	7.35 - 7.05 - 6.75	8.60 - 8.20 - 7.90	11.30 - 10.80 - 10.40	16.90 - 16.10 - 15.50	20.40 - 19.50 - 18.70						
	Heat	A	3.90 - 3.75 - 3.60	6.60 - 6.30 - 6.05	7.85 - 7.50 - 7.20	9.75 - 9.45 - 9.05	13.40 - 19.20 - 12.40	18.10 - 17.30 - 16.60	22.50 - 21.50 - 20.60						
Air flow	Cool / Heat	m <sup>3</sup> /min	34.1/36.4	42.0/42.0	42.0/42.0	61.0/60.0	118.0/108.0	125.0/112.0	129.0/116.0						
Sound pressure	Cool / Heat (Hi)	dB(A)	43/44	46/48	47/50	48/50	52/52	53/53	54/54						
Sound power	Cool / Heat (Hi)	dB(A)	62/64	64/67	65/69	65/67	69/69	70/70	71/71						
Dimension	HxWxD	mm	695x875x320	695x875x320	695x875x320	996x940x340	1416x940x340	1416x940x340	1416x940x340						
Net weight	Liquid pipe	Inch (mm)	1/4(6.35)	1/4(6.35)	1/4(6.35) <sup>5)</sup>	3/8(9.52)	3/8(9.52)	3/8(9.52)	3/8(9.52)						
	Gas pipe	Inch (mm)	1/2(12.70)	1/2(12.70)	1/2(12.70) <sup>6)</sup>	5/8(15.88)	5/8(15.88)	5/8(15.88)	5/8(15.88)						
Pipe length range		m	3 - 40	3 - 40	3 - 40	5 - 50	5 - 85	5 - 85	5 - 85						
Elevation difference (in/out) <sup>7)</sup>		m	15/30 <sup>8)</sup>	15/30 <sup>8)</sup>	15/30 <sup>8)</sup>	15/30 <sup>8)</sup>	15/30 <sup>8)</sup>	15/30 <sup>8)</sup>	15/30 <sup>8)</sup>						
Pipe length for additional gas		m	30	30	30	30	30	30	30						
Additional gas amount		g/m	15	15	15	45	45	45	45						
Refrigerant (R32) / CO <sub>2</sub> Eq.		kg / T	1.13/0.76	1.13/0.76	1.15/0.78	1.95/1.32	3.05/2.06	3.05/2.06	3.05/2.06						
Operating range	Cool Min - Max	°C	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +48	-20 ~ +48 <sup>9)</sup>	-20 ~ +48 <sup>9)</sup>	-20 ~ +48 <sup>9)</sup>						
	Heat Min - Max	°C	-20 ~ +24	-20 ~ +24	-20 ~ +24	-20 ~ +24	-20 ~ +24	-20 ~ +24	-20 ~ +24						
Kit RRP		€	<b>2132</b>	<b>2338</b>	<b>2671</b>	<b>2947</b>	<b>3921</b>	<b>4011</b>	<b>4847</b>						
Indoor unit RRP		€	762	762	1042	1042	1407	1407	1407						
Outdoor unit RRP		€	1241	1447	1500	1776	2385	2475	3311						
Wired control RRP		€	129	129	129	129	129	129	129						

**Technical focus**

- Wide air distribution for large rooms
- Horizontal air flow reaches maximum 9.5 m
- Fresh air connection available on the unit
- Slim design with 235 mm height fits narrow space
- Silent operation
- Wired remote control CZ-RTC6BL allows easy system setting via Bluetooth®
- Twin, Triple and Double-twin split options
- Easy connection and control of external fan or ERV using the connector PAW-FDC on the indoor unit PCB. The external device can be controlled by the remote control of the Panasonic indoor unit

**Further comfort improvement with airflow distribution**

Horizontal air flow reaches maximum 9.5 m. This is ideal for wide rooms.

The wide air discharge opening expands the air flow to the left and the right. The unpleasant feeling caused when the air flow directly hits the human body is prevented by the "Draft prevention position", which changes the swing width, so that the degree of comfort is increased.

nanoe™ X (Generator Mark 2 = 9,6 trillion hydroxyl radicals/sec) as standard for better indoor air quality, indoor unit internal cleaning with nanoe™ X and dry operation



COMPATIBLE WITH ALL PANASONIC CONNECTIVITY SOLUTIONS. FOR DETAILED INFORMATION GO TO THE CONTROL SYSTEMS SECTION



CZ-RTC5B



**Optional controller. CONEX wired remote controller.**  
CZ-RTC6 - CZ-RTC6BL  
- CZ-RTC6BLW



**Optional controller. Infrared remote controller.**  
CZ-RWS3 +  
CZ-RWRT3



**Optional Econavi sensor.**  
CZ-CENSC1

		Three phase				
		7.1 kW	10.0 kW	12.5 kW	14.0 kW	
Kit		KIT-71PT3ZH8	KIT-100PT3ZH8	KIT-125PT3ZH8	KIT-140PT3ZH8	
Remote controller		CZ-RTC5B	CZ-RTC5B	CZ-RTC5B	CZ-RTC5B	
Cooling capacity	Nominal (Min - Max)	kW	6.8(2.2 - 9.0)	9.5(3.1 - 12.5)	12.1(3.2 - 14.0)	13.4(3.3 - 16.0)
UK Cooling	[Total - Sensible]	kW	8.1 - 5.2	11.4 - 7.5	12.8 - 8.3	14.6 - 9.2
EER <sup>1)</sup>		W/W	3.91	4.15	3.51	3.21
<b>SEER<sup>2)</sup></b>			<b>7.2 A++</b>	<b>7.2 A++</b>	<b>7.0</b>	<b>6.6</b>
Pdesign		kW	6.8	9.5	12.1	13.4
Input power cooling		kW	1.74	2.29	3.45	4.17
Annual energy consumption <sup>3)</sup>		kWh/a	331	462	—	—
Heating capacity	Nominal (Min - Max)	kW	8.0(2.0 - 9.0)	11.2(3.1 - 14.0)	14.0(3.2 - 16.0)	16.0(3.3 - 18.0)
UK Heating		kW	8.55	12.65	14.5	16.35
COP <sup>1)</sup>		W/W	3.96	4.09	3.78	3.48
<b>SCOP<sup>2)</sup></b>			<b>4.7 A++</b>	<b>4.7 A++</b>	<b>4.6</b>	<b>4.5</b>
Pdesign at -10 °C		kW	4.7	7.8	9.5	10.2
Input power heating		kW	2.02	2.74	3.7	4.6
Annual energy consumption <sup>3)</sup>		kWh/a	1400	2324	—	—
<b>Indoor unit</b>			<b>S-6071PT3E</b>	<b>S-1014PT3E</b>	<b>S-1014PT3E</b>	<b>S-1014PT3E</b>
Air flow	Hi / Med / Lo	m <sup>3</sup> /min	21.0/18.0/15.0	30.0/25.0/23.0	34.0/28.0/24.0	35.0/29.0/25.0
Moisture removal volume		L/h	2.7	3.6	5.4	6.4
Sound pressure <sup>4)</sup>	Hi / Med / Lo	dB(A)	39/35/30	42/37/34	46/40/35	47/41/36
Sound power	Hi / Med / Lo	dB(A)	57/53/48	60/55/52	64/58/53	65/59/54
Dimension	HxWxD	mm	235 x 1275 x 690	235 x 1590 x 690	235 x 1590 x 690	235 x 1590 x 690
Net weight		kg	34	40	40	40
<b>Outdoor unit</b>			<b>U-71PZH3E8</b>	<b>U-100PZH3E8</b>	<b>U-125PZH3E8</b>	<b>U-140PZH3E8</b>
Power source	[to outdoor]	V	380 - 400 - 415	380 - 400 - 415	380 - 400 - 415	380 - 400 - 415
Recommended Fuse		A	15	15	15	15
Current	Cool	A	2.90 - 2.80 - 2.70	3.80 - 3.65 - 3.45	5.70 - 5.40 - 5.20	5.90 - 6.55 - 6.30
	Heat	A	3.35 - 3.20 - 3.10	4.55 - 4.35 - 4.15	6.20 - 5.85 - 5.65	7.70 - 7.30 - 6.95
Air flow	Cool / Heat	m <sup>3</sup> /min	61.0/60.0	118.0/108.0	125.0/112.0	129.0/116.0
Sound pressure	Cool / Heat (Hi)	dB(A)	48/50	52/52	53/53	54/54
Sound power	Cool / Heat (Hi)	dB(A)	65/67	69/69	70/70	71/71
Dimension	HxWxD	mm	996 x 940 x 340	1416 x 940 x 340	1416 x 940 x 340	1416 x 940 x 340
Net weight		kg	65	98	98	98
Pipe diameter	Liquid pipe	Inch (mm)	3/8(9.52)	3/8(9.52)	3/8(9.52)	3/8(9.52)
	Gas pipe	Inch (mm)	5/8(15.88)	5/8(15.88)	5/8(15.88)	5/8(15.88)
Pipe length range		m	5 - 50	5 - 85	5 - 85	5 - 85
Elevation difference (in/out) <sup>7)</sup>		m	15/30 <sup>8)</sup>	15/30 <sup>8)</sup>	15/30 <sup>8)</sup>	15/30 <sup>8)</sup>
Pipe length for additional gas		m	30	30	30	30
Additional gas amount		g/m	45	45	45	45
Refrigerant (R32) / CO <sub>2</sub> Eq.		kg / T	1.95/1.32	3.05/2.06	3.05/2.06	3.05/2.06
Operating range	Cool Min ~ Max	°C	-15 ~ +48	-20 ~ +48 <sup>9)</sup>	-20 ~ +48 <sup>9)</sup>	-20 ~ +48 <sup>9)</sup>
	Heat Min ~ Max	°C	-20 ~ +24	-20 ~ +24	-20 ~ +24	-20 ~ +24
<b>Kit RRP</b>		€	<b>3107</b>	<b>3966</b>	<b>4206</b>	<b>5229</b>
Indoor unit RRP		€	1042	1407	1407	1407
Outdoor unit RRP		€	1936	2430	2670	3693
Wired control RRP		€	129	129	129	129

Accessories		RRP €
<b>CZ-RTC6</b>	CONEX wired remote controller (non-wireless)	148
<b>CZ-RTC6BL</b>	CONEX wired remote controller with Bluetooth®	177
<b>CZ-RTC6BLW</b>	CONEX wired remote controller with Wi-Fi and Bluetooth®	250
<b>CZ-RTC5B</b>	Wired remote controller with Econavi function and datanavi	129
<b>CZ-RWS3 + CZ-RWRT3</b>	Infrared remote controller	292

Accessories		RRP €
<b>CZ-CAPWFC1</b>	Commercial Wi-Fi Adaptor	264
<b>PAW-WTRAY</b>	Tray for condenser water compatible with outdoor elevation platform	152
<b>PAW-GRDBSE20</b>	Outdoor base ground support for noise and vibration absorption	152
<b>PAW-GRDSTD40</b>	Outdoor elevation platform 400 x 900 x 400 mm	152
<b>CZ-CENSC1</b>	Econavi energy savings sensor	159

1) EER and COP calculation is based in accordance to EN14511. 2) Energy Label Scale from A+++ to D. For models below 12 kW, the SEER and SCOP is calculated based on values of EU/626/2011. For models above 12 kW, the SEER and SCOP is calculated based on values of EU/2281/2016. 3) The annual energy consumption is calculated in accordance to EU/626/2011. 4) The sound pressure of the units shows the value measured of the position 1 m in front of the main body and 1 m below the unit. The sound pressure is measured in accordance with Eurovent 6/C/006-97 specification. 5) Connect the liquid socket tube (Ø6,35-Ø9,52) to the liquid tubing side indoor unit. 6) Connect the gas socket tube (Ø12,70-Ø15,88) to the gas tubing side indoor unit. 7) When installing the outdoor unit at a higher position than the indoor unit. 8) Outdoor unit located lower / outdoor unit located higher. 9) For models 100 - 140PZH3E5(8), it is possible to operate the lowest -20 °C in the computer rooms with the piping length of 30 m or less.\* Recommended fuse for the indoor 3 A.



SEER and SCOP: For S-3650PT3E + U-36PZH3E5. INTERNET CONTROL: Optional.

Rating Conditions: Cooling Indoor 27 °C DB / 19 °C WB. Cooling Outdoor 35 °C DB / 24 °C WB. Heating Indoor 20 °C DB. Heating Outdoor 7 °C DB / 6 °C WB. [DB: Dry Bulb; WB: Wet Bulb]. Specifications subject to change without notice. For detailed information about ErP / Energy Labelling, please visit our websites www.aircon.panasonic.eu or www.ptc.panasonic.eu.



nanoe™ X as a standard.

## NEW PACi NX Series Standard adaptive ducted unit Inverter+ • R32

### New design duct range PF3.

2 installation possibilities (horizontal / vertical) with high ESP 150Pa allows flexible installation.



			Single phase						
			3.6 kW	5.0 kW	6.0 kW	7.1 kW	10.0 kW	12.5 kW	14.0 kW
			KIT-36PF3Z5	KIT-50PF3Z5	KIT-60PF3Z5	KIT-71PF3Z5	KIT-100PF3Z5	KIT-125PF3Z5	KIT-140PF3Z5
			CZ-RTC5B	CZ-RTC5B	CZ-RTC5B	CZ-RTC5B	CZ-RTC5B	CZ-RTC5B	CZ-RTC5B
<b>Kit</b>									
<b>Remote controller</b>			<b>CZ-RTC5B</b>	<b>CZ-RTC5B</b>	<b>CZ-RTC5B</b>	<b>CZ-RTC5B</b>	<b>CZ-RTC5B</b>	<b>CZ-RTC5B</b>	<b>CZ-RTC5B</b>
Cooling capacity	Nominal (Min - Max)	kW	3.4(1.5 - 4.0)	5.0(1.5 - 5.3)	5.7(2.0 - 6.3)	6.8(2.6 - 7.7)	10.0(3.0 - 11.5)	12.5(3.2 - 13.5)	14.0(3.3 - 15.0)
UK Cooling	(Total - Sensible)	kW	3.2 - 2.3	4.8 - 3.1	5.6 - 3.7	6.5 - 4.2	10.6 - 7.3	12.6 - 8.2	13.9 - 9
EER <sup>1)</sup>	Nominal (Min - Max)	W/W	3.78	2.78	3.54	3.18	3.66(5.36 - 2.81)	3.52(5.33 - 2.80)	3.18(5.32 - 2.70)
<b>SEER<sup>2)</sup></b>			<b>6.0 A+</b>	<b>6.5 A++</b>	<b>6.4 A++</b>	<b>6.0 A+</b>	<b>5.6 A+</b>	<b>5.6</b>	<b>5.4</b>
Pdesign		kW	3.4	5.0	5.7	6.8	10.0	12.5	14.0
Input power cooling	Nominal (Min - Max)	kW	0.9	1.8	1.61	2.14	2.73(0.56 - 4.09)	3.55(0.60 - 4.82)	4.40(0.62 - 5.56)
Annual energy consumption <sup>3)</sup>		kWh/a	198	267	310	391	625	787	911
Heating capacity	Nominal (Min - Max)	kW	3.4(1.5 - 4.6)	5.0(1.5 - 5.9)	5.7(1.8 - 7.0)	6.8(2.1 - 8.1)	10.0(3.0 - 14.0)	12.5(3.3 - 15.0)	14.0(3.4 - 16.0)
UK Heating		kW	3.9	5.2	6.2	6.9	12.18	14.7	15.22
COP <sup>1)</sup>	Nominal (Min - Max)	W/W	4.15	3.62	4.04	4.00	4.31(5.36 - 3.51)	4.02(5.50 - 3.45)	3.79(5.48 - 3.13)
<b>SCOP<sup>2)</sup></b>			<b>4.0 A+</b>	<b>4.0 A+</b>	<b>4.4 A+</b>	<b>4.1 A+</b>	<b>3.8 A</b>	<b>3.6</b>	<b>3.5</b>
Pdesign at -10 °C		kW	2.4	3.8	4.4	4.7	10.0	12.5	13.6
Input power heating	Nominal (Min - Max)	kW	0.82	1.38	1.41	1.7	2.32(0.56 - 3.99)	3.11(0.60 - 4.35)	3.69(0.62 - 5.12)
Annual energy consumption <sup>3)</sup>		kWh/a	839	1303	1376	1591	3684	4848	5379
<b>Indoor unit</b>			<b>S-3650PF3E</b>	<b>S-3650PF3E</b>	<b>S-6071PF3E</b>	<b>S-6071PF3E</b>	<b>S-1014PF3E</b>	<b>S-1014PF3E</b>	<b>S-1014PF3E</b>
External static pressure <sup>4)</sup>	Nominal (Min - Max)	Pa	30(10 - 150)	30(10 - 150)	30(10 - 150)	30(10 - 150)	40(10 - 150)	50(10 - 150)	50(10 - 150)
Air flow	Hi / Med / Lo	m <sup>3</sup> /min	14.0/13.0/10.0	16.0/15.0/12.0	21.0/19.0/15.0	21.0/19.0/15.0	32.0/26.0/21.0	34.0/29.0/23.0	36.0/32.0/25.0
Moisture removal volume		L/h	0.9	1.9	1.7	2.7	3.2	4.1	4.9
Sound pressure <sup>5)</sup>	Hi / Med / Lo	dB(A)	30/27/22	34/30/25	30/26/23	30/26/23	33/29/25	35/31/27	39/35/29
Sound power	Hi / Med / Lo	dB(A)	53/50/45	57/53/48	53/49/46	53/49/46	56/52/48	58/54/50	62/58/52
Dimension	HxWxD	mm	250x800x730	250x800x730	250x1000x730	250x1000x730	250x1400x730	250x1400x730	250x1400x730
Net weight		kg	25	25	30	30	39	39	39
nanoe X Generator			Mark 2	Mark 2	Mark 2	Mark 2	Mark 2	Mark 2	Mark 2
<b>Outdoor unit</b>			<b>U-36PZ3E5</b>	<b>U-50PZ3E5</b>	<b>U-60PZ3E5A</b>	<b>U-71PZ3E5A</b>	<b>U-100PZ3E5</b>	<b>U-125PZ3E5</b>	<b>U-140PZ3E5</b>
Power source	(to outdoor)	V	220 - 230 - 240	220 - 230 - 240	220 - 230 - 240	220 - 230 - 240	220 - 230 - 240	220 - 230 - 240	220 - 230 - 240
Recommended Fuse		A	15A / *	15A / *	20A / *	20A / *	35A / *	40A / *	40A / *
Current	Cool	A	4.15 - 4.00 - 3.85	8.35 - 8.00 - 7.65	7.45 - 7.15 - 6.85	9.95 - 9.50 - 9.10	13.30 - 12.70 - 12.20	17.20 - 16.40 - 15.80	20.50 - 16.60 - 18.80
	Heat	A	3.85 - 3.70 - 3.50	6.45 - 6.20 - 5.95	6.55 - 6.25 - 6.00	7.90 - 7.55 - 7.25	11.60 - 11.10 - 10.60	16.40 - 15.70 - 15.00	17.20 - 16.40 - 15.80
Air flow	Cool / Heat	m <sup>3</sup> /min	33.6/34.0	32.7/31.9	42.6/41.5	44.7/45.9	76 / 70	86 / 78	89 / 83
Sound pressure	Cool / Heat (Hi)	dB(A)	46/47	46/46	47/48	48/49	52/52	55/55	56/56
Sound power	Cool / Heat (Hi)	dB(A)	64/66	64/64	64/65	66/68	70/70	73/73	74/74
Dimension	HxWxD	mm	619x824x299	619x824x299	695x875x320	695x875x320	996x980x370	996x980x370	996x980x370
Net weight		kg	32	35	42	50	83	87	87
Pipe diameter	Liquid pipe	Inch (mm)	1/4(Ø6.35)	1/4(Ø6.35)	1/4(Ø6.35) <sup>6)</sup>	1/4(Ø6.35) <sup>6)</sup>	3/8(9.52)	3/8(9.52)	3/8(9.52)
	Gas pipe	Inch (mm)	1/2(Ø12.7)	1/2(Ø12.7)	1/2(Ø12.7) <sup>7)</sup>	5/8(Ø15.88)	5/8(15.88)	5/8(15.88)	5/8(15.88)
Pipe length range		m	3 - 15	3 - 20	3 - 40	3 - 40	5 - 50	5 - 50	5 - 50
Elevation difference (in/out) <sup>8)</sup>		m	15/15 <sup>9)</sup>	15/15 <sup>9)</sup>	15/30 <sup>9)</sup>	20/30 <sup>9)</sup>	15/30 <sup>9)</sup>	15/30 <sup>9)</sup>	15/30 <sup>9)</sup>
Pipe length for additional gas		m	7.5	7.5	7.5	10	30	30	30
Additional gas amount		g/m	10	15	15	17	45	45	45
Refrigerant (R32) / CO <sub>2</sub> Eq.		kg / T	0.87/0.59	1.14/0.77	1.15/0.78	1.32/0.89	2.40/1.76	2.80/2.01	2.80/2.01
Operating range	Cool Min - Max	°C	-10 ~ +43	-10 ~ +43	-10 ~ +43	-10 ~ +43	-10 ~ +43	-10 ~ +43	-10 ~ +43
	Heat Min - Max	°C	-15 ~ +24	-15 ~ +24	-15 ~ +24	-15 ~ +24	-15 ~ +24	-15 ~ +24	-15 ~ +24
<b>Kit RRP</b>		€	<b>1731</b>	<b>1916</b>	<b>2265</b>	<b>2524</b>	<b>3234</b>	<b>3618</b>	<b>4432</b>
Indoor unit RRP		€	845	845	984	984	1323	1323	1323
Outdoor unit RRP		€	757	942	1152	1411	1782	2166	2980
Wired control RRP		€	129	129	129	129	129	129	129

### Technical focus

- 2 installation possibilities (horizontal / vertical)
- Maximum external static pressure: 150 Pa
- Selectable inlet air position (rear / bottom entry)
- Improved drain pan suitable for both horizontal / vertical installation
- Drain pump included
- nanoe™ X (Generator Mark 2= 9,6 trillion hydroxyl radicals / sec) as standard for the long duct piping case\*
- Wired remote control CZ-RTC6BL allows easy system setting via Bluetooth®

\* The performance of nanoe™ X air can be expected even by 10 m long duct by Panasonic internal survey.


### 2 installation possibilities (horizontal / vertical)

Vertical installation is newly available. ESP 150Pa, sufficient for remotely installing units away from the rooms.



### Improved drain pan design

Drain pan is shared in both cases horizontal and vertical installation. No need to alternate anymore.





CZ-RTC5B



COMPATIBLE WITH ALL PANASONIC CONNECTIVITY SOLUTIONS. FOR DETAILED INFORMATION GO TO THE CONTROL SYSTEMS SECTION



**Optional controller. CONEX wired remote controller.**  
CZ-RTC6 - CZ-RTC6BL  
- CZ-RTC6BLW



**Optional controller. Infrared remote controller.**  
CZ-RWS3 +  
CZ-RWRC3



**Optional Econavi sensor.**  
CZ-CENSC1

			Three phase		
			10.0 kW	12.5 kW	14.0 kW
			KIT-100PF3Z8	KIT-125PF3Z8	KIT-140PF3Z8
			CZ-RTC5B	CZ-RTC5B	CZ-RTC5B
<b>Kit</b>					
<b>Remote controller</b>					
Cooling capacity	Nominal (Min - Max)	kW	10.0(3.0 - 11.5)	12.5(3.2 - 13.5)	14.0(3.3 - 15.0)
UK Cooling	(Total - Sensible)	kW	10.6 - 7.3	12.6 - 8.2	13.9 - 9
EER <sup>1)</sup>	Nominal (Min - Max)	W/W	3.66(5.36 - 2.81)	3.52(5.33 - 2.80)	3.18(5.32 - 2.70)
<b>SEER <sup>2)</sup></b>			<b>5.6 A+</b>	<b>5.5</b>	<b>5.4</b>
Pdesign		kW	10.0	12.5	14.0
Input power cooling	Nominal (Min - Max)	kW	2.73(0.56 - 4.09)	3.55(0.60 - 4.82)	4.40(0.62 - 5.56)
Annual energy consumption <sup>3)</sup>		kWh/a	625	790	912
Heating capacity	Nominal (Min - Max)	kW	10.0(3.0 - 14.0)	12.5(3.3 - 15.0)	14.0(3.4 - 16.0)
UK Heating		kW	12.18	14.7	15.22
COP <sup>1)</sup>	Nominal (Min - Max)	W/W	4.31(5.36 - 3.51)	4.02(5.50 - 3.45)	3.79(5.48 - 3.13)
<b>SCOP <sup>2)</sup></b>			<b>3.8 A</b>	<b>3.60</b>	<b>3.5</b>
Pdesign at -10 °C		kW	10.0	12.5	13.6
Input power heating	Nominal (Min - Max)	kW	2.32(0.56 - 3.99)	3.11(0.60 - 4.35)	3.69(0.62 - 5.12)
Annual energy consumption <sup>3)</sup>		kWh/a	3684	4848	5379
<b>Indoor unit</b>			<b>S-1014PF3E</b>	<b>S-1014PF3E</b>	<b>S-1014PF3E</b>
External static pressure <sup>4)</sup>	Nominal (Min - Max)	Pa	40(10 - 150)	50(10 - 150)	50(10 - 150)
Air flow	Hi / Med / Lo	m <sup>3</sup> /min	32.0/26.0/21.0	34.0/29.0/23.0	36.0/32.0/25.0
Moisture removal volume		L/h	3.2	4.1	4.9
Sound pressure <sup>5)</sup>	Hi / Med / Lo	dB(A)	33/29/25	35/31/27	39/35/29
Sound power	Hi / Med / Lo	dB(A)	56/52/48	58/54/50	62/58/52
Dimension	HxWxD	mm	250 x 1400 x 730	250 x 1400 x 730	250 x 1400 x 730
Net weight		kg	39	39	39
nanoe X Generator			Mark 2	Mark 2	Mark 2
<b>Outdoor unit</b>			<b>U-100PZ3E8</b>	<b>U-125PZ3E8</b>	<b>U-140PZ3E8</b>
Power source	[to outdoor]	V	380 - 400 - 415	380 - 400 - 415	380 - 400 - 415
Recommended Fuse		A	15	20	20
Current	Cool	A	4.45 - 4.20 - 4.05	5.75 - 5.45 - 5.25	6.85 - 6.50 - 6.30
	Heat	A	3.85 - 3.70 - 3.55	5.50 - 5.20 - 5.05	5.75 - 5.45 - 5.25
Air flow	Cool / Heat	m <sup>3</sup> /min	76/70	86/78	89/83
Sound pressure	Cool / Heat (Hi)	dB(A)	52/52	55/55	56/56
Sound power	Cool / Heat (Hi)	dB(A)	70/70	73/73	74/74
Dimension	HxWxD	mm	996 x 980 x 370	996 x 980 x 370	996 x 980 x 370
Net weight		kg	90	94	94
Pipe diameter	Liquid pipe	Inch (mm)	3/8(9.52)	3/8(9.52)	3/8(9.52)
	Gas pipe	Inch (mm)	5/8(15.88)	5/8(15.88)	5/8(15.88)
Pipe length range		m	5 - 50	5 - 50	5 - 50
Elevation difference [in/out] <sup>8)</sup>		m	15/30 <sup>9)</sup>	15/30 <sup>9)</sup>	15/30 <sup>9)</sup>
Pipe length for additional gas		m	30	30	30
Additional gas amount		g/m	45	45	45
Refrigerant (R32) / CO <sub>2</sub> Eq.		kg / T	2.60/1.76	2.98/2.01	2.98/2.01
Operating range	Cool Min ~ Max	°C	-10 ~ +43	-10 ~ +43	-10 ~ +43
	Heat Min ~ Max	°C	-15 ~ +24	-15 ~ +24	-15 ~ +24
<b>Kit RRP</b>		€	<b>3386</b>	<b>3729</b>	<b>4776</b>
Indoor unit RRP		€	1323	1323	1323
Outdoor unit RRP		€	1934	2277	3324
Wired control RRP		€	129	129	129

Accessories		RRP €
<b>CZ-RTC6</b>	CONEX wired remote controller (non-wireless)	148
<b>CZ-RTC6BL</b>	CONEX wired remote controller with Bluetooth®	177
<b>CZ-RTC6BLW</b>	CONEX wired remote controller with Wi-Fi and Bluetooth®	250
<b>CZ-RTC5B</b>	Wired remote controller with Econavi function and datanavi	129
<b>CZ-RWS3 + CZ-RWRC3</b>	Infrared remote controller	298
<b>CZ-CAPWFC1</b>	Commercial Wi-Fi Adaptor	264

Accessories		RRP €
<b>PAW-WTRAY</b>	Tray for condenser water compatible with outdoor elevation platform	152
<b>PAW-GRDBSE20</b>	Outdoor base ground support for noise and vibration absorption	152
<b>PAW-GRDSTD40</b>	Outdoor elevation platform 400 x 900 x 400 mm	152
<b>CZ-CENSC1</b>	Econavi energy savings sensor	159
<b>CZ-56DAF2</b>	Air outlet plenum for S-3650PF3E	135
<b>CZ-90DAF2</b>	Air outlet plenum for S-6071PF3E	203
<b>CZ-160DAF2</b>	Air outlet plenum for S-1014PF3E	271

1) EER and COP calculation is based in accordance to EN14511. 2) Energy Label Scale from A+++ to D. For models below 12 kW, the SEER and SCOP is calculated based on values of EU/626/2011. For models above 12 kW, the SEER and SCOP is calculated based on values of EU/2281/2016. 3) The annual energy consumption is calculated in accordance to EU/626/2011. 4) Medium external static pressure setting from factory. 5) The sound pressure of the units shows the value measured of the position 1,5 m below the unit. The sound pressure is measured in accordance with Eurovent 6/C/006-97 specification. 6) Connect the liquid socket tube (Ø6,35-Ø9,52) to the liquid tubing side indoor unit. 7) Connect the gas socket tube (Ø12,70-Ø15,88) to the gas tubing side indoor unit. 8) When installing the outdoor unit at a higher position than the indoor unit. 9) Outdoor unit located lower / outdoor unit located higher. \* Recommended fuse for the indoor 3 A. \*\* Above values are in the case of standard installation(horizontal installation in the ceiling, rear side air intake) and nanoe™ X OFF.



SEER: For S-3650PF3E + U-50PZ3E5. SCOP: For S-6071PF3E + U-60PZ3E5A. SUPER QUIET: For S-3650PF3E + U-36PZ3E5. INTERNET CONTROL: Optional. Rating Conditions: Cooling Indoor 27 °C DB / 19 °C WB. Cooling Outdoor 35 °C DB / 24 °C WB. Heating Indoor 20 °C DB. Heating Outdoor 7 °C DB / 6 °C WB. [DB: Dry Bulb; WB: Wet Bulb]. Specifications subject to change without notice. For detailed information about ErP / Energy Labelling, please visit our websites www.aircon.panasonic.eu or www.ptc.panasonic.eu.



nanoe™ X as a standard.

## NEW PACi NX Series Elite adaptive ducted unit Inverter+ • R32

### New design duct range PF3.

2 installation possibilities (horizontal / vertical) with high ESP 150Pa allows flexible installation.



		Single phase							
		3.6 kW	5.0 kW	6.0 kW	7.1 kW	10.0 kW	12.5 kW	14.0 kW	
Kit		KIT-36PFH3Z5	KIT-50PFH3Z5	KIT-60PFH3Z5	KIT-71PFH3Z5	KIT-100PFH3Z5	KIT-125PFH3Z5	KIT-140PFH3Z5	
Remote controller		CZ-RTC5B	CZ-RTC5B	CZ-RTC5B	CZ-RTC5B	CZ-RTC5B	CZ-RTC5B	CZ-RTC5B	
Cooling capacity	Nominal (Min - Max)	kW	3.6 (1.2 - 4.0)	5.0 (1.2 - 5.6)	5.7 (1.2 - 6.3)	6.8 (2.2 - 7.8)	9.5 (3.1 - 11.4)	12.1 (3.2 - 13.6)	13.4 (3.3 - 15.3)
UK Cooling	(Total - Sensible)	kW	3.5 - 2.4	4.9 - 3.2	5.6 - 3.7	7.1 - 4.7	10.4 - 7.2	12.4 - 8.1	13.9 - 8.9
EER <sup>1)</sup>		W/W	4.24	3.42	3.68	3.74	4.17	3.58	3.38
SEER <sup>2)</sup>			<b>6.8 A++</b>	<b>6.1 A++</b>	<b>7.1 A++</b>	<b>7.1 A++</b>	<b>7.4 A++</b>	<b>7.1</b>	<b>7.0</b>
Pdesign		kW	3.6	5.0	5.7	6.8	9.5	12.1	13.4
Input power cooling		kW	0.850	1.46	1.55	1.82	2.28	3.38	3.96
Annual energy consumption <sup>3)</sup>		kWh/a	185	287	281	332	447	—	—
Heating capacity	Nominal (Min - Max)	kW	4.0 (1.2 - 5.0)	5.6 (1.2 - 6.5)	7.0 (1.2 - 8.0)	7.5 (2.0 - 9.0)	10.8 (3.1 - 13.5)	13.5 (3.2 - 15.4)	15.5 (3.3 - 17.4)
UK Heating		kW	4.34	5.6	6.92	8.55	12.3	14.5	16.35
COP <sup>1)</sup>		W/W	4.17	3.61	3.74	4.03	3.97	3.46	3.44
SCOP <sup>2)</sup>			<b>4.5 A+</b>	<b>4.2 A+</b>	<b>4.4 A+</b>	<b>4.7 A++</b>	<b>4.5 A+</b>	<b>4.3</b>	<b>4.4</b>
Pdesign	at -10 °C	kW	3.6	4.0	4.7	4.7	7.8	9.3	9.5
Input power heating		kW	0.96	1.55	1.87	1.86	2.72	3.90	4.51
Annual energy consumption <sup>3)</sup>		kWh/a	1120	1333	1495	1393	2424	—	—
<b>Indoor unit</b>			<b>S-3650PF3E</b>	<b>S-3650PF3E</b>	<b>S-6071PF3E</b>	<b>S-6071PF3E</b>	<b>S-1014PF3E</b>	<b>S-1014PF3E</b>	<b>S-1014PF3E</b>
External static pressure <sup>4)</sup>	Nominal (Min - Max)	Pa	30 (10 - 150)	30 (10 - 150)	30 (10 - 150)	30 (10 - 150)	40 (10 - 150)	50 (10 - 150)	50 (10 - 150)
Air flow	Hi / Med / Lo	m <sup>3</sup> /min	14.0/13.0/10.0	16.0/15.0/12.0	21.0/19.0/15.0	21.0/19.0/15.0	32.0/26.0/21.0	34.0/29.0/23.0	36.0/32.0/25.0
Moisture removal volume		L/h	0.9	1.9	1.7	2.7	3.2	4.1	4.9
Sound pressure <sup>5)</sup>	Hi / Med / Lo	dB(A)	30/27/22	34/30/25	30/26/23	30/26/23	33/29/25	35/31/27	39/35/29
Sound power	Hi / Med / Lo	dB(A)	53/50/45	57/53/48	53/49/46	53/49/46	56/52/48	58/54/50	62/58/52
Dimension	H x W x D	mm	250 x 800 x 730	250 x 800 x 730	250 x 1000 x 730	250 x 1000 x 730	250 x 1400 x 730	250 x 1400 x 730	250 x 1400 x 730
Net weight		kg	25	25	30	30	39	39	39
nanoe X Generator			Mark 2	Mark 2	Mark 2	Mark 2	Mark 2	Mark 2	Mark 2
<b>Outdoor unit</b>			<b>U-36PZH3E5</b>	<b>U-50PZH3E5</b>	<b>U-60PZH3E5</b>	<b>U-71PZH3E5</b>	<b>U-100PZH3E5</b>	<b>U-125PZH3E5</b>	<b>U-140PZH3E5</b>
Power source	(to outdoor)	V	220 - 230 - 240	220 - 230 - 240	220 - 230 - 240	220 - 230 - 240	220 - 230 - 240	220 - 230 - 240	220 - 230 - 240
Recommended Fuse		A	20	20	25	25	35	40	40
Current	Cool	A	4.20 - 4.00 - 3.85	6.90 - 6.60 - 6.35	7.25 - 6.95 - 6.65	9.00 - 8.60 - 8.25	11.10 - 10.80 - 10.30	16.50 - 15.80 - 15.10	19.60 - 18.70 - 17.90
	Heat	A	4.70 - 4.50 - 4.30	7.35 - 7.00 - 6.75	8.65 - 8.30 - 7.95	9.00 - 8.60 - 8.35	13.30 - 12.70 - 12.20	19.10 - 18.20 - 17.50	22.00 - 21.10 - 20.20
Air flow	Cool / Heat	m <sup>3</sup> /min	34.1/36.4	42.0/42.0	42.0/42.0	61.0/60.0	118.0/108.0	125.0/112.0	129.0/116.0
Sound pressure	Cool / Heat(Hi)	dB(A)	43/44	46/48	47/50	48/50	52/52	53/53	54/54
Sound power	Cool / Heat(Hi)	dB(A)	62/64	64/67	65/69	65/67	69/69	70/70	71/71
Dimension	H x W x D	mm	695 x 875 x 320	695 x 875 x 320	695 x 875 x 320	996 x 940 x 340	1416 x 940 x 340	1416 x 940 x 340	1416 x 940 x 340
Net weight		kg	42	42	43	65	98	98	98
Pipe diameter	Liquid pipe	Inch(mm)	1/4(6.35)	1/4(6.35)	1/4(6.35) <sup>6)</sup>	3/8(9.52)	3/8(9.52)	3/8(9.52)	3/8(9.52)
	Gas pipe	Inch(mm)	1/2(12.70)	1/2(12.70)	1/2(12.70) <sup>7)</sup>	5/8(15.88)	5/8(15.88)	5/8(15.88)	5/8(15.88)
Pipe length range		m	3~40	3~40	3~40	5~50	5~85	5~85	5~85
Elevation difference(in/out) <sup>8)</sup>		m	15/30 <sup>8)</sup>	15/30 <sup>8)</sup>	15/30 <sup>9)</sup>	15/30 <sup>9)</sup>	15/30 <sup>9)</sup>	15/30 <sup>9)</sup>	15/30 <sup>9)</sup>
Pipe length for additional gas		m	30	30	30	30	30	30	30
Additional gas amount		g/m	15	15	15	45	45	45	45
Refrigerant(R32) / CO <sub>2</sub> Eq.		kg / T	1.13/0.76	1.13/0.76	1.15/0.78	1.95/1.32	3.05/2.06	3.05/2.06	3.05/2.06
Operating range	Cool Min - Max	°C	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +48	-20 ~ +48 <sup>10)</sup>	-20 ~ +48 <sup>10)</sup>	-20 ~ +48 <sup>10)</sup>
	Heat Min - Max	°C	-20 ~ +24	-20 ~ +24	-20 ~ +24	-20 ~ +24	-20 ~ +24	-20 ~ +24	-20 ~ +24
<b>Kit RRP</b>		€	<b>2215</b>	<b>2421</b>	<b>2613</b>	<b>2889</b>	<b>3837</b>	<b>3927</b>	<b>4763</b>
Indoor unit RRP		€	845	845	984	984	1323	1323	1323
Outdoor unit RRP		€	1241	1447	1500	1776	2385	2475	3311
Wired control RRP		€	129	129	129	129	129	129	129

### Technical focus

- 2 installation possibilities (horizontal / vertical)
- Maximum external static pressure: 150 Pa
- Selectable inlet air position (rear / bottom entry)
- Improved drain pan suitable for both horizontal / vertical installation
- Drain pump included
- nanoe™ X (Generator Mark 2= 9,6 trillion hydroxyl radicals / sec) as standard for the long duct piping case\*
- Wired remote control CZ-RTC6BL allows easy system setting via Bluetooth®

\* The performance of nanoe™ X air can be expected even by 10 m long duct by Panasonic internal survey.

### 2 installation possibilities (horizontal / vertical)


Vertical installation is newly available. ESP 150Pa, sufficient for remotely installing units away from the rooms.



### Improved drain pan design

Drain pan is shared in both cases horizontal and vertical installation.

No need to alternate anymore.





CZ-RTC5B



**Optional controller.**  
**CONEX wired remote controller.**  
CZ-RTC6 - CZ-RTC6BL  
- CZ-RTC6BLW



**Optional controller.**  
**Infrared remote controller.**  
CZ-RWS3 + CZ-RWRC3

**Optional Econavi sensor.**  
CZ-CENSC1




COMPATIBLE WITH ALL PANASONIC CONNECTIVITY SOLUTIONS. FOR DETAILED INFORMATION GO TO THE CONTROL SYSTEMS SECTION

				7.1 kW		10.0 kW		Three phase	
				KIT-71PFH3Z8		KIT-100PFH3Z8		12.5 kW	
				KIT-125PFH3Z8		KIT-140PFH3Z8		14.0 kW	
<b>Kit</b>				CZ-RTC5B		CZ-RTC5B		CZ-RTC5B	
<b>Remote controller</b>				CZ-RTC5B		CZ-RTC5B		CZ-RTC5B	
Cooling capacity	Nominal (Min - Max)	kW		6.8 [2.2 - 7.8]		9.5 [3.1 - 11.4]		12.1 [3.2 - 13.6]	
UK Cooling	(Total - Sensible)	kW		7.1 - 4.7		10.4 - 7.2		12.4 - 8.1	
EER <sup>1)</sup>		W/W		3.74		4.17		3.58	
SEER <sup>2)</sup>				<b>7.0 A++</b>		<b>7.3 A++</b>		<b>7.1</b>	
Pdesign		kW		6.8		9.5		12.1	
Input power cooling		kW		1.82		2.28		3.38	
Annual energy consumption <sup>3)</sup>		kWh/a		338		451		—	
Heating capacity	Nominal (Min - Max)	kW		7.5 [2.0 - 9.0]		10.8 [3.1 - 13.5]		13.5 [3.2 - 15.4]	
UK Heating		kW		8.55		12.3		14.5	
COP <sup>1)</sup>		W/W		4.03		3.97		3.46	
SCOP <sup>2)</sup>				<b>4.7 A++</b>		<b>4.5 A+</b>		<b>4.3</b>	
Pdesign at -10 °C		kW		4.7		7.8		9.3	
Input power heating		kW		1.86		2.72		3.9	
Annual energy consumption <sup>3)</sup>		kWh/a		1394		2424		—	
<b>Indoor unit</b>				<b>S-6071PF3E</b>		<b>S-1014PF3E</b>		<b>S-1014PF3E</b>	
External static pressure <sup>4)</sup>	Nominal (Min - Max)	Pa		30 [10 - 150]		40 [10 - 150]		50 [10 - 150]	
Air flow	Hi / Med / Lo	m <sup>3</sup> /min		21.0/19.0/15.0		32.0/26.0/21.0		34.0/29.0/23.0	
Moisture removal volume		L/h		2.7		3.2		4.1	
Sound pressure <sup>5)</sup>	Hi / Med / Lo	dB(A)		30/26/23		33/29/25		35/31/27	
Sound power	Hi / Med / Lo	dB(A)		53/49/46		56/52/48		58/54/50	
Dimension	H x W x D	mm		250 x 1000 x 730		250 x 1400 x 730		250 x 1400 x 730	
Net weight		kg		30		39		39	
nanoe X Generator				Mark 2		Mark 2		Mark 2	
<b>Outdoor unit</b>				<b>U-71PZH3E8</b>		<b>U-100PZH3E8</b>		<b>U-125PZH3E8</b>	
Power source	(to outdoor)	V		380 - 400 - 415		380 - 400 - 415		380 - 400 - 415	
Recommended Fuse		A		15		15		15	
Current	Cool	A		3.00 - 2.90 - 2.80		3.80 - 3.60 - 3.50		5.60 - 5.30 - 5.15	
	Heat	A		3.05 - 2.95 - 2.85		4.50 - 4.30 - 4.15		6.45 - 6.10 - 5.90	
Air flow	Cool / Heat	m <sup>3</sup> /min		61.0/60.0		118.0/108.0		125.0/112.0	
Sound pressure	Cool / Heat (Hi)	dB(A)		48/50		52/52		53/53	
Sound power	Cool / Heat (Hi)	dB(A)		65/67		69/69		70/70	
Dimension	H x W x D	mm		996 x 940 x 340		1416 x 940 x 340		1416 x 940 x 340	
Net weight		kg		65		98		98	
Pipe diameter	Liquid pipe	Inch (mm)		3/8 (9.52)		3/8 (9.52)		3/8 (9.52)	
	Gas pipe	Inch (mm)		5/8 (15.88)		5/8 (15.88)		5/8 (15.88)	
Pipe length range		m		5 - 50		5 - 85		5 - 85	
Elevation difference (in/out) <sup>8)</sup>		m		15/30 <sup>9)</sup>		15/30 <sup>9)</sup>		15/30 <sup>9)</sup>	
Pipe length for additional gas		m		30		30		30	
Additional gas amount		g/m		45		45		45	
Refrigerant (R32) / CO <sub>2</sub> Eq.		kg / T		1.95/1.32		3.05/2.06		3.05/2.06	
Operating range	Cool Min ~ Max	°C		-15 ~ +48		-20 ~ +48 <sup>10)</sup>		-20 ~ +48 <sup>10)</sup>	
	Heat Min ~ Max	°C		-20 ~ +24		-20 ~ +24		-20 ~ +24	
<b>Kit RRP</b>		€		<b>3049</b>		<b>3882</b>		<b>4122</b>	
Indoor unit RRP		€		984		1323		1323	
Outdoor unit RRP		€		1936		2430		2670	
Wired control RRP		€		129		129		129	

Accessories		RRP €
<b>CZ-RTC6</b>	CONEX wired remote controller (non-wireless)	148
<b>CZ-RTC6BL</b>	CONEX wired remote controller with Bluetooth®	177
<b>CZ-RTC6BLW</b>	CONEX wired remote controller with Wi-Fi and Bluetooth®	250
<b>CZ-RTC5B</b>	Wired remote controller with Econavi function and datanavi	129
<b>CZ-RWS3 + CZ-RWRC3</b>	Infrared remote controller	298
<b>CZ-CAPWFC1</b>	Commercial Wi-Fi Adaptor	264
























Accessories		RRP €
<b>PAW-WTRAY</b>	Tray for condenser water compatible with outdoor elevation platform	152
<b>PAW-GRDBSE20</b>	Outdoor base ground support for noise and vibration absorption	152
<b>PAW-GRDSTD40</b>	Outdoor elevation platform 400 x 900 x 400 mm	152
<b>CZ-CENSC1</b>	Econavi energy savings sensor	159
<b>CZ-56DAF2</b>	Air outlet plenum for S-3650PF3E	135
<b>CZ-90DAF2</b>	Air outlet plenum for S-6071PF3E	203
<b>CZ-160DAF2</b>	Air outlet plenum for S-1014PF3E	271

1) EER and COP calculation is based in accordance to EN14511. 2) Energy Label Scale from A+++ to D. For models below 12 kW, the SEER and SCOP is calculated based on values of EU/626/2011. For models above 12 kW, the SEER and SCOP is calculated based on values of EU/2281/2016. 3) The annual energy consumption is calculated in accordance to EU/626/2011. 4) Medium external static pressure setting from factory. 5) The sound pressure of the units shows the value measured of the position 1.5 m below the unit. The sound pressure is measured in accordance with Eurovent 6/C/006-97 specification. 6) Connect the liquid socket tube (Ø6,35-Ø9,52) to the liquid tubing side indoor unit. 7) Connect the gas socket tube (Ø12,70-Ø15,88) to the gas tubing side indoor unit. 8) When installing the outdoor unit at a higher position than the indoor unit. 9) Outdoor unit located lower / outdoor unit located higher. 10) For models 100 - 140PZH3E5(8), it is possible to operate the lowest -20 °C in the computer rooms with the piping length of 30 m or less. \* Recommended fuse for the indoor 3 A. \*\* Above values are in the case of standard installation (horizontal installation in the ceiling, rear side air intake) and nanoe™ X OFF.



SEER and SCOP: For S-6071PF3E + U-71PZH3E5. SUPER QUIET: For S-3650PF3E + U-36PZH3E5. INTERNET CONTROL: Optional.  
Rating Conditions: Cooling Indoor 27 °C DB / 19 °C WB. Cooling Outdoor 35 °C DB / 24 °C WB. Heating Indoor 20 °C DB. Heating Outdoor 7 °C DB / 6 °C WB. (DB: Dry Bulb; WB: Wet Bulb).  
Specifications subject to change without notice. For detailed information about ErP / Energy Labelling, please visit our websites www.aircon.panasonic.eu or www.ptc.panasonic.eu.

# Commercial units PACi R32 range

















Page	Indoor units	3.6 kW	4.5 kW <sup>1)</sup>	5.0 kW	6.0 kW
P. 68	Wall-mounted Inverter+ • R32	 S-36PK2E5B	 S-45PK2E5B	 S-50PK2E5B	 S-60PK2E5B
P. 70	4 Way 60x60 cassette Inverter+ • R32	 S-36PY2E5B	 S-45PY2E5B	 S-50PY2E5B	
P. 74	<b>NEW</b> 4 way 90x90 cassette Inverter+ • R32	 S-3650PU3E	 S-3650PU3E	 S-3650PU3E	 S-6071PU3E
P. 78	Ceiling Inverter+ • R32	 S-36PT2E5B	 S-45PT2E5B	 S-50PT2E5B	 S-60PT2E5B
P. 82	<b>NEW</b> adaptive ducted Inverter+ • R32	 S-3650PF3E	 S-3650PF3E	 S-3650PF3E	 S-6071PF3E
P. 84	High static pressure hide-away 20-25 kW Inverter+ • R32				
Outdoor units	3.6 kW	5.0 kW	6.0 kW		
PACi Elite • R32	 U-36PZH2E5	 U-50PZH2E5	 U-60PZH2E5		
PACi Standard • R32			 U-60PZ2E5		



1) The 4.5 kW indoor unit are only available only for twin, triple and double-twin combinations. \* U-\_\_E5 Single phase / U-\_\_E8 Three phase.





**+** OPTIONAL UNITS ON VENTILATION SECTION

7.1 kW	10.0 kW	12.5 kW	14.0 kW	20.0 kW	25.0 kW
					
S-71PK2E5B	S-100PK2E5B (9.0 kW)				
					
S-6071PU3E	S-1014PU3E	S-1014PU3E	S-1014PU3E		
					
S-71PT2E5B	S-100PT2E5B	S-125PT2E5B	S-140PT2E5B		
					
S-6071PF3E	S-1014PF3E	S-1014PF3E	S-1014PF3E		
					
				S-200PE3E5B	S-250PE3E5B

7.1 kW	10.0 kW	12.5 kW	14.0 kW	20.0 kW	25.0 kW
					
U-71PZH2E5 / U-71PZH2E8	U-100PZH2E5 / U-100PZH2E8	U-125PZH2E5 / U-125PZH2E8	U-140PZH2E5 / U-140PZH2E8	U-200PZH2E8	U-250PZH2E8
					
U-71PZ2E5	U-100PZ2E5 / U-100PZ2E8	U-125PZ2E5 / U-125PZ2E8	U-140PZ2E5 / U-140PZ2E8		

## PACi Standard wall-mounted Inverter+ • R32

The wall-mounted units with stylish matt color can be offered for many applications such as studios, gyms, high ceiling areas and even computer server rooms. The compact design and flat face ensure discreet installation, even in a small space.



			Single phase		
			6.0 kW	7.1 kW	9.0 kW
KIT			KIT-60PK2Z5	KIT-71PK2Z5	KIT-100PK2Z5
Remote controller			CZ-RTC5B	CZ-RTC5B	CZ-RTC5B
Cooling capacity	Nominal (Min - Max)	kW	6.1 [2.0 - 7.1]	7.1 [2.0 - 7.7]	9.0 [3.0 - 9.7]
UK Cooling	(Total - Sensible)	kW	6.80 - 5.10	7.40 - 5.40	8.90 - 6.00
EER <sup>1)</sup>	Nominal (Min - Max)	W/W	3.79	3.21	3.47 [5.36 - 3.13]
<b>SEER / Dsc<sup>2)</sup></b>			<b>6.8 A++</b>	<b>6.4 A++</b>	<b>6.5 A++</b>
Pdesign		kW	6.1	7.1	9.0
Input power cooling	Nominal (Min - Max)	kW	1.61	2.21	2.59 [0.56 - 3.10]
Annual energy consumption <sup>3)</sup>		kWh/a	314	388	485
Heating capacity	Nominal (Min - Max)	kW	6.1 [1.8 - 7.0]	7.1 [1.8 - 8.1]	9.0 [3.0 - 10.5]
UK Heating		kW	6.80	7.90	9.80
COP <sup>1)</sup>	Nominal (Min - Max)	W/W	4.80	4.41	3.93 [5.36 - 3.56]
<b>SCOP / Dsc<sup>2)</sup></b>			<b>4.7 A++</b>	<b>4.6 A++</b>	<b>3.9 A</b>
Pdesign at -10 °C		kW	6.0	6.0	9.0
Input power heating	Nominal (Min - Max)	kW	1.27	1.61	2.29 [0.56 - 2.95]
Annual energy consumption <sup>3)</sup>		kWh/a	1787	1826	3231
<b>Indoor unit</b>			<b>S-60PK2E5B</b>	<b>S-71PK2E5B</b>	<b>S-100PK2E5B</b>
Air flow	Hi / Med / Lo	m <sup>3</sup> /min	20.0/18.0/15.0	20.0/18.0/15.0	22.0/18.5/15.0
Moisture removal volume		L/h	2.0	3.0	4.3
Sound pressure <sup>4)</sup>	Hi / Med / Lo	dB(A)	47/44/40	47/44/40	49/45/41
Sound power	Hi / Med / Lo	dB(A)	63/60/56	63/60/56	65/61/57
Dimension	HxWxD	mm	302 x 1120 x 236	302 x 1120 x 236	302 x 1120 x 236
Net weight		kg	14	14	14
Recommended Fuse	OD/ID	A	20 / 5	20 / 5	32 / 5
<b>Outdoor unit</b>			<b>U-60PZ2E5</b>	<b>U-71PZ2E5</b>	<b>U-100PZ2E5</b>
Power source		V	220 - 230 - 240	220 - 230 - 240	220 - 230 - 240
Current	Cool	A	7.85 - 7.50 - 7.20	10.70 - 10.20 - 9.85	12.10 - 11.50 - 11.10
	Heat	A	6.10 - 5.85 - 5.60	7.85 - 7.50 - 7.20	10.60 - 10.20 - 9.70
Air flow	Cool / Heat	m <sup>3</sup> /min	40 / 45	50 / 45	76 / 70
Sound pressure	Cool / Heat (Hi)	dB(A)	46 / 48	49 / 49	52 / 52
Sound power	Cool / Heat (Hi)	dB(A)	65 / 68	69 / 69	70 / 70
Dimension	HxWxD	mm	695 x 875 x 320	695 x 875 x 320	996 x 980 x 370
Net weight		kg	44	44	90
Pipe diameter	Liquid pipe	Inch (mm)	3/8 (9.52)	3/8 (9.52)	3/8 (9.52)
	Gas pipe	Inch (mm)	5/8 (15.88)	5/8 (15.88)	5/8 (15.88)
Pipe length range		m	3 - 40	3 - 40	5 - 50
Elevation difference (in/out) <sup>5)</sup>		m	30	30	30
Pipe length for additional gas		m	30	30	30
Additional gas amount		g/m	35	35	45
Refrigerant [R32] / CO <sub>2</sub> Eq.		kg / T	1.45 / 0.979	1.45 / 0.979	2.60 / 1.755
Operating range	Cool Min ~ Max	°C	-10 ~ +43	-10 ~ +43	-10 ~ +43
	Heat Min ~ Max	°C	-15 ~ +24	-15 ~ +24	-15 ~ +24
<b>Kit RRP</b>		€	<b>2420</b>	<b>2718</b>	<b>3128</b>
Indoor unit RRP		€	1139	1178	1218
Outdoor unit RRP		€	1152	1411	1781
Wired control RRP		€	129	129	129

## Technical focus

- Modern design with flat face and compact size
- Stylish matt white color
- DC fan for better efficiency and control
- Six directional piping outlet
- Datanavi simple support tool app with CZ-RTC5B
- Easy connection and control of external fan or ERV using the connector PAW-FDC on the indoor unit PCB. The external device can be controlled by the remote control of the Panasonic indoor unit

## Closed discharge port

When the unit is turned OFF, the flap closes completely to prevent dust getting into the unit and to keep the equipment clean.

## Quiet operation

These units are among the quietest in the industry, making them ideal for hotels and hospitals.

## Piping outlet in six directions

Piping outlet is possible in the six directions of right, right rear, right bottom, left, left rear and left bottom, making the installation work easier.



COMPATIBLE WITH ALL PANASONIC CONNECTIVITY SOLUTIONS. FOR DETAILED INFORMATION GO TO THE CONTROL SYSTEMS SECTION



CZ-RTC5B



CONEX



Optional controller. CONEX wired remote controller. CZ-RTC6 - CZ-RTC6BL



Optional controller. Infrared remote controller. CZ-RWS3



Optional Econavi sensor. CZ-CENSC1

			Three phase
			9.0 kW
<b>KIT</b>			<b>KIT-100PK2Z8</b>
<b>Remote controller</b>			<b>CZ-RTC5B</b>
Cooling capacity	Nominal (Min - Max)	kW	9.0 (3.0 - 9.7)
UK Cooling	(Total - Sensible)	kW	8.90 - 6.00
EER <sup>1)</sup>	Nominal (Min - Max)	W/W	3.47 (5.36 - 3.13)
<b>SEER / Dsc <sup>2)</sup></b>			<b>6.5 A++</b>
Pdesign		kW	9.0
Input power cooling	Nominal (Min - Max)	kW	2.59 (0.56 - 3.10)
Annual energy consumption <sup>3)</sup>		kWh/a	485
Heating capacity	Nominal (Min - Max)	kW	9.0 (3.0 - 10.5)
UK Heating		kW	9.80
COP <sup>1)</sup>	Nominal (Min - Max)	W/W	3.93 (5.36 - 3.56)
<b>SCOP / Dsc <sup>2)</sup></b>			<b>3.9 A</b>
Pdesign at -10 °C		kW	9.0
Input power heating	Nominal (Min - Max)	kW	2.29 (0.56 - 2.95)
Annual energy consumption <sup>3)</sup>		kWh/a	3231
<b>Indoor unit</b>			<b>S-100PK2E5B</b>
Air flow	Hi / Med / Lo	m <sup>3</sup> /min	22.0 / 18.5 / 15.0
Moisture removal volume		L/h	4.3
Sound pressure <sup>4)</sup>	Hi / Med / Lo	dB(A)	49 / 45 / 41
Sound power	Hi / Med / Lo	dB(A)	65 / 61 / 57
Dimension	H x W x D	mm	302 x 1120 x 236
Net weight		kg	14
Recommended Fuse	OD/ID	A	13 per phase / 5
<b>Outdoor unit</b>			<b>U-100PZ2E8</b>
Power source		V	380 - 400 - 415
Current	Cool	A	4.10 - 3.90 - 3.75
	Heat	A	3.60 - 3.45 - 3.30
Air flow	Cool / Heat	m <sup>3</sup> /min	76 / 70
Sound pressure	Cool / Heat (Hi)	dB(A)	52 / 52
Sound power	Cool / Heat (Hi)	dB(A)	70 / 70
Dimension	H x W x D	mm	996 x 980 x 370
Net weight	Liquid pipe	Inch (mm)	3/8 (9.52)
	Gas pipe	Inch (mm)	5/8 (15.88)
Pipe length range		m	5 - 50
Elevation difference (in/out) <sup>5)</sup>		m	30
Pipe length for additional gas		m	30
Additional gas amount		g/m	45
Refrigerant (R32) / CO <sub>2</sub> Eq.		kg / T	2.60 / 1.755
Operating range	Cool Min - Max	°C	-10 ~ +43
	Heat Min - Max	°C	-15 ~ +24
<b>Kit RRP</b>		€	<b>3275</b>
Indoor unit RRP		€	1218
Outdoor unit RRP		€	1928
Wired control RRP		€	129

Accessories		RRP €
<b>CZ-RTC6</b>	CONEX wired remote controller (non-wireless)	148
<b>CZ-RTC6BL</b>	CONEX wired remote controller with Bluetooth®	177
<b>CZ-RTC5B</b>	Wired remote controller with Econavi function and datanavi	129
<b>CZ-RWS3</b>	Infrared remote controller	119
<b>CZ-CAPWFC1</b>	Commercial Wi-Fi Adaptor	264
<b>PAW-PACR3</b>	Interfaces to run 3 units on Backup and alternative run	1905

Accessories		RRP €
<b>PAW-WTRAY</b>	Tray for condenser water compatible with outdoor elevation platform	152
<b>PAW-GRDBSE20</b>	Outdoor base ground support for noise and vibration absorption	152
<b>PAW-GRDSTD40</b>	Outdoor elevation platform 400 x 900 x 400 mm	152
<b>CZ-CENSC1</b>	Econavi energy savings sensor	159

1) EER and COP calculation is based in accordance to EN14511. 2) Energy Label Scale from A+++ to D. For models below 12 kW, the SEER and SCOP is calculated based on values of EU/626/2011. For models above 12 kW, the Dsc / Dsh values is calculated based on EN 14825. 3) The annual energy consumption is calculated in accordance to EU/626/2011. 4) The sound pressure of the units shows the value measured of the position 1 m in front of the main body and 1 m below the unit. The sound pressure is measured in accordance with Eurovent 6/C/006-97 specification. 5) When installing the outdoor unit at a higher position than the indoor unit. \* Recommended fuse for the indoor 3 A.

R32

6,8 SEER

4,7 SCOP

INVERTER+

COOLING MODE

HEATING MODE

DC FAN

R22/R410A RENEWAL

OPTIONAL WI-FI

BMS CONNECTIVITY

SEER and SCOP: For KIT-60PKZ25. INTERNET CONTROL: Optional.

Rating Conditions: Cooling Indoor 27 °C DB / 19 °C WB. Cooling Outdoor 35 °C DB / 24 °C WB. Heating Indoor 20 °C DB. Heating Outdoor 7 °C DB / 6 °C WB. (DB: Dry Bulb; WB: Wet Bulb). Specifications subject to change without notice. For detailed information about ErP / Energy Labelling, please visit our websites [www.aircon.panasonic.eu](http://www.aircon.panasonic.eu) or [www.ptc.panasonic.eu](http://www.ptc.panasonic.eu).

## PACi Elite wall-mounted Inverter+ • R32

The wall-mounted units with stylish matt color can be offered for many applications such as studios, gyms, high ceiling areas and even computer server rooms. The compact design and flat face ensure discreet installation, even in a small space.



		Single phase					
		3.6 kW	5.0 kW	6.0 kW	7.1 kW	9.0 kW	
KIT		KIT-36PK2ZH5	KIT-50PK2ZH5	KIT-60PK2ZH5	KIT-71PK2ZH5	KIT-100PK2ZH5	
Remote controller		CZ-RTC5B	CZ-RTC5B	CZ-RTC5B	CZ-RTC5B	CZ-RTC5B	
Cooling capacity	Nominal (Min - Max)	kW	3.6(1.5~4.0)	5.0(1.5~5.6)	6.1(2.0~7.1)	7.1(2.2~9.0)	9.5(3.1~10.5)
UK Cooling	(Total - Sensible)	kW	4.00 - 3.00	5.50 - 4.10	6.80 - 5.10	7.90 - 5.90	9.60 - 6.50
EER <sup>1)</sup>		W/W	4.90	4.10	3.86	3.50	3.26
<b>SEER / Δsc <sup>2)</sup></b>			<b>8.0 A++</b>	<b>7.6 A++</b>	<b>7.2 A++</b>	<b>6.8 A++</b>	<b>6.4 A++</b>
Pdesign		kW	3.6	5.0	6.1	7.1	9.5
Input power cooling		kW	0.74	1.22	1.58	2.03	2.91
Annual energy consumption <sup>3)</sup>		kWh/a	157	230	297	365	520
Heating capacity	Nominal (Min - Max)	kW	4.0(1.5~5.0)	5.6(1.5~6.5)	7.0(1.8~8.0)	8.0(2.0~9.0)	9.5(3.1~11.5)
UK Heating		kW	4.60	6.30	7.80	8.10	11.50
COP <sup>1)</sup>		W/W	4.94	4.21	4.46	4.00	3.97
<b>SCOP / Δsc <sup>2)</sup></b>			<b>4.9 A++</b>	<b>4.7 A++</b>	<b>4.8 A++</b>	<b>4.7 A++</b>	<b>4.1 A+</b>
Pdesign at -10 °C		kW	3.6	4.5	6.0	5.2	8.0
Input power heating		kW	0.81	1.33	1.57	2.00	2.39
Annual energy consumption <sup>3)</sup>		kWh/a	1029	1340	1750	1549	2732
<b>Indoor unit</b>			<b>S-36PK2E5B</b>	<b>S-50PK2E5B</b>	<b>S-60PK2E5B</b>	<b>S-71PK2E5B</b>	<b>S-100PK2E5B</b>
Air flow	Hi / Med / Lo	m <sup>3</sup> /min	13.0/11.0/9.0	16.0/14.0/11.0	20.0/18.0/15.0	20.0/17.5/14.5	22.0/18.5/15.0
Sound pressure <sup>4)</sup>	Hi / Med / Lo	dB(A)	35/31/27	40/36/32	47/44/40	47/44/40	49/45/41
Dimension	HxWxD	mm	302x1120x236	302x1120x236	302x1120x236	302x1120x236	302x1120x236
Net weight		kg	13	13	14	14	14
Recommended Fuse	OD/ID	A	13 / 5	13 / 5	20 / 5	20 / 5	TBC / 5
<b>Outdoor unit</b>			<b>U-36PZH2E5</b>	<b>U-50PZH2E5</b>	<b>U-60PZH2E5</b>	<b>U-71PZH2E5</b>	<b>U-100PZH2E5</b>
Power source		V	220 - 230 - 240	220 - 230 - 240	220 - 230 - 240	220 - 230 - 240	220 - 230 - 240
Current	Cool	A	3.55 - 3.40 - 3.25	5.70 - 5.50 - 5.25	7.70 - 7.35 - 7.05	9.55 - 9.10 - 8.75	13.50 - 12.90 - 12.40
	Heat	A	3.95 - 3.75 - 3.60	6.35 - 6.05 - 5.80	7.65 - 7.30 - 7.00	9.20 - 8.80 - 8.50	11.10 - 10.60 - 10.10
Air flow	Cool / Heat	m <sup>3</sup> /min	40/40	40/45	40/45	61/60	118/108
Sound pressure	Cool / Heat (Hi)	dB(A)	43/44	45/48	46/49	48/50	52/52
Sound power	Cool / Heat (Hi)	dB(A)	62/64	64/68	65/69	65/67	69/69
Dimension	HxWxD	mm	695x875x320	695x875x320	695x875x320	996x940x340	1416x940x340
Net weight		kg	43	43	44	68	99
Pipe diameter	Liquid pipe	Inch (mm)	1/4(6.35)	1/4(6.35)	3/8(9.52)	3/8(9.52)	3/8(9.52)
	Gas pipe	Inch (mm)	1/2(12.70)	1/2(12.70)	5/8(15.88)	5/8(15.88)	5/8(15.88)
Pipe length range		m	3~40	3~40	3~40	5~50	5~85
Elevation difference (in/out) <sup>5)</sup>		m	30	30	30	30	30
Pipe length for additional gas		m	30	30	30	30	30
Additional gas amount		g/m	20	20	35	45	45
Refrigerant (R32) / CO <sub>2</sub> Eq.		kg / T	1.15/0.776	1.15/0.776	1.45/0.979	1.95/1.316	3.05/2.059
Operating range	Cool Min ~ Max	°C	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	-20 <sup>6)</sup> ~ +46
	Heat Min ~ Max	°C	-20 ~ +24	-20 ~ +24	-20 ~ +24	-20 ~ +24	-20 ~ +24
<b>Kit RRP</b>		€	<b>2391</b>	<b>2676</b>	<b>2768</b>	<b>3083</b>	<b>3732</b>
Indoor unit RRP		€	1021	1100	1139	1178	1218
Outdoor unit RRP		€	1241	1447	1500	1776	2385
Wired control RRP		€	129	129	129	129	129

### Technical focus

- Modern design with flat face and compact size
- Stylish matt white color
- DC fan for better efficiency and control
- Six directional piping outlet
- Datanavi simple support tool app with CZ-RTC5B
- Easy connection and control of external fan or ERV using the connector PAW-FDC on the indoor unit PCB. The external device can be controlled by the remote control of the Panasonic indoor unit

### Closed discharge port

When the unit is turned OFF, the flap closes completely to prevent dust getting into the unit and to keep the equipment clean.

### Quiet operation

These units are among the quietest in the industry, making them ideal for hotels and hospitals.

### Smooth and durable design

Stylish matt color matches with modern interiors. The sleek, compact design ensures a discreet installation - even where space is limited.

### Piping outlet in six directions

Piping outlet is possible in the six directions of right, right rear, right bottom, left, left rear and left bottom, making the installation work easier.



CZ-RTC5B



CONEX



Optional controller.  
CONEX wired remote controller.  
CZ-RTC6 - CZ-RTC6BL



Optional controller.  
Infrared remote controller.  
CZ-RWS3



Optional Econavi sensor.  
CZ-CENSC1

COMPATIBLE WITH ALL PANASONIC CONNECTIVITY SOLUTIONS. FOR DETAILED INFORMATION GO TO THE CONTROL SYSTEMS SECTION

Three phase

				7.1 kW	9.0 kW
KIT				KIT-71PK2ZH8	KIT-100PK2ZH8
Remote controller				CZ-RTC5B	CZ-RTC5B
Cooling capacity	Nominal (Min - Max)	kW		7.1 (2.2 - 9.0)	9.5 (3.1 - 10.5)
UK Cooling	(Total - Sensible)	kW		7.90 - 5.90	9.60 - 6.50
EER <sup>1)</sup>		W/W		3.50	3.26
SEER / Dsc <sup>2)</sup>				6.7 A++	6.3 A++
Pdesign		kW		7.10	9.50
Input power cooling		kW		2.03	2.91
Annual energy consumption <sup>3)</sup>		kWh/a		370	526
Heating capacity	Nominal (Min - Max)	kW		8.0 (2.0 - 9.0)	9.5 (3.1 - 11.5)
UK Heating		kW		8.40	11.50
COP <sup>1)</sup>		W/W		4.00	3.97
SCOP / Dsc <sup>2)</sup>				4.7 A++	4.1 A+
Pdesign at -10 °C		kW		5.20	8.00
Input power heating		kW		2.00	2.39
Annual energy consumption <sup>3)</sup>		kWh/a		1549	2732
<b>Indoor unit</b>				<b>S-71PK2E5B</b>	<b>S-100PK2E5B</b>
Air flow	Hi / Med / Lo	m <sup>3</sup> /min		20.0/17.5/14.5	22.0/18.5/15.0
Sound pressure <sup>4)</sup>	Hi / Med / Lo	dB(A)		47/44/40	49/45/41
Dimension	HxWxD	mm		302x1120x236	302x1120x236
Net weight		kg		14	14
Recommended Fuse		A		TBC / 5	TBC / 5
<b>Outdoor unit</b>				<b>U-71PZH2E8</b>	<b>U-100PZH2E8</b>
Power source		V		380 - 400 - 415	380 - 400 - 415
Current	Cool	A		3.20 - 3.05 - 2.95	4.60 - 4.35 - 4.20
	Heat	A		3.10 - 3.00 - 2.85	3.75 - 3.55 - 3.45
Air flow	Cool / Heat	m <sup>3</sup> /min		61/60	118/108
Sound pressure	Cool / Heat (Hi)	dB(A)		48/50	52/52
Sound power	Cool / Heat (Hi)	dB(A)		65/67	69/69
Dimension	HxWxD	mm		996 x 940 x 340	1416 x 940 x 340
Net weight		kg		68	99
Pipe diameter	Liquid pipe	Inch (mm)		3/8 (9.52)	3/8 (9.52)
	Gas pipe	Inch (mm)		5/8 (15.88)	5/8 (15.88)
Pipe length range		m		5 - 50	5 - 85
Elevation difference (in/out) <sup>5)</sup>		m		30	30
Pipe length for additional gas		m		30	30
Additional gas amount		g/m		45	45
Refrigerant (R32) / CO <sub>2</sub> Eq.		kg / T		1.95/1.316	3.05/2.059
Operating range	Cool Min ~ Max	°C		-15 ~ +46	-20 <sup>6)</sup> ~ +46
	Heat Min ~ Max	°C		-20 ~ +24	-20 ~ +24
<b>Kit RRP</b>		€		<b>3243</b>	<b>3777</b>
Indoor unit RRP		€		1178	1218
Outdoor unit RRP		€		1936	2430
Wired control RRP		€		129	129

Accessories		RRP €
CZ-RTC6	CONEX wired remote controller (non-wireless)	148
CZ-RTC6BL	CONEX wired remote controller with Bluetooth®	177
CZ-RTC5B	Wired remote controller with Econavi function and datanavi	129
CZ-RWS3	Infrared remote controller	119
CZ-CAPWFC1	Commercial Wi-Fi Adaptor	264
PAW-PACR3	Interfaces to run 3 units on Backup and alternative run	1905

Accessories		RRP €
PAW-WTRAY	Tray for condenser water compatible with outdoor elevation platform	152
PAW-GRDBSE20	Outdoor base ground support for noise and vibration absorption	152
PAW-GRDSTD40	Outdoor elevation platform 400x900x400 mm	152
CZ-CENSC1	Econavi energy savings sensor	159

1) EER and COP calculation is based in accordance to EN14511. 2) Energy Label Scale from A+++ to D. For models below 12 kW, the SEER and SCOP is calculated based on values of EU/626/2011. For models above 12 kW, the Dsc / Dsh values is calculated based on EN 14825. 3) The annual energy consumption is calculated in accordance to EU/626/2011. 4) The sound pressure of the units shows the value measured of the position 1 m in front of the main body and 1 m below the unit. The sound pressure is measured in accordance with Eurovent 6/C/006-97 specification. 5) When installing the outdoor unit at a higher position than the indoor unit. 6) For models 100 - 140PZH2E5(8), it is possible to operate the lowest -20 °C in the computer rooms with the piping length of 30 m or less. \* Recommended fuse for the indoor 3 A.



SEER and SCOP: For KIT-36PK2ZH5. INTERNET CONTROL: Optional.

Rating Conditions: Cooling Indoor 27 °C DB / 19 °C WB. Cooling Outdoor 35 °C DB / 24 °C WB. Heating Indoor 20 °C DB. Heating Outdoor 7 °C DB / 6 °C WB. (DB: Dry Bulb; WB: Wet Bulb). Specifications subject to change without notice. For detailed information about ErP / Energy Labelling, please visit our websites www.aircon.panasonic.eu or www.ptc.panasonic.eu.



## PACi Elite and Standard 4 way 60x60 cassette Inverter+ • R32

**Small and powerful, ideal for offices and restaurants.**  
Standard units only for Twin, Triple and Double-twin combinations.

			Single phase	
			3.6 kW	5.0 kW
Kit			KIT-36PY2ZH5	KIT-50PY2ZH5
Remote controller			CZ-RTC5B	CZ-RTC5B
Cooling capacity	Nominal (Min - Max)	kW	3.6 (1.5 - 4.0)	5.0 (1.5 - 5.6)
UK Cooling	(Total - Sensible)	kW	4.00 - 2.90	5.50 - 3.80
EER <sup>1)</sup>		W/W	4.68	3.68
<b>SEER / <math>\text{\textcircled{D}sc}</math> <sup>2)</sup></b>			<b>6.6 A++</b>	<b>6.4 A++</b>
Pdesign		kW	3.6	5.0
Input power cooling		kW	0.77	1.36
Annual energy consumption <sup>3)</sup>		kWh/a	191	273
Heating capacity	Nominal (Min - Max)	kW	4.0 (1.5 - 5.0)	5.6 (1.5 - 6.5)
UK Heating		kW	TBC	TBC
COP <sup>1)</sup>		W/W	4.26	3.46
<b>SCOP / <math>\text{\textcircled{D}sc}</math> <sup>2)</sup></b>			<b>4.6 A++</b>	<b>4.3 A+</b>
Pdesign at -10 °C		kW	3.6	4.5
Input power heating		kW	0.94	1.62
Annual energy consumption <sup>3)</sup>		kWh/a	1096	1465
<b>Indoor unit</b>			<b>S-36PY2E5B</b>	<b>S-50PY2E5B</b>
Air flow	Hi / Med / Lo	m <sup>3</sup> /min	9.7/8.0/6.0	11.1/9.8/8.5
Moisture removal volume		L/h	1.5	2.4
Sound pressure <sup>4)</sup>	Hi / Med / Lo	dB(A)	36/32/26	40/37/33
Sound power	Hi / Med / Lo	dB(A)	51/47/41	55/52/48
Dimension (HxWxD) / Net weight	Indoor	mm / kg	288x583x583/18	288x583x583/18
	CZ-KPY3AW Panel	mm / kg	31x700x700/2.4	31x700x700/2.4
	CZ-KPY3BW Panel	mm / kg	31x625x625/2.4	31x625x625/2.4
Recommended Fuse	OD/ID	A	TBC / 5	TBC / 5
<b>Outdoor unit</b>			<b>U-36PZH2E5</b>	<b>U-50PZH2E5</b>
Power source		V	220 - 230 - 240	220 - 230 - 240
Current	Cool	A	3.65 - 3.50 - 3.35	6.35 - 6.10 - 5.85
	Heat	A	4.50 - 4.30 - 4.15	7.70 - 8.40 - 8.10
Air flow	Cool / Heat	m <sup>3</sup> /min	40/40	40/45
Sound pressure	Cool / Heat (Hi)	dB(A)	43/44	45/48
Sound power	Cool / Heat (Hi)	dB(A)	62/64	64/68
Dimension / Net weight	HxWxD	mm / kg	695x875x320/43	695x875x320/43
Pipe diameter	Liquid pipe	Inch (mm)	1/4 (6.35)	1/4 (6.35)
	Gas pipe	Inch (mm)	1/2 (12.70)	1/2 (12.70)
Pipe length range		m	3 - 40	3 - 40
Elevation difference (in/out) <sup>5)</sup>		m	30	30
Pipe length for additional gas		m	30	30
Additional gas amount		g/m	20	20
Refrigerant (R32) / CO <sub>2</sub> Eq.		kg / T	1.15/0.776	1.15/0.776
Operating range	Cool Min ~ Max	°C	-15 ~ +46	-15 ~ +46
	Heat Min ~ Max	°C	-20 ~ +24	-20 ~ +24
<b>Kit RRP</b>		€	<b>2335</b>	<b>2618</b>
Indoor unit RRP		€	717	794
Outdoor unit RRP		€	1241	1447
Panel RRP		€	248	248
Wired control RRP		€	129	129

Accessories		RRP €
<b>CZ-RTC6</b>	CONEX wired remote controller (non-wireless)	148
<b>CZ-RTC6BL</b>	CONEX wired remote controller with Bluetooth®	177
<b>CZ-RTC5B</b>	Wired remote controller with Econavi function and datanavi	129
<b>CZ-RWS3</b>	Infrared remote controller	119
<b>CZ-CAPWFC1</b>	Commercial Wi-Fi Adaptor	264

Accessories		RRP €
<b>PAW-WTRAY</b>	Tray for condenser water compatible with outdoor elevation platform	152
<b>PAW-GRDBSE20</b>	Outdoor base ground support for noise and vibration absorption	152
<b>PAW-GRDSTD40</b>	Outdoor elevation platform 400x900x400 mm	152
<b>CZ-CENSC1</b>	Econavi energy savings sensor	159

1) EER and COP calculation is based in accordance to EN14511. 2) Energy Label Scale from A+++ to D. For models below 12 kW, the SEER and SCOP is calculated based on values of EU/626/2011. For models above 12 kW, the  $\text{\textcircled{D}sc}$  /  $\text{\textcircled{D}sh}$  values is calculated based on EN 14825. 3) The annual energy consumption is calculated in accordance to EU/626/2011. 4) The sound pressure of the units shows the value measured of the position 1,5 m below the unit. The sound pressure is measured in accordance with Eurovent 6/C/006-97 specification. 5) When installing the outdoor unit at a higher position than the indoor unit. \* Recommended fuse for the indoor 3 A.



CZ-RTC5B



COMPATIBLE WITH ALL PANASONIC CONNECTIVITY SOLUTIONS. FOR DETAILED INFORMATION GO TO THE CONTROL SYSTEMS SECTION



Panel 700x700 mm.  
CZ-KPY3AW

C O N E X



Optional controller.  
CONEX wired remote controller.  
CZ-RTC6 - CZ-RTC6BL



Optional controller.  
Infrared remote controller.  
CZ-RWS3

			3.6 kW	4.5 kW	5.0 kW
			S-36PY2E5B	S-45PY2E5B <sup>1)</sup>	S-50PY2E5B
Indoor unit					
Cooling capacity		kW	3.6	4.5	5.0
Heating capacity		kW	4.0	5.2	5.6
Current	Cool	A	0.30	0.32	0.35
	Heat	A	0.30	0.30	0.35
Input power	Cool	kW	0.04	0.04	0.05
	Heat	kW	0.04	0.04	0.04
Air flow	Cool (Hi / Med / Lo)	m <sup>3</sup> /min	9.7/8.0/6.0	10.0/8.8/7.0	11.1/9.8/8.5
	Heat (Hi / Med / Lo)	m <sup>3</sup> /min	9.9/8.2/6.0	10.3/9.2/7.0	11.1/9.8/8.7
Moisture removal volume		L/h	1.5	2.2	2.4
Sound pressure <sup>6)</sup>	Cool (Hi / Med / Lo)	dB(A)	36/32/26	38/34/28	40/37/33
	Heat (Hi / Med / Lo)	dB(A)	36/32/26	38/34/28	40/37/33
Sound power	Cool (Hi / Med / Lo)	dB(A)	51/47/41	53/49/43	55/52/48
	Heat (Hi / Med / Lo)	dB(A)	51/47/41	53/49/43	55/52/48
Dimension (H x W x D)	Indoor	mm	288 x 583 x 583	288 x 583 x 583	288 x 583 x 583
	Panel CZ-KPY3AW	mm	31 x 700 x 700	31 x 700 x 700	31 x 700 x 700
	Panel CZ-KPY3BW	mm	31 x 625 x 625	31 x 625 x 625	31 x 625 x 625
Net weight	Indoor	kg	18	18	18
	Panel	kg	2.4	2.4	2.4
Pipe diameter	Liquid pipe	Inch (mm)	1/4(6.35)	1/4(6.35)	1/4(6.35)
	Gas pipe	Inch (mm)	1/2(12.70)	1/2(12.70)	1/2(12.70)
Operating range	Cool Min ~ Max	°C	+18 ~ +32	+18 ~ +32	+18 ~ +32
	Heat Min ~ Max	°C	+16 ~ +30	+16 ~ +30	+16 ~ +30
Indoor unit RRP		€	717	754	794

1) Only for multi combinations.  
Recommended fuse for the indoor 3 A.

### Technical focus


- Fresh air distribution
- Multidirectional air flow
- Integrated drain pump gives 850 mm lift
- 3 speed centrifugal fan
- DC fan for better efficiency and control
- Easy connection and control of external fan or ERV using the connector PAW-FDC on the indoor unit PCB. The external device can be controlled by the remote control of the Panasonic indoor unit

### Lighter and slimmer, easier installation

Lightweight and very slim which makes installation possible even in narrow ceilings. Designed to fit exactly into a 600x600 mm ceiling grid without the need to alter the bar configuration.

### A drain height of approximately 850 mm from the ceiling surface

The drain height can be increased by approx. 350 mm over the conventional value by using a high-lift drain pump, and long horizontal piping is possible. Lightweight at 18kg, the unit is also very slim with a height of only 288 mm, making installation possible even in narrow ceilings.

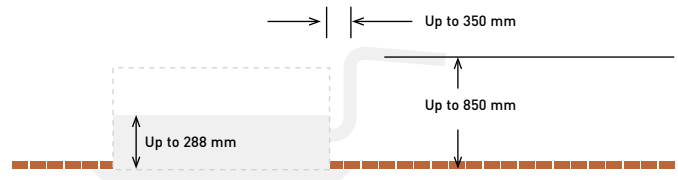

Significant reduction of power consumption by using highly developed DC fan motors with variable speed, special heat exchangers, etc.



SEER and SCOP: For KIT-36PY2ZH5. INTERNET CONTROL: Optional.

Rating Conditions: Cooling Indoor 27 °C DB / 19 °C WB. Cooling Outdoor 35 °C DB / 24 °C WB. Heating Indoor 20 °C DB. Heating Outdoor 7 °C DB / 6 °C WB. [DB: Dry Bulb; WB: Wet Bulb]. Specifications subject to change without notice. For detailed information about ErP / Energy Labelling, please visit our websites [www.aircon.panasonic.eu](http://www.aircon.panasonic.eu) or [www.ptc.panasonic.eu](http://www.ptc.panasonic.eu).



## NEW PACi Standard 4 way 90x90 cassette Inverter+ • R32

## New 4 way 90x90 cassette - PU3.

Powerful turbo fan and intelligent Econavi sensor ensure high energy efficiency, and nanoe™ X which is equipped as standard provides an exceptional level of indoor air quality.

		Single phase					
		6.0 kW	7.1 kW	10.0 kW	12.5 kW	14.0 kW	
KIT		KIT-60PU3Z25	KIT-71PU3Z25	KIT-100PU3Z25	KIT-125PU3Z25	KIT-140PU3Z25	
<b>Remote controller</b>		<b>CZ-RTC5B</b>					
Cooling capacity	Nominal (Min - Max)	kW	6.0(2.0 - 7.1)	7.1(2.0 - 7.7)	10.0(3.0 - 11.5)	12.5(3.2 - 13.5)	14.0(3.3 - 15.0)
UK Cooling	(Total - Sensible)	kW	6.7 - 4.6	7.5 - 5.0	10.7 - 7.6	12.6 - 8.4	13.9 - 9.2
EER <sup>1)</sup>	Nominal (Min - Max)	W/W	4.00(8.00 - 3.36)	3.50(8.00 - 3.01)	3.82(5.36 - 2.88)	3.58(5.33 - 2.81)	3.23(5.32 - 2.73)
<b>SEER / Øsc<sup>2)</sup></b>			<b>7.6 A++</b>	<b>7.6 A++</b>	<b>6.8 A++</b>	<b>267.1</b>	<b>257.3</b>
Pdesign		kW	6.0	7.1	10.0	12.5	14.0
Input power cooling	Nominal (Min - Max)	kW	1.50(0.25 - 2.11)	2.03(0.25 - 2.56)	2.62(0.56 - 4.00)	3.49(0.60 - 4.80)	4.34(0.62 - 5.50)
Annual energy consumption <sup>3)</sup>		kWh/a	276	327	515	—	—
Heating capacity	Nominal (Min - Max)	kW	6.0(1.8 - 7.0)	7.1(1.8 - 8.1)	10.0(3.0 - 14.0)	12.5(3.3 - 15.0)	14.0(3.4 - 16.0)
UK Heating		kW	TBC	TBC	TBC	TBC	TBC
COP <sup>1)</sup>	Nominal (Min - Max)	W/W	4.72(9.47 - 4.49)	4.36(9.47 - 3.80)	4.93(5.36 - 3.59)	4.43(5.50 - 3.57)	4.18(5.48 - 3.33)
<b>SCOP / Øsc<sup>2)</sup></b>			<b>4.7 A++</b>	<b>4.7 A++</b>	<b>4.4 A+</b>	<b>157.3</b>	<b>152.4</b>
Pdesign at -10 °C		kW	6.0	6.0	10.0	12.5	14.0
Input power heating	Nominal (Min - Max)	kW	1.27(0.19 - 1.56)	1.63(0.19 - 2.13)	2.03(0.56 - 3.90)	2.82(0.60 - 4.20)	3.35(0.62 - 4.80)
Annual energy consumption <sup>3)</sup>		kWh/a	1787	1787	3182	—	—
<b>Indoor unit</b>		<b>S-6071PU3E</b>					
Air flow	Hi / Med / Lo	m <sup>3</sup> /min	21.0/16.0/13.0	22.0/16.0/13.0	36.0/26.0/18.0	37.0/27.0/19.0	38.0/29.0/20.0
Moisture removal volume		L/h	1.7	2.5	2.7	4.8	6.0
Sound pressure <sup>4)</sup>	Hi / Med / Lo	dB(A)	36/31/28	37/31/28	45/38/32	46/39/33	47/40/34
Sound power	Hi / Med / Lo	dB(A)	51/46/43	52/46/43	60/53/47	61/54/48	62/55/49
Dimension	Indoor (H x W x D)	mm	256x840x840	256x840x840	319x840x840	319x840x840	319x840x840
	Panel (H x W x D)	mm	33.5x950x950	33.5x950x950	33.5x950x950	33.5x950x950	33.5x950x950
Net weight	Indoor / Panel	kg	20/5	20/5	25/5	25/5	25/5
nanoe X Generator			Mark 1	Mark 1	Mark 1	Mark 1	Mark 1
Recommended Fuse	OD/ID	A	TBC	TBC	TBC	TBC	TBC
<b>Outdoor unit</b>		<b>U-60PZ2E5</b>					
Power source		V	220 - 230 - 240	220 - 230 - 240	220 - 230 - 240	220 - 230 - 240	220 - 230 - 240
Current	Cool	A	7.40 - 7.05 - 6.75	9.95 - 9.50 - 9.10	12.10 - 11.50 - 11.10	16.30 - 15.60 - 15.00	20.40 - 19.50 - 18.70
	Heat	A	6.25 - 5.95 - 5.70	8.05 - 7.70 - 7.35	9.25 - 8.85 - 8.50	13.10 - 12.60 - 12.00	15.60 - 15.00 - 14.30
Air flow	Cool / Heat	m <sup>3</sup> /min	40/45	50/45	76/70	86/78	89/83
Sound pressure	Cool / Heat (Hi)	dB(A)	46/48	49/49	52/52	55/55	56/56
Sound power	Cool / Heat (Hi)	dB(A)	65/68	69/69	70/70	73/73	74/74
Dimension	HxWxD	mm	695x875x320	695x875x320	996x980x370	996x980x370	996x980x370
Net weight		kg	44	44	90	94	94
Pipe diameter	Liquid pipe	Inch (mm)	3/8(9.52)	3/8(9.52)	3/8(9.52)	3/8(9.52)	3/8(9.52)
	Gas pipe	Inch (mm)	5/8(15.88)	5/8(15.88)	5/8(15.88)	5/8(15.88)	5/8(15.88)
Pipe length range		m	3 - 40	3 - 40	5 - 50	5 - 50	5 - 50
Elevation difference (in/out) <sup>5)</sup>		m	30	30	30	30	30
Pipe length for additional gas		m	30	30	30	30	30
Additional gas amount		g/m	35	35	45	45	45
Refrigerant (R32) / CO <sub>2</sub> , Eq.		kg / T	1.45/0.979	1.45/0.979	2.60/1.755	2.98/2.0115	2.98/2.0115
Operating range	Cool Min ~ Max	°C	-10 ~ +43	-10 ~ +43	-10 ~ +43	-10 ~ +43	-10 ~ +43
	Heat Min ~ Max	°C	-15 ~ +24	-15 ~ +24	-15 ~ +24	-15 ~ +24	-15 ~ +24
<b>Kit RRP</b>		€	<b>2389</b>	<b>2648</b>	<b>3403</b>	<b>3657</b>	<b>4375</b>
Indoor unit RRP		€	892	892	1277	1277	1277
Outdoor unit RRP		€	1152	1411	1781	2035	2753
Panel RRP		€	216	216	216	216	216
Wired control RRP		€	129	129	129	129	129

## Technical focus

- High performance turbo fan, path system for heat exchanger
- Econavi: An optional intelligent sensor to reduce waste of energy
- nanoe™ X (Generator Mark 1= 4.8 trillion hydroxyl radicals/ sec) as standard for better indoor air quality, indoor unit internal cleaning with nanoe™ X and dry operation
- Lower noise in slow fan operation
- Light weight, easy piping and integrated drain pump for quick installation
- Wired remote control CZ-RTC6BL allows easy system setting via Bluetooth®
- High volume fresh air input with optional air-intake plenum and chamber (CZ-FDU3+CZ-ATU2)





Standard panel.  
CZ-KPU3W

CZ-RTC5B



Optional Econavi panel (CZ-RTC5B is required). CZ-KPU3AW



Optional controller. CONEX wired remote controller. CZ-RTC6 - CZ-RTC6BL - CZ-RTC6BLW



Optional controller. Infrared remote controller. CZ-RWS3 + CZ-RWRU3W

COMPATIBLE WITH ALL PANASONIC CONNECTIVITY SOLUTIONS. FOR DETAILED INFORMATION GO TO THE CONTROL SYSTEMS SECTION

		Three phase			
		10.0 kW	12.5 kW	14.0 kW	
KIT		KIT-100PU3Z28	KIT-125PU3Z28	KIT-140PU3Z28	
Remote controller		CZ-RTC5B	CZ-RTC5B	CZ-RTC5B	
Cooling capacity	Nominal (Min - Max)	kW	10.0 (3.0 - 11.5)	12.5 (3.2 - 13.5)	14.0 (3.3 - 15.0)
UK Cooling	(Total - Sensible)	kW	10.7 - 7.6	12.6 - 8.4	13.9 - 9.2
EER <sup>1)</sup>	Nominal (Min - Max)	W/W	3.82 (5.36 - 2.88)	3.58 (5.33 - 2.81)	3.23 (5.32 - 2.73)
SEER / D <sub>sc</sub> <sup>2)</sup>			<b>6.7 A++</b>	<b>266.1</b>	<b>256.5</b>
P <sub>design</sub>		kW	10.0	12.5	14.0
Input power cooling	Nominal (Min - Max)	kW	2.62 (0.56 - 4.00)	3.49 (0.60 - 4.80)	4.34 (0.62 - 5.50)
Annual energy consumption <sup>3)</sup>		kWh/a	521	—	—
Heating capacity	Nominal (Min - Max)	kW	10.0 (3.0 - 14.0)	12.5 (3.3 - 15.0)	14.0 (3.4 - 16.0)
UK Heating		kW	TBC	TBC	TBC
COP <sup>1)</sup>	Nominal (Min - Max)	W/W	4.93 (5.36 - 3.59)	4.43 (5.50 - 3.57)	4.18 (5.48 - 3.33)
SCOP / D <sub>sc</sub> <sup>2)</sup>			<b>4.4 A+</b>	<b>157.3</b>	<b>152.4</b>
P <sub>design</sub> at -10 °C		kW	10.0	12.5	14.0
Input power heating	Nominal (Min - Max)	kW	2.03 (0.56 - 3.90)	2.82 (0.60 - 4.20)	3.35 (0.62 - 4.80)
Annual energy consumption <sup>3)</sup>		kWh/a	3182	—	—
<b>Indoor unit</b>			<b>S-1014PU3E</b>	<b>S-1014PU3E</b>	<b>S-1014PU3E</b>
Air flow	Hi / Med / Lo	m <sup>3</sup> /min	36.0/26.0/18.0	37.0/27.0/19.0	38.0/29.0/20.0
Moisture removal volume		L/h	2.7	4.8	6.0
Sound pressure <sup>4)</sup>	Hi / Med / Lo	dB(A)	45/38/32	46/39/33	47/40/34
Sound power	Hi / Med / Lo	dB(A)	60/53/47	61/54/48	62/55/49
Dimension	Indoor (H x W x D)	mm	319x840x840	319x840x840	319x840x840
	Panel (H x W x D)	mm	33.5x950x950	33.5x950x950	33.5x950x950
Net weight	Indoor / Panel	kg	25/5	25/5	25/5
nanoe X Generator			Mark 1	Mark 1	Mark 1
Recommended Fuse	OD/ID	A	TBC	TBC	TBC
<b>Outdoor unit</b>			<b>U-100PZ2E8</b>	<b>U-125PZ2E8</b>	<b>U-140PZ2E8</b>
Power source		V	380 - 400 - 415	380 - 400 - 415	380 - 400 - 415
Current	Cool	A	4.10 - 3.90 - 3.75	5.45 - 5.20 - 5.00	6.85 - 6.50 - 6.25
	Heat	A	3.15 - 3.00 - 2.90	4.40 - 4.15 - 4.00	5.25 - 4.95 - 4.80
Air flow	Cool / Heat	m <sup>3</sup> /min	76/70	86/78	89/83
Sound pressure	Cool / Heat (Hi)	dB(A)	52/52	55/55	56/56
Sound power	Cool / Heat (Hi)	dB(A)	70/70	73/73	74/74
Dimension	H x W x D	mm	996 x 980 x 370	996 x 980 x 370	996 x 980 x 370
Net weight		kg	90	94	94
Pipe diameter	Liquid pipe	Inch (mm)	3/8 (9.52)	3/8 (9.52)	3/8 (9.52)
	Gas pipe	Inch (mm)	5/8 (15.88)	5/8 (15.88)	5/8 (15.88)
Pipe length range		m	5 - 50	5 - 50	5 - 50
Elevation difference (in/out) <sup>5)</sup>		m	30	30	30
Pipe length for additional gas		m	30	30	30
Additional gas amount		g/m	45	45	45
Refrigerant (R32) / CO <sub>2</sub> , Eq.		kg / T	2.60/1.755	2.98/2.0115	2.98/2.0115
Operating range	Cool Min ~ Max	°C	-10 ~ +43	-10 ~ +43	-10 ~ +43
	Heat Min ~ Max	°C	-15 ~ +24	-15 ~ +24	-15 ~ +24
<b>Kit RRP</b>		€	<b>3550</b>	<b>3766</b>	<b>4293</b>
Indoor unit RRP		€	1277	1277	1277
Outdoor unit RRP		€	1928	2144	2671
Panel RRP		€	216	216	216
Wired control RRP		€	129	129	129

Accessories		RRP €
<b>CZ-RTC6</b>	CONEX wired remote controller (non-wireless)	148
<b>CZ-RTC6BL</b>	CONEX wired remote controller with Bluetooth®	177
<b>CZ-RTC6BLW</b>	CONEX wired remote controller with Wi-Fi and Bluetooth®	250
<b>CZ-RTC5B</b>	Wired remote controller with Econavi function and datanavi	129
<b>CZ-RWS3 + CZ-RWRU3W</b>	Infrared remote controller	292

Accessories		RRP €
<b>CZ-CAPWFC1</b>	Commercial Wi-Fi Adaptor	264
<b>CZ-KPU3AW</b>	Econavi exclusive panel	
<b>PAW-WTRAY</b>	Tray for condenser water compatible with outdoor elevation platform	152
<b>PAW-GRDBSE20</b>	Outdoor base ground support for noise and vibration absorption	152
<b>CZ-CENSC1</b>	Econavi energy savings sensor	159
<b>CZ-FDU3+CZ-ATU2</b>	Fresh air-intake kit	663

1) EER and COP calculation is based in accordance to EN14511. 2) Energy Label Scale from A+++ to D. For models below 12 kW, the SEER and SCOP is calculated based on values of EU/626/2011. For models above 12 kW, the D<sub>sc</sub> / D<sub>sh</sub> values is calculated based on EN 14825. 3) The annual energy consumption is calculated in accordance to EU/626/2011. 4) The sound pressure of the units shows the value measured of the position 1,5 m below the unit. The sound pressure is measured in accordance with Eurovent 6/C/006-97 specification. 5) When installing the outdoor unit at a higher position than the indoor unit. \* Recommended fuse for the indoor 3 A. \*\* Above values are in the case of nanoe™ X OFF.



SEER and SCOP: For S-6071PU3E + U-60PZ2E5 and S-6071PU3E + U-71PZ2E5. ECONAVI and INTERNET CONTROL: Optional.

Rating Conditions: Cooling Indoor 27 °C DB / 19 °C WB. Cooling Outdoor 35 °C DB / 24 °C WB. Heating Indoor 20 °C DB. Heating Outdoor 7 °C DB / 6 °C WB. (DB: Dry Bulb; WB: Wet Bulb). Specifications subject to change without notice. For detailed information about ErP / Energy Labelling, please visit our websites www.aircon.panasonic.eu or www.ptc.panasonic.eu.



## NEW PACi Elite 4 way 90x90 cassette Inverter+ • R32

## New 4 way 90x90 cassette - PU3.

Powerful turbo fan and intelligent Econavi sensor ensure high energy efficiency, and nanoe™ X which is equipped as standard provides an exceptional level of indoor air quality.

		Single phase							
			3.6 kW	5.0 kW	6.0 kW	7.1 kW	10.0 kW	12.5 kW	14.0 kW
KIT			KIT-36PU3ZH25	KIT-50PU3ZH25	KIT-60PU3ZH25	KIT-71PU3ZH25	KIT-100PU3ZH25	KIT-125PU3ZH25	KIT-140PU3ZH25
Remote controller			CZ-RTC5B	CZ-RTC5B	CZ-RTC5B	CZ-RTC5B	CZ-RTC5B	CZ-RTC5B	CZ-RTC5B
Cooling capacity	Nominal (Min - Max)	kW	3.6(1.5 - 4.0)	5.0(1.5 - 5.6)	6.0(2.0 - 7.1)	7.1(2.2 - 9.0)	10.0(3.1 - 12.5)	12.5(3.2 - 14.0)	14.0(3.3 - 16.0)
UK Cooling	(Total - Sensible)	kW	3.7 - 2.8	5.1 - 3.6	6.7 - 4.6	8.1 - 5.4	11.4 - 7.9	12.8 - 8.6	14.6 - 9.5
EER <sup>1)</sup>	Nominal (Min - Max)	W/W	5.22(6.25 - 4.60)	4.31(6.25 - 3.61)	4.05(8.00 - 3.36)	4.06(5.79 - 2.69)	4.41(5.34 - 3.42)	3.80(5.33 - 3.08)	3.41(5.32 - 2.74)
SEER / ðsc <sup>2)</sup>			8.5 A+++	8.2 A++	8.0 A++	7.7 A++	7.8 A++	304.3	286.6
Pdesign		kW	3.6	5.0	6.0	7.1	10.0	12.5	14.0
Input power cooling	Nominal (Min - Max)	kW	0.69(0.24 - 0.87)	1.16(0.24 - 1.55)	1.48(0.25 - 2.11)	1.75(0.38 - 3.35)	2.27(0.58 - 3.65)	3.29(0.60 - 4.55)	4.11(0.62 - 5.85)
Annual energy consumption <sup>3)</sup>		kWh/a	148	213	262	323	449	—	—
Heating capacity	Nominal (Min - Max)	kW	4.0(1.5 - 5.0)	5.6(1.5 - 6.5)	7.0(1.8 - 8.0)	8.0(2.0 - 9.0)	11.2(3.1 - 14.0)	14.0(3.2 - 16.0)	16.0(3.3 - 18.0)
UK Heating		kW	TBC	TBC	TBC	TBC	TBC	TBC	TBC
COP <sup>1)</sup>	Nominal (Min - Max)	W/W	5.48(7.89 - 4.90)	4.71(7.89 - 4.19)	4.29(9.47 - 4.10)	4.30(5.56 - 3.16)	5.00(5.54 - 3.64)	4.61(5.52 - 3.37)	4.30(5.50 - 3.27)
SCOP / ðsc <sup>2)</sup>			5.1 A+++	4.9 A++	4.8 A++	4.8 A++	4.9 A++	186.0	181.2
Pdesign at -10 °C		kW	3.6	4.5	6.0	5.2	8.0	9.5	10.6
Input power heating	Nominal (Min - Max)	kW	0.73(0.19 - 1.02)	1.19(0.19 - 1.55)	1.63(0.19 - 1.95)	1.86(0.36 - 2.85)	2.24(0.56 - 3.85)	3.04(0.58 - 4.75)	3.72(0.60 - 5.50)
Annual energy consumption <sup>3)</sup>		kWh/a	988	1286	1750	1517	2286	—	—
<b>Indoor unit</b>			<b>S-3650PU3E</b>	<b>S-3650PU3E</b>	<b>S-6071PU3E</b>	<b>S-6071PU3E</b>	<b>S-1014PU3E</b>	<b>S-1014PU3E</b>	<b>S-1014PU3E</b>
Air flow	Hi / Med / Lo	m <sup>3</sup> /min	14.5/13.0/11.5	16.5/13.5/11.5	21.0/16.0/13.0	22.0/16.0/13.0	36.0/26.0/18.0	37.0/27.0/19.0	38.0/29.0/20.0
Moisture removal volume		L/h	0.7	1.6	1.7	2.5	2.7	4.8	6.0
Sound pressure <sup>4)</sup>	Hi / Med / Lo	dB(A)	30/28/27	32/29/27	36/31/28	37/31/28	45/38/32	46/39/33	47/40/34
Sound power	Hi / Med / Lo	dB(A)	45/43/42	47/44/42	51/46/43	52/46/43	60/53/47	61/54/48	62/55/49
Dimension	Indoor (H x W x D)	mm	256 x 840 x 840	256 x 840 x 840	256 x 840 x 840	256 x 840 x 840	319 x 840 x 840	319 x 840 x 840	319 x 840 x 840
	Panel (H x W x D)	mm	33.5 x 950 x 950	33.5 x 950 x 950	33.5 x 950 x 950	33.5 x 950 x 950	33.5 x 950 x 950	33.5 x 950 x 950	33.5 x 950 x 950
Net weight	Indoor / Panel	kg	19/5	19/5	20/5	20/5	25/5	25/5	25/5
nanoe X Generator			Mark 1	Mark 1	Mark 1	Mark 1	Mark 1	Mark 1	Mark 1
Recommended Fuse		A	TBC	TBC	TBC	TBC	TBC	TBC	TBC
<b>Outdoor unit</b>			<b>U-36PZH2E5</b>	<b>U-50PZH2E5</b>	<b>U-60PZH2E5</b>	<b>U-71PZH2E5</b>	<b>U-100PZH2E5</b>	<b>U-125PZH2E5</b>	<b>U-140PZH2E5</b>
Power source		V	220 - 230 - 240	220 - 230 - 240	220 - 230 - 240	220 - 230 - 240	220 - 230 - 240	220 - 230 - 240	220 - 230 - 240
Current	Cool	A	3.35 - 3.20 - 3.05	5.45 - 5.25 - 5.00	7.30 - 6.95 - 6.70	8.25 - 7.90 - 7.55	10.40 - 9.95 - 9.50	15.20 - 14.50 - 13.90	19.10 - 18.20 - 17.50
	Heat	A	3.55 - 3.40 - 3.25	5.70 - 5.45 - 5.20	8.05 - 7.70 - 7.40	8.60 - 8.25 - 8.00	10.20 - 9.80 - 9.40	14.00 - 13.40 - 12.80	17.20 - 16.50 - 15.80
Air flow	Cool / Heat	m <sup>3</sup> /min	40/40	40/45	40/45	61/60	118/108	125/122	129/116
Sound pressure	Cool / Heat (Hi)	dB(A)	43/44	45/48	46/49	48/50	52/52	53/53	54/54
Sound power	Cool / Heat (Hi)	dB(A)	62/64	64/68	65/69	65/67	69/69	70/70	71/71
Dimension	H x W x D	mm	695 x 875 x 320	695 x 875 x 320	695 x 875 x 320	996 x 940 x 340	1416 x 940 x 340	1416 x 940 x 340	1416 x 940 x 340
Net weight		kg	43	43	44	68	99	99	99
Pipe diameter	Liquid pipe	Inch (mm)	1/4(6.35)	1/4(6.35)	3/8(9.52)	3/8(9.52)	3/8(9.52)	3/8(9.52)	3/8(9.52)
	Gas pipe	Inch (mm)	1/2(12.70)	1/2(12.70)	5/8(15.88)	5/8(15.88)	5/8(15.88)	5/8(15.88)	5/8(15.88)
Pipe length range		m	3~40	3~40	3~40	5~50	5~85	5~85	5~85
Elevation difference (in/out) <sup>5)</sup>		m	30	30	30	30	30	30	30
Pipe length for additional gas		m	30	30	30	30	30	30	30
Additional gas amount		g/m	20	20	35	45	45	45	45
Refrigerant (R32) / CO <sub>2</sub> , Eq.		kg / T	1.15/0.776	1.15/0.776	1.45/0.979	1.95/1.316	3.05/2.059	3.05/2.059	3.05/2.059
Operating range	Cool Min - Max	°C	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	-20 <sup>6)</sup> ~ +46	-20 <sup>6)</sup> ~ +46	-20 <sup>6)</sup> ~ +46
	Heat Min - Max	°C	-20 ~ +24	-20 ~ +24	-20 ~ +24	-20 ~ +24	-20 ~ +24	-20 ~ +24	-20 ~ +24
<b>Kit RRP</b>		€	<b>2314</b>	<b>2520</b>	<b>2737</b>	<b>3013</b>	<b>4007</b>	<b>4097</b>	<b>4544</b>
Indoor unit RRP		€	728	728	892	892	1277	1277	1277
Outdoor unit RRP		€	1241	1447	1500	1776	2385	2475	2922
Panel RRP		€	216	216	216	216	216	216	216
Wired control RRP		€	129	129	129	129	129	129	129

## Technical focus

- High performance turbo fan, path system for heat exchanger
- Econavi: An optional intelligent sensor to reduce waste of energy
- nanoe™ X (Generator Mark 1= 4.8 trillion hydroxyl radicals/ sec) as standard for better indoor air quality, indoor unit internal cleaning with nanoe™ X and dry operation
- Lower noise in slow fan operation
- Light weight, easy piping and integrated drain pump for quick installation
- Wired remote control CZ-RTC6BL allows easy system setting via Bluetooth®
- High volume fresh air input with optional air-intake plenum and chamber (CZ-FDU3+CZ-ATU2)



Standard panel.  
CZ-KPU3W

CZ-RTC5B



Optional Econavi panel (CZ-RTC5B is required).  
CZ-KPU3AW



Optional controller. CONEX wired remote controller.  
CZ-RTC6 - CZ-RTC6BL - CZ-RTC6BLW



Optional controller. Infrared remote controller.  
CZ-RWS3 + CZ-RWRU3W

COMPATIBLE WITH ALL PANASONIC CONNECTIVITY SOLUTIONS. FOR DETAILED INFORMATION GO TO THE CONTROL SYSTEMS SECTION

Three phase

			7.1 kW	10.0 kW	12.5 kW	14.0 kW
			KIT-71PU3ZH28	KIT-100PU3ZH28	KIT-125PU3ZH28	KIT-140PU3ZH28
			CZ-RTC5B	CZ-RTC5B	CZ-RTC5B	CZ-RTC5B
Remote controller			CZ-RTC5B	CZ-RTC5B	CZ-RTC5B	CZ-RTC5B
Cooling capacity	Nominal (Min - Max)	kW	7.1 [2.2 - 9.0]	10.0 [3.1 - 12.5]	12.5 [3.2 - 14.0]	14.0 [3.3 - 16.0]
UK Cooling	(Total - Sensible)	kW	8.1 - 5.4	11.4 - 7.9	12.8 - 8.6	14.6 - 9.5
EER <sup>1)</sup>	Nominal (Min - Max)	W/W	4.06 [5.79 - 2.69]	4.41 [5.34 - 3.42]	3.80 [5.33 - 3.08]	3.41 [5.32 - 2.74]
SEER / D <sub>sc</sub> <sup>2)</sup>			7.6 A++	7.7 A++	303.0	285.6
P <sub>design</sub>		kW	7.1	10.0	12.5	14.0
Input power cooling	Nominal (Min - Max)	kW	1.75 [0.38 - 3.35]	2.27 [0.58 - 3.65]	3.29 [0.60 - 4.55]	4.11 [0.62 - 5.85]
Annual energy consumption <sup>3)</sup>		kWh/a	327	455	—	—
Heating capacity	Nominal (Min - Max)	kW	8.0 [2.0 - 9.0]	11.2 [3.1 - 14.0]	14.0 [3.2 - 16.0]	16.0 [3.3 - 18.0]
UK Heating		kW	TBC	TBC	TBC	TBC
COP <sup>1)</sup>	Nominal (Min - Max)	W/W	4.30 [5.56 - 3.16]	5.00 [5.54 - 3.64]	4.61 [5.52 - 3.37]	4.30 [5.50 - 3.27]
SCOP / D <sub>sc</sub> <sup>2)</sup>			4.8 A++	4.9 A++	186.0	181.1
P <sub>design</sub> at -10 °C		kW	5.2	8.0	9.5	10.6
Input power heating	Nominal (Min - Max)	kW	1.86 [0.36 - 2.85]	2.24 [0.56 - 3.85]	3.04 [0.58 - 4.75]	3.72 [0.60 - 5.50]
Annual energy consumption <sup>3)</sup>		kWh/a	1517	2286	—	—
Indoor unit			S-6071PU3E	S-1014PU3E	S-1014PU3E	S-1014PU3E
Air flow	Hi / Med / Lo	m <sup>3</sup> /min	22.0/16.0/13.0	36.0/26.0/18.0	37.0/27.0/19.0	38.0/29.0/20.0
Moisture removal volume		L/h	2.5	2.7	4.8	6.0
Sound pressure <sup>4)</sup>	Hi / Med / Lo	dB(A)	37/31/28	45/38/32	46/39/33	47/40/34
Sound power	Hi / Med / Lo	dB(A)	52/46/43	60/53/47	61/54/48	62/55/49
Dimension	Indoor (H x W x D)	mm	256 x 840 x 840	319 x 840 x 840	319 x 840 x 840	319 x 840 x 840
	Panel (H x W x D)	mm	33.5 x 950 x 950	33.5 x 950 x 950	33.5 x 950 x 950	33.5 x 950 x 950
Net weight	Indoor / Panel	kg	20/5	25/5	25/5	25/5
nanoe X Generator			Mark 1	Mark 1	Mark 1	Mark 1
Recommended Fuse		A	TBC	TBC	TBC	TBC
Outdoor unit			U-71PZH2E8	U-100PZH2E8	U-125PZH2E8	U-140PZH2E8
Power source		V	380 - 400 - 415	380 - 400 - 415	380 - 400 - 415	380 - 400 - 415
Current	Cool	A	2.75 - 2.65 - 2.55	3.50 - 3.35 - 3.20	5.15 - 4.90 - 4.70	6.45 - 6.15 - 5.90
	Heat	A	2.90 - 2.80 - 2.70	3.45 - 3.30 - 3.15	4.75 - 4.50 - 4.35	5.85 - 5.55 - 5.35
Air flow	Cool / Heat	m <sup>3</sup> /min	61/60	118/108	125/112	129/116
Sound pressure	Cool / Heat (Hi)	dB(A)	48/50	52/52	53/53	54/54
Sound power	Cool / Heat (Hi)	dB(A)	65/67	69/69	70/70	71/71
Dimension	H x W x D	mm	996 x 940 x 340	1416 x 940 x 340	1416 x 940 x 340	1416 x 940 x 340
Net weight		kg	68	99	99	99
Pipe diameter	Liquid pipe	Inch (mm)	3/8 (9.52)	3/8 (9.52)	3/8 (9.52)	3/8 (9.52)
	Gas pipe	Inch (mm)	5/8 (15.88)	5/8 (15.88)	5/8 (15.88)	5/8 (15.88)
Pipe length range		m	5 - 50	5 - 85	5 - 85	5 - 85
Elevation difference (in/out) <sup>5)</sup>		m	30	30	30	30
Pipe length for additional gas		m	30	30	30	30
Additional gas amount		g/m	45	45	45	45
Refrigerant (R32) / CO <sub>2</sub> Eq.		kg / T	1.95 / 1.316	3.05 / 2.059	3.05 / 2.059	3.05 / 2.059
Operating range	Cool Min ~ Max	°C	-15 ~ +46	-20 <sup>6)</sup> ~ +46	-20 <sup>6)</sup> ~ +46	-20 <sup>6)</sup> ~ +46
	Heat Min ~ Max	°C	-20 ~ +24	-20 ~ +24	-20 ~ +24	-20 ~ +24
Kit RRP		€	3173	4052	4292	4717
Indoor unit RRP		€	892	1277	1277	1277
Outdoor unit RRP		€	1936	2430	2670	3095
Panel RRP		€	216	216	216	216
Wired control RRP		€	129	129	129	129

Accessories	RRP €
CZ-RTC6	148
CZ-RTC6BL	177
CZ-RTC6BLW	250
CZ-RTC5B	129
CZ-RWS3 + CZ-RWRU3W	292

Accessories	RRP €
CZ-CAPWFC1	264
CZ-KPU3AW	
PAW-WTRAY	152
PAW-GRDBSE20	152
CZ-CENSC1	159
CZ-FDU3+CZ-ATU2	663

1) EER and COP calculation is based in accordance to EN14511. 2) Energy Label Scale from A+++ to D. For models below 12 kW, the SEER and SCOP is calculated based on values of EU/626/2011. For models above 12 kW, the D<sub>sc</sub> / D<sub>sh</sub> values is calculated based on EN 14825. 3) The annual energy consumption is calculated in accordance to EU/626/2011. 4) The sound pressure of the units shows the value measured of the position 1,5 m below the unit. The sound pressure is measured in accordance with Eurovent 6/C/006-97 specification. 5) When installing the outdoor unit at a higher position than the indoor unit. 6) For models 100 ~ 140PZH2E5(8), it is possible to operate the lowest -20 °C in the computer rooms with the piping length of 30 m or less. \* Recommended fuse for the indoor 3 A. \*\* Above values are in the case of nanoe™ X OFF.



SEER and SCOP: For S-3650PU3E + U-36PZH2E5. ECONAVI and INTERNET CONTROL: Optional.

Rating Conditions: Cooling Indoor 27 °C DB / 19 °C WB. Cooling Outdoor 35 °C DB / 24 °C WB. Heating Indoor 20 °C DB. Heating Outdoor 7 °C DB / 6 °C WB. [DB: Dry Bulb; WB: Wet Bulb]. Specifications subject to change without notice. For detailed information about ErP / Energy Labelling, please visit our websites www.aircon.panasonic.eu or www.ptc.panasonic.eu.

## PACi Standard ceiling Inverter+ • R32



**Ceiling mounted units provide large and wide air distribution which is good for big rooms.**

The height and depth of all capacities are the same for unified appearance in mixed installations.

			Single phase				
			6.0 kW	7.1 kW	10.0 kW	12.5 kW	14.0 kW
KIT			KIT-60PT2Z5	KIT-71PT2Z5	KIT-100PT2Z5	KIT-125PT2Z5	KIT-140PT2Z5
Remote controller			CZ-RTC5B	CZ-RTC5B	CZ-RTC5B	CZ-RTC5B	CZ-RTC5B
Cooling capacity	Nominal (Min - Max)	kW	6.0(2.0~7.1)	7.1(2.0~7.7)	10.0(3.0~11.5)	12.5(3.2~13.5)	14.0(3.3~15.0)
UK Cooling	(Total - Sensible)	kW	6.7 - 4.4	7.5 - 5.0	10.7 - 7.1	12.6 - 8.2	13.9 - 8.9
EER <sup>1)</sup>	Nominal (Min - Max)	W/W	4.00	3.55	3.64(5.36~2.80)	3.32(5.33~2.77)	2.98(5.32~2.73)
SEER <sup>2)</sup>			6.8 A++	6.5 A++	6.5 A++	5.8	5.5
Pdesign		kW	6.0	7.1	10.0	12.5	14.0
Input power cooling	Nominal (Min - Max)	kW	1.50	2.00	2.75(0.56~4.10)	3.76(0.60~4.88)	4.70(0.62~5.50)
Annual energy consumption <sup>3)</sup>		kWh/a	309	382	535	1300	1530
Heating capacity	Nominal (Min - Max)	kW	6.0(1.8~7.0)	7.1(1.8~8.1)	10.0(3.0~14.0)	12.5(3.3~15.0)	14.0(3.4~16.0)
UK Heating		kW	6.8	7.9	TBC	TBC	TBC
COP <sup>1)</sup>	Nominal (Min - Max)	W/W	4.80	4.41	4.24(5.36~3.50)	3.89(4.52~3.41)	3.70(5.48~3.08)
SCOP <sup>2)</sup>			4.6 A++	4.3 A+	4.2 A+	3.8	3.7
Pdesign at -10 °C		kW	6.0	6.0	10.0	12.5	13.6
Input power heating	Nominal (Min - Max)	kW	1.25	1.62	2.36(0.56~4.00)	3.21(0.73~4.40)	3.78(0.62~5.20)
Annual energy consumption <sup>3)</sup>		kWh/a	1826	1953	3324	4669	5153
<b>Indoor unit</b>			<b>S-60PT2E5B</b>	<b>S-71PT2E5B</b>	<b>S-100PT2E5B</b>	<b>S-125PT2E5B</b>	<b>S-140PT2E5B</b>
Air flow	Hi / Med / Lo	m <sup>3</sup> /min	20.0/17.0/14.5	21.0/18.0/15.5	30/25/23	34/28/24	35/29/25
Moisture removal volume		L/h	3.4	4.2	6.0	7.9	9.0
Sound pressure <sup>4)</sup>	Hi / Med / Lo	dB(A)	38/34/30	39/35/31	42/37/35	46/40/36	47/41/37
Sound power	Hi / Med / Lo	dB(A)	56/52/48	57/53/49	60/55/53	64/58/54	65/59/55
Dimension	HxWxD	mm	235x1275x690	235x1275x690	235x1590x690	235x1590x690	235x1590x690
Net weight		kg	33	33	40	40	40
Recommended Fuse	OD/ID	A	TBC / 5	TBC / 5	32 / 5	32 / 5	32 / 5
<b>Outdoor unit</b>			<b>U-60PZ2E5</b>	<b>U-71PZ2E5</b>	<b>U-100PZ2E5</b>	<b>U-125PZ2E5</b>	<b>U-140PZ2E5</b>
Power source		V	220 - 230 - 240	220 - 230 - 240	220 - 230 - 240	220 - 230 - 240	220 - 230 - 240
Current	Cool	A	7.30 - 7.00 - 6.70	9.70 - 9.30 - 8.90	12.80 - 12.20 - 11.70	17.60 - 16.90 - 16.20	22.10 - 21.20 - 20.30
	Heat	A	6.05 - 5.80 - 5.55	7.85 - 7.50 - 7.20	10.90 - 10.40 - 10.00	15.00 - 14.30 - 13.70	17.70 - 16.90 - 16.20
Air flow	Cool / Heat	m <sup>3</sup> /min	40/45	50/45	76/70	86/78	89/83
Sound pressure	Cool / Heat (Hi)	dB(A)	46/48	49/49	52/52	55/55	56/56
Sound power	Cool / Heat (Hi)	dB(A)	65/68	69/69	70/70	73/73	74/74
Dimension	HxWxD	mm	695x875x320	695x875x320	996x980x370	996x980x370	996x980x370
Net weight		kg	44	44	90	94	94
Pipe diameter	Liquid pipe	Inch (mm)	3/8(9.52)	3/8(9.52)	3/8(9.52)	3/8(9.52)	3/8(9.52)
	Gas pipe	Inch (mm)	5/8(15.88)	5/8(15.88)	5/8(15.88)	5/8(15.88)	5/8(15.88)
Pipe length range		m	3~40	3~40	5~50	5~50	5~50
Elevation difference (in/out) <sup>5)</sup>		m	30	30	30	30	30
Pipe length for additional gas		m	30	30	30	30	30
Additional gas amount		g/m	35	35	45	45	45
Refrigerant (R32) / CO <sub>2</sub> Eq.		kg / T	1.45/0.979	1.45/0.979	2.60/1.755	2.98/2.0115	2.98/2.0115
Operating range	Cool Min ~ Max	°C	-10~+43	-10~+43	-10~+43	-10~+43	-10~+43
	Heat Min ~ Max	°C	-15~+24	-15~+24	-15~+24	-15~+24	-15~+24
<b>Kit RRP</b>		€	<b>2323</b>	<b>2629</b>	<b>3317</b>	<b>3814</b>	<b>4861</b>
Indoor unit RRP		€	1042	1089	1407	1650	1979
Outdoor unit RRP		€	1152	1411	1781	2035	2753
Wired control RRP		€	129	129	129	129	129

### Technical focus

- Wide air distribution for large rooms
- Horizontal air flow reaches maximum 9.5 m
- Fresh air connection available on the unit
- Slim design with 235 mm height fits narrow space
- Silent operation
- Datanavi simple support tool app with CZ-RTC5B
- Twin, Triple and Double-twin split options
- Easy connection and control of external fan or ERV using the connector PAW-FDC on the indoor unit PCB. The external device can be controlled by the remote control of the Panasonic indoor unit

### Further comfort improvement with airflow distribution

Horizontal air flow reaches maximum 9.5 m. This is ideal for wide rooms.

The wide air discharge opening expands the air flow to the left and the right. The unpleasant feeling caused when the air flow directly hits the human body is prevented by the "Draft prevention position", which changes the swing width, so that the degree of comfort is increased.



COMPATIBLE WITH ALL PANASONIC CONNECTIVITY SOLUTIONS. FOR DETAILED INFORMATION GO TO THE CONTROL SYSTEMS SECTION



CZ-RTC5B



CONEX



Optional controller. CONEX wired remote controller. CZ-RTC6 - CZ-RTC6BL



Optional controller. Infrared remote controller. CZ-RWS3 + CZ-RWRT3



Optional Econavi sensor. CZ-CENSC1

			Three phase		
			10.0 kW	12.5 kW	14.0 kW
KIT			KIT-100PT2Z8	KIT-125PT2Z8	KIT-140PT2Z8
Remote controller			CZ-RTC5B	CZ-RTC5B	CZ-RTC5B
Cooling capacity	Nominal (Min - Max)	kW	10.0 (3.0 - 11.5)	12.5 (3.2 - 13.5)	14.0 (3.3 - 15.0)
UK Cooling	(Total - Sensible)	kW	10.7 - 7.1	12.6 - 8.2	13.9 - 8.9
EER <sup>1)</sup>	Nominal (Min - Max)	W/W	3.64 (5.36 - 2.80)	3.32 (5.33 - 2.77)	2.98 (5.32 - 2.73)
SEER <sup>2)</sup>			6.5 A++	5.8	5.5
Pdesign		kW	10.0	12.5	14.0
Input power cooling	Nominal (Min - Max)	kW	2.75 (0.56 - 4.10)	3.76 (0.60 - 4.88)	4.70 (0.62 - 5.50)
Annual energy consumption <sup>3)</sup>		kWh/a	538	1304	1534
Heating capacity	Nominal (Min - Max)	kW	10.0 (3.0 - 14.0)	12.5 (3.3 - 15.0)	14.0 (3.4 - 16.0)
UK Heating		kW	12.54	14.37	16.16
COP <sup>1)</sup>	Nominal (Min - Max)	W/W	4.24 (5.36 - 3.50)	3.89 (4.52 - 3.41)	3.70 (5.48 - 3.08)
SCOP <sup>2)</sup>			4.2 A+	3.8	3.7
Pdesign at -10 °C		kW	10.0	12.5	13.6
Input power heating	Nominal (Min - Max)	kW	2.36 (0.56 - 4.00)	3.21 (0.73 - 4.40)	3.78 (0.62 - 5.20)
Annual energy consumption <sup>3)</sup>		kWh/a	3324	4669	5153
<b>Indoor unit</b>			<b>S-100PT2E5B</b>	<b>S-125PT2E5B</b>	<b>S-140PT2E5B</b>
Air flow	Hi / Med / Lo	m <sup>3</sup> /min	30/25/23	34/28/24	35/29/25
Moisture removal volume		L/h	6.0	7.9	9.0
Sound pressure <sup>4)</sup>	Hi / Med / Lo	dB(A)	42/37/35	46/40/36	47/41/37
Sound power	Hi / Med / Lo	dB(A)	60/55/53	64/58/54	65/59/55
Dimension	HxWxD	mm	235 x 1590 x 690	235 x 1590 x 690	235 x 1590 x 690
Net weight		kg	40	40	40
Recommended Fuse	OD/ID	A	TBC / 5	TBC / 5	TBC / 5
<b>Outdoor unit</b>			<b>U-100PZ2E8</b>	<b>U-125PZ2E8</b>	<b>U-140PZ2E8</b>
Power source		V	380 - 400 - 415	380 - 400 - 415	380 - 400 - 415
Current	Cool	A	4.37 - 4.15 - 4.00	5.90 - 5.60 - 5.40	7.40 - 7.05 - 6.80
	Heat	A	3.72 - 3.55 - 3.40	5.00 - 4.75 - 4.60	5.90 - 5.60 - 5.40
Air flow	Cool / Heat	m <sup>3</sup> /min	76/70	86/78	89/83
Sound pressure	Cool / Heat (Hi)	dB(A)	52/52	55/55	56/56
Sound power	Cool / Heat (Hi)	dB(A)	70/70	73/73	74/74
Dimension	HxWxD	mm	996 x 980 x 370	996 x 980 x 370	996 x 980 x 370
Net weight	Liquid pipe	Inch (mm)	3/8 (9.52)	3/8 (9.52)	3/8 (9.52)
	Gas pipe	Inch (mm)	5/8 (15.88)	5/8 (15.88)	5/8 (15.88)
Pipe length range		m	5 - 50	5 - 50	5 - 50
Elevation difference (in/out) <sup>5)</sup>		m	30	30	30
Pipe length for additional gas		m	30	30	30
Additional gas amount		g/m	45	45	45
Refrigerant (R32) / CO <sub>2</sub> Eq.		kg / T	2.60 / 1.755	2.98 / 2.0115	2.98 / 2.0115
Operating range	Cool Min ~ Max	°C	-10 ~ +43	-10 ~ +43	-10 ~ +43
	Heat Min ~ Max	°C	-15 ~ +24	-15 ~ +24	-15 ~ +24
<b>Kit RRP</b>		€	<b>3464</b>	<b>3923</b>	<b>4779</b>
Indoor unit RRP		€	1407	1650	1979
Outdoor unit RRP		€	1928	2144	2671
Wired control RRP		€	129	129	129

Accessories		RRP €
<b>CZ-RTC6</b>	CONEX wired remote controller (non-wireless)	148
<b>CZ-RTC6BL</b>	CONEX wired remote controller with Bluetooth®	177
<b>CZ-RTC5B</b>	Wired remote controller with Econavi function and datanavi	129
<b>CZ-RWS3 + CZ-RWRT3</b>	Infrared remote controller	304
<b>CZ-CAPWFC1</b>	Commercial Wi-Fi Adaptor	264

Accessories		RRP €
<b>PAW-WTRAY</b>	Tray for condenser water compatible with outdoor elevation platform	152
<b>PAW-GRDBSE20</b>	Outdoor base ground support for noise and vibration absorption	152
<b>PAW-GRDSTD40</b>	Outdoor elevation platform 400 x 900 x 400 mm	152
<b>CZ-CENSC1</b>	Econavi energy savings sensor	159

1) EER and COP calculation is based in accordance to EN14511. 2) Energy Label Scale from A+++ to D. For models below 12 kW, the SEER and SCOP is calculated based on values of EU/626/2011. For models above 12 kW, the Dsc / Dsh values is calculated based on EN 14825. 3) The annual energy consumption is calculated in accordance to EU/626/2011. 4) The sound pressure of the units shows the value measured of the position 1 m in front of the main body and 1 m below the unit. The sound pressure is measured in accordance with Eurovent 6/C/006-97 specification. 5) When installing the outdoor unit at a higher position than the indoor unit. \* Recommended fuse for the indoor 3 A.



SEER and SCOP: For KIT-60PTY2E5D. INTERNET CONTROL: Optional.

Rating Conditions: Cooling Indoor 27 °C DB / 19 °C WB. Cooling Outdoor 35 °C DB / 24 °C WB. Heating Indoor 20 °C DB. Heating Outdoor 7 °C DB / 6 °C WB. (DB: Dry Bulb; WB: Wet Bulb). Specifications subject to change without notice. For detailed information about ErP / Energy Labelling, please visit our websites www.aircon.panasonic.eu or www.ptc.panasonic.eu.

## PACi Elite ceiling Inverter+ • R32



**Ceiling mounted units provide large and wide air distribution which is good for big rooms.**

The height and depth of all capacities are the same for unified appearance in mixed installations.

			Single phase						
			3.6 kW	5.0 kW	6.0 kW	7.1 kW	10.0 kW	12.5 kW	14.0 kW
KIT			KIT-36PT2ZH5	KIT-50PT2ZH5	KIT-60PT2ZH5	KIT-71PT2ZH5	KIT-100PT2ZH5	KIT-125PT2ZH5	KIT-140PT2ZH5
Remote controller			CZ-RTC5B	CZ-RTC5B	CZ-RTC5B	CZ-RTC5B	CZ-RTC5B	CZ-RTC5B	CZ-RTC5B
Cooling capacity	Nominal (Min - Max)	kW	3.6(1.5 - 4.0)	5.0(1.5 - 5.6)	6.0(2.0 - 7.1)	7.1(2.2 - 9.0)	10.0(3.1 - 12.5)	12.5(3.2 - 14.0)	14.0(3.3 - 16.0)
UK Cooling	(Total - Sensible)	kW	3.7 - 2.7	5.1 - 3.5	6.7 - 4.4	8.1 - 5.2	11.4 - TBC	12.8 - 8.2	14.6 - 9.1
EER <sup>1)</sup>		W/W	5.07	4.17	4.08	3.78	4.05	3.45	3.10
SEER / Δsc <sup>2)</sup>			<b>7.2 A++</b>	<b>7.0 A++</b>	<b>7.2 A++</b>	<b>6.7 A++</b>	<b>7.0 A++</b>	<b>6.6</b>	<b>6.2</b>
Pdesign		kW	3.6	5.0	6.0	7.1	10.0	12.5	14.0
Input power cooling		kW	0.71	1.20	1.47	1.88	2.47	3.62	4.52
Annual energy consumption <sup>3)</sup>		kWh/a	175	250	292	371	500	—	—
Heating capacity	Nominal (Min - Max)	kW	4.0(1.5 - 5.0)	5.6(1.5 - 6.5)	7.0(1.8 - 8.0)	8.0(2.0 - 9.0)	11.2(3.1 - 14.0)	14.0(3.2 - 16.0)	16.0(3.3 - 18.0)
UK Heating		kW	4.1	5.3	6.1	8.1	12.5	14.4	16.2
COP <sup>1)</sup>		W/W	5.19	4.34	4.43	4.15	4.31	3.99	3.67
SCOP / Δsc <sup>2)</sup>			<b>4.8 A++</b>	<b>4.6 A++</b>	<b>4.7 A++</b>	<b>4.6 A++</b>	<b>4.6 A++</b>	<b>4.4</b>	<b>4.3</b>
Pdesign at -10 °C		kW	3.6	4.5	6.0	5.2	8.0	9.5	10.6
Input power heating		kW	0.77	1.29	1.58	1.93	2.60	3.51	4.36
Annual energy consumption <sup>3)</sup>		kWh/a	1050	1370	1787	1583	2435	—	—
<b>Indoor unit</b>			<b>S-36PT2E5B</b>	<b>S-50PT2E5B</b>	<b>S-60PT2E5B</b>	<b>S-71PT2E5B</b>	<b>S-100PT2E5B</b>	<b>S-125PT2E5B</b>	<b>S-140PT2E5B</b>
Air flow	Hi / Med / Lo	m <sup>3</sup> /min	14.0/12.0/10.5	15.0/12.5/10.5	20.0/17.0/14.5	21.0/18.0/15.5	30.0/25.0/23.0	34.0/28.0/24.0	35.0/29.0/25.0
Sound pressure <sup>4)</sup>	Hi / Med / Lo	dB(A)	36/32/29	37/33/29	38/34/30	39/35/31	42/37/35	46/40/36	47/41/37
Dimension	HxWxD	mm	235x960x690	235x960x690	235x1275x690	235x1275x690	235x1590x690	235x1590x690	235x1590x690
Net weight		kg	27	27	33	33	40	40	40
Recommended Fuse	OD/ID	A	TBC / 5	TBC / 5	TBC / 5	TBC / 5	TBC / 5	TBC / 5	TBC / 5
<b>Outdoor unit</b>			<b>U-36PZH2E5</b>	<b>U-50PZH2E5</b>	<b>U-60PZH2E5</b>	<b>U-71PZH2E5</b>	<b>U-100PZH2E5</b>	<b>U-125PZH2E5</b>	<b>U-140PZH2E5</b>
Power source		V	220 - 230 - 240	220 - 230 - 240	220 - 230 - 240	220 - 230 - 240	220 - 230 - 240	220 - 230 - 240	220 - 230 - 240
Current	Cool	A	3.35 - 3.25 - 3.10	5.60 - 5.35 - 5.10	7.15 - 6.85 - 6.55	8.80 - 8.45 - 8.10	11.40 - 10.90 - 10.50	16.80 - 16.00 - 15.40	21.00 - 20.10 - 19.30
	Heat	A	3.65 - 3.50 - 3.35	6.10 - 5.85 - 5.60	7.75 - 7.40 - 7.10	8.90 - 8.50 - 8.20	12.00 - 11.50 - 11.00	16.20 - 15.50 - 14.90	20.30 - 19.40 - 18.60
Air flow	Cool / Heat	m <sup>3</sup> /min	40/40	40/45	40/45	61/60	118/108	125/122	129/116
Sound pressure	Cool / Heat (Hi)	dB(A)	43/44	45/48	46/49	48/50	52/52	53/53	54/54
Sound power	Cool / Heat (Hi)	dB(A)	62/64	64/68	65/69	65/67	69/69	70/70	71/71
Dimension	HxWxD	mm	695x875x320	695x875x320	695x875x320	996x940x340	1416x940x340	1416x940x340	1416x940x340
Net weight		kg	43	43	44	68	99	99	99
Pipe diameter	Liquid pipe	Inch (mm)	1/4(6.35)	1/4(6.35)	3/8(9.52)	3/8(9.52)	3/8(9.52)	3/8(9.52)	3/8(9.52)
	Gas pipe	Inch (mm)	1/2(12.70)	1/2(12.70)	5/8(15.88)	5/8(15.88)	5/8(15.88)	5/8(15.88)	5/8(15.88)
Pipe length range		m	3~40	3~40	3~40	5~50	5~85	5~85	5~85
Elevation difference (in/out) <sup>5)</sup>		m	30	30	30	30	30	30	30
Pipe length for additional gas		m	30	30	30	30	30	30	30
Additional gas amount		g/m	20	20	35	45	45	45	45
Refrigerant (R32) / CO <sub>2</sub> Eq.		kg / T	1.15/0.776	1.15/0.776	1.45/0.979	1.95/1.316	3.05/2.059	3.05/2.059	3.05/2.059
Operating range	Cool Min - Max	°C	-15~+46	-15~+46	-15~+46	-15~+46	-20 <sup>6)</sup> ~+46	-20 <sup>6)</sup> ~+46	-20 <sup>6)</sup> ~+46
	Heat Min - Max	°C	-20~+24	-20~+24	-20~+24	-20~+24	-20~+24	-20~+24	-20~+24
<b>Kit RRP</b>		€	<b>2234</b>	<b>2533</b>	<b>2671</b>	<b>2994</b>	<b>3921</b>	<b>4254</b>	<b>5030</b>
Indoor unit RRP		€	864	957	1042	1089	1407	1650	1979
Outdoor unit RRP		€	1241	1447	1500	1776	2385	2475	2922
Wired control RRP		€	129	129	129	129	129	129	129

### Technical focus

- Wide air distribution for large rooms
- Horizontal air flow reaches maximum 9,5 m
- Fresh air connection available on the unit
- Slim design with 235 mm height fits narrow space
- Silent operation
- Datanavi simple support tool app with CZ-RTC5B
- Twin, Triple and Double-twin split options
- Easy connection and control of external fan or ERV using the connector PAW-FDC on the indoor unit PCB. The external device can be controlled by the remote control of the Panasonic indoor unit

### Further comfort improvement with airflow distribution

Horizontal air flow reaches maximum 9.5 m. This is ideal for wide rooms.

The wide air discharge opening expands the air flow to the left and the right. The unpleasant feeling caused when the air flow directly hits the human body is prevented by the "Draft prevention position", which changes the swing width, so that the degree of comfort is increased.



CZ-RTC5B



Optional controller. CONEX wired remote controller. CZ-RTC6 - CZ-RTC6BL



Optional controller. Infrared remote controller. CZ-RWS3 + CZ-RWRT3



Optional Econavi sensor. CZ-CENSC1

COMPATIBLE WITH ALL PANASONIC CONNECTIVITY SOLUTIONS. FOR DETAILED INFORMATION GO TO THE CONTROL SYSTEMS SECTION

			Three phase			
			7.1 kW	10.0 kW	12.5 kW	14.0 kW
KIT			KIT-71PT2ZH8	KIT-100PT2ZH8	KIT-125PT2ZH8	KIT-140PT2ZH8
Remote controller			CZ-RTC5B	CZ-RTC5B	CZ-RTC5B	CZ-RTC5B
Cooling capacity	Nominal (Min - Max)	kW	7.1 [2.2 - 9.0]	10.0 [3.1 - 12.5]	12.5 [3.2 - 14.0]	14.0 [3.3 - 16.0]
UK Cooling	(Total - Sensible)	kW	8.1 - 5.2	11.4 -	12.8 - 8.6	14.6 - 9.1
EER <sup>1)</sup>		W/W	3.78	4.05	3.45	3.10
SEER / D <sub>sc</sub> <sup>2)</sup>			6.6 A++	6.9 A++	6.6	6.2
P <sub>design</sub>		kW	7.1	10.0	12.5	14.0
Input power cooling		kW	1.88	2.47	3.62	4.52
Annual energy consumption <sup>3)</sup>		kWh/a	375	507	—	—
Heating capacity	Nominal (Min - Max)	kW	8.0 [2.0 - 9.0]	11.2 [3.1 - 14.0]	14.0 [3.2 - 16.0]	16.0 [3.3 - 18.0]
UK Heating		kW	8.1	12.5	14.4	16.2
COP <sup>1)</sup>		W/W	4.15	4.31	3.99	3.67
SCOP / D <sub>sc</sub> <sup>2)</sup>			4.6 A++	4.6 A++	4.4	4.3
P <sub>design</sub> at -10 °C		kW	5.2	8.0	9.5	10.6
Input power heating		kW	1.93	2.60	3.51	4.36
Annual energy consumption <sup>3)</sup>		kWh/a	1583	2435	—	—
<b>Indoor unit</b>			<b>S-71PT2E5B</b>	<b>S-100PT2E5B</b>	<b>S-125PT2E5B</b>	<b>S-140PT2E5B</b>
Air flow	Hi / Med / Lo	m <sup>3</sup> /min	21.0/18.0/15.5	30.0/25.0/23.0	34.0/28.0/24.0	35.0/29.0/25.0
Sound pressure <sup>4)</sup>	Hi / Med / Lo	dB(A)	39/35/31	42/37/35	46/40/36	47/41/37
Dimension	HxWxD	mm	235x1275x690	235x1590x690	235x1590x690	235x1590x690
Net weight		kg	33	40	40	40
Recommended Fuse	OD/ID	A	TBC / 5	TBC / 5	TBC / 5	TBC / 5
<b>Outdoor unit</b>			<b>U-71PZH2E8</b>	<b>U-100PZH2E8</b>	<b>U-125PZH2E8</b>	<b>U-140PZH2E8</b>
Power source		V	380 - 400 - 415	380 - 400 - 415	380 - 400 - 415	380 - 400 - 415
Current	Cool	A	2.95 - 2.85 - 2.75	3.85 - 3.65 - 3.55	5.65 - 5.40 - 5.20	7.10 - 6.75 - 6.50
	Heat	A	3.00 - 2.90 - 2.80	4.05 - 3.85 - 3.75	5.50 - 5.20 - 5.05	6.85 - 6.50 - 6.30
Air flow	Cool / Heat	m <sup>3</sup> /min	61/60	118/108	125/112	129/116
Sound pressure	Cool / Heat (Hi)	dB(A)	48/50	52/52	53/53	54/54
Sound power	Cool / Heat (Hi)	dB(A)	65/67	69/69	70/70	71/71
Dimension	HxWxD	mm	996x940x340	1416x940x340	1416x940x340	1416x940x340
Net weight		kg	68	99	99	99
Pipe diameter	Liquid pipe	Inch (mm)	3/8(9.52)	3/8(9.52)	3/8(9.52)	3/8(9.52)
	Gas pipe	Inch (mm)	5/8(15.88)	5/8(15.88)	5/8(15.88)	5/8(15.88)
Pipe length range		m	5 - 50	5 - 85	5 - 85	5 - 85
Elevation difference (in/out) <sup>5)</sup>		m	30	30	30	30
Pipe length for additional gas		m	30	30	30	30
Additional gas amount		g/m	45	45	45	45
Refrigerant (R32) / CO <sub>2</sub> Eq.		kg / T	1.95/1.316	3.05/2.059	3.05/2.059	3.05/2.059
Operating range	Cool Min ~ Max	°C	-15 ~ +46	-20 <sup>6)</sup> ~ +46	-20 <sup>6)</sup> ~ +46	-20 <sup>6)</sup> ~ +46
	Heat Min ~ Max	°C	-20 ~ +24	-20 ~ +24	-20 ~ +24	-20 ~ +24
<b>Kit RRP</b>		€	<b>3154</b>	<b>3966</b>	<b>4449</b>	<b>5203</b>
Indoor unit RRP		€	1089	1407	1650	1979
Outdoor unit RRP		€	1936	2430	2670	3095
Wired control RRP		€	129	129	129	129

Accessories		RRP €
<b>CZ-RTC6L</b>	CONEX wired remote controller (non-wireless)	148
<b>CZ-RTC6BL</b>	CONEX wired remote controller with Bluetooth®	177
<b>CZ-RTC5B</b>	Wired remote controller with Econavi function and datanavi	129
<b>CZ-RWS3 + CZ-RWRT3</b>	Infrared remote controller	304
<b>CZ-CAPWFC1</b>	Commercial Wi-Fi Adaptor	264

Accessories		RRP €
<b>PAW-WTRAY</b>	Tray for condenser water compatible with outdoor elevation platform	152
<b>PAW-GRDBSE20</b>	Outdoor base ground support for noise and vibration absorption	152
<b>PAW-GRDSTD40</b>	Outdoor elevation platform 400x900x400 mm	152
<b>CZ-CENSC1</b>	Econavi energy savings sensor	159

1) EER and COP calculation is based in accordance to EN14511. 2) Energy Label Scale from A+++ to D. For models below 12 kW, the SEER and SCOP is calculated based on values of EU/626/2011. For models above 12 kW, the D<sub>sc</sub> / D<sub>sh</sub> values is calculated based on EN 14825. 3) The annual energy consumption is calculated in accordance to EU/626/2011. 4) The sound pressure of the units shows the value measured of the position 1 m in front of the main body and 1 m below the unit. The sound pressure is measured in accordance with Eurovent 6/C/006-97 specification. 5) When installing the outdoor unit at a higher position than the indoor unit. 6) For models 100 - 140PZH2E5(8), it is possible to operate the lowest -20 °C in the computer rooms with the piping length of 30 m or less. \* Recommended fuse for the indoor 3 A.



SEER and SCOP: For KIT-36PT2ZH5. INTERNET CONTROL: Optional.

Rating Conditions: Cooling Indoor 27 °C DB / 19 °C WB. Cooling Outdoor 35 °C DB / 24 °C WB. Heating Indoor 20 °C DB. Heating Outdoor 7 °C DB / 6 °C WB. (DB: Dry Bulb; WB: Wet Bulb). Specifications subject to change without notice. For detailed information about ErP / Energy Labelling, please visit our websites www.aircon.panasonic.eu or www.ptc.panasonic.eu.



nanoe™ X as a standard.

## NEW PACi Standard adaptive ducted unit Inverter+ • R32

## New design duct range PF3.

2 installation possibilities (horizontal / vertical) with high ESP 150Pa allows flexible installation.



		Single phase					
		6.0 kW	7.1 kW	10.0 kW	12.5 kW	14.0 kW	
Kit		KIT-60PF3Z25	KIT-71PF3Z25	KIT-100PF3Z25	KIT-125PF3Z25	KIT-140PF3Z25	
<b>Remote controller</b>		<b>CZ-RTC5B</b>	<b>CZ-RTC5B</b>	<b>CZ-RTC5B</b>	<b>CZ-RTC5B</b>	<b>CZ-RTC5B</b>	
Cooling capacity	Nominal (Min - Max)	kW	5.7(2.0 - 6.3)	6.8(2.2 - 7.8)	9.5(3.1 - 11.4)	12.1(3.2 - 13.5)	13.4(3.3 - 15.0)
UK Cooling	(Total - Sensible)	kW	4.8 - 3.1	5.6 - 3.7	6.5 - 4.2	TBC	TBC
EER <sup>1)</sup>	Nominal (Min - Max)	W/W	3.63(4.76 - 2.50)	3.15(4.76 - 2.70)	3.57(6.00 - 2.36)	3.40(5.93 - 2.76)	3.16(5.08 - 2.56)
<b>SEER / Øsc<sup>2)</sup></b>			<b>7.1 A++</b>	<b>6.7 A++</b>	<b>6.6 A++</b>	<b>257.5</b>	<b>252.6</b>
Pdesign		kW	5.7	6.8	9.5	12.1	13.4
Input power cooling	Nominal (Min - Max)	kW	1.57(0.42 - 2.52)	2.16(0.42 - 2.85)	2.66(0.50 - 4.84)	3.56(0.54 - 4.90)	4.24(0.65 - 5.86)
Annual energy consumption <sup>3)</sup>		kWh/a	281	354	502	—	—
Heating capacity	Nominal (Min - Max)	kW	5.7(1.8 - 7.0)	6.8(1.8 - 8.1)	9.5(3.0 - 13.5)	12.1(3.3 - 15.0)	13.4(3.4 - 16.0)
UK Heating		kW	5.2	6.2	6.9	TBC	TBC
COP <sup>1)</sup>	Nominal (Min - Max)	W/W	4.22(4.86 - 2.83)	3.93(4.86 - 3.82)	4.09(6.00 - 3.00)	3.56(6.11 - 3.16)	3.76(5.23 - 3.03)
<b>SCOP / Øsc<sup>2)</sup></b>			<b>4.7 A++</b>	<b>4.2 A+</b>	<b>3.9 A</b>	<b>144.2</b>	<b>140.8</b>
Pdesign at -10 °C		kW	4.4	4.7	7.8	9.3	9.5
Input power heating	Nominal (Min - Max)	kW	1.35(0.37 - 2.47)	1.73(0.37 - 2.12)	2.32(0.50 - 4.50)	3.40(0.54 - 4.74)	3.56(0.65 - 5.28)
Annual energy consumption <sup>3)</sup>		kWh/a	1289	1565	2795	—	—
<b>Indoor unit</b>		<b>S-6071PF3E</b>	<b>S-6071PF3E</b>	<b>S-1014PF3E</b>	<b>S-1014PF3E</b>	<b>S-1014PF3E</b>	
External static pressure <sup>4)</sup>	Nominal (Min - Max)	Pa	30(10 - 150)	30(10 - 150)	40(10 - 150)	50(10 - 150)	50(10 - 150)
Air flow	Hi / Med / Lo	m <sup>3</sup> /min	21.0/19.0/15.0	21.0/19.0/15.0	32.0/26.0/21.0	34.0/29.0/23.0	36.0/32.0/25.0
Moisture removal volume		L/h	1.7	2.7	3.2	4.1	4.9
Sound pressure <sup>5)</sup>	Hi / Med / Lo	dB(A)	30/26/23	30/26/23	33/29/25	35/31/27	39/35/29
Sound power	Hi / Med / Lo	dB(A)	53/49/46	53/49/46	56/52/48	58/54/50	62/58/52
Dimension	HxWxD	mm	250 x 1000 x 730	250 x 1000 x 730	250 x 1400 x 730	250 x 1400 x 730	250 x 1400 x 730
Net weight		kg	30	30	39	39	39
nanoe X Generator			Mark 2	Mark 2	Mark 2	Mark 2	Mark 2
Recommended Fuse		A	TBC	TBC	TBC	TBC	TBC
<b>Outdoor unit</b>		<b>U-60PZ2E5</b>	<b>U-71PZ2E5</b>	<b>U-100PZ2E5</b>	<b>U-125PZ2E5</b>	<b>U-140PZ2E5</b>	
Power source		V	220 - 230 - 240	220 - 230 - 240	220 - 230 - 240	220 - 230 - 240	220 - 230 - 240
Current	Cool	A	7.30 - 7.00 - 6.70	9.70 - 9.30 - 8.90	12.80 - 12.20 - 11.70	17.60 - 16.90 - 16.20	22.10 - 21.20 - 20.30
	Heat	A	6.05 - 5.80 - 5.55	7.85 - 7.50 - 7.20	10.90 - 10.40 - 10.00	15.00 - 14.30 - 13.70	17.70 - 16.90 - 16.20
Air flow	Cool / Heat	m <sup>3</sup> /min	40/45	50/45	76/70	86/78	89/83
Sound pressure	Cool / Heat (Hi)	dB(A)	46/48	49/49	52/52	55/55	56/56
Sound power	Cool / Heat (Hi)	dB(A)	65/68	69/69	70/70	73/73	74/74
Dimension	HxWxD	mm	695 x 875 x 320	695 x 875 x 320	996 x 980 x 370	996 x 980 x 370	996 x 980 x 370
Net weight		kg	44	44	90	94	94
Pipe diameter	Liquid pipe	Inch (mm)	3/8(9.52)	3/8(9.52)	3/8(9.52)	3/8(9.52)	3/8(9.52)
	Gas pipe	Inch (mm)	5/8(15.88)	5/8(15.88)	5/8(15.88)	5/8(15.88)	5/8(15.88)
Pipe length range		m	3 - 40	3 - 40	5 - 50	5 - 50	5 - 50
Elevation difference (in/out) <sup>6)</sup>		m	30	30	30	30	30
Pipe length for additional gas		m	30	30	30	30	30
Additional gas amount		g/m	35	35	45	45	45
Refrigerant (R32) / CO <sub>2</sub> Eq.		kg / T	1.45/0.979	1.45/0.979	2.60/1.755	2.98/2.0115	2.98/2.0115
Operating range	Cool Min ~ Max	°C	-10 ~ +43	-10 ~ +43	-10 ~ +43	-10 ~ +43	-10 ~ +43
	Heat Min ~ Max	°C	-15 ~ +24	-15 ~ +24	-15 ~ +24	-15 ~ +24	-15 ~ +24
<b>Kit RRP</b>		€	<b>2265</b>	<b>2524</b>	<b>3233</b>	<b>3487</b>	<b>4205</b>
Indoor unit RRP		€	984	984	1323	1323	1323
Outdoor unit RRP		€	1152	1411	1781	2035	2753
Wired control RRP		€	129	129	129	129	129

## Technical focus

- 2 installation possibilities (horizontal / vertical)
- Maximum external static pressure: 150 Pa
- Selectable inlet air position (rear / bottom entry)
- Improved drain pan suitable for both horizontal / vertical installation
- Drain pump included
- nanoe™ X (Generator Mark 2= 9,6 trillion hydroxyl radicals / sec) as standard for the long duct piping case\*
- Wired remote control CZ-RTC6BL allows easy system setting via Bluetooth®

\* The performance of nanoe™ X air can be expected even by 10 m long duct by Panasonic internal survey.

## 2 installation possibilities (horizontal / vertical)


Vertical installation is newly available. ESP 150Pa, sufficient for remotely installing units away from the rooms.



## Improved drain pan design

Drain pan is shared in both cases horizontal and vertical installation.

No need to alternate anymore.







CZ-RTC5B



COMPATIBLE WITH ALL PANASONIC CONNECTIVITY SOLUTIONS. FOR DETAILED INFORMATION GO TO THE CONTROL SYSTEMS SECTION



CONEX



Optional controller.  
CONEX wired remote controller.  
CZ-RTC6 - CZ-RTC6BL  
- CZ-RTC6BLW



Optional controller.  
Infrared remote controller.  
CZ-RWS3 +  
CZ-RWRC3




Optional Econavi sensor.  
CZ-CENSC1

			Three phase		
			10.0 kW	12.5 kW	14.0 kW
Kit			KIT-100PF3Z28	KIT-125PF3Z28	KIT-140PF3Z28
Remote controller			CZ-RTC5B	CZ-RTC5B	CZ-RTC5B
Cooling capacity	Nominal (Min - Max)	kW	9.5(3.0 11.4)	12.1 (3.2 - 13.5)	13.4(3.3 15.0)
UK Cooling	[Total - Sensible]	kW	TBC	TBC	TBC
EER <sup>1)</sup>	Nominal (Min - Max)	W/W	3.57(6.00 - 2.36)	3.40(5.93 - 2.76)	3.16(5.08 - 2.56)
SEER / D <sub>sc</sub> <sup>2)</sup>			6.5 A++	256.5	251.7
P <sub>design</sub>		kW	9.5	12.1	13.4
Input power cooling	Nominal (Min - Max)	kW	2.66(0.50 - 4.84)	3.56(0.54 - 4.90)	4.24(0.65 - 5.86)
Annual energy consumption <sup>3)</sup>		kWh/a	508	—	—
Heating capacity	Nominal (Min - Max)	kW	9.5(3.0 - 13.5)	12.1(3.3 - 15.0)	13.4(3.4 - 16.0)
UK Heating		kW	TBC	TBC	TBC
COP <sup>1)</sup>	Nominal (Min - Max)	W/W	4.09(6.00 - 3.00)	3.56(6.11 - 3.16)	3.76(5.23 - 3.03)
SCOP / D <sub>sc</sub> <sup>2)</sup>			3.9 A	144.1	140.8
P <sub>design</sub> at -10 °C		kW	7.8	9.3	9.5
Input power heating	Nominal (Min - Max)	kW	2.32(0.50 - 4.50)	3.40(0.54 - 4.74)	3.56(0.65 - 5.28)
Annual energy consumption <sup>3)</sup>		kWh/a	2795	—	—
Indoor unit			S-1014PF3E	S-1014PF3E	S-1014PF3E
External static pressure <sup>4)</sup>	Nominal (Min - Max)	Pa	40(10 - 150)	50(10 - 150)	50(10 - 150)
Air flow	Hi / Med / Lo	m <sup>3</sup> /min	32.0/26.0/21.0	34.0/29.0/23.0	36.0/32.0/25.0
Moisture removal volume		L/h	3.2	4.1	4.9
Sound pressure <sup>5)</sup>	Hi / Med / Lo	dB(A)	33/29/25	35/31/27	39/35/29
Sound power	Hi / Med / Lo	dB(A)	56/52/48	58/54/50	62/58/52
Dimension	HxWxD	mm	250x1400x730	250x1400x730	250x1400x730
Net weight		kg	39	39	39
nanoe X Generator			Mark 2	Mark 2	Mark 2
Recommended Fuse		A	TBC	TBC	TBC
Outdoor unit			U-100PZ2E8	U-125PZ2E8	U-140PZ2E8
Power source		V	380 - 400 - 415	380 - 400 - 415	380 - 400 - 415
Current	Cool	A	4.37 - 4.15 - 4.00	5.90 - 5.60 - 5.40	7.40 - 7.05 - 6.80
	Heat	A	3.72 - 3.55 - 3.40	5.00 - 4.75 - 4.60	5.90 - 5.60 - 5.40
Air flow	Cool / Heat	m <sup>3</sup> /min	76/70	86/78	89/83
Sound pressure	Cool / Heat (Hi)	dB(A)	52/52	55/55	56/56
Sound power	Cool / Heat (Hi)	dB(A)	70/70	73/73	74/74
Dimension	HxWxD	mm	996x980x370	996x980x370	996x980x370
Net weight		kg	90	94	94
Pipe diameter	Liquid pipe	Inch (mm)	3/8(9.52)	3/8(9.52)	3/8(9.52)
	Gas pipe	Inch (mm)	5/8(15.88)	5/8(15.88)	5/8(15.88)
Pipe length range		m	5 - 50	5 - 50	5 - 50
Elevation difference (in/out) <sup>6)</sup>		m	30	30	30
Pipe length for additional gas		m	30	30	30
Additional gas amount		g/m	45	45	45
Refrigerant (R32) / CO <sub>2</sub> , Eq.		kg / T	2.60/1.755	2.98/2.0115	2.98/2.0115
Operating range	Cool Min ~ Max	°C	-10 ~ +43	-10 ~ +43	-10 ~ +43
	Heat Min ~ Max	°C	-15 ~ +24	-15 ~ +24	-15 ~ +24
Kit RRP		€	3380	3596	4123
Indoor unit RRP		€	1323	1323	1323
Outdoor unit RRP		€	1928	2144	2671
Wired control RRP		€	129	129	129

Accessories		RRP €
CZ-RTC6	CONEX wired remote controller (non-wireless)	148
CZ-RTC6BL	CONEX wired remote controller with Bluetooth®	177
CZ-RTC6BLW	CONEX wired remote controller with Wi-Fi and Bluetooth®	250
CZ-RTC5B	Wired remote controller with Econavi function and datanavi	129
CZ-RWS3 + CZ-RWRC3	Infrared remote controller	298
CZ-CAPWFC1	Commercial Wi-Fi Adaptor	264

Accessories		RRP €
PAW-WTRAY	Tray for condenser water compatible with outdoor elevation platform	152
PAW-GRDBSE20	Outdoor base ground support for noise and vibration absorption	152
PAW-GRDSTD40	Outdoor elevation platform 400x900x400 mm	152
CZ-CENSC1	Econavi energy savings sensor	159
CZ-56DAF2	Air outlet plenum for S-3650PF3E	135
CZ-90DAF2	Air outlet plenum for S-6071PF3E	203
CZ-160DAF2	Air outlet plenum for S-1014PF3E	271

1) EER and COP calculation is based in accordance to EN14511. 2) Energy Label Scale from A+++ to D. For models below 12 kW, the SEER and SCOP is calculated based on values of EU/626/2011. For models above 12 kW, the D<sub>sc</sub> / D<sub>sh</sub> values is calculated based on EN 14825. 3) The annual energy consumption is calculated in accordance to EU/626/2011. 4) Medium external static pressure setting from factory. 5) The sound pressure of the units shows the value measured of the position 1,5 m below the unit. The sound pressure is measured in accordance with Eurovent 6/C/006-97 specification. 6) When installing the outdoor unit at a higher position than the indoor unit. 7) Outdoor unit located lower / outdoor unit located higher. \* Recommended fuse for the indoor 3 A. \*\* Above values are in the case of standard installation(horizontal installation in the ceiling, rear side air intake) and nanoe™ X OFF.



SEER: For S-6071PF3E + U-60PZ2E5. SCOP: For S-6071PF3E + U-60PZ3E5. SUPER QUIET: For S-6071PF3E + U-60PZ2E5 and S-6071PF3E + U-71PZ2E5. INTERNET CONTROL: Optional. Rating Conditions: Cooling Indoor 27 °C DB / 19 °C WB. Cooling Outdoor 35 °C DB / 24 °C WB. Heating Indoor 20 °C DB. Heating Outdoor 7 °C DB / 6 °C WB. (DB: Dry Bulb; WB: Wet Bulb). Specifications subject to change without notice. For detailed information about ErP / Energy Labelling, please visit our websites www.aircon.panasonic.eu or www.ptc.panasonic.eu.



nanoe™ X as a standard.

## NEW PACi Elite adaptive ducted unit Inverter+ • R32

## New design duct range PF3.

2 installation possibilities (horizontal / vertical) with high ESP 150Pa allows flexible installation.



		Single phase							
		3.6 kW	5.0 kW	6.0 kW	7.1 kW	10.0 kW	12.5 kW	14.0 kW	
Kit		KIT-36PF3ZH25	KIT-50PF3ZH25	KIT-60PF3ZH25	KIT-71PF3ZH25	KIT-100PF3ZH25	KIT-125PF3ZH25	KIT-140PF3ZH25	
Remote controller		CZ-RTC5B	CZ-RTC5B	CZ-RTC5B	CZ-RTC5B	CZ-RTC5B	CZ-RTC5B	CZ-RTC5B	
Cooling capacity	Nominal (Min - Max)	kW	3.4(1.5 - 4.0)	5.0(1.5 - 5.6)	5.7(2.0 - 6.3)	6.8(2.2 - 7.8)	9.5(3.1 - 11.4)	12.1(3.2 - 13.6)	13.4(3.3 - 15.3)
UK Cooling	(Total - Sensible)	kW	TBC	TBC	TBC	TBC	TBC	TBC	TBC
EER <sup>1)</sup>	Nominal (Min - Max)	W/W	4.36(5.36 - 2.25)	3.55(4.84 - 2.80)	3.83(5.13 - 2.68)	3.74(5.64 - 2.41)	4.17(5.08 - 2.82)	3.58(5.00 - 3.00)	3.38(4.18 - 2.59)
SEER / Øsc <sup>2)</sup>			<b>6.3 A++</b>	<b>6.3 A++</b>	<b>7.4 A++</b>	<b>7.1 A++</b>	<b>7.4 A++</b>	<b>281.7</b>	<b>275.9</b>
Pdesign		kW	3.4	5.0	5.7	6.8	9.5	12.1	13.4
Input power cooling	Nominal (Min - Max)	kW	0.78(0.28 - 1.78)	1.41(0.31 - 2.00)	1.49(0.39 - 2.35)	1.82(0.39 - 2.24)	2.28(0.61 - 4.04)	3.38(0.64 - 4.54)	3.96(0.79 - 5.90)
Annual energy consumption <sup>3)</sup>		kWh/a	188	278	269	332	447	—	—
Heating capacity	Nominal (Min - Max)	kW	4.0(1.5 - 5.0)	5.5(1.5 - 6.5)	7.0(1.8 - 8.0)	7.5(2.0 - 9.0)	10.8(3.1 - 13.5)	13.5(3.2 - 15.4)	15.5(3.3 - 17.4)
UK Heating		kW	TBC	TBC	TBC	TBC	TBC	TBC	TBC
COP <sup>1)</sup>	Nominal (Min - Max)	W/W	4.35(6.52 - 2.84)	3.79(5.77 - 2.97)	4.04(5.29 - 2.63)	4.03(5.41 - 3.16)	3.97(5.25 - 3.07)	3.46(5.16 - 3.06)	3.44(4.29 - 3.14)
SCOP / Øsc <sup>2)</sup>			<b>4.4 A+</b>	<b>4.3 A+</b>	<b>4.8 A++</b>	<b>4.7 A++</b>	<b>4.5 A+</b>	<b>170.0</b>	<b>171.0</b>
Pdesign at -10 °C		kW	2.4	3.8	4.4	4.7	7.8	9.3	9.5
Input power heating	Nominal (Min - Max)	kW	0.92(0.23 - 1.76)	1.45(0.26 - 2.19)	1.72(0.34 - 3.04)	1.86(0.37 - 2.85)	2.72(0.59 - 4.40)	3.90(0.62 - 5.04)	4.51(0.77 - 5.55)
Annual energy consumption <sup>3)</sup>		kWh/a	762	1231	1259	1393	2424	—	—
<b>Indoor unit</b>			<b>S-3650PF3E</b>	<b>S-3650PF3E</b>	<b>S-6071PF3E</b>	<b>S-6071PF3E</b>	<b>S-1014PF3E</b>	<b>S-1014PF3E</b>	<b>S-1014PF3E</b>
External static pressure <sup>4)</sup>	Nominal (Min - Max)	Pa	30(10 - 150)	30(10 - 150)	30(10 - 150)	30(10 - 150)	40(10 - 150)	50(10 - 150)	50(10 - 150)
Air flow	Hi / Med / Lo	m <sup>3</sup> /min	14.0/13.0/10.0	16.0/15.0/12.0	21.0/19.0/15.0	21.0/19.0/15.0	32.0/26.0/21.0	34.0/29.0/23.0	36.0/32.0/25.0
Moisture removal volume		L/h	0.9	1.9	1.7	2.7	3.2	4.1	4.9
Sound pressure <sup>5)</sup>	Hi / Med / Lo	dB(A)	30/27/22	34/30/25	30/26/23	30/26/23	33/29/25	35/31/27	39/35/29
Sound power	Hi / Med / Lo	dB(A)	53/50/45	57/53/48	53/49/46	53/49/46	56/52/48	58/54/50	62/58/52
Dimension	HxWxD	mm	250x800x730	250x800x730	250x1000x730	250x1000x730	250x1400x730	250x1400x730	250x1400x730
Net weight		kg	25	25	30	30	39	39	39
nanoe X Generator			Mark 2	Mark 2	Mark 2	Mark 2	Mark 2	Mark 2	Mark 2
Recommended Fuse	OD/ID	A	TBC / 5	TBC / 5	TBC / 5	TBC / 5	TBC / 5	TBC / 5	TBC / 5
<b>Outdoor unit</b>			<b>U-36PZH2E5</b>	<b>U-50PZH2E5</b>	<b>U-60PZH2E5</b>	<b>U-71PZH2E5</b>	<b>U-100PZH2E5</b>	<b>U-125PZH2E5</b>	<b>U-140PZH2E5</b>
Power source		V	220 - 230 - 240	220 - 230 - 240	220 - 230 - 240	220 - 230 - 240	220 - 230 - 240	220 - 230 - 240	220 - 230 - 240
Current	Cool	A	3.35 - 3.25 - 3.10	5.60 - 5.35 - 5.10	7.15 - 6.85 - 6.55	8.80 - 8.45 - 8.10	11.40 - 10.90 - 10.50	16.80 - 16.00 - 15.40	21.00 - 20.10 - 19.30
	Heat	A	3.65 - 3.50 - 3.35	6.10 - 5.85 - 5.60	7.75 - 7.40 - 7.10	8.90 - 8.50 - 8.20	12.00 - 11.50 - 11.00	16.20 - 15.50 - 14.90	20.30 - 19.40 - 18.60
Air flow	Cool / Heat	m <sup>3</sup> /min	40/40	40/45	40/45	61/60	118/108	125/122	129/116
Sound pressure	Cool / Heat (Hi)	dB(A)	43/44	45/48	46/49	48/50	52/52	53/53	54/54
Sound power	Cool / Heat (Hi)	dB(A)	62/64	64/68	65/69	65/67	69/69	70/70	71/71
Dimension	HxWxD	mm	695x875x320	695x875x320	695x875x320	996x940x340	1416x940x340	1416x940x340	1416x940x340
Net weight		kg	43	43	44	68	99	99	99
Pipe diameter	Liquid pipe	Inch (mm)	1/4(6.35)	1/4(6.35)	3/8(9.52)	3/8(9.52)	3/8(9.52)	3/8(9.52)	3/8(9.52)
	Gas pipe	Inch (mm)	1/2(12.70)	1/2(12.70)	5/8(15.88)	5/8(15.88)	5/8(15.88)	5/8(15.88)	5/8(15.88)
Pipe length range		m	3 - 40	3 - 40	3 - 40	5 - 50	5 - 85	5 - 85	5 - 85
Elevation difference (in/out) <sup>6)</sup>		m	30	30	30	30	30	30	30
Pipe length for additional gas		m	30	30	30	30	30	30	30
Additional gas amount		g/m	20	20	35	45	45	45	45
Refrigerant (R32) / CO <sub>2</sub> Eq.		kg / T	1.15/0.776	1.15/0.776	1.45/0.979	1.95/1.316	3.05/2.059	3.05/2.059	3.05/2.059
Operating range	Cool Min - Max	°C	-15 ~ +46	-15 ~ +46	-15 ~ +46	-15 ~ +46	-20 <sup>7)</sup> ~ +46	-20 <sup>7)</sup> ~ +46	-20 <sup>7)</sup> ~ +46
	Heat Min - Max	°C	-20 ~ +24	-20 ~ +24	-20 ~ +24	-20 ~ +24	-20 ~ +24	-20 ~ +24	-20 ~ +24
<b>Kit RRP</b>		€	<b>2215</b>	<b>2421</b>	<b>2613</b>	<b>2889</b>	<b>3837</b>	<b>3927</b>	<b>4374</b>
Indoor unit RRP		€	845	845	984	984	1323	1323	1323
Outdoor unit RRP		€	1241	1447	1500	1776	2385	2475	2922
Wired control RRP		€	129	129	129	129	129	129	129

## Technical focus

- 2 installation possibilities (horizontal / vertical)
- Maximum external static pressure: 150 Pa
- Selectable inlet air position (rear / bottom entry)
- Improved drain pan suitable for both horizontal / vertical installation
- Drain pump included
- nanoe™ X (Generator Mark 2= 9,6 trillion hydroxyl radicals / sec) as standard for the long duct piping case\*
- Wired remote control CZ-RTC6BL allows easy system setting via Bluetooth®

\* The performance of nanoe™ X air can be expected even by 10 m long duct by Panasonic internal survey.


## 2 installation possibilities (horizontal / vertical)

Vertical installation is newly available. ESP 150Pa, sufficient for remotely installing units away from the rooms.



## Improved drain pan design

Drain pan is shared in both cases horizontal and vertical installation. No need to alternate anymore.





COMPATIBLE WITH ALL PANASONIC CONNECTIVITY SOLUTIONS. FOR DETAILED INFORMATION GO TO THE CONTROL SYSTEMS SECTION



CZ-RTC5B



**Optional controller. CONEX wired remote controller.**  
CZ-RTC6 - CZ-RTC6BL  
- CZ-RTC6BLW



**Optional controller. Infrared remote controller.**  
CZ-RWS3 +  
CZ-RWRC3



**Optional Econavi sensor.**  
CZ-CENSC1

Three phase

				7.1 kW	10.0 kW	12.5 kW	14.0 kW
				KIT-71PF3ZH28	KIT-100PF3ZH28	KIT-125PF3ZH28	KIT-140PF3ZH28
				CZ-RTC5B	CZ-RTC5B	CZ-RTC5B	CZ-RTC5B
Kit							
Remote controller							
Cooling capacity	Nominal (Min - Max)	kW		6.8 [2.2 - 7.8]	9.5 [3.1 - 11.4]	12.1 [3.2 - 13.6]	13.4 [3.3 - 15.3]
UK Cooling	(Total - Sensible)	kW		TBC	TBC	TBC	TBC
EER <sup>1)</sup>	Nominal (Min - Max)	W/W		3.74 [5.64 - 2.41]	4.17 [5.08 - 2.82]	3.58 [5.00 - 3.00]	3.38 [4.18 - 2.59]
SEER / Dsc <sup>2)</sup>				<b>7.0 A++</b>	<b>7.3 A++</b>	<b>281.7</b>	<b>275.9</b>
Pdesign		kW		6.8	9.5	12.1	13.4
Input power cooling	Nominal (Min - Max)	kW		1.82 [0.39 - 3.24]	2.28 [0.61 - 4.04]	3.38 [0.64 - 4.54]	3.96 [0.79 - 5.90]
Annual energy consumption <sup>3)</sup>		kWh/a		338	451	—	—
Heating capacity	Nominal (Min - Max)	kW		7.5 [2.0 - 9.0]	10.8 [3.1 - 13.5]	13.5 [3.2 - 15.4]	15.5 [3.3 - 17.4]
UK Heating		kW		TBC	TBC	TBC	TBC
COP <sup>1)</sup>	Nominal (Min - Max)	W/W		4.03 [5.41 - 3.16]	3.97 [5.25 - 3.07]	3.46 [5.16 - 3.06]	3.44 [4.29 - 3.14]
SCOP / Dsc <sup>2)</sup>				<b>4.7 A++</b>	<b>4.5 A+</b>	<b>170.0</b>	<b>171.0</b>
Pdesign at -10 °C		kW		4.7	7.8	9.3	9.5
Input power heating	Nominal (Min - Max)	kW		1.86 [0.37 - 2.85]	2.72 [0.59 - 4.40]	3.90 [0.62 - 5.04]	4.51 [0.77 - 5.55]
Annual energy consumption <sup>3)</sup>		kWh/a		1394	2424	—	—
Indoor unit				<b>S-6071PF3E</b>	<b>S-1014PF3E</b>	<b>S-1014PF3E</b>	<b>S-1014PF3E</b>
External static pressure <sup>4)</sup>	Nominal (Min - Max)	Pa		30 (10 - 150)	40 (10 - 150)	50 (10 - 150)	50 (10 - 150)
Air flow	Hi / Med / Lo	m <sup>3</sup> /min		21.0 / 19.0 / 15.0	32.0 / 26.0 / 21.0	34.0 / 29.0 / 23.0	36.0 / 32.0 / 25.0
Moisture removal volume		L/h		2.7	3.2	4.1	4.9
Sound pressure <sup>5)</sup>	Hi / Med / Lo	dB(A)		30 / 26 / 23	33 / 29 / 25	35 / 31 / 27	39 / 35 / 29
Sound power	Hi / Med / Lo	dB(A)		53 / 49 / 46	56 / 52 / 48	58 / 54 / 50	62 / 58 / 52
Dimension	H x W x D	mm		250 x 1000 x 730	250 x 1400 x 730	250 x 1400 x 730	250 x 1400 x 730
Net weight		kg		30	39	39	39
nanoe X Generator				Mark 2	Mark 2	Mark 2	Mark 2
Recommended Fuse	OD/ID	A		TBC / 5	TBC / 5	TBC / 5	TBC / 5
Outdoor unit				<b>U-71PZH2E8</b>	<b>U-100PZH2E8</b>	<b>U-125PZH2E8</b>	<b>U-140PZH2E8</b>
Power source		V		380 - 400 - 415	380 - 400 - 415	380 - 400 - 415	380 - 400 - 415
Current	Cool	A		2.95 - 2.85 - 2.75	3.85 - 3.65 - 3.55	5.65 - 5.40 - 5.20	7.10 - 6.75 - 6.50
	Heat	A		3.00 - 2.90 - 2.80	4.05 - 3.85 - 3.75	5.50 - 5.20 - 5.05	6.85 - 6.50 - 6.30
Air flow	Cool / Heat	m <sup>3</sup> /min		61 / 60	118 / 108	125 / 112	129 / 116
Sound pressure	Cool / Heat (Hi)	dB(A)		48 / 50	52 / 52	53 / 53	54 / 54
Sound power	Cool / Heat (Hi)	dB(A)		65 / 67	69 / 69	70 / 70	71 / 71
Dimension	H x W x D	mm		996 x 940 x 340	1416 x 940 x 340	1416 x 940 x 340	1416 x 940 x 340
Net weight		kg		68	99	99	99
Pipe diameter	Liquid pipe	Inch (mm)		3/8 (9.52)	3/8 (9.52)	3/8 (9.52)	3/8 (9.52)
	Gas pipe	Inch (mm)		5/8 (15.88)	5/8 (15.88)	5/8 (15.88)	5/8 (15.88)
Pipe length range		m		5 - 50	5 - 85	5 - 85	5 - 85
Elevation difference (in/out) <sup>6)</sup>		m		30	30	30	30
Pipe length for additional gas		m		30	30	30	30
Additional gas amount		g/m		45	45	45	45
Refrigerant (R32) / CO <sub>2</sub> Eq.		kg / T		1.95 / 1.316	3.05 / 2.059	3.05 / 2.059	3.05 / 2.059
Operating range	Cool Min ~ Max	°C		-15 ~ +46	-20 <sup>7)</sup> ~ +46	-20 <sup>7)</sup> ~ +46	-20 <sup>6)</sup> ~ +46
	Heat Min ~ Max	°C		-20 ~ +24	-20 ~ +24	-20 ~ +24	-20 ~ +24
Kit RRP		€		<b>3049</b>	<b>3882</b>	<b>4122</b>	<b>4547</b>
Indoor unit RRP		€		984	1323	1323	1323
Outdoor unit RRP		€		1936	2430	2670	3095
Wired control RRP		€		129	129	129	129

Accessories		RRP €
<b>CZ-RTC6</b>	CONEX wired remote controller (non-wireless)	148
<b>CZ-RTC6BL</b>	CONEX wired remote controller with Bluetooth®	177
<b>CZ-RTC6BLW</b>	CONEX wired remote controller with Wi-Fi and Bluetooth®	250
<b>CZ-RTC5B</b>	Wired remote controller with Econavi function and datanavi	129
<b>CZ-RWS3 + CZ-RWRC3</b>	Infrared remote controller	298
<b>CZ-CAPWFC1</b>	Commercial Wi-Fi Adaptor	264

Accessories		RRP €
<b>PAW-WTRAY</b>	Tray for condenser water compatible with outdoor elevation platform	152
<b>PAW-GRDBSE20</b>	Outdoor base ground support for noise and vibration absorption	152
<b>PAW-GRDSTD40</b>	Outdoor elevation platform 400 x 900 x 400 mm	152
<b>CZ-CENSC1</b>	Econavi energy savings sensor	159
<b>CZ-56DAF2</b>	Air outlet plenum for S-3650PF3E	135
<b>CZ-90DAF2</b>	Air outlet plenum for S-6071PF3E	203
<b>CZ-160DAF2</b>	Air outlet plenum for S-1014PF3E	271

1) EER and COP calculation is based in accordance to EN14511. 2) Energy Label Scale from A+++ to D. For models below 12 kW, the SEER and SCOP is calculated based on values of EU/626/2011. For models above 12 kW, the Dsc / Dsh values is calculated based on EN 14825. 3) The annual energy consumption is calculated in accordance to EU/626/2011. 4) Medium external static pressure setting from factory. 5) The sound pressure of the units shows the value measured of the position 1,5 m below the unit. The sound pressure is measured in accordance with Eurovent 6/C/006-97 specification. 6) When installing the outdoor unit at a higher position than the indoor unit. 7) For models 100 - 140PZH2E5(B), it is possible to operate the lowest -20 °C in the computer rooms with the piping length of 30 m or less. \* Recommended fuse for the indoor 3 A. \*\* Above values are in the case of standard installation(horizontal installation in the ceiling, rear side air intake) and nanoe™ X OFF.



SEER and SCOP: For Para S-6071PF3E + U-60PZH2E5. SUPER QUIET: For S-3650PF3E + U-36PZH2E5. INTERNET CONTROL: Optional.  
Rating Conditions: Cooling Indoor 27 °C DB / 19 °C WB. Cooling Outdoor 35 °C DB / 24 °C WB. Heating Indoor 20 °C DB. Heating Outdoor 7 °C DB / 6 °C WB. (DB: Dry Bulb; WB: Wet Bulb).  
Specifications subject to change without notice. For detailed information about ErP / Energy Labelling, please visit our websites www.aircon.panasonic.eu or www.ptc.panasonic.eu.

**Panasonic Big PACi high static pressure hide-away 20,0-25,0 kW Inverter+ • R32**

**Panasonic Big PACi, not only environmental friendly but also a groundbreaking product.**

Big PACi with R32 has been introduced with full renewal of its indoor unit, offering hydronic application by PACi Water heat exchanger .



**4 Panasonic Comfort Cloud control**

Ready to control PACi systems with Panasonic Comfort Cloud App in your smartphones.\*

\* Panasonic Wi-Fi Adaptor CZ-CAPWFC1 is required.

**Maximum 200 Pa\* static pressure setting**

A high static pressure enables the use of long ducts for installation in a wide range of spaces.

**3-step static pressure set up.**

Selectable of static pressure modes can change 200 Pa / 130 Pa / 75 Pa for extra installation flexibility.

\* In case of S-250PE3E5B.



**Dimensions of Each Component (lightweight design for easy disassembly).**



The weight is for S-200PE3E5B model.



**1 Compact & light indoor body**

Compact and light indoor body, keeping the high efficiency, has a split-able design for easy installation within a limited narrow space. Plus ease of maintenance due to the simplified disassembly design.

**2 Easy pipe work with split-able hide-away indoor design**

Heat exchanger and fan elements (fan + casing) can be separated during installation. The hide-away indoor unit is easily reassembled and will fit through a narrow space.

**3 High external static pressure, maximum 200 Pa\* setting**

A high static pressure enables the use of long ducts for installation in a wide range of spaces.

\* S-250PE3E5B.

**Compact and light indoor body, keeping high efficiency**

15 % lighter weight vs conventional model drastically improves installation work.

	Conventional model	Panasonic model
20,0 kW	100 kg	<b>86 kg</b>
25,0 kW	104 kg	<b>88 kg</b>

**DEPTH WAS REDUCED BY 230 mm**



**Easy Installation with Light Components**

Indoor unit can easily be split into 3 components, the heaviest of which weighs only 48 kg.





COMPATIBLE WITH ALL PANASONIC CONNECTIVITY SOLUTIONS. FOR DETAILED INFORMATION GO TO THE CONTROL SYSTEMS SECTION

CONEX



Optional controller. CONEX wired remote controller. CZ-RTC6 - CZ-RTC6BL



Optional controller. Infrared remote controller. CZ-RWS3 + CZ-RWRC3



Optional Econavi sensor. CZ-CENSC1

			Three phase	
			20.0 kW	25.0 kW
Kit			KIT-200PE3ZH8	KIT-250PE3ZH8
Remote controller			CZ-RTC5B	CZ-RTC5B
Cooling capacity	Nominal (Min - Max)	kW	19.5 [5.7 - 21.0]	23.2 [6.1 - 27.0]
UK Cooling	(Total - Sensible)	kW	20.8 - 14.0	26.9 - 17.4
EER <sup>1)</sup>		W/W	3.22	3.11
SEER / Dsc <sup>2)</sup>			207.0	190.6
Pdesign		kW	19.5	23.2
Input power cooling		kW	6.06	7.46
Heating capacity	Nominal (Min - Max)	kW	22.4 [5.0 - 25.0]	28.0 [5.5 - 29.0]
UK Heating		kW	24.41	28.31
COP <sup>1)</sup>		W/W	3.61	3.41
SCOP / Dsc <sup>2)</sup>			141.3	142.7
Pdesign at -10 °C		kW	17.0	20.0
Input power heating		kW	6.21	8.21
Indoor unit			S-200PE3E5B	S-250PE3E5B
Power source		V / ph / Hz	220 - 230 - 240 / 1/50	220 - 230 - 240 / 1/50
External static pressure at shipment (adjustable)		Pa	75 <sup>3)</sup> - 120 - 180	75 <sup>3)</sup> - 130 - 200
Air flow	Hi / Med / Lo	m <sup>3</sup> /min	72/63/53	84/72/59
Sound pressure <sup>4)</sup>	Hi / Med / Lo	dB(A)	46/44/41	47/45/42
Dimension	HxWxD	mm	486x1456x916	486x1456x916
Net weight		kg	86	88
Recommended Fuse	OD/ID	A	TBC	TBC
Outdoor unit			U-200PZH2E8	U-250PZH2E8
Power source		V / ph / Hz	380 - 400 - 415 / 3/50	380 - 400 - 415 / 3/50
Recommended fuse		A	30	30
Air flow	Cool / Heat	m <sup>3</sup> /min	164/164	160/160
Sound pressure	Cool / Heat (Hi)	dB(A)	59/61	59/63
Sound power	Cool / Heat (Hi)	dB(A)	77/79	78/82
Dimension <sup>5)</sup>	HxWxD	mm	1500x980x370	1500x980x370
Net weight		kg	117	128
Pipe diameter	Liquid pipe	Inch (mm)	3/8 (9.52)	1/2 (12.70)
	Gas pipe	Inch (mm)	1 (25.40)	1 (25.40)
Pipe length range		m	5 - 90	5 - 60
Elevation difference (in/out) <sup>6)</sup>		m	30	30
Pipe length for additional gas		m	30	30
Additional gas amount		g/m	60	80
Refrigerant (R32) / CO <sub>2</sub> Eq.		kg / T	4.20/2.835	5.20/3.51
Operating range	Cool Min ~ Max	°C	-15 ~ +46	-15 ~ +46
	Heat Min ~ Max	°C	-20 ~ +24	-20 ~ +24
Kit RRP		€	7035	7585
Indoor unit RRP		€	2990	3167
Outdoor unit RRP		€	3916	4289
Wired control RRP		€	129	129

Accessories		RRP €
CZ-RTC6	CONEX wired remote controller (non-wireless)	148
CZ-RTC6BL	CONEX wired remote controller with Bluetooth®	177
CZ-RTC5B	Wired remote controller with Econavi function and datanavi	129
CZ-RWS3 + CZ-RWRC3	Infrared remote controller	298

Accessories		RRP €
CZ-CAPWFC1	Commercial Wi-Fi Adaptor	264
PAW-GRDBSE20	Outdoor base ground support for noise and vibration absorption	152
PAW-GRDSTD40	Outdoor elevation platform 400x900x400 mm	152
CZ-CENSC1	Econavi energy savings sensor	159

1) EER and COP calculation is based in accordance to EN14511. 2) For models below 12 kW, the SEER and SCOP is calculated based on values of EU/626/2011. For models above 12 kW, the Dsc / Dsh values is calculated based on EN 14825. 3) Factory setting. 4) The sound pressure of the units shows the value measured of the position 1,5 m below the unit. The sound pressure is measured in accordance with Eurovent 6/C/006-97 specification. 5) Add 100 mm for indoor unit or 70 mm for outdoor unit for piping port. 6) When installing the outdoor unit at a higher position than the indoor unit. \* No filter included.



INTERNET CONTROL: Optional.

Rating Conditions: Cooling Indoor 27 °C DB / 19 °C WB. Cooling Outdoor 35 °C DB / 24 °C WB. Heating Indoor 20 °C DB. Heating Outdoor 7 °C DB / 6 °C WB. (DB: Dry Bulb; WB: Wet Bulb). Specifications subject to change without notice. For detailed information about ErP / Energy Labelling, please visit our websites www.aircon.panasonic.eu or www.ptc.panasonic.eu.

## Commercial single, twin, triple and double-twin systems • R32



### 1 PACi and PACi NX Elite from 7.1 to 14.0 kW

Up to 4 indoor units can be connected to the same outdoor unit. Panasonic's Elite units 7.1, 10.0, 12.0 and 14.0 can be installed as twin, triple and double-twin systems. The indoor units can be combined as per the selection table. The operation will always be simultaneous. All the indoor units will work with the same settings.

### 2 PACi and PACi NX Standard from 10.0 to 14.0 kW

Up to 2 indoor units connectable on the same outdoor. Panasonic's Standard units can be installed as single and twin systems. The indoor units can be combined following the selection table. The operation will always be simultaneous. All the indoor units will work with the same settings.

### 3 Big PACi Elite from 20.0 to 25.0 kW

Up to 4 indoor units can be connected to the same outdoor unit. Panasonic's PACi units 20.0 and 25.0 can be installed as twin, triple and double-twin systems. The indoor units can be combined as per the selection table. The operation will always be simultaneous. All the indoor units will work with the same settings.



With this system, a single outdoor unit can split its capacity up to 4 indoor units for better distribution within the space simultaneously. This makes the system particularly apt for common areas. It reduces noise concentration and enables the same temperature to be reached around the room. A mix of indoor units can be installed (wall-mounted, cassette, hide-away, ceiling) in one system.

**PACi and PACi NX Elite from 7.1 to 14.0 kW Single/Simultaneous operation system combinations • R32**

Indoor	Outdoor			
	7.1 kW	10.0 kW	12.5 kW	14.0 kW
3.6 kW	Twin <sup>1)</sup> U-71 S-36 S-36	Triple U-100 S-36 S-36 S-36	Double-twin U-125 S-36 S-36 S-36 S-36	
4.5 kW			Triple U-125 S-45 S-45 S-45	
5.0 kW		Twin U-100 S-50 S-50		Triple U-140 S-50 S-50 S-50
6.0 kW			Twin U-125 S-60 S-60	
7.1 kW	Single <sup>2)</sup> U-71 S-71			Twin U-140 S-71 S-71
10.0 kW		Single <sup>2)</sup> U-100 S-100		
12.5 kW			Single <sup>2)</sup> U-125 S-125	
14.0 kW				Single <sup>2)</sup> U-140 S-140

**PACi and PACi NX Standard from 7.1 to 14.0 kW Single/Simultaneous operation system combinations • R32**

Indoor	Outdoor			
	7.1 kW	10.0 kW	12.5 kW	14.0 kW
3.6 kW				
5.0 kW		Twin U-100 S-50 S-50		
6.0 kW			Twin U-125 S-60 S-60	
7.1 kW	Single <sup>2)</sup> U-71 S-71			Twin U-140 S-71 S-71
10.0 kW		Single <sup>2)</sup> U-100 S-100		
12.5 kW			Single <sup>2)</sup> U-125 S-125	
14.0 kW				Single <sup>2)</sup> U-140 S-140

**PACi Elite from 20.0 to 25.0 kW Single/Simultaneous operation system combinations • R32**

Indoor	Outdoor	
	20.0 kW	25.0 kW
5.0 kW	Double-twin U-200 S-50 S-50 S-50 S-50	
6.0 kW		Double-twin U-250 S-60 S-60 S-60 S-60
7.1 kW	Triple U-200 S-71 S-71 S-71	
10.0 kW	Twin U-200 S-100 S-100	
12.5 kW		Twin U-250 S-125 S-125
20.0 kW	Single <sup>2)</sup> U-200 S-200	
25.0 kW		Single <sup>2)</sup> U-250 S-250

1) Available for only PZ2 (R32) model with limitations of main pipe and branch pipe. Please contact an authorized Panasonic dealer. 2) PACi 1x1 Kit solution.

# PACi NX single, twin, triple and double-twin systems • R32



NEW PACi NX Standard Outdoor units • R32			10.0 kW	12.5 kW	14.0 kW
<b>Outdoor unit single phase</b>			<b>U-100PZ3E5</b>	<b>U-125PZ3E5</b>	<b>U-140PZ3E5</b>
<b>Outdoor unit three phase</b>			<b>U-100PZ3E8</b>	<b>U-125PZ3E8</b>	<b>U-140PZ3E8</b>
Cooling capacity	Nominal (Min - Max)	kW	10.0(3.0 - 11.5)	12.5(3.2 - 13.5)	14.0(3.3 - 15.0)
Heating capacity	Nominal (Min - Max)	kW	10.0(3.0 - 14.0)	12.5(3.3 - 15.0)	14.0(3.4 - 16.0)
Power source	Single phase	V	220-230-240	220-230-240	220-230-240
	Three phase	V	380-400-415	380-400-415	380-400-415
Connection indoor / outdoor		mm <sup>2</sup>	2x1.5 or 2.5	2x1.5 or 2.5	2x1.5 or 2.5
Air flow	Cool / Heat	m <sup>3</sup> /min	73.0/73.0	82.0/80.0	84.0/82.0
Sound pressure	Cool / Heat (Hi)	dB(A)	52/52	55/55	56/56
Sound power	Cool / Heat (Hi)	dB(A)	70/70	73/73	74/74
Dimension	HxWxD	mm	996 x 980 x 370	996 x 980 x 370	996 x 980 x 370
Net weight		kg	83	87	87
Pipe diameter	Liquid pipe	Inch (mm)	3/8 (9.52)	3/8 (9.52)	3/8 (9.52)
	Gas pipe	Inch (mm)	5/8 (15.88)	5/8 (15.88)	5/8 (15.88)
Pipe length range	Min ~ Max	m	5 - 50	5 - 50	5 - 50
Elevation difference (in/out)	Max	m	15/30 <sup>1)</sup>	15/30 <sup>1)</sup>	15/30 <sup>1)</sup>
Pipe length for additional gas		m	30	30	30
Additional gas amount		g/m	45	45	45
Refrigerant (R32) / CO <sub>2</sub> Eq.		kg / T	2.4 / 1.62	2.8 / 1.89	2.8 / 1.89
Operating range	Cool Min ~ Max	°C	-10 ~ -43	-10 ~ -43	-10 ~ -43
	Heat Min ~ Max	°C	-15 ~ -24	-15 ~ -24	-15 ~ -24
<b>Outdoor unit single phase RRP</b>		€	<b>1782</b>	<b>2166</b>	<b>2980</b>
<b>Outdoor unit three phase RRP</b>		€	<b>1934</b>	<b>2277</b>	<b>3324</b>

1) Outdoor unit located lower / outdoor unit located higher.



NEW PACi NX Elite Outdoor units • R32			7.1 kW	10.0 kW	12.5 kW	14.0 kW
<b>Outdoor unit single phase</b>			<b>U-71PZH3E5</b>	<b>U-100PZH3E5</b>	<b>U-125PZH3E5</b>	<b>U-140PZH3E5</b>
<b>Outdoor unit three phase</b>			<b>U-71PZH3E8</b>	<b>U-100PZH3E8</b>	<b>U-125PZH3E8</b>	<b>U-140PZH3E8</b>
Cooling capacity	Nominal (Min - Max)	kW	6.8(2.2 - 9.0)	9.5(3.1 - 12.5)	12.1(3.2 - 14.0)	13.4(3.3 - 16.0)
Heating capacity	Nominal (Min - Max)	kW	8.0(2.0 - 9.0)	11.2(3.1 - 14.0)	14.0(3.2 - 16.0)	16.0(3.3 - 18.0)
Power source	Single phase	V	220-230-240	220-230-240	220-230-240	220-230-240
	Three phase	V	380-400-415	380-400-415	380-400-415	380-400-415
Connection indoor / outdoor		mm <sup>2</sup>	2x1.5 or 2.5	2x1.5 or 2.5	2x1.5 or 2.5	2x1.5 or 2.5
Air flow	Cool / Heat	m <sup>3</sup> /min	61.0/60.0	118.0/108.0	125.0/112.0	129.0/116.0
Sound pressure	Cool / Heat (Hi)	dB(A)	48/50	52/52	53/53	54/54
Sound power	Cool / Heat (Hi)	dB(A)	65/67	69/69	70/70	71/71
Dimension	HxWxD	mm	996 x 940 x 340	1416 x 940 x 340	1416 x 940 x 340	1416 x 940 x 340
Net weight		kg	65	98	98	98
Pipe diameter	Liquid pipe	Inch (mm)	3/8 (9.52)	3/8 (9.52)	3/8 (9.52)	3/8 (9.52)
	Gas pipe	Inch (mm)	5/8 (15.88)	5/8 (15.88)	5/8 (15.88)	5/8 (15.88)
Pipe length range	Min ~ Max	m	5 - 50	5 - 85	5 - 85	5 - 85
Elevation difference (in/out)	Max	m	15/30 <sup>1)</sup>	15/30 <sup>1)</sup>	15/30 <sup>1)</sup>	15/30 <sup>1)</sup>
Pipe length for additional gas		m	30	30	30	30
Additional gas amount		g/m	45	45	45	45
Refrigerant (R32) / CO <sub>2</sub> Eq.		kg / T	1.95 / 1.32	3.05 / 2.06	3.05 / 2.06	3.05 / 2.06
Operating range	Cool Min ~ Max	°C	-15 ~ -48	-20 ~ +48 <sup>2)</sup>	-20 ~ +48 <sup>2)</sup>	-20 ~ +48 <sup>2)</sup>
	Heat Min ~ Max	°C	-20 ~ -24	-20 ~ -24	-20 ~ -24	-20 ~ -24
<b>Outdoor unit single phase RRP</b>		€	<b>1776</b>	<b>2385</b>	<b>2475</b>	<b>3311</b>
<b>Outdoor unit three phase RRP</b>		€	<b>1936</b>	<b>2430</b>	<b>2670</b>	<b>3693</b>

1) Outdoor unit located lower / outdoor unit located higher. 2) For models 100 - 140PZH3E5(8), it is possible to operate the lowest -20 °C in the computer rooms with the piping length of 30 m or less.



NEW  
2021

NEW wall-mounted	Indoor	Cooling capacity	Heating capacity	Dimension	Sound pressure	Air volume	RRP
		kW	kW	HxWxD mm	Hi / Med / Lo dB(A)	Hi / Med / Lo m <sup>3</sup> /min	€
3.6 / 4.5 / 5.0 kW	S-3650PK3E	3.6 - 5.0	4.0 - 5.6	302 x 1120 x 236	35/31/27 <sup>1)</sup>	13.0/11.0/9.0 <sup>1)</sup>	1021
6.0 / 7.1 kW	S-6010PK23E	6.1 - 10.0	7.0 - 8.0	302 x 1120 x 236	47/44/40 <sup>1)</sup>	20.0/17.5/14.5 <sup>1)</sup>	1139



NEW 4 way 90x90 cassette	Indoor (panels CZ-KPU3W / CZ-KPU3AW)	Cooling capacity	Heating capacity	Dimension indoor	Dimension panel	Sound pressure	Air volume	RRP	Panel RRP
		kW	kW	HxWxD mm	HxWxD mm	Hi / Med / Lo dB(A)	Hi / Med / Lo m <sup>3</sup> /min	€	€
3.6 / 4.5 / 5.0 kW	S-3650PU3E	3.6 - 5.0	4.0 - 5.6	256 x 840 x 840	33.5 x 950 x 950	30/28/27 <sup>1)</sup>	14.5/13.0/11.5 <sup>1)</sup>	728	216/270
6.0 / 7.1 kW	S-6071PU3E	6.0 - 7.1	7.0 - 8.0	256 x 840 x 840	33.5 x 950 x 950	36/31/28 <sup>1)</sup>	21.0/16.0/13.0 <sup>1)</sup>	892	216/270
10.0 / 12.5 / 14.0 kW	S-1014PU3E	10.0 - 14.0	11.2 - 16.0	319 x 840 x 840	33.5 x 950 x 950	45/38/32 <sup>1)</sup>	36.0/26.0/18.0 <sup>1)</sup>	1277	216/270

NEW  
2021

NEW ceiling	Indoor	Cooling capacity	Heating capacity	Dimension	Sound pressure	Air volume	RRP
		kW	kW	HxWxD mm	Hi / Med / Lo dB(A)	Hi / Med / Lo m <sup>3</sup> /min	€
3.6 / 4.5 / 5.0 kW	S-3650PT3E	3.5 - 5.0	4.0 - 5.6	235 x 960 x 690	36/32/28 <sup>1)</sup>	14.0/12.0/10.5 <sup>1)</sup>	762
6.0 / 7.1 kW	S-6071PT3E	6.0 - 6.8	7.0 - 8.0	235 x 1275 x 690	38/34/29 <sup>1)</sup>	20.0/17.0/14.5 <sup>1)</sup>	1042
10.0 / 12.5 / 14.0 kW	S-1014PT3E	9.5 - 13.4	11.2 - 16.0	235 x 1590 x 690	42/37/34 <sup>1)</sup>	30.0/25.0/23.0 <sup>1)</sup>	1407



NEW adaptive ducted unit	Indoor	Cooling capacity	Heating capacity	Dimension	External static pressure	Sound pressure	Air volume	RRP
		kW	kW	HxWxD mm	Nominal (Min - Max) Hi / Med / Lo Pa	Hi / Med / Lo dB(A)	Hi / Med / Lo m <sup>3</sup> /min	€
3.6 / 4.5 / 5.0 kW	S-3650PF3E	3.6 - 5.0	4.0 - 5.6	250 x 800 x 730	30 (10 - 150)	30/27/22 <sup>1)</sup>	14.0/13.0/10.0 <sup>1)</sup>	845
6.0 / 7.1 kW	S-6071PF3E	5.7 - 6.8	7.0 - 7.5	250 x 1000 x 730	30 (10 - 150)	30/26/23 <sup>1)</sup>	21.0/19.0/15.0 <sup>1)</sup>	984
10.0 / 12.5 / 14.0 kW	S-1014PF3E	9.5 - 13.4	10.8 - 13.5	250 x 1400 x 730	30 (10 - 150)	33/29/25 <sup>1)</sup>	32.0/26.0/21.0 <sup>1)</sup>	1323

1) 36/60/10 types of indoor units value.

# PACi single, twin, triple and double-twin systems • R32




PACi Standard Outdoor units • R32			10.0 kW	12.5 kW	14.0 kW
<b>Outdoor unit Single phase</b>			<b>U-100PZ2E5</b>	<b>U-125PZ2E5</b>	<b>U-140PZ2E5</b>
<b>Outdoor unit Three phase</b>			<b>U-100PZ2E8</b>	<b>U-125PZ2E8</b>	<b>U-140PZ2E8</b>
Cooling capacity	Nominal (Min - Max)	kW	10,0(3,0 - 11,5)	12,5(3,2 - 13,5)	14,0(3,3 - 15,0)
Heating capacity	Nominal (Min - Max)	kW	10,0(3,0 - 14,0)	12,5(3,3 - 15,0)	14,0(3,4 - 16,0)
Power source	Single phase	V	220 - 230 - 240	220 - 230 - 240	220 - 230 - 240
	Three phase	V	380 - 400 - 415	380 - 400 - 415	380 - 400 - 415
Connection indoor / outdoor		mm <sup>2</sup>	2 x 1,5 or 2,5	2 x 1,5 or 2,5	2 x 1,5 or 2,5
Air flow	Cool / Heat	m <sup>3</sup> /min	76/70	86/78	89/83
Sound pressure	Cool / Heat (Hi)	dB(A)	52/52	55/55	56/56
Sound power	Cool / Heat (Hi)	dB(A)	70/70	73/73	74/74
Dimension	H x W x D	mm	996 x 980 x 370	996 x 980 x 370	996 x 980 x 370
Net weight		kg	90	94	94
Pipe diameter	Liquid pipe	Inch (mm)	3/8(9,52)	3/8(9,52)	3/8(9,52)
	Gas pipe	Inch (mm)	5/8(15,88)	5/8(15,88)	5/8(15,88)
Pipe length range	Min ~ Max	m	5 ~ 50	5 ~ 50	5 ~ 50
Elevation difference (in/out)	Max	m	30	30	30
Pipe length for additional gas		m	30	30	30
Additional gas amount		g/m	45	45	45
Refrigerant (R32) / CO <sub>2</sub> Eq.		kg / T	2,60/1,755	2,98/2,0115	2,98/2,0115
Operating range	Cool Min ~ Max	°C	-10 ~ +43	-10 ~ +43	-10 ~ +43
	Heat Min ~ Max	°C	-15 ~ +24	-15 ~ +24	-15 ~ +24
<b>Outdoor unit single phase RRP</b>		€	<b>1781</b>	<b>2035</b>	<b>2753</b>
<b>Outdoor unit three phase RRP</b>		€	<b>1928</b>	<b>2144</b>	<b>2671</b>



PACi Elite Outdoor units • R32			7.1 kW	10.0 kW	12.5 kW	14.0 kW	20.0 kW	25.0 kW
<b>Outdoor unit Single phase</b>			<b>U-71PZH2E5</b>	<b>U-100PZH2E5</b>	<b>U-125PZH2E5</b>	<b>U-140PZH2E5</b>	—	—
<b>Outdoor unit Three phase</b>			<b>U-71PZH2E8</b>	<b>U-100PZH2E8</b>	<b>U-125PZH2E8</b>	<b>U-140PZH2E8</b>	<b>U-200PZH2E8</b>	<b>U-250PZH2E8</b>
Cooling capacity	Nominal (Min - Max)	kW	7.1(2.2 - 9.0)	10.0(3.1 - 12.5)	12.5(3.2 - 14.0)	14.0(3.3 - 16.0)	20.0(5.7 - 22.4)	25.0(6.1 - 28.0)
Heating capacity	Nominal (Min - Max)	kW	8.0(2.0 - 9.0)	11.2(3.1 - 14.0)	14.0(3.2 - 16.0)	16.0(3.3 - 18.0)	22.4(5.0 - 25.0)	28.0(5.5 - 31.5)
Power source	Single phase	V	220 - 230 - 240	220 - 230 - 240	220 - 230 - 240	220 - 230 - 240	—	—
	Three phase	V	380 - 400 - 415	380 - 400 - 415	380 - 400 - 415	380 - 400 - 415	380 - 400 - 415	380 - 400 - 415
Connection indoor / outdoor		mm <sup>2</sup>	2 x 1.5 or 2.5	2 x 1.5 or 2.5	2 x 1.5 or 2.5	2 x 1.5 or 2.5	—	—
Air flow	Cool / Heat	m <sup>3</sup> /min	61/60	118/108	125/122	129/116	164/164	160/160
Sound pressure	Cool / Heat (Hi)	dB(A)	48/50	52/52	53/53	54/54	59/61	59/63
Sound power	Cool / Heat (Hi)	dB(A)	65/67	69/69	70/70	71/71	77/79	78/82
Dimension	H x W x D	mm	996 x 940 x 340	1416 x 940 x 340	1416 x 940 x 340	1416 x 940 x 340	1500 x 980 x 370	1500 x 980 x 370
Net weight		kg	68	99	99	99	117	128
Pipe diameter	Liquid pipe	Inch (mm)	3/8(9.52)	3/8(9.52)	3/8(9.52)	3/8(9.52)	3/8(9.52)	1/2(12.70)
	Gas pipe	Inch (mm)	5/8(15.88)	5/8(15.88)	5/8(15.88)	5/8(15.88)	1(25.40)	1(25.40)
Pipe length range	Min ~ Max	m	5 ~ 50	5 ~ 85	5 ~ 85	5 ~ 85	5 ~ 80	5 ~ 60
Elevation difference (in/out)	Max	m	30	30	30	30	30	30
Pipe length for additional gas		m	30	30	30	30	30	30
Additional gas amount		g/m	45	45	45	45	60	80
Refrigerant (R32) / CO <sub>2</sub> Eq.		kg / T	1.95/1.316	3.05/2.059	3.05/2.059	3.05/2.059	4.20/2.835	5.20/3.51
Operating range	Cool Min ~ Max	°C	-15 ~ +46	-20 <sup>1)</sup> ~ +46	-20 <sup>1)</sup> ~ +46	-20 <sup>1)</sup> ~ +46	-15 ~ +46	-15 ~ +46
	Heat Min ~ Max	°C	-20 ~ +24	-20 ~ +24	-20 ~ +24	-20 ~ +24	-20 ~ +24	-20 ~ +24
<b>Outdoor unit single phase RRP</b>		€	<b>1776</b>	<b>2385</b>	<b>2475</b>	<b>2922</b>	-	-
<b>Outdoor unit three phase RRP</b>		€	<b>1936</b>	<b>2430</b>	<b>2670</b>	<b>3095</b>	<b>3916</b>	<b>4289</b>

1) For models 100 ~ 140PZH2E5(8), it is possible to operate the lowest -20 °C in the computer rooms with the piping length of 30 m or less.



Wall-mounted	Indoor	Cooling capacity kW	Heating capacity kW	Dimension	Sound pressure	Air volume	RRP €
				HxWxD	Hi / Med / Lo	Hi / Med / Lo	
				mm	dB(A)	m <sup>3</sup> /min	
3.6 kW	S-36PK2E5B	3.6	4.2	302x1120x236	35/31/27	11.00/9.50/7.50	1021
4.5 kW	S-45PK2E5B	4.5	5.2	302x1120x236	38/34/30	12.00/10.50/8.50	1061
5.0 kW	S-50PK2E5B	5.0	5.6	302x1120x236	40/36/32	14.00/12.00/10.50	1100
6.0 kW	S-60PK2E5B	6.0	7.0	302x1120x236	47/44/40	18.00/14.50/11.50	1139
7.1 kW	S-71PK2E5B	7.1	8.0	302x1120x236	47/44/40	18.00/14.50/11.50	1178
10.0 kW	S-100PK2E5B	10.0	11.2	302x1120x236	47/44/40	19.00/16.50/13.00	1218



4 Way 60x60 cassette	Indoor (panels CZ-KPY3AW / CZ-KPY3BW)	Cooling capacity kW	Heating capacity kW	Dimension: indoor / CZ-KPY3AW / CZ-KPY3BW		Sound pressure dB(A)	Air volume m <sup>3</sup> /min	Indoor RRP €	Panels RRP €
				HxWxD					
				mm					
3.6 kW	S-36PY2E5B	3.6	4.2	288x583x583 / 31x700x700 / 31x625x625		36/32/26	9.70/9.90	717	248/216
4.5 kW	S-45PY2E5B	4.5	5.2	288x583x583 / 31x700x700 / 31x625x625		38/34/28	10.00/10.30	754	248/216
5.0 kW	S-50PY2E5B	5.0	5.6	288x583x583 / 31x700x700 / 31x625x625		40/37/33	11.10/11.10	794	248/216



NEW 4 way 90x90 cassette	Indoor (panels CZ-KPU3W / CZ-KPU3AW)	Cooling capacity kW	Heating capacity kW	Dimension indoor	Dimension panel	Sound pressure dB(A)	Air volume m <sup>3</sup> /min	RRP €	Panel RRP €
				HxWxD	HxWxD				
				mm	mm				
3.6 / 4.5 / 5.0 kW	S-3650PU3E	3.6 - 5.0	4.0 - 5.6	256x840x840	33.5x950x950	30/28/27 <sup>1)</sup>	14.5/13.0/11.5 <sup>1)</sup>	728	216/270
6.0 / 7.1 kW	S-6071PU3E	6.0 - 7.1	7.0 - 8.0	256x840x840	33.5x950x950	36/31/28 <sup>1)</sup>	21.0/16.0/13.0 <sup>1)</sup>	892	216/270
10.0 / 12.5 / 14.0 kW	S-1014PU3E	10.0 - 14.0	11.2 - 16.0	319x840x840	33.5x950x950	45/38/32 <sup>1)</sup>	36.0/26.0/18.0 <sup>1)</sup>	1277	216/270



Ceiling	Indoor	Cooling capacity kW	Heating capacity kW	Dimension	Sound pressure	Air volume	RRP €
				HxWxD	Hi / Med / Lo	Hi / Med / Lo	
				mm	dB(A)	m <sup>3</sup> /min	
3.6 kW	S-36PT2E5B	3.6	4.2	235x960x690	35/32/30	14.00/12.00/10.50	864
4.5 kW	S-45PT2E5B	4.5	5.2	235x960x690	38/33/30	15.00/12.50/10.50	909
5.0 kW	S-50PT2E5B	5.0	5.6	235x960x690	38/33/30	15.00/12.50/10.50	957
6.0 kW	S-60PT2E5B	6.0	7.0	235x1275x690	39/36/33	20.00/17.00/14.50	1042
7.1 kW	S-71PT2E5B	7.1	8.0	235x1275x690	39/36/33	21.00/18.00/15.50	1089
10.0 kW	S-100PT2E5B	10.0	11.2	235x1590x690	42/38/35	30.00/25.00/23.00	1407
12.5 kW	S-125PT2E5B	12.5	14.0	235x1590x690	45/40/37	34.00/28.00/24.00	1650
14.0 kW	S-140PT2E5B	14.0	14.0	235x1590x690	47/41/37	35.00/29.00/25.00	1979



NEW adaptive ducted unit	Indoor	Cooling capacity kW	Heating capacity kW	Dimension	External static pressure	Sound pressure	Air volume	RRP €
				HxWxD	Nominal[Min - Max] Hi / Med / Lo	Hi / Med / Lo	Hi / Med / Lo	
				mm	Pa	dB(A)	m <sup>3</sup> /min	
3.6 / 4.5 / 5.0 kW	S-3650PF3E	3.6 - 5.0	4.0 - 5.6	250x800x730	30(10 - 150)	30/27/22 <sup>1)</sup>	14.0/13.0/10.0 <sup>1)</sup>	845
6.0 / 7.1 kW	S-6071PF3E	5.7 - 6.8	7.0 - 7.5	250x1000x730	30(10 - 150)	30/26/23 <sup>1)</sup>	21.0/19.0/15.0 <sup>1)</sup>	984
10.0 / 12.5 / 14.0 kW	S-1014PF3E	9.5 - 13.4	10.8 - 13.5	250x1400x730	30(10 - 150)	33/29/25 <sup>1)</sup>	32.0/26.0/21.0 <sup>1)</sup>	1323

1) 36/60/10 types of indoor units value.

Rating Conditions: Cooling Indoor 27 °C DB / 19 °C WB. Cooling Outdoor 35 °C DB / 24 °C WB. Heating Indoor 20 °C DB. Heating Outdoor 7 °C DB / 6 °C WB. (DB: Dry Bulb; WB: Wet Bulb). Specifications subject to change without notice. For detailed information about ErP / Energy Labelling, please visit our websites [www.aircon.panasonic.eu](http://www.aircon.panasonic.eu) or [www.ptc.panasonic.eu](http://www.ptc.panasonic.eu).



## PRO-HT TANK

## PRO-HT Tank DHW

**High temperature hot water is efficiently produced without any boosters.**

Panasonic commercial PRO-HT Tank solutions can be adapted to adapt various projects from high-end residential to gyms and hotels.

PRO-HT Tank			PAW-VP750-1-G3L	PAW-VP1000-1-G3L
Outdoor Unit			U-250PE2E8A	U-250PE2E8A
Volume (net)	L		726	933
Height	Al x Ø	mm	1855 x 990	2210 x 990
Connections to the water supply network			RP 1½	RP 1½
Net weight / with water	kg		179 / 905	191 / 1124
Nominal electrical power	W		6670	6670
Reference tapping cycle			2XL	2XL
Energy consumption by chosen cycle A7 / W10-55	kWh		6	6.36
Energy consumption by chosen cycle A15 / W10-55	kWh		5.12	5.12
COP DHW [A7 / W10-55] EN 16147 <sup>1)</sup>			4.1	3.86
COP DHW [A15 / W10-55] EN 16147 <sup>2)</sup>			4.79	4.79
<b>Energy Efficiency Class (from A+ to F) <sup>3)</sup></b>			<b>A+</b>	<b>A+</b>
Standby input power according to EN16147	W		77	80
Sound pressure on 1m	dB(A)		57	57
Quantity of refrigerant	g		6400	6400
Operating range - air temperature	°C		-20 ~ +24	-20 ~ +24
Stainless steel 316 L tank			Yes	Yes
Average insulation thickness	mm		100	100
Heat exchanger connection for inlet / outlet	Inch (mm)		1/2 [12.70] - 3/4 [19.05]	1/2 [12.70] - 3/4 [19.05]
Maximum power consumption without heater	W		12900	12900
Maximum power consumption with heater	W		18900	18900
Number of electrical heaters x power	W		1 x 6000	1 x 6000
Voltage / Frequency	V / Hz		400 / 50	400 / 50
Electric protection	A		16	16
Moisture protection			IP24	IP24
Heating with heat pump	Min / Max	°C	5 / 65	5 / 65
Heating with electrical heater	Max	°C	85	85
Refrigerant (R410A) / CO <sub>2</sub> Eq.	kg / T		6.4 / 13.363	6.4 / 13.363
<b>PRO-HT Tank RRP</b>	<b>€</b>		<b>11471</b>	<b>12145</b>
<b>Outdoor unit RRP</b>	<b>€</b>		<b>3208</b>	<b>3208</b>

Accessories		RRP €
PAW-VP-RTC5B-PAC	Tank controller for PACi system	1195

1) Heating of sanitary water up to 55 °C with inlet air temperature at 7 °C, humidity at 89 % and inlet water temperature at 10 °C. According to EN16147. 2) Heating of sanitary water up to 55 °C with inlet air temperature at 15 °C, humidity at 74 % and inlet water temperature at 10 °C. According to EN16147. 3) Scale from A+ to F following [COMMISSION DELEGATED REGULATION (EU) No. 812/2013].

This product is designed to comply with the European Water Quality Directive 98/83/EC amended by 2015/1787/EU. The lifespan of the product is not guaranteed in the case of the use of groundwater, such as spring water or well water, the use of tap water when salt or other impurities are contained, nor in areas of acidic water quality. Maintenance and warranty costs related to these cases are the customer's responsibility.

\* When connected as pressurised, safety valve is mandatory.


### Technical focus

- Water volume 750 L and 1000 L
- Maximum hot water production 65 °C without boosters
- Heating coil 52 m (750 L) and 63 m (1000 L)
- Tank material 3 mm
- ABS external case



### Solution example DHW tank 1000 L + PACi

- Ideal for small hotels and high-end residential
- Hot water temperature up to 65 °C

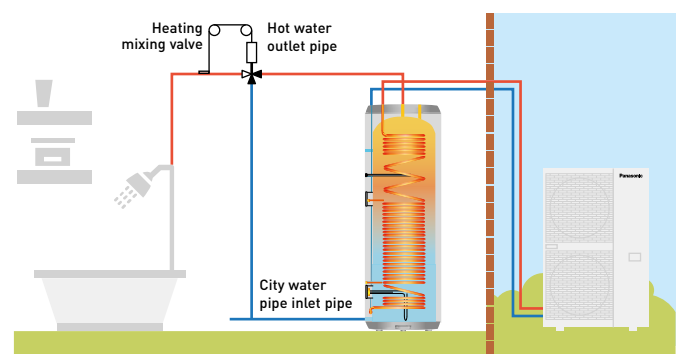



**PRO-HT TANK**

**PRO-HT Tank heating and cooling**

**High temperature hot water is efficiently produced without any boosters.**

Panasonic commercial PRO-HT Tank solutions can be combined with PACi to adapt various projects from high-end residential to small offices.

PRO-HT Tank			PAW-VP380L
Cooling capacity at 35 °C. water outlet 7 °C		kW	12.80
Heating capacity		kW	25.00
Heating capacity at +7 °C. heating water temperature at 45 °C		kW	23.00
COP at +7 °C with heating water temperature at 45 °C		W/W	3.26
<b>Heating Energy Efficiency class at 35 °C (from A+++ to D)</b>			<b>A+++</b>
<b>Ɖsh (LOT1) <sup>1)</sup></b>		<b>%</b>	<b>193</b>
Dimension	H x Ø	mm	1820 x 690
Shipping weight		kg	99
Water pipe connector			1½
Heating water flow (ΔT=5 K. 35 °C)		m³/h	3.9
<b>Outdoor unit</b>			<b>U-200PZH2E8</b>
Sound pressure		dB(A)	57
Dimension	H x W x D	mm	1500 x 980 x 370
Net weight		kg	117
Pipe diameter	Liquid pipe	Inch (mm)	1/2(12.07)
	Gas pipe	Inch (mm)	3/4(19.05)
Refrigerant (R32) / CO <sub>2</sub> Eq.		kg	4.20 (1.0kg additional gas charge on site)
Pipe length range <sup>2)</sup>		m	30
Elevation difference (in/out)		m	30 (OD above) 30 (OD below)
Pipe length for nominal capacity		m	7.5
Pipe length for additional gas		m	→ 7.5
Additional gas amount		g/m	Refer to manual
Operation range - outdoor ambient	Heat / Cool	°C	-20 ~ +24 / -15 ~ +46
Water outlet	Heat / Cool	°C	25 ~ 45 / 5 ~ 15
<b>PRO-HT Tank RRP</b>		<b>€</b>	<b>5738</b>
<b>Outdoor unit RRP</b>		<b>€</b>	<b>3916</b>

Accessories		RRP €
<b>PAW-VP-RTC5B-PAC</b>	Tank controller for PACi system	<b>1195</b>

Accessories		RRP €
<b>PAW-IU29/39</b>	Additional heater	<b>605/783</b>

1) Seasonal space cooling/heating energy efficiency following COMMISSION REGULATION (EU) 811/2013. 2) The pipe length range is between indoor and outdoor, but does not include additional length for coil.

This product is designed to comply with the European Water Quality Directive 98/83/EC amended by 2015/1787/EU. The lifespan of the product is not guaranteed in the case of the use of groundwater, such as spring water or well water, the use of tap water when salt or other impurities are contained, nor in areas of acidic water quality. Maintenance and warranty costs related to these cases are the customer's responsibility.

Performance calculation in agreement with Eurovent. Sound pressure measured at 1 m from the outdoor unit and at 1,5 m height.


\* Flow switch and water filter are not equipped.

**Technical focus**

- Water volume 380L
- Maximum hot water production 45 °C
- Tank and heat exchanger made with stainless steel
- Heating coil 52 m 316L
- Internal and external pickling
- Foam insulation 70 mm
- Tank material 2 mm 316L
- ABS external case

**Heating and cooling tank 380 L + PACi 20,0 kW**

- Ideal offer for small offices
- Cost saving solution with simple waterborne heating and cooling
- Hot water up to 45 °C

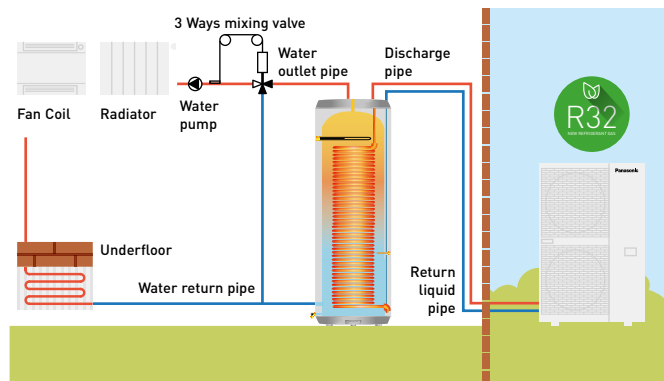

Rating Conditions: Cooling Indoor 27 °C DB / 19 °C WB. Cooling Outdoor 35 °C DB / 24 °C WB. Heating Indoor 20 °C DB. Heating Outdoor 7 °C DB / 6 °C WB. [DB: Dry Bulb, WB: Wet Bulb]. Specifications subject to change without notice. For detailed information about ErP / Energy Labelling, please visit our websites www.aircon.panasonic.eu or www.ptc.panasonic.eu.

## PACi with water heat exchanger - R32

Panasonic introduces highly-efficient water heat exchanger for PACi Series. This ground-breaking product gives further possibilities of PACi solutions by adding hydronic options.

**WATER OUTLET TEMPERATURE**  
Cooling: 5 ~ 15 °C  
Heating: 35 ~ 50 °C



### 1 Cost Saving Solution

- A+++ energy efficiency class (scale from A+++ to D)
- Cost effective water projects thanks to lower cost for PACi compared to VRF


### 2 Space Saving & Flexible Positioning

- 2 installation possibilities (wall-mounted / floor-standing)
- Compact, lightweight unit design, only 27 kg

### 3 Easy Installation, Maintenance

- Quick mounting process
- Flow switch kit is included as a standard
- Direct access to electrical box

#### System example.

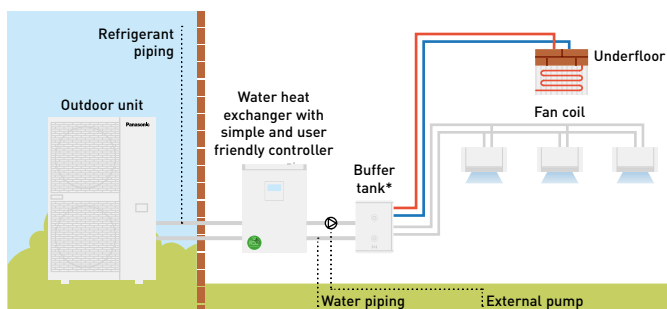

\* Minimum buffer tank volume: 10 L/kW. \*\* Diagram is for illustrative purpose only.

### Space saving and flexible positioning

#### Compact and light unit.


- Only 205 mm depth fits within a limited space
- Lightweight design at only 27 kg, makes it easy to maneuver and position
- Maximum total refrigerant piping length: 90 m\*

\* 90 m for PAW-200W5APAC.



### 2 installation options.

- Wall-mounted and floor-standing installation options are available. Free-up floor space by using the wall-mounted installation
  - Quick mounting process with its lightweight compact design
- Make fixing holes → Fix 2 screws → Hang the unit → Finish

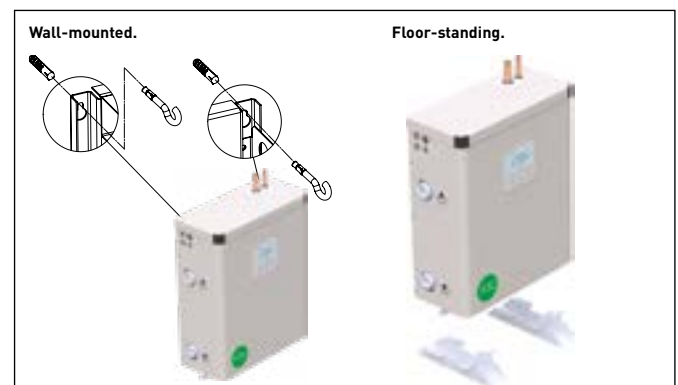

**PACi with water heat exchanger for chilled and hot water production****Short-term investment.**

PACi water heat exchanger is ideal for small offices and retails.

The investment costs can be amortised within a very short period.

This solution allows investors and operators to save money.

			PAW-200W5APAC	PAW-250W5APAC
Cooling capacity <sup>1)</sup>		kW	20,00	25,00
EER <sup>1)</sup>		W/W	3,03	2,89
Heating capacity <sup>2)</sup>		kW	23,00	28,00
COP <sup>2)</sup>		W/W	2,98	2,95
Esh (LOT1) <sup>3)</sup>		%	<b>178</b>	<b>178</b>
<b>Energy efficiency class (Scale A+++ to D) <sup>4)</sup></b>			<b>A+++</b>	<b>A+++</b>
Dimension	H x W x D	mm	550 x 455 x 205	550 x 455 x 205
Net weight		kg	27	27
Water pipe connector		Inch	Male Thread 1 ¼	Male Thread 1 ¼
Cooling water flow (ΔT=5 K. 35 °C)		m³/h	3,45	4,30
Heating water flow (ΔT=5 K. 35 °C)		m³/h	4,15	4,85
Flow switch			Included	Included
Water filter			Included	Included
<b>Outdoor Unit</b>			<b>U-200PZH2E8</b>	<b>U-250PZH2E8</b>
Sound pressure	Cool / Heat (Hi)	dB(A)	59 / 61	59 / 63
Dimension	H x W x D	mm	1500 x 980 x 370	1500 x 980 x 370
Net weight		kg	117	128
Pipe diameter	Liquid pipe	Inch (mm)	3/8 (9,52)	1/2 (12,70)
	Gas pipe	Inch (mm)	1 (25,40)	1 (25,40)
Pipe length range		m	5 ~ 90	5 ~ 60
Elevation difference (in/out)		m	30	30
Pipe length for additional gas		m	30	30
Additional gas amount		g/m	60	80
Water outlet temperature range	Cool Min ~ Max	°C	+5 ~ +15	+5 ~ +15
	Heat Min ~ Max	°C	+35 ~ +50	+35 ~ +50
Operating range	Cool Min ~ Max	°C	-15 ~ +46	-15 ~ +46
	Heat Min ~ Max	°C	-20 ~ +24	-20 ~ +24
<b>Water heat exchanger RRP</b>		€	<b>3984</b>	<b>4279</b>
<b>Outdoor unit RRP</b>		€	<b>3916</b>	<b>4289</b>

1) Data refers to 7 °C leaving chilled water temperature and 35 °C ambient air temperature, according to EN14511 standard. 2) Data refers to 45 °C leaving warm water temperature and 7 °C ambient air temperature according to EN14511 standard. 3) Following COMMISSION REGULATION (EU) No 813/2013 for low-temperature heat pumps. 4) Following COMMISSION REGULATION (EU) No 811/2013 for low-temperature heat pumps. Scale from A+++ to D.

**Professional solution**

Water heat exchanger is compatible with R32 PACi. Many air conditioning manufacturers selling R32 systems and it is becoming the standard refrigerant for split type air conditioning systems because R32 has a much lower global warming potential than R410A and can also provide higher efficiency.



# Solutions for server rooms

High efficiency products for 24/7 applications. Panasonic has developed a complete range of solutions for server rooms which efficiently protect your servers, keeping them at an appropriate temperature even when the outdoor temperature is below -20 °C.



## 1 Designed for 24h/7d a week operation

High efficiency all year round. This wall-mounted air conditioner is designed for professional, critical applications such as computer rooms where reliable cooling inside the room is necessary even when the outside temperature is low.

## 2 High seasonal performance

Highest Energy Rating: A+++ (2,5 to 5,0 kW units). Highly efficient performance - even at -20 °C outside. Uses new R32 refrigerant.

## 3 Server room logic control


PAW-SERVER-PKEA: Group wiring of 2 TKEA systems ensures auto individual control. BMS interface: Panasonic offer different interfaces for integrate to Modbus and BACnet.

## 4 More comfort

Indoor Fan. Cross-Flow-Fan: High durability rolling bearings, large size (φ105 mm) fan. High efficiency blade. Random pitch blade (low sound) Compressor: DC2P Panasonic original compressor, with high efficiency and reliability.

## Exceptional efficiency means exceptional savings


### TKEA provides high capacity at -20 °C!

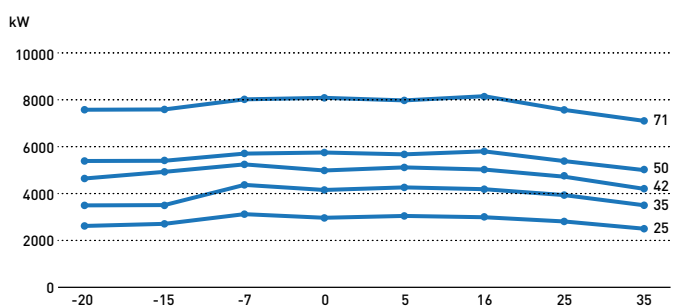

## PAW-SERVER-PKEA Logic


### Rotation operation time line.

Every 12 hours units change operation ON/OFF to increase compressor lifecycle.

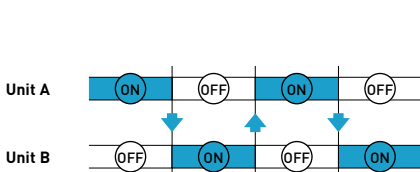


### Backup operation time line.

When unit A has an error, unit B switches on automatically and gives the error output signal.

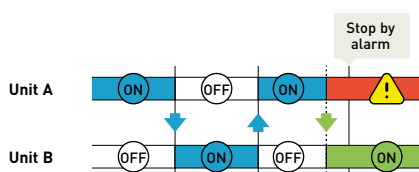

### Support operation time line.

When room temperature rises to than 28 °C, both units work together and automatically give an output error signal.

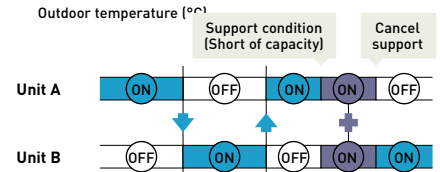





Wall-mounted Professional Inverter -20 °C • R32

High efficiency all the year.

- From 2.5 to 7.1 kW with TKEA units A+++ in cooling
- Backup function
- Redundancy function
- Alternative run function
- Error information by Dry Contact
- Operation even at -20 °C outdoor temperature
- High seasonal performance
- Product design for 24/7 operation

Kit			KIT-Z25-TKEA	KIT-Z35-TKEA	KIT-Z42-TKEA	KIT-Z50-TKEA	KIT-Z71-TKEA
Cooling capacity	Nominal (Min - Max)	kW	2.50 (0.85 - 3.00)	3.50 (0.85 - 4.00)	4.20 (0.98 - 5.00)	5.00 (0.98 - 6.00)	7.10 (0.98 - 8.10)
UK Cooling	(Total - Sensible)	kW	2.49 - 1.90	3.48 - 2.66	4.18 - 3.19	4.66 - 4.25	6.55 - 5.20
EER <sup>1)</sup>	Nominal (Min - Max)	W/W	4.90 (5.00 - 4.29)	4.07 (5.00 - 3.64)	3.82 (4.90 - 3.25)	3.60 (3.50 - 3.09)	3.17 (2.33 - 3.03)
SEER <sup>2)</sup>			<b>8.5 A+++</b>	<b>8.5 A+++</b>	<b>8.5 A+++</b>	<b>8.5 A+++</b>	<b>6.1 A++</b>
Pdesign		kW	2.50	3.50	4.20	5.00	7.10
Input power cooling	Nominal (Min - Max)	kW	0.51 (0.17 - 0.70)	0.86 (0.17 - 1.10)	1.10 (0.20 - 1.54)	1.39 (0.28 - 1.94)	2.24 (0.42 - 2.67)
Annual energy consumption <sup>3)</sup>		kWh/a	103	144	173	206	407
Heating capacity	Nominal (Min - Max)	kW	3.40 (0.85 - 5.40)	4.00 (0.85 - 6.60)	5.40 (0.98 - 7.25)	5.80 (0.98 - 8.00)	8.60 (0.98 - 9.90)
UK Heating		kW	3.33	4.62	5.04	5.62	6.94
Heating capacity at -7 °C		kW	3.33	4.07	4.30	5.00	6.13
COP <sup>1)</sup>	Nominal (Min - Max)	W/W	4.86 (5.15 - 4.12)	4.35 (5.15 - 3.63)	4.00 (4.45 - 3.37)	4.03 (2.88 - 3.20)	3.51 (2.45 - 3.47)
SCOP <sup>2)</sup>			<b>4.5 A+</b>	<b>4.4 A+</b>	<b>4.3 A+</b>	<b>4.4 A+</b>	<b>4.0 A+</b>
Pdesign at -10 °C		kW	2.80	3.60	3.80	4.40	5.50
Input power heating	Nominal (Min - Max)	kW	0.70 (0.17 - 1.31)	0.92 (0.17 - 1.82)	1.35 (0.22 - 2.15)	1.44 (0.34 - 2.50)	2.45 (0.40 - 2.85)
Annual energy consumption <sup>3)</sup>		kWh/a	871	1145	1237	1400	1925
<b>Indoor unit</b>			<b>CS-Z25TKEA</b>	<b>CS-Z35TKEA</b>	<b>CS-Z42TKEA</b>	<b>CS-Z50TKEA</b>	<b>CS-Z71TKEA</b>
Power source		V	230	230	230	230	230
Recommended fuse		A	16	16	16	16	20
Connection indoor / outdoor		mm <sup>2</sup>	4x1.5	4x1.5	4x1.5	4x2.5	4x2.5
Air flow	Cool / Heat	m <sup>3</sup> /min	10.4/11.7	10.7/12.4	18.2/20.2	19.2/21.3	20.2/21.0
Moisture removal volume		L/h	1.5	2.0	2.4	2.8	4.1
Sound pressure <sup>4)</sup>	Cool (Hi / Lo / Q-Lo)	dB(A)	39/25/21	42/28/21	43/32/29	44/37/30	47/38/35
	Heat (Hi / Lo / Q-Lo)	dB(A)	41/27/22	43/30/22	44/35/29	44/37/30	47/38/35
Dimension	HxWxD	mm	295x919x194	295x919x194	302x1120x236	302x1120x236	302x1120x236
Net weight		kg	9	10	12	12	13
Recommended Fuse		A	10	10	16	16	20
<b>Outdoor unit</b>			<b>CU-Z25TKEA</b>	<b>CU-Z35TKEA</b>	<b>CU-Z42TKEA</b>	<b>CU-Z50TKEA</b>	<b>CU-Z71TKEA</b>
Sound pressure <sup>4)</sup>	Cool / Heat (Hi)	dB(A)	46/48	48/50	48/50	48/50	52/54
Dimension <sup>5)</sup>	HxWxD	mm	619x824x299	619x824x299	619x824x299	695x875x320	695x875x320
Net weight		kg	37	38	38	43	49
Pipe diameter	Liquid pipe	Inch (mm)	1/4 (6.35)	1/4 (6.35)	1/4 (6.35)	1/4 (6.35)	1/4 (6.35)
	Gas pipe	Inch (mm)	3/8 (9.52)	3/8 (9.52)	1/2 (12.70)	1/2 (12.70)	5/8 (15.88)
Pipe length range		m	3~20	3~20	3~20	3~30	3~30
Elevation difference (in/out) <sup>6)</sup>		m	15	15	15	15	20
Pipe length for additional gas		m	7.5	7.5	7.5	7.5	10
Additional gas amount		g/m	10	10	10	15	25
Refrigerant [R32] / CO <sub>2</sub> Eq.		kg / T	0.96/0.648	1.00/0.675	1.08/0.729	1.15/0.776	1.32/0.891
Operating range	Cool Min ~ Max	°C	-20 ~ +43	-20 ~ +43	-20 ~ +43	-20 ~ +43	-20 ~ +43
	Heat Min ~ Max	°C	-15 ~ +24	-15 ~ +24	-15 ~ +24	-15 ~ +24	-15 ~ +24
<b>Kit RRP</b>		€	<b>1216</b>	<b>1394</b>	<b>1587</b>	<b>1763</b>	<b>2386</b>
Indoor unit RRP		€	401	451	530	630	868
Outdoor unit RRP		€	815	943	1057	1133	1518

Accessories		RRP €
<b>CZ-TACG1*</b>	Wi-Fi adapter for smart control via Panasonic Comfort Cloud App	120
<b>CZ-CAPRA1*</b>	RAC interface adapter for integration into P-Link	190
<b>PAW-SERVER-PKEA*</b>	PCB for installation in server rooms with security	223

Accessories		RRP €
<b>PAW-WTRAY</b>	Tray for condenser water compatible with outdoor elevation platform	152
<b>PAW-GRDBSE20</b>	Outdoor base ground support for noise and vibration absorption	152
<b>PAW-GRDSTD40</b>	Outdoor elevation platform 400x900x400 mm	152

1) EER and COP calculation is based in accordance to EN14511. 2) Energy Label Scale from A+++ to D. 3) The annual energy consumption is calculated in accordance to EU/626/2011. 4) The sound pressure of the indoor unit shows the value measured of a position 1 m in front of the main body and 0,8 m below the unit. For outdoor unit 1 m in front and 1 m in rear side of main body. The sound pressure is measured in accordance with JIS C 9612. Q-Lo: Quiet mode. Lo: The lowest set fan speed. 5) Add 70 mm for piping port. 6) When installing the outdoor unit at a higher position than the indoor unit.  
 \* Only one of these can be used at a time.



SEER and SCOP: For KIT-Z25-TKEA. SUPER QUIET: For KIT-Z25-TKEA. INTERNET CONTROL: Optional.

## Panasonic ventilation solutions

Increase the efficiency of an installation with the use of AHU ventilation and a wide range of air curtains.



### Electric air curtain

			FY-3009U1	FY-3012U1	FY-3015U1
Width		mm	900	1200	1500
Voltage		V	220	220	220
Air flow	Hi / Lo	m <sup>3</sup> /h	1100/920	1400/1270	2000/1800
Consumption	Hi / Lo	W	76/70	94/85	131/110
Current	Hi / Lo	A	0,35/0,32	0,43/0,40	0,59/0,50
Air speed	Hi / Lo	m/s	10,50/8,50	9,50/8,00	10,50/9,50
Sound pressure		dB(A)	48,5/45,0	48,5/44,5	51,5/48,0
Dimension / Net weight	HxWxD	mm / kg	900x231,5x212/12,0	1200x231,5x212/14,5	1500x231,5x212/18,0
<b>RRP</b>		<b>€</b>	<b>763</b>	<b>868</b>	<b>999</b>



## Air curtain with DX Coil

Outdoor unit			7,1 kW	10,0 kW	14,0 kW	20,0 kW
<b>Air outlet height 2,7 m</b>			<b>PAW-10PAIRC-LS</b>	<b>PAW-15PAIRC-LS</b>	<b>PAW-20PAIRC-LS</b>	<b>PAW-25PAIRC-LS</b>
Cooling capacity <sup>1)</sup>	Max	kW	6,1	9,7	13,0	17,0
Heating capacity <sup>2)</sup>	Max	kW	7,9	12,0	15,0	19,0
Air flow	High	m <sup>3</sup> /h	1800	2700	3600	4500
Heat Exchanger	Volume	L	1,67	2,85	3,94	5,03
Electric consumption fan	230 V / 50Hz	kW	0,30	0,50	0,60	0,80
Current	230 V / 50Hz	A	2,10	3,10	4,10	5,10
Sound pressure <sup>3)</sup>	Max	dB(A)	65	66	67	69
<b>Air outlet height 3,0 m</b>			<b>PAW-10PAIRC-HS</b>	<b>PAW-15PAIRC-HS</b>	<b>PAW-20PAIRC-HS</b>	<b>PAW-25PAIRC-HS</b>
Cooling capacity <sup>1)</sup>	Max	kW	9,1	13,0	19,5	23,7
Heating capacity <sup>2)</sup>	Max	kW	11,8	15,8	23,6	27,6
Air flow	High	m <sup>3</sup> /h	2700	3600	5400	6300
Heat Exchanger	Volume	L	1,67	2,85	3,94	5,12
Electric consumption fan	230 V / 50Hz	kW	0,75	1,00	1,50	1,75
Current	230 V / 50Hz	A	4,10	5,50	8,20	9,60
Sound pressure <sup>3)</sup>	Max	dB(A)	66	67	68	68
<b>Common data</b>						
Dimension <sup>4)</sup>	HxWxD	mm	260 (+140) x 1000 x 460	260 (+140) x 1500 x 460	260 (+140) x 2000 x 460	260 (+140) x 2500 x 460
Net weight	Air outlet height 2,7 m	kg	50	65	80	95
	Air outlet height 3,0 m	kg	55	65	85	110
Fan type			EC	EC	EC	EC
Pipe diameter	Liquid pipe / Gas pipe	Inch (mm)	3/8(9,52) / 5/8(15,88)	3/8(9,52) / 3/4(19,05)	3/8(9,52) / 7/8(22,22)	3/8(9,52) / 7/8(22,22)
Door width		m	1,0	1,5	2,0	2,5
Refrigerant			R32/R410A	R32/R410A	R32/R410A	R32/R410A
<b>RRP air outlet height 2,7 m</b>		€	<b>7595</b>	<b>8859</b>	<b>9989</b>	<b>11192</b>
<b>RRP air outlet height 3,0 m</b>		€	<b>7916</b>	<b>9111</b>	<b>10430</b>	<b>11422</b>

Accessories		RRP €
<b>PAW-AIR1-DP</b>	Optional drain pump	<b>552</b>

1) Cooling capacity DX Coil, air temperature in/out +27/+18 °C, R32 and R410. 2) Heating capacity condenser, air temperature in/out +20/+33 °C, R32 and R410. In the case of lower outdoor temperatures, an outdoor model with higher capacity may be necessary. 3) Measured in distance up to 5,0 m, direction factor 2, absorbing surfaces 200 m<sup>2</sup>, Min / Max air volume. 4) 140 mm is the height of an electrical box if it is installed on the top.

**NEW  
2021**

AHU connection kit		RRP €
<b>PAW-280PAH2</b>	AHU Kit for 3,6 to 25 kW (IP 65, 0-10 V demand control*, outdoor temperature shift compensation, cold draft prevention)	<b>1768</b>
<b>PAW-280PAH2M</b>	AHU Kit for 3,6 to 25 kW (IP 65, 0-10 V demand control)*	<b>1503</b>
<b>PAW-280PAH2L</b>	AHU Kit for 3,6 to 25 kW (IP 65)	<b>1474</b>

AHU connection kit for PACi NX		RRP €
<b>PAW-280PAH3M</b>	<b>NEW</b> AHU Kit for PACi NX 3,6 to 14,0 kW (IP 65, 0-10 V demand control)	<b>TBC</b>

\* With CZ-CAPBC2.



# Accessories and control

## Branch Pipes, Header





 <p><b>Branch pipe.</b> ----- CZ-P224BK2BM 133 €</p>	 <p><b>Branch pipe (from 22,4 kW to 68 kW).</b> ----- CZ-P680BK2BM 133 €</p>	 <p><b>Header.</b> ----- CZ-P3HPC2BM 224 €</p>
---	---	---

## Outdoor accessories

 <p><b>Tray for condenser water compatible with outdoor elevation platform.</b> ----- PAW-WTRAY 152 €</p>	 <p><b>Outdoor elevation platform.</b> Dimension (H x W x D): 400 x 900 x 400 mm ----- PAW-GRDSTD40 152 €</p>	 <p><b>Outdoor base ground support for noise and vibration absorption.</b> Dimension (H x W x D): 200 x 95 x 600 mm Weight: 500 kg ----- PAW-GRDBSE20 152 €</p>
--	--	--

 <p><b>Wind protection shield for U-71PZH2E5/8, U-71PE1E5A/8A and U-100/125PEY1E5/8.</b> ----- PAW-WPH9* TBC €</p>	 <p><b>Wind protection shield for U-100/125/140PZH2E5/8, U-100/125/140PE1E5A/8A and U-140PEY1E8.</b> ----- PAW-WPH7* TBC €</p>
---	---

## Panels

 <p><b>Standard panel for 4 way 90x90 cassette.</b> ----- CZ-KPU3W 216 €</p>	 <p><b>Econavi panel for 4 way 90x90 cassette.</b> ----- CZ-KPU3AW 270 €</p>	 <p><b>Panel for 60x60 cassette size 700 x 700 mm.</b> ----- CZ-KPY3AW 248 €</p> <p><b>Panel for 60x60 cassette size 625 x 625 mm.</b> ----- CZ-KPY3BW 216 €</p>	 <p><b>nanoe X Generator Mark 1 kit for 4 way 90x90 cassette PU2 type.</b> ----- CZ-CNEXU1 158 €</p>
---	---	--	---



Sensors



Econavi energy savings sensor.

CZ-CENSC1

159 €




Remote temperature sensor.

CZ-CSRC3

115 €

Plenums

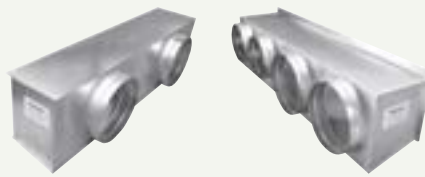

Air inlet plenum for S . .PF1E5B 60 & 71.

CZ-DUMPA90MF2

274 €

Air outlet plenum for S . .PF1E5B 36, 45 & 50 and S-3650PF3E.

CZ-56DAF2

135 €

Air outlet plenum for S-200PE2E5.

CZ-TREMIESPW705

TBC €

Air inlet plenum for S . .PF1E5B 100, 125 & 140.

CZ-DUMPA160MF2

295 €

Air outlet plenum for S . .PF1E5B 60 & 71 and S-6071PF3E.

CZ-90DAF2

203 €

Air outlet plenum for S-250PE2E5.

CZ-TREMIESPW706

TBC €

Air outlet plenum for S . .PF1E5B 100, 125 & 140 and S-1014PF3E.

CZ-160DAF2

271 €

VRF Smart Connectivity+



Remote controller Panasonic Net Con, RH, No PIR, R1/R2.

SER8150R0B1194

384 €

Remote controller Panasonic Net Con, RH, PIR, R1/R2.

SER8150R5B1194

410 €

Wireless ZigBee® Pro module / Green Com card.

VCM8000V5094P

190 €



Hotel Room Expansion Module 14 indoor units.

HRCEP14R

338 €

Hotel Room Controller w/ Display 42 indoor units.

HRCPDG42R

1150 €



Door / window wireless sensor.

SED-WDC-G-5045

221 €



Wall / ceiling (motion) wireless sensor.

SED-MTH-G-5045




221 €

Hotel Room Controller 28 indoor units.

HRCPBG28R

901 €



# Accessories and control

		
<b>CO<sub>2</sub> sensor.</b>	<b>Sensor with room temperature and humidity.</b>	<b>Water leakage sensor.</b>
SED-CO2-G-5045	SED-TRH-G-5045	SED-WLS-G-5045
688 €	204 €	208 €



<b>Cover frame. Silver.</b>	<b>Cover frame. Glossy translucent white.</b>	<b>Cover frame. Dark brown wood.</b>	<b>Cover frame. Brushed steel finish.</b>
FAS-00	FAS-03	FAS-06	FAS-10
42 €	78 €	60 €	78 €
<b>Cover frame. White.</b>	<b>Cover frame. Light tan wood.</b>	<b>Cover frame. Dark black wood.</b>	
FAS-01	FAS-05	FAS-07	
42 €	60 €	60 €	

## Controller and touch controllers for hotels with dry contacts

	
<b>Modbus RS-485 touch room controller with I/O, White.</b>	<b>Modbus RS-485 touch room controller with I/O, Black.</b>
PAW-RE2C4-MOD-WH	PAW-RE2C4-MOD-BK
457 €	457 €
<b>Touch display control with 2 digital inputs, White.</b>	<b>Touch display control with 2 digital inputs, Black.</b>
PAW-RE2D4-WH	PAW-RE2D4-BK
279 €	279 €

## Hotel sensors for dry contacts

			
<b>Wall motion sensor 24 V.</b>	<b>Ceiling motion sensor 24 V.</b>	<b>Power supply 24 V.</b>	<b>Door or window contact.</b>
PAW-WMS-DC	PAW-CMS-DC	PAW-24DC	PAW-DWC
190 €	190 €	68 €	18 €
<b>Wall motion sensor 240 V AC.</b>	<b>Ceiling motion sensor 240 V AC.</b>		
PAW-WMS-AC	PAW-CMS-AC		
190 €	192 €		



Centralised controls



System controller for 64 indoor units with weekly timer.

CZ-64ESMC3

812 €



Central ON/OFF controller, up to 16 groups, 64 indoor units.

CZ-ANC3

473 €



Intelligent controller (touch screen/web server) to control up to 256 indoors with included load distribution ratio (LDR).

CZ-256ESMC3

3237 €

Panasonic AC Smart Cloud



Panasonic AC Smart Cloud. Cloud internet control. Up to 128 groups. Controls 128 units.

CZ-CFUSCC1

1576 €

Accessories interfaces



Modbus Interface for 16 indoors.

PAW-AC2-MBS-16P

2501 €

KNX Interface for 16 indoors.

PAW-AC2-KNX-16P

2501 €

BACnet Interface for 16 indoors.

PAW-AC2-BAC-16P

2501 €

Modbus Interface for 64 indoors.

PAW-AC2-MBS-64P

3615 €

KNX Interface for 64 indoors.

PAW-AC2-KNX-64P

3615 €

BACnet Interface for 64 indoors.

PAW-AC2-BAC-64P

3615 €

Modbus Interface for 128 indoors.

PAW-AC2-MBS-128P

4838 €

BACnet Interface for 128 indoors.

PAW-AC2-BAC-128P

4838 €



Commercial Wi-Fi Adaptor.

CZ-CAPWFC1

264 €



KNX Interface.

PAW-RC2-KNX-1i

388 €



Modbus Interface.

PAW-RC2-MBS-1

388 €







Modbus interface to control 4 indoor/groups.

PAW-RC2-MBS-4

883 €









# Accessories and control

 <p><b>Modbus RTU to TCP gateway.</b></p> <p>----- PAW-MBS-TCP2RTU                      1059 €</p>	 <p><b>BACnet Interface.</b></p> <p>----- PAW-RC2-BAC-1                      615 €</p>	 <p><b>Wi-Fi adapter for smart control via Panasonic Comfort Cloud App.</b></p> <p>----- CZ-TACG1                      120 €</p>	 <p><b>RAC interface adapter for integration into P-Link, plus external input and alarm/status output.</b></p> <p>----- CZ-CAPRA1                      190 €</p>
---	---	--	---

## Centralised controls. Connection with 3rd party controller

 <p><b>Serial parallel device controlling outdoor units, up to 4 units.</b></p> <p>----- CZ-CAPDC2*                      633 €</p>	 <p><b>Adaptor for ON/OFF control of external devices.</b></p> <p>----- CZ-CAPC3                      350 €</p>	 <p><b>Mini series parallel device controlling indoor units, maximum 1 group and 8 indoor unit.</b></p> <p>----- CZ-CAPBC2*                      242 €</p>	 <p><b>Communication Adaptor. Up to 128 groups. Controls 128 units.</b></p> <p>----- CZ-CFUNC2                      1262 €</p>
---	--	--	---

## Individual controls

 <p><b>CONEX wired remote controller (non-wireless).</b></p> <p>----- CZ-RTC6                      148 €</p>	 <p><b>CONEX wired remote controller with Bluetooth®.</b></p> <p>----- CZ-RTC6BL                      177 €</p>	 <p><b>CONEX wired remote controller with Wi-Fi and Bluetooth®.</b></p> <p>----- CZ-RTC6BLW**                      250 €</p>	 <p><b>Design wired remote controller with Econavi function and datanavi.</b></p> <p>----- CZ-RTC5B                      129 €</p>
 <p><b>Infrared remote controller for 4 way 90x90 cassette.</b></p> <p>----- CZ-RWS3 + CZ-RWU3W                      292 €</p>	 <p><b>Infrared remote controller for wall-mounted and 4 Way 60x60 with panel.</b></p> <p>----- CZ-RWS3                      97 €</p>	 <p><b>Infrared remote controller for ceiling.</b></p> <p>----- CZ-RWS3 + CZ-RWRT3                      €</p>	 <p><b>Infrared remote controller for all indoor units.</b></p> <p>----- CZ-RWS3 + CZ-RWRC3                      298 €</p>





Accessories PCB



T10 interface PCB with digital and relay connections.

PAW-T10

102 €



PCB for server room application, control of 3 PACi units, redundancy, backup, etc.

PAW-PACR3\*

1905 €



Redundancy of 2 units PKEA or TKEA.

PAW-SERVER-PKEA

223 €

Accessories cables



Cable for all the T10 functions.

CZ-T10

52 €



Cable to operate external EC fan.

PAW-FDC

52 €



Cable for all option monitoring signals.

PAW-OCT

52 €

Cable with force thermo OFF/leakage detection.

PAW-EXCT

52 €

PRO-HT Tank accessories

Tank controller for PACi system.

PAW-VP-RTC5B-PAC

1195 €

Additional heater.

PAW-IU29/39

605/783 €

\* Not compatible with PACi NX Series.  
 \*\* Only compatible with PACi NX Series.

**ECO*i* EX**  
EXCEEDS

*ECO*i**

**ECO G**



















## Commercial VRF Systems

Professional solutions for commercial projects. Panasonic VRF System is specifically designed for energy saving, easy installation and high efficiency performance, with a wide choice of outdoor and indoor unit models and unique features which are designed for the most demanding offices and big buildings.

<b>VRF outdoor units range</b>	→ 108
Mini ECOi LZ2 Series R32	→ 110
Mini ECOi LE Series R410A	→ 114
2-Pipe ECOi EX ME2 Series	→ 118
3-Pipe ECOi EX MF3 Series	→ 124
2-Pipe ECO G GE3 Series	→ 130
3-Pipe ECO G GF3 Series	→ 133
Panasonic GHP/EHP Hybrid System	→ 134
Water heat exchanger for chilled and hot water production	→ 136
<b>ECOi and ECO G systems indoor units range</b>	→ 138
U2 Type 4 way 90x90 cassette • R32/R410A	→ 141
Y2 Type 4 way 60x60 cassette • R32/R410A	→ 142
L1 Type 2 way cassette • R410A	→ 143
D1 Type 1 way cassette • R410A	→ 144
F3 Type variable static pressure adaptive duct • R410A	→ 145
M1 Type slim variable static pressure hide-away concealed duct • R32/R410A	→ 146
E2 Type high static pressure hide-away • R410A	→ 147
Heat recovery with DX Coil • R410A	→ 148
T2 Type ceiling • R410A	→ 149
K2 Type wall-mounted • R32/R410A	→ 150
G1 Type floor console • R410A	→ 151
P1 Type floor-standing • R410A	→ 152
R1 Type concealed floor-standing • R410A	→ 152
Hydrokit for ECOi, water at 45 °C • R410A	→ 153
<b>VRF Smart Connectivity+</b>	→ 113
Panasonic AC Smart Cloud	→ 117
Slim 3-Pipe Control Box Kit / Multiple connection type	→ 126
Bringing nature's balance indoors	→ 140
PRO-HT Tank DHW	→ 154
BMS interface with P-Link	→ 155
Fan coils	→ 156
Panasonic ventilation solutions	→ 160
Control and connectivity	→ 162
Accessories and control	→ 164
Dimensions and tube sizes of branches and headers	→ 172

# VRF outdoor units range

Page	Outdoor units	4 HP	5 HP	6 HP	8 HP	10 HP	12 HP
P. 110	<b>NEW</b> Mini ECOi LZ2 Series • R32	 U-4LZ2E5 / U-4LZ2E8	 U-5LZ2E5 / U-5LZ2E8	 U-6LZ2E5 / U-6LZ2E8	 U-8LZ2E8	 U-10LZ2E8	
P. 114	Mini ECOi LE2 / LE1 Series	 U-4LE2E5 / U-4LE2E8	 U-5LE2E5 / U-5LE2E8	 U-6LE2E5 / U-6LE2E8	 U-8LE1E8	 U-10LE1E8	
P. 118	2-Pipe ECOi EX ME2 Series				 U-8ME2E8	 U-10ME2E8	 U-12ME2E8
P. 124	3-Pipe ECOi EX MF3 Series				 U-8MF3E8	 U-10MF3E8	 U-12MF3E8
P. 130	2-Pipe ECO G GE3 Series						
P. 133	3-Pipe ECO G GF3 Series						
P. 134	GHP/EHP Hybrid System						



14 HP

16 HP

18 HP

20 HP

25 HP

30 HP



U-14ME2E8



U-16ME2E8



U-18ME2E8



U-20ME2E8



U-14MF3E8

U-16MF3E8



U-16GE3E5



U-20GE3E5



U-25GE3E5



U-30GE3E5



U-16GF3E5



U-20GF3E5



U-25GF3E5



U-20GES3E5 / U-10MES2E8

# New Mini ECOi LZ2 Series R32

ECO *i*

For light commercial & residential use. The most flexible VRF system ever. Meeting the needs of light commercial applications.



**1 Low GWP and less refrigerant**  
The new Mini ECOi LZ2 Series utilizes environmentally friendly R32 refrigerant, reducing the total amount of refrigerant by 20 % and more, resulting in lower GWP, reduced by 75 %\*.

\* As a result of applying R32 while at the same time reducing the total refrigerant amount.

**2 Outstanding efficiency at most challenging ambient conditions**  
Re-engineered for better efficiency, the LZ2 series produces extraordinary savings with SEER levels up to 8,5 and SCOP levels up to 5,05 (for 4 HP model). The large range of outdoor units from 12 kW to 28 kW can also work at extreme ambient temperatures, down to -20 °C in heating and up to 52 °C in cooling, providing a very wide range of operating ability.

**3 More flexibility for your project**  
The ECOi LZ2 series provides ease of installation with long piping lengths and small footprints in a lightweight body. A variety of indoor units, supporting an optional refrigerant leak detector, increases the options for installers. A wide range of individual and central controllers, the new generation Smart and Service Cloud as well as apps for end users and installers provide a fully customizable monitoring and controlling solution.

**WIDE OPERATING RANGE**  
-20 °C in heating to  
52 °C in cooling

**8.5** | **5.05**  
**SEER** | **SCOP**  
**EXTRAORDINARY SAVINGS**

## ECOi LZ2 mini VRF series from 12 to 28 kW

- Low GWP and -20 % less refrigerant
- Improved connectivity with CONEX remote controllers and app support, Smart and Service Cloud applications along with a wide range of communication protocols for BMS integration
- Increased indoor/outdoor capacity ratio up to 150 %
- Quiet mode operation with low capacity drop
- Same Panasonic DNA with Panasonic compressors and precise temperature control due to discharge temperature sensors in the indoor units
- Improving protection 24/7 with nanoe™ X integrated indoor units



**NEW Mini ECOi LZ2 Series 4 to 6 HP • R32**

Outstanding efficiency in a compact body and continuous operation even at extreme ambient temperatures.



**NEW  
2021**

Available  
Mar 21

HP			4 HP	5 HP	6 HP	4 HP	5 HP	6 HP
<b>Outdoor units</b>			<b>U-4LZ2E5</b>	<b>U-5LZ2E5</b>	<b>U-6LZ2E5</b>	<b>U-4LZ2E8</b>	<b>U-5LZ2E8</b>	<b>U-6LZ2E8</b>
Power supply	Voltage	V	220 - 230 - 240	220 - 230 - 240	220 - 230 - 240	380 - 400 - 415	380 - 400 - 415	380 - 400 - 415
	Phase		Single phase	Single phase	Single phase	Three phase	Three phase	Three phase
	Frequency	Hz	50	50	50	50	50	50
Cooling capacity		kW	12.1	14.0	15.5	12.1	14.0	15.5
<b>EER</b> <sup>1)</sup>		W/W	4.53	4.12	3.88	4.53	4.12	3.88
<b>SEER</b> <sup>2)</sup>			<b>8.50</b>	<b>8.12</b>	<b>7.71</b>	<b>8.50</b>	<b>8.12</b>	<b>7.71</b>
Running current cooling		A	13.30 - 12.80 - 12.20	16.90 - 16.20 - 15.50	19.60 - 18.70 - 18.00	4.37 - 4.15 - 4.00	5.50 - 5.23 - 5.04	6.44 - 6.12 - 5.89
Input power cooling		kW	2.67	3.40	4.00	2.67	3.40	4.00
Heating capacity		kW	12.5	16.0	16.5	12.5	16.0	16.5
<b>COP</b> <sup>1)</sup>		W/W	5.27	4.71	4.42	5.27	4.71	4.42
<b>SCOP</b> <sup>2)</sup>			<b>5.05</b>	<b>4.61</b>	<b>4.59</b>	<b>5.05</b>	<b>4.61</b>	<b>4.59</b>
Running current heating		A	12.00 - 11.40 - 11.00	16.90 - 16.20 - 15.50	18.50 - 17.70 - 17.00	3.91 - 3.71 - 3.58	5.50 - 5.22 - 5.03	6.02 - 5.72 - 5.51
Input power heating		kW	2.37	3.40	3.73	2.37	3.40	3.73
Starting current		A	1.0	1.0	1.0	1.0	1.0	1.0
Maximum current		A	19.6	23.7	26.5	7.2	9.2	9.9
Recommended Fuse		A	25	30	35	15	15	15
Maximum input power		kW	3.92 - 4.10 - 4.28	4.76 - 4.98 - 5.19	5.41 - 5.66 - 5.90	4.40 - 4.63 - 4.80	5.69 - 5.99 - 6.22	6.15 - 6.47 - 6.72
Maximum number of connectable indoor units <sup>3)</sup>			7(10)	8(12)	9(12)	7(10)	8(12)	9(12)
External static pressure		Pa	0 ~ 35	0 ~ 35	0 ~ 35	0 ~ 35	0 ~ 35	0 ~ 35
Air flow		m <sup>3</sup> /min	69	72	74	69	72	74
Sound pressure	Cool	dB(A)	52	53	54	52	53	54
	Cool (Silent1/2/3/4)	dB(A)	49/47/45	50/48/46	51/49/47	49/47/45	50/48/46	51/49/47
	Heat	dB(A)	54	56	56	54	56	56
Sound power	Cool / Heat	dB(A)	69/72	70/74	72/75	69/72	70/74	72/75
Dimension	H x W x D	mm	996 x 980 x 370	996 x 980 x 370	996 x 980 x 370	996 x 980 x 370	996 x 980 x 370	996 x 980 x 370
Net weight		kg	94	94	94	94	94	94
Pipe diameter	Liquid pipe	Inch (mm)	3/8(9.52)	3/8(9.52)	3/8(9.52)	3/8(9.52)	3/8(9.52)	3/8(9.52)
	Gas pipe	Inch (mm)	5/8(15.88)	5/8(15.88)	5/8(15.88)	5/8(15.88)	5/8(15.88)	5/8(15.88)
Maximum piping length (total)		m	90(180)	90(180)	90(180)	90(180)	90(180)	90(180)
Elevation difference (in/out)		m	50(Outdoor unit upper)/ 40(Outdoor unit lower)	50(Outdoor unit upper)/ 40(Outdoor unit lower)	50(Outdoor unit upper)/ 40(Outdoor unit lower)	50(Outdoor unit upper)/ 40(Outdoor unit lower)	50(Outdoor unit upper)/ 40(Outdoor unit lower)	50(Outdoor unit upper)/ 40(Outdoor unit lower)
Refrigerant (R32)		kg	2.7	2.7	2.7	2.7	2.7	2.7
Maximum allowable indoor / outdoor capacity ratio <sup>4)</sup>		%	50 ~ 150(130)	50 ~ 150(130)	50 ~ 150(130)	50 ~ 150(130)	50 ~ 150(130)	50 ~ 150(130)
Operating range	Cool Min ~ Max	°C	-10 ~ 52	-10 ~ 52	-10 ~ 52	-10 ~ 52	-10 ~ 52	-10 ~ 52
	Heat Min ~ Max	°C	-20 ~ 18	-20 ~ 18	-20 ~ 18	-20 ~ 18	-20 ~ 18	-20 ~ 18
<b>RRP</b>		€	<b>4140</b>	<b>4681</b>	<b>5038</b>	<b>4392</b>	<b>4965</b>	<b>5347</b>

1) EER and COP calculation is based in accordance to EN14511. 2) SEER/SCOP is calculated based on the seasonal space cooling/heating efficiency "D" values of the COMMISSION REGULATION (EU) 2016/2281. SEER, SCOP = (D + Correction) × PEF. 3) The number in parenthesis indicates maximum number of connectable indoor unit in case of 1.5kW indoor unit's connection. 4) The number in parenthesis indicates maximum allowed indoor/outdoor capacity ratio in case of 1.5 kW indoor unit's connection.

**Minimum environmental impact**

Panasonic has designed the LZ2 series in order to minimise the environmental impact of the system. Low GWP refrigerant R32 and highest efficiency levels, ensure this through the total operational lifetime.

**For the most challenging spaces**

The new Mini ECOi LZ2 R32 VRF system is the ideal solution to fit into any application thanks to its compact design and long piping length support.

**Technical focus**

- SEER levels up to 8.5 and SCOP levels up to 5.05 (for 4 HP model)
- Continuous operation at extreme ambient temperatures: -20 °C (heating) to 52 °C (cooling)
- Wide range of connectable units
- New and unique indoors with nanoe™ X, with hydroxyl radicals contained in water
- Allowing wide range of installations with and without refrigerant mitigation
- Flexible mitigation measures, with leak detector/alarm to be installed only when required



INTERNET CONTROL: Optional.

Rating Conditions: Cooling Indoor 27 °C DB / 19 °C WB. Cooling Outdoor 35 °C DB / 24 °C WB. Heating Indoor 20 °C DB. Heating Outdoor 7 °C DB / 6 °C WB. (DB: Dry Bulb, WB: Wet Bulb). Specifications subject to change without notice. For detailed information about ErP / Energy Labelling, please visit our websites www.aircon.panasonic.eu or www.ptc.panasonic.eu.

## NEW Mini ECOi LZ2 Series 8 and 10 HP • R32

Introducing the widest range of R32 Mini VRF.

NEW  
2021Available  
Mar 21

HP			8 HP	10 HP
<b>Outdoor units</b>			<b>U-8LZ2E8</b>	<b>U-10LZ2E8</b>
Power supply	Voltage	V	380 - 400 - 415	380 - 400 - 415
	Phase		Three phase	Three phase
	Frequency	Hz	50	50
Cooling capacity		kW	22.4	28.0
<b>EER</b> <sup>1)</sup>		W/W	3.84	3.47
<b>SEER</b> <sup>2)</sup>			<b>7.56</b>	<b>7.08</b>
Running current cooling		A	9.73 - 9.25 - 8.91	13.2 - 12.5 - 12.1
Input power cooling		kW	5.83	8.07
Heating capacity		kW	25.0	28.0
<b>COP</b> <sup>1)</sup>		W/W	4.30	4.47
<b>SCOP</b> <sup>2)</sup>			<b>4.59</b>	<b>4.60</b>
Running current heating		A	9.81 - 9.32 - 8.98	10.5 - 9.93 - 9.57
Input power heating		kW	5.81	6.26
Starting current		A	1.0	1.0
Maximum current		A	13.7	19.5
Recommended Fuse		A	25	30
Maximum input power		kW	8.21 - 8.64 - 8.96	11.9 - 12.6 - 13.0
Maximum number of connectable indoor units <sup>3)</sup>			16	16
External static pressure		Pa	0 ~ 35	0 ~ 35
Air flow		m <sup>3</sup> /min	158	167
Sound pressure	Cool	dB(A)	59.0	60.0
	Cool (Silent 1/2/3/4)	dB(A)	56.0/54.0/52.0	57.0/55.0/53.0
	Heat	dB(A)	—	—
Sound power	Cool / Heat	dB(A)	72 / —	74 / —
Dimension	H x W x D	mm	1500 x 980 x 370	1500 x 980 x 370
Net weight		kg	125	126
Pipe diameter	Liquid pipe	Inch (mm)	3/8 (9.52)	3/8 (9.52)
	Gas pipe	Inch (mm)	3/4 (19.05)	7/8 (22.22)
Maximum piping length (total)		m	100 (300)	100 (300)
Elevation difference (in/out)		m	50 (Outdoor unit upper) / 40 (Outdoor unit lower)	50 (Outdoor unit upper) / 40 (Outdoor unit lower)
Refrigerant (R32)		kg	4.9	5.1
Maximum allowable indoor / outdoor capacity ratio <sup>4)</sup>		%	50 ~ 150 (130)	50 ~ 150 (130)
Operating range	Cool Min ~ Max	°C	-10 - 52	-10 - 52
	Heat Min ~ Max	°C	-20 - 18	-20 - 18
<b>RRP</b>		€	<b>7092</b>	<b>7960</b>

1) EER and COP calculation is based in accordance to EN14511. 2) SEER/SCOP is calculated based on the seasonal space cooling/heating efficiency "D" values of the COMMISSION REGULATION (EU) 2016/2281. SEER, SCOP = (D + Correction) × PEFCF. 3) The number in parenthesis indicates maximum number of connectable indoor unit in case of 1.5kW indoor unit's connection. 4) The number in parenthesis indicates maximum allowed indoor/outdoor capacity ratio in case of 1.5 kW indoor unit's connection.

### Perfect fit for small to medium size projects

8 and 10 HP LZ2 Mini VRF units bring in the total benefits of a VRF system in a smaller application. You can enjoy advanced individual and central VRF control options including the revolutionary Panasonic AC Smart Cloud and AC Service Cloud.

### For the most difficult conditions

New ECOi LZ2 series are able to operate at the hardest conditions from -20 °C up to +52 °C providing continuous and efficient, heating and cooling for your space all year long.

### Technical focus

- SEER levels up to 7.56 and SCOP levels up to 4.59 (for 8 HP model)
- Continuous operation at extreme ambient temperatures: -20 °C (heating) to 52 °C (cooling)
- Widest range of connectable units in R32 VRF
- New and unique indoors with nanoe™ X, with hydroxyl radicals contained in water
- Allowing wide range of installations with and without refrigerant mitigation
- Flexible mitigation measures, with leak detector/alarm to be installed only when required



INTERNET CONTROL: Optional.





# VRF Smart Connectivity+

The future of Control.

VRF Smart Connectivity+ offers efficient energy management and a new air conditioning control solution with high IAQ (Indoor Air Quality).



<p><b>Energy Management System for Rooms</b></p>	<p>Each room is monitored by high-precision sensors, making it possible to make every room's temperature comfortable without wasting energy.</p>
<p><b>Management System for the Entire Building</b></p>	<p>A Building Energy Management System (BEMS) can also be connected for Plug &amp; Play centralised control of the building's entire energy consumption.</p>


## Connect to the future. VRF Smart Connectivity+

Through thorough energy management, Panasonic's VRF Smart Connectivity+ is a completely new, state-of-the-art solution providing energy saving and comfort as well as simple installation, operation and running.

Panasonic, passionately pursuing the ultimate in energy saving through the application of cutting-edge technology, and Schneider Electric, an advanced global energy management specialist offering innovative control systems. This collaboration has set the new standard for creating the next generation of contemporary buildings.

## Smart connectivity devices

	<p><b>Door/window sensor.</b> SED-WDC-G-5045</p>		<p><b>Wall/ceiling motion/temperature/humidity sensor.</b> SED-MTH-G-5045</p>
	<p><b>CO<sub>2</sub> temperature/humidity sensor.</b> SED-CO2-G-5045</p>		<p><b>Water leakage sensor.</b> SED-WLS-G-5045</p>

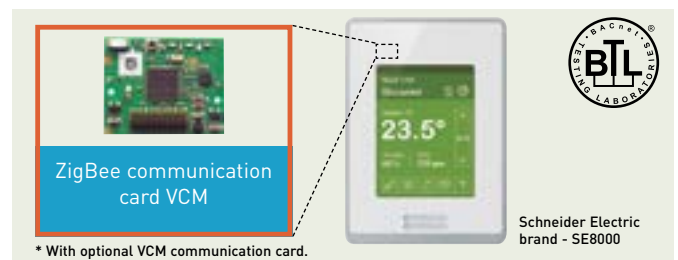

## Features

- Up to 5-year battery life batteries included
- Battery life of CO<sub>2</sub> sensor up to 10-year.
- Battery level is a data point
- Sensor points visible when SE8000 is integrated via BACnet MS/TP
- Sensor status and battery level visible when SE8150 is integrated via ZigBee® Pro
- Integration to BMS only recommended when each MPM is connected to Ethernet and set as a ZigBee® Coordinator node

# Mini ECOi LE Series R410A

ECO *i*

For light commercial & residential use. The most flexible VRF system ever. Meeting the needs of light commercial applications.



## 1 Efficiency energy control

Upgraded outdoor units deliver high efficiency rating and reduced energy costs.

## 2 Space saving

Ideal for commercial locations with limited space such as banks and shops. Compact units integrate easily and discreetly into building design.

## 3 Flexible installation

Reduced installation time thanks to compact units and extra long piping without additional refrigeration charge. High external static pressure 35Pa and small chassis increase installation options.



**7.9** | **4.9\***  
SEER | SCOP  
**INDUSTRY LEADING EFFICIENCY**



**6.4\***  
SEER  
**4.3**  
SCOP

### Compact design: LE2 Series - 4 / 5 / 6 HP

- Extraordinary energy saving: 7.9 SEER and 4.9 SCOP (4 HP)\*
- 50 m piping length without additional refrigerant charge
- Quiet operation mode with 4 levels
- High COP mode option

### LE1 Series - 8 / 10 HP

- 60 % smaller than ECOi ME2 8 / 10 HP with vertical flow type
- Flexible piping length (Total: 300 m, Furthest: 150 m)
- Maximum number of connectable indoor units: 15

\* SEER/SCOP is calculated based on the seasonal space cooling/heating efficiency "η" values of the COMMISSION REGULATION (EU) 2016/2281. SEER, SCOP = (η + Correction) × PEF.

### Key features for LE2 / LE1.

**High external static pressure 35Pa — Full range of ECOi indoor units and controllers — Variable evaporation temperature control as standard — Connectable maximum indoor / outdoor capacity ratio up to 130 % — Auto restart from outdoor units — Demand response (Peak cut) by optional parts — Suitable for R22 renewable projects**



## Mini ECOi LE2 Series High Efficiency 4 to 6 HP • R410A

**Panasonic Mini ECOi. Extraordinary energy-saving.**  
The most compact ECOi system ever.



HP			4 HP	5 HP	6 HP	4 HP	5 HP	6 HP
<b>Outdoor units</b>			<b>U-4LE2E5</b>	<b>U-5LE2E5</b>	<b>U-6LE2E5</b>	<b>U-4LE2E8</b>	<b>U-5LE2E8</b>	<b>U-6LE2E8</b>
Power supply	Voltage	V	220 - 230 - 240	220 - 230 - 240	220 - 230 - 240	380 - 400 - 415	380 - 400 - 415	380 - 400 - 415
	Phase		Single phase	Single phase	Single phase	Three phase	Three phase	Three phase
	Frequency	Hz	50	50	50	50	50	50
Cooling capacity		kW	12.1	14.0	15.5	12.1	14.0	15.5
<b>EER<sup>1)</sup></b>		W/W	4.50	4.06	3.73	4.50	4.06	3.73
<b>SEER<sup>2)</sup></b>			<b>7.9</b>	<b>7.5</b>	<b>7.3</b>	<b>7.9</b>	<b>7.5</b>	<b>7.3</b>
Running current cooling		A	13.30 - 12.70 - 12.20	16.30 - 15.60 - 17.00	20.30 - 19.40 - 18.60	4.39 - 4.17 - 4.02	5.58 - 5.30 - 5.11	6.71 - 6.37 - 6.14
Input power cooling		kW	2.69	3.45	4.15	2.69	3.45	4.15
Heating capacity		kW	12.5	16.0	16.5	12.5	16.0	16.5
<b>COP<sup>1)</sup></b>		W/W	5.19	4.60	4.27	5.19	4.60	4.27
<b>SCOP<sup>2)</sup></b>			<b>4.9</b>	<b>4.4</b>	<b>4.2</b>	<b>4.9</b>	<b>4.4</b>	<b>4.2</b>
Running current heating		A	12.20 - 11.60 - 11.20	17.60 - 16.80 - 16.10	19.10 - 18.20 - 17.50	3.98 - 3.78 - 3.64	5.62 - 5.34 - 5.14	6.24 - 5.93 - 5.71
Input power heating		kW	2.41	3.48	3.86	2.41	3.48	3.86
Recommended Fuse		A	25	32	32			
Starting current		A	1.00	1.00	1.00	1.00	1.00	1.00
Maximum current		A	17.30	24.30	27.40	7.90	10.10	10.70
Maximum input power		kW	3.50 - 3.66 - 3.82	4.92 - 5.14 - 5.37	5.61 - 5.86 - 6.12	4.34 - 5.09 - 5.28	6.25 - 6.55 - 6.82	6.62 - 6.97 - 7.23
Maximum number of connectable indoor units <sup>3)</sup>			7(10)	8(10)	9(12)	7(10)	8(10)	9(12)
External static pressure		Pa	0 ~ 35	0 ~ 35	0 ~ 35	0 ~ 35	0 ~ 35	0 ~ 35
Air flow		m <sup>3</sup> /min	69	72	74	69	72	74
Sound pressure	Cool	dB(A)	52	53	54	52	53	53
	Cool (Silent 1/2/3/4)	dB(A)	50.5/49/47/45	51.5/50/48/46	52.5/51/48/46	50.5/49/49/47	48.5/50/48/46	48.5/50/48/46
	Heat	dB(A)	54	56	56	54	56	56
Sound power	Cool / Heat	dB(A)	69/72	71/75	73/75	69/72	71/75	73/75
Dimension	H x W x D	mm	996 x 980 x 370	996 x 980 x 370	996 x 980 x 370	996 x 980 x 370	996 x 980 x 370	996 x 980 x 370
Net weight		kg	106	106	106	106	106	106
Pipe diameter	Liquid pipe	Inch (mm)	3/8(9.52)	3/8(9.52)	3/8(9.52)	3/8(9.52)	3/8(9.52)	3/8(9.52)
	Gas pipe	Inch (mm)	5/8(15.88)	5/8(15.88)	5/8(15.88)	5/8(15.88)	5/8(15.88)	5/8(15.88)
Maximum piping length (total)		m	150(180)	150(180)	150(180)	150(180)	150(180)	150(180)
Elevation difference (in/out)		m	50(Outdoor unit upper)/ 40(Outdoor unit lower)	50(Outdoor unit upper)/ 40(Outdoor unit lower)	50(Outdoor unit upper)/ 40(Outdoor unit lower)	50(Outdoor unit upper)/ 40(Outdoor unit lower)	50(Outdoor unit upper)/ 40(Outdoor unit lower)	50(Outdoor unit upper)/ 40(Outdoor unit lower)
Refrigerant (R410A) / CO <sub>2</sub> Eq.		kg / T	6.70(14.40)/ 13.9896	6.70(14.40)/ 13.9896	6.70(14.40)/ 13.9896	6.70(14.40)/ 13.9896	6.70(14.40)/ 13.9896	6.70(14.40)/ 13.9896
Maximum allowable indoor / outdoor capacity ratio		%	50 ~ 130	50 ~ 130	50 ~ 130	50 ~ 130	50 ~ 130	50 ~ 130
Operating range	Cool Min ~ Max	°C	-10 ~ +46	-10 ~ +46	-10 ~ +46	-10 ~ +46	-10 ~ +46	-10 ~ +46
	Heat Min ~ Max	°C	-20 ~ +18	-20 ~ +18	-20 ~ +18	-20 ~ +18	-20 ~ +18	-20 ~ +18
<b>RRP</b>		€	<b>4140</b>	<b>4681</b>	<b>5038</b>	<b>4392</b>	<b>4965</b>	<b>5347</b>

1) EER and COP calculation is based in accordance to EN14511. 2) SEER/SCOP is calculated based on the seasonal space cooling/heating efficiency "D" values of the COMMISSION REGULATION (EU) 2016/2281. SEER, SCOP = (D + Correction) × PEf. 3) In case of 1.5 kW indoor unit's connection, able to connect maximum 12 indoor units.

### For light commercial use

Mini ECOi allows easier installation in condominiums and medium sized buildings with limited spaces. Utilising R410A and DC inverter technology, Panasonic offers VRF to a new and growing market.

### Reduced height of 996 mm

In addition to raising efficiency, the outdoor unit has been designed to be as compact as possible. It can now be installed in places that were previously too small.

### Technical focus

- Outstanding SEER and SCOP
- Better efficiency even compared to 2 fan outdoor units
- 50 m piping length free of refrigeration charge
- High static pressure 35Pa
- High COP mode selectable with maintenance remote controller
- Selectable silent mode



INTERNET CONTROL: Optional.

Rating Conditions: Cooling Indoor 27 °C DB / 19 °C WB, Cooling Outdoor 35 °C DB / 24 °C WB, Heating Indoor 20 °C DB, Heating Outdoor 7 °C DB / 6 °C WB. (DB: Dry Bulb, WB: Wet Bulb). Specifications subject to change without notice. For detailed information about ErP / Energy Labelling, please visit our websites [www.aircon.panasonic.eu](http://www.aircon.panasonic.eu) or [www.ptc.panasonic.eu](http://www.ptc.panasonic.eu).



## Mini ECOi LE1 Series High Efficiency 8 and 10 HP • R410A



### Prepare to be blown away by Panasonic's Mini VRF system.

The Mini VRF compact system is the ideal solution for minimum outdoor space. Panasonic extends the Mini VRF range by 8 and 10 HP units.

HP			8 HP	10 HP
<b>Outdoor units</b>			<b>U-8LE1E8</b>	<b>U-10LE1E8</b>
Power supply	Voltage	V	380 - 400 - 415	380 - 400 - 415
	Phase		Three phase	Three phase
	Frequency	Hz	50	50
Cooling capacity		kW	22.4	28.0
<b>EER</b> <sup>1)</sup>		W/W	3.80	3.11
<b>SEER</b> <sup>2)</sup>			<b>6.3</b>	<b>6.4</b>
Running current cooling		A	9.60 - 9.15 - 8.80	14.70 - 14.00 - 13.50
Input power cooling		kW	5.89	9.00
Heating capacity		kW	25.0	28.0
<b>COP</b> <sup>1)</sup>		W/W	4.02	3.93
<b>SCOP</b> <sup>2)</sup>			<b>4.2</b>	<b>4.3</b>
Running current heating		A	10.20 - 9.65 - 9.30	11.60 - 11.10 - 10.70
Input power heating		kW	6.22	7.13
Recommended Fuse		A	16 per phase	25 per phase
Starting current		A	1.00	1.00
Maximum current		A	13.70	19.60
Maximum input power		kW	9.16	13.10
Maximum number of connectable indoor units <sup>3)</sup>			15	15
External static pressure		Pa	0 ~ 35	0 ~ 35
Air flow		m <sup>3</sup> /min	150	160
Sound pressure	Cool	dB(A)	60	63
	Cool (Silent 1/2/3/4)	dB(A)	57/55/53	60/58/56
	Heat	dB(A)	64	65
Sound power	Cool / Heat	dB(A)	81/85	84/86
Dimension	H x W x D	mm	1500 x 980 x 370	1500 x 980 x 370
Net weight		kg	132	133
Pipe diameter	Liquid pipe	Inch (mm)	3/8(9.52) <sup>4)</sup> /1/2(12.70) <sup>5)</sup>	3/8(9.52) <sup>4)</sup> /1/2(12.70) <sup>5)</sup>
	Gas pipe	Inch (mm)	3/4(19.05) <sup>4)</sup> /7/8(22.22) <sup>5)</sup>	7/8(22.22) <sup>4)</sup> /1(25.40) <sup>5)</sup>
Maximum piping length (total)		m	7.5 - 150(7.5 - 300)	7.5 - 150(7.5 - 300)
Elevation difference (in/out)		m	50(Outdoor unit upper)/40(Outdoor unit lower)	50(Outdoor unit upper)/40(Outdoor unit lower)
Refrigerant (R410A) / CO <sub>2</sub> Eq.		kg / T	6.30(24.00)/13.1544	6.60(24.00)/13.7808
Maximum allowable indoor / outdoor capacity ratio		%	50 ~ 130	50 ~ 130
Operating range	Cool Min ~ Max	°C	-10 ~ +46	-10 ~ +46
	Heat Min ~ Max	°C	-20 ~ +18	-20 ~ +18
<b>RRP</b>		€	<b>7092</b>	<b>7960</b>

1) EER and COP calculation is based in accordance to EN14511. 2) SEER/SCOP is calculated based on the seasonal space cooling/heating efficiency "D" values of the COMMISSION REGULATION (EU) 2016/2281. SEER, SCOP = (D + Correction) × PEF. 3) If the heating utilized, it is necessary to increase 1 size with respect to the main liquid pipe, depending on the combination of the indoor unit. 4) Under 90 m for ultimate indoor unit. 5) Over 90 m for ultimate indoor unit. If the longest piping equivalent length exceeds 90 m, increase the sizes of the main tubes by 1 rank for gas and liquid pipes.

### Increase external static pressure

When unit is installed on a narrow balcony, the fence at front side will be the obstacle. High external static pressure will overcome this obstacle and maintain operation capacity.

### High ambient temperature performance

Cooling operation range up to 46 °C. The system can maintain the rated (100 %) capacity up to 40 °C by 8 HP model & up to 37 °C by 10 HP model.

### Technical focus

- Piping flexibility with 150 m maximum length
- High efficiency
- 15 indoor units connectable
- Quiet operation mode (one of the lowest in the market)
- High ambient temp performance
- High static pressure 35Pa



INTERNET CONTROL: Optional.





# Panasonic AC Smart Cloud

With Panasonic AC Smart Cloud, have your business under control, and start saving!



## Flexible solution and scalable solution

- Energy saving
- Zero downtime
- Site(s) management

Centralise control of your business premises, from wherever you are, 24/7/365. It doesn't matter how many sites you have, or where they are! The AC Smart Cloud system from Panasonic allows you to have complete control of all your installations from your tablet or from your computer. In a simple click, all your units from several locations, receive status updates in real-time of all your installations, reducing potential breakdowns and optimizing costs.

### Flexible solution for your business



Every time



Everywhere



Multiplatform




Internet browser

### Scalable solution for your business




Small to large



1 to multi sites



Upgrade features\*



PACi / ECOi / ECO G


\* Customized to meet user demand / Continuous upgrades: new functions and product introductions / IT smart management.

## Panasonic AC Smart Cloud offers continuous improvement always thinking about users


### E-CUT function

E-CUT functions are newly available in Panasonic AC Smart Cloud. 5 energy saving settings reduces automatically its energy consumption.

**1. Set temperature auto return.**  
When you want to return to the set temperature after a certain time even if the temperature is changed.




**2. Unattended auto shut off.**  
When you want to operate outside of a schedule but to monitor and stop automatically.

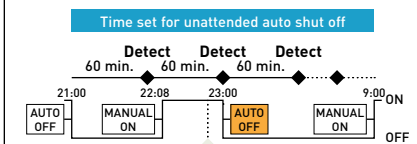

### 3. Set temperature range limit.

When you want to limit the temperatures that can be set.




Reduced consumption of electricity or gas by over cooling.

Set temperature restricted to the range between 26 °C and 30 °C.


### 4. Energy saving timer / Efficient operation setting.

Specify time slots when you want operation capacity reduced.

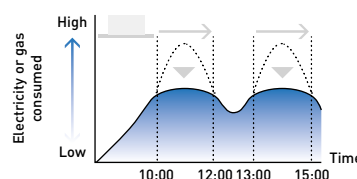

### 5. Demand / peak shaving settings/ Peak cut settings.

Specify time slots when you want operation capacity of the outdoor units reduced.

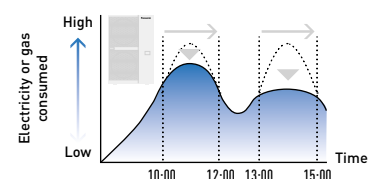

## Panasonic AC Smart Cloud parts lists

\* Cloud service fee is additionally required. Please contact an authorized Panasonic dealer.  
1) Please contact an authorized Panasonic dealer.

CF-CFUSCC1

AC Smart Cloud communication adaptor. Up to 128 groups. 128 units control

## 2-Pipe ECOi EX ME2 Series



Energy saving performance, powerful operation, reliability and comfort surpassing anything previously possible.



### High performance at extreme conditions

ECOi EX is highly reliable, with strong cooling and heating power, even when operating at extreme ambient temperatures. The units can operate at 100 % of capacity at 43 °C, reaching a great cooling operation up to 52 °C and in heating -25 °C.

Also, the ECOi EX features include Bluefin in newly designed heat exchanger improving efficiency as well in marine ambient. A silicone coated PCB (Printed Circuit Board) protects the unit from being damaged by environmental factors such as moisture and dust.

### Superior flexibility

With its up to 1000 meters of pipeline, its maximum 30 meters height difference between indoor units and maximum 90 meters between outdoor unit and indoor unit, the design possibilities have grown exponentially making the ECOi EX the ideal air conditioning option for expansive buildings, such as train stations, airports, schools or hospitals. These advantages are enhanced with the wide range of indoor unit models and capacities facilitating the perfect adaptation to all kind of projects. The careful selection of controls and peripherals such as the Pump Down, the AHU and/or the chiller, enables an optimum system use. Maximum allowable indoor / outdoor connected capacity ratio of up to 200 %.

**VRF with outstanding energy saving performance and powerful operation SEER 7,56 (18 HP model).**

### Outstanding efficiency and comfort

The ECOi EX system is designed to increase energy efficiency by delivering high SEER rating, as well as high efficiency for part-load operations.

The system has reduced energy costs thanks to "All-Inverter Compressors", with independent control to deliver highly flexible performance. Also, the ECOi EX features an enlarged heat exchanger with triple surfaces that allow for improved heat transfer and a newly designed curved air discharge bell-mouth for better aerodynamics. The three-stage oil recovery design makes it able to minimise the frequency of forced oil recovery, leading to reduced energy costs and sustained comfort.

**Remarkable improvement on key components: extraordinary energy saving performance and redesigned for smooth and better air discharge.**



Enlarged heat exchanger surface area with triple surface.



Multiple large-capacity all inverter compressors (more than 14 HP).



Newly designed curved air discharge bell mouth for better aerodynamics.

\* For 8 and 10 HP unit, the heat exchanger is 2 row design.



2-Pipe ECOi EX ME2 Series



**A VRF system delivering energy-saving performance, powerful operation, reliability and comfort surpassing anything previously possible. It represents a true paradigm shift in air conditioning solutions.**

VRF with outstanding energy-saving performance and powerful operation SEER 7.6 (18 HP model).

			8 HP	10 HP	12 HP	14 HP	16 HP	18 HP	20 HP
Outdoor units			U-8ME2E8	U-10ME2E8	U-12ME2E8	U-14ME2E8	U-16ME2E8	U-18ME2E8	U-20ME2E8
Power supply	Voltage	V	380-400-415	380-400-415	380-400-415	380-400-415	380-400-415	380-400-415	380-400-415
	Phase		Three phase	Three phase	Three phase	Three phase	Three phase	Three phase	Three phase
	Frequency	Hz	50	50	50	50	50	50	50
Cooling capacity		kW	22.4	28.0	33.5	40.0	45.0	50.0	56.0
EER <sup>1)</sup>		W/W	4.70	4.37	3.96	3.88	3.52	3.52	3.35
ESEER		W/W	9.33	8.67	7.94	7.73	7.19	6.95	6.18
SEER <sup>2)</sup>			<b>7.4</b>	<b>6.8</b>	<b>6.7</b>	<b>7.2</b>	<b>6.4</b>	<b>7.6</b>	<b>7.0</b>
Running current cooling		A	7.40/7.14	10.20/9.80	13.00/12.50	16.50/15.90	20.10/19.40	22.00/21.20	25.40/24.50
Input power cooling		kW	4.77	6.41	8.47	10.30	12.80	14.20	16.70
Heating capacity		kW	25.0	31.5	37.5	45.0	50.0	56.0	63.0
COP <sup>1)</sup>		W/W	5.13	4.76	4.73	4.56	4.42	4.38	3.94
SCOP <sup>2)</sup>			<b>4.8</b>	<b>4.3</b>	<b>4.7</b>	<b>4.3</b>	<b>4.1</b>	<b>4.3</b>	<b>4.1</b>
Running current heating		A	7.56/7.29	10.50/11.10	12.30/11.80	15.80/15.20	17.90/17.30	20.10/19.40	24.60/23.70
Input power heating		kW	4.87	6.62	7.92	9.86	11.30	12.80	16.00
Recommended Fuse		A	16	20	25	32	32	40	40
Starting current		A	1.00	1.00	1.00	2.00	2.00	2.00	2.00
External static pressure (Max)		Pa	80	80	80	80	80	80	80
Air flow		m <sup>3</sup> /min	224	224	232	232	232	405	405
Sound pressure	Normal mode	dB(A)	54	56	59	60	61	59	60
	Silent mode	dB(A)	51	53	56	57	58	56	57
Sound power	Normal mode	dB(A)	75	77	80	81	82	80	81
Dimension	HxWxD	mm	1842x770 x1000	1842x770 x1000	1842x1180 x1000	1842x1180 x1000	1842x1180 x1000	1842x1540 x1000	1842x1540 x1000
Net weight		kg	210	210	270	315	315	375	375
Pipe diameter <sup>3)</sup>	Liquid pipe	Inch (mm)	3/8(9.52)/ 1/2(12.70)	3/8(9.52)/ 1/2(12.70)	1/2(12.70)/ 5/8(15.88)	1/2(12.70)/ 5/8(15.88)	1/2(12.70)/ 5/8(15.88)	5/8(15.88)/ 3/4(19.05)	5/8(15.88)/ 3/4(19.05)
	Gas pipe	Inch (mm)	3/4(19.05)/ 7/8(22.22)	7/8(22.22)/ 1(25.40)	1(25.40)/ 1-1/8(28.58)	1(25.40)/ 1-1/8(28.58)	1-1/8(28.58)/ 1-1/4(31.75)	1-1/8(28.58)/ 1-1/4(31.75)	1-1/8(28.58)/ 1-1/4(31.75)
	Balance pipe	Inch (mm)	1/4(6.35)	1/4(6.35)	1/4(6.35)	1/4(6.35)	1/4(6.35)	1/4(6.35)	1/4(6.35)
Refrigerant (R410A) / CO <sub>2</sub> Eq		kg/T	5.60/11.6928	5.60/11.6928	8.30/17.3304	8.30/17.3304	8.30/17.3304	9.50/19.836	9.50/19.836
Maximum allowable indoor / outdoor capacity ratio % <sup>4)</sup>			50 ~ 130 [200]	50 ~ 130 [200]	50 ~ 130 [200]	50 ~ 130 [200]	50 ~ 130 [200]	50 ~ 130 [200]	50 ~ 130 [200]
Operating range	Cool Min ~ Max	°C	-10 ~ +52	-10 ~ +52	-10 ~ +52	-10 ~ +52	-10 ~ +52	-10 ~ +52	-10 ~ +52
	Heat Min ~ Max	°C	-25 ~ +18	-25 ~ +18	-25 ~ +18	-25 ~ +18	-25 ~ +18	-25 ~ +18	-25 ~ +18
RRP		€	<b>7882</b>	<b>8933</b>	<b>10360</b>	<b>12194</b>	<b>13481</b>	<b>14627</b>	<b>16240</b>

1) EER and COP calculation is based in accordance to EN14511. 2) SEER/SCOP is calculated based on the seasonal space cooling/heating efficiency "D" values of the COMMISSION REGULATION (EU) 2016/2281. SEER, SCOP = (D + Correction) × PEF. 3) Pipe diameter under 90 m for ultimate indoor unit / over 90 m for ultimate indoor unit (if the longest piping equivalent length exceeds 90 m, increase the sizes of the main tubes by 1 rank for gas tubes and liquid tubes). 4) If the following conditions are satisfied, the effective range is above 130 % and below 200 %: A. Obey the limited number of connectable indoor units. B. The lower limit of operating range for heating outdoor temperature is limited to -10 °C WB (standard -25 °C WB). C. Simultaneous operation is limited to less than 130 % of connectable indoor units.

Technical focus

- New twin rotary inverter compressor
- High performance at extreme conditions
- Outstanding efficiency and comfort
- Extraordinary partial load and SEER/SCOP
- SEER and SCOP following to EN-14825
- Oil recovery intelligent control
- Top comfort
- Superior flexibility
- Bluefin full line up EX
- Extremely high capacity at -20 °C and unique heating capacity at -25 °C
- Smooth exhaust flow by new bell-mouth





## 2-Pipe ECOi EX ME2 Series High Efficiency model combination from 18 to 28 HP

			18 HP	20 HP	22 HP	24 HP	26 HP	28 HP
Model name			U-8ME2E8	U-10ME2E8	U-10ME2E8	U-12ME2E8	U-10ME2E8	U-12ME2E8
			U-10ME2E8	U-10ME2E8	U-12ME2E8	U-12ME2E8	U-16ME2E8	U-16ME2E8
Power supply	Voltage	V	380-400-415	380-400-415	380-400-415	380-400-415	380-400-415	380-400-415
	Phase		Three phase	Three phase	Three phase	Three phase	Three phase	Three phase
	Frequency	Hz	50	50	50	50	50	50
Cooling capacity		kW	50.0	56.0	61.5	68.0	73.0	78.5
EER <sup>1)</sup>		W/W	4.55	4.38	4.13	3.93	3.80	3.69
Running current cooling		A	17.30/16.60	20.30/19.60	23.10/22.30	26.60/25.60	30.10/29.00	33.10/31.90
Input power cooling		kW	11.00	12.80	14.90	17.30	19.20	21.30
Heating capacity		kW	56.0	63.0	69.0	76.5	81.5	87.5
COP <sup>1)</sup>		W/W	4.96	4.77	4.76	4.69	4.55	4.56
Running current heating		A	17.70/17.10	20.90/20.20	22.70/21.90	25.30/24.40	28.40/27.40	30.10/29.00
Input power heating		kW	11.30	13.20	14.50	16.30	17.90	19.20
Recommended Fuse		A		20, 20	20, 25	25, 25	20, 32	25, 32
Starting current		A	2.00	2.00	2.00	2.00	3.00	3.00
External static pressure (Max)		Pa	80	80	80	80	80	80
Air flow		m <sup>3</sup> /min	448	448	456	464	456	464
Sound pressure	Normal	dB(A)	58.50	59.00	61.00	62.00	62.50	63.50
	Silent mode	dB(A)	55.50	56.00	58.00	59.00	59.50	60.50
Sound power	Normal mode	dB(A)	79.50	80.00	82.00	83.00	83.50	84.50
Dimension / Net weight	HxWxD	mm / kg	1842x1600 x1000/420	1842x1600 x1000/420	1842x2010 x1000/480	1842x2420 x1000/540	1842x2010 x1000/535	1842x2420 x1000/585
	Pipe diameter <sup>2)</sup>							
Pipe diameter <sup>2)</sup>	Liquid pipe	Inch (mm)	5/8(15.88)/ 3/4(19.05)	5/8(15.88)/ 3/4(19.05)	5/8(15.88)/ 3/4(19.05)	5/8(15.88)/ 3/4(19.05)	3/4(19.05)/ 7/8(22.22)	3/4(19.05)/ 7/8(22.22)
	Gas pipe	Inch (mm)	1-1/8(28.58)/ 1-1/4(31.75)	1-1/8(28.58)/ 1-1/4(31.75)	1-1/8(28.58)/ 1-1/4(31.75)	1-1/8(28.58)/ 1-1/4(31.75)	1-1/4(31.75)/ 1-1/2(38.10)	1-1/4(31.75)/ 1-1/2(38.10)
	Balance pipe	Inch (mm)	1/4(6.35)	1/4(6.35)	1/4(6.35)	1/4(6.35)	1/4(6.35)	1/4(6.35)
Refrigerant (R410A) / CO <sub>2</sub> Eq.		kg / T	11.20/23.3856	11.20/23.3856	13.90/29.0232	16.60/34.6608	13.90/29.0232	16.60/34.6608
Maximum allowable indoor / outdoor capacity ratio % <sup>3)</sup>			50 ~ 130(200)	50 ~ 130(200)	50 ~ 130(200)	50 ~ 130(200)	50 ~ 130(200)	50 ~ 130(200)
Operating range	Cool Min ~ Max	°C	-10 ~ +52	-10 ~ +52	-10 ~ +52	-10 ~ +52	-10 ~ +52	-10 ~ +52
	Heat Min ~ Max	°C	-25 ~ +18	-25 ~ +18	-25 ~ +18	-25 ~ +18	-25 ~ +18	-25 ~ +18
RRP		€	16,815	17,866	19,293	20,720	22,414	23,841

## 2-Pipe ECOi EX ME2 Series High Efficiency model combination from 30 to 40 HP

			30 HP	32 HP	34 HP	36 HP	38 HP	40 HP
Model name			U-14ME2E8	U-16ME2E8	U-10ME2E8	U-12ME2E8	U-10ME2E8	U-12ME2E8
			U-16ME2E8	U-16ME2E8	U-12ME2E8	U-12ME2E8	U-12ME2E8	U-16ME2E8
Power supply	Voltage	V	380-400-415	380-400-415	380-400-415	380-400-415	380-400-415	380-400-415
	Phase		Three phase	Three phase	Three phase	Three phase	Three phase	Three phase
	Frequency	Hz	50	50	50	50	50	50
Cooling capacity		kW	85.0	90.0	96.0	101.0	107.0	113.0
EER <sup>1)</sup>		W/W	3.68	3.52	4.05	3.95	3.84	3.75
Running current cooling		A	36.60/35.30	40.20/38.70	36.80/35.50	39.30/37.90	43.80/42.20	46.70/45.00
Input power cooling		kW	23.10	25.60	23.70	25.60	27.90	30.10
Heating capacity		kW	95.0	100.0	108.0	113.0	119.0	127.0
COP <sup>1)</sup>		W/W	4.48	4.42	4.72	4.73	4.61	4.57
Running current heating		A	33.60/32.40	35.80/34.60	35.90/34.60	37.10/35.80	40.50/39.00	43.60/42.00
Input power heating		kW	21.20	22.60	22.90	23.90	25.80	27.80
Recommended Fuse		A	32, 32	32, 32	20, 25, 25	25, 25, 25	20, 25, 32	25, 25, 32
Starting current		A	4.00	4.00	3.00	3.00	4.00	4.00
External static pressure (Max)		Pa	80	80	80	80	80	80
Air flow		m <sup>3</sup> /min	464	464	688	696	688	696
Sound pressure	Normal	dB(A)	63.50	64.00	63.00	64.00	64.00	64.50
	Silent mode	dB(A)	60.50	61.00	60.00	61.00	61.00	61.50
Sound power	Normal mode	dB(A)	84.50	85.00	84.00	85.00	85.00	85.50
Dimension / Net weight	HxWxD	mm / kg	1842x2420 x1000/630	1842x2420 x1000/630	1842x3250 x1000/750	1842x3660 x1000/810	1842x3250 x1000/795	1842x3660 x1000/855
	Pipe diameter <sup>2)</sup>							
Pipe diameter <sup>2)</sup>	Liquid pipe	Inch (mm)	3/4(19.05)/ 7/8(22.22)	3/4(19.05)/ 7/8(22.22)	3/4(19.05)/ 7/8(22.22)	3/4(19.05)/ 7/8(22.22)	3/4(19.05)/ 7/8(22.22)	3/4(19.05)/ 7/8(22.22)
	Gas pipe	Inch (mm)	1-1/4(31.75)/ 1-1/2(38.10)	1-1/4(31.75)/ 1-1/2(38.10)	1-1/4(31.75)/ 1-1/2(38.10)	1-1/2(38.10)/ 1-5/8(41.28)	1-1/2(38.10)/ 1-5/8(41.28)	1-1/2(38.10)/ 1-5/8(41.28)
	Balance pipe	Inch (mm)	1/4(6.35)	1/4(6.35)	1/4(6.35)	1/4(6.35)	1/4(6.35)	1/4(6.35)
Refrigerant (R410A) / CO <sub>2</sub> Eq.		kg / T	16.60/34.6608	16.60/34.6608	22.20/46.3536	24.90/51.9912	22.20/46.3536	24.90/46.3536
Maximum allowable indoor / outdoor capacity ratio % <sup>3)</sup>			50 ~ 130(200)	50 ~ 130(200)	50 ~ 130(200)	50 ~ 130(200)	50 ~ 130(200)	50 ~ 130(200)
Operating range	Cool Min ~ Max	°C	-10 ~ +52	-10 ~ +52	-10 ~ +52	-10 ~ +52	-10 ~ +52	-10 ~ +52
	Heat Min ~ Max	°C	-25 ~ +18	-25 ~ +18	-25 ~ +18	-25 ~ +18	-25 ~ +18	-25 ~ +18
RRP		€	25,675	26,962	29,653	3,080	32,774	34,201

Data is for reference. 1) EER and COP calculation is based in accordance to EN14511. 2) Pipe diameter under 90 m for ultimate indoor unit / over 90 m for ultimate indoor unit (if the longest piping equivalent length exceeds 90 m, increase the sizes of the main tubes by 1 rank for gas tubes and liquid tubes). 3) If the following conditions are satisfied, the effective range is above 130 % and below 200 %: A. Obey the limited number of connectable indoor units. B. The lower limit of operating range for heating outdoor temperature is limited to -10 °C WB (standard -25 °C WB). C. Simultaneous operation is limited to less than 130 % of connectable indoor units.





## 2-Pipe ECOi EX ME2 Series High Efficiency model combination from 42 to 52 HP

			42 HP	44 HP	46 HP	48 HP	50 HP	52 HP	
			U-10ME2E8	U-12ME2E8	U-14ME2E8	U-16ME2E8	U-10ME2E8	U-12ME2E8	
			U-16ME2E8	U-16ME2E8	U-16ME2E8	U-16ME2E8	U-12ME2E8	U-12ME2E8	
			U-16ME2E8	U-16ME2E8	U-16ME2E8	U-16ME2E8	U-12ME2E8	U-16ME2E8	
Model name	U-10ME2E8	U-12ME2E8	U-14ME2E8	U-16ME2E8	U-16ME2E8	U-16ME2E8	U-16ME2E8	U-12ME2E8	U-12ME2E8
	U-16ME2E8	U-16ME2E8	U-16ME2E8	U-16ME2E8	U-16ME2E8	U-16ME2E8	U-12ME2E8	U-12ME2E8	U-16ME2E8
	U-16ME2E8	U-16ME2E8	U-16ME2E8	U-16ME2E8	U-16ME2E8	U-16ME2E8	U-12ME2E8	U-16ME2E8	
Power supply	Voltage	V	380-400-415	380-400-415	380-400-415	380-400-415	380-400-415	380-400-415	380-400-415
	Phase		Three phase	Three phase	Three phase	Three phase	Three phase	Three phase	Three phase
	Frequency	Hz	50	50	50	50	50	50	50
Cooling capacity		kW	118.0	124.0	130.0	135.0	140.0	145.0	
EER <sup>1)</sup>		W/W	3.69	3.62	3.62	3.52	3.87	3.82	
Running current cooling		A	50.20/48.40	53.20/51.30	56.90/54.90	60.20/58.10	56.20/54.20	59.00/56.80	
Input power cooling		kW	32.00	34.30	35.90	38.40	36.20	38.00	
Heating capacity		kW	132.0	138.0	145.0	150.0	155.0	160.0	
COP <sup>1)</sup>		W/W	4.49	4.50	4.46	4.42	4.65	4.66	
Running current heating		A	46.60/44.90	48.20/46.40	51.50/49.70	53.80/51.80	52.20/50.40	53.80/51.90	
Input power heating		kW	29.40	30.70	32.50	33.90	33.30	34.30	
Recommended Fuse		A	20, 32, 32	25, 32, 32	32, 32, 32	32, 32, 32	20, 25, 25, 32	25, 25, 25, 32	
Starting current		A	5,00	5,00	6,00	6,00	5,00	5,00	
External static pressure (Max)		Pa	80	80	80	80	80	80	
Air flow		m <sup>3</sup> /min	688	696	696	696	920	928	
Sound pressure	Normal	dB(A)	65.00	65.50	65.50	66.00	65.50	66.00	
	Silent mode	dB(A)	62.00	62.50	62.50	63.00	62.50	63.00	
Sound power	Normal mode	dB(A)	86.00	86.50	86.50	87.00	86.50	87.00	
Dimension / Net weight	H x W x D	mm / kg	1842 x 3250 x 1000 / 840	1842 x 3660 x 1000 / 900	1842 x 3660 x 1000 / 945	1842 x 3660 x 1000 / 945	1842 x 4490 x 1000 / 1065	1842 x 4900 x 1000 / 1125	
	Liquid pipe	Inch (mm)	3/4(19.05)/7/8(22.22)	3/4(19.05)/7/8(22.22)	3/4(19.05)/7/8(22.22)	3/4(19.05)/7/8(22.22)	3/4(19.05)/7/8(22.22)	3/4(19.05)/7/8(22.22)	
Pipe diameter <sup>2)</sup>	Gas pipe	Inch (mm)	1-1/2(38.10)/1-5/8(41.28)	1-1/2(38.10)/1-5/8(41.28)	1-1/2(38.10)/1-5/8(41.28)	1-1/2(38.10)/1-5/8(41.28)	1-1/2(38.10)/1-5/8(41.28)	1-1/2(38.10)/1-5/8(41.28)	
	Balance pipe	Inch (mm)	1/4(6.35)	1/4(6.35)	1/4(6.35)	1/4(6.35)	1/4(6.35)	1/4(6.35)	
Refrigerant (R410A) / CO <sub>2</sub> Eq.		kg / T	22.20/51.9912	24.90/51.9912	24.90/51.9912	24.90/51.9912	30.50/63.6840	33.20/69.3216	
Maximum allowable indoor / outdoor capacity ratio % <sup>3)</sup>			50 ~ 130(200)	50 ~ 130(200)	50 ~ 130(200)	50 ~ 130(200)	50 ~ 130(200)	50 ~ 130(200)	
Operating range	Cool Min ~ Max	°C	-10 ~ +52	-10 ~ +52	-10 ~ +52	-10 ~ +52	-10 ~ +52	-10 ~ +52	
	Heat Min ~ Max	°C	-25 ~ +18	-25 ~ +18	-25 ~ +18	-25 ~ +18	-25 ~ +18	-25 ~ +18	
RRP		€	35,895	37,322	39,156	40,443	43,134	44,561	

## 2-Pipe ECOi EX ME2 Series High Efficiency model combination from 54 to 64 HP

			54 HP	56 HP	58 HP	60 HP	62 HP	64 HP
			U-10ME2E8	U-12ME2E8	U-10ME2E8	U-12ME2E8	U-14ME2E8	U-16ME2E8
			U-12ME2E8	U-12ME2E8	U-16ME2E8	U-16ME2E8	U-16ME2E8	U-16ME2E8
			U-16ME2E8	U-16ME2E8	U-16ME2E8	U-16ME2E8	U-16ME2E8	U-16ME2E8
Model name	U-10ME2E8	U-12ME2E8	U-10ME2E8	U-12ME2E8	U-16ME2E8	U-16ME2E8	U-16ME2E8	U-16ME2E8
	U-12ME2E8	U-12ME2E8	U-16ME2E8	U-16ME2E8	U-16ME2E8	U-16ME2E8	U-16ME2E8	U-16ME2E8
	U-16ME2E8	U-16ME2E8	U-16ME2E8	U-16ME2E8	U-16ME2E8	U-16ME2E8	U-16ME2E8	U-16ME2E8
Power supply	Voltage	V	380-400-415	380-400-415	380-400-415	380-400-415	380-400-415	380-400-415
	Phase		Three phase	Three phase	Three phase	Three phase	Three phase	Three phase
	Frequency	Hz	50	50	50	50	50	50
Cooling capacity		kW	151.0	156.0	162.0	168.0	174.0	180.0
EER <sup>1)</sup>		W/W	3.75	3.71	3.65	3.60	3.60	3.52
Running current cooling		A	63.20/60.90	65.30/63.00	69.70/67.10	73.30/70.60	75.80/73.00	80.30/77.40
Input power cooling		kW	40.30	42.10	44.40	46.70	48.30	51.20
Heating capacity		kW	169.0	175.0	182.0	189.0	195.0	201.0
COP <sup>1)</sup>		W/W	4.56	4.56	4.47	4.47	4.45	4.42
Running current heating		A	58.80/56.70	60.20/58.10	64.60/62.20	67.10/64.70	69.50/67.00	72.20/69.60
Input power heating		kW	37.10	38.40	40.70	42.30	43.80	45.50
Recommended Fuse		A	20, 25, 32, 32	25, 25, 32, 32	20, 32, 32, 32	25, 32, 32, 32	32, 32, 32, 32	32, 32, 32, 32
Starting current		A	6,00	6,00	7,00	7,00	8,00	8,00
External static pressure (Max)		Pa	80	80	80	80	80	80
Air flow		m <sup>3</sup> /min	920	928	920	928	928	928
Sound pressure	Normal	dB(A)	66,00	66,50	66,50	67,00	67,00	67,00
	Silent mode	dB(A)	63,00	63,50	63,50	64,00	64,00	64,00
Sound power	Normal mode	dB(A)	87,00	87,50	87,50	88,00	88,00	88,00
Dimension / Net weight	H x W x D	mm / kg	1842 x 4490 x 1000 / 1110	1842 x 4900 x 1000 / 1170	1842 x 4490 x 1000 / 1155	1842 x 4900 x 1000 / 1215	1842 x 4900 x 1000 / 1260	1842 x 4900 x 1000 / 1260
	Liquid pipe	Inch (mm)	3/4(19.05)/7/8(22.22)	3/4(19.05)/7/8(22.22)	3/4(19.05)/7/8(22.22)	3/4(19.05)/7/8(22.22)	3/4(19.05)/7/8(22.22)	3/4(19.05)/7/8(22.22)
Pipe diameter <sup>2)</sup>	Gas pipe	Inch (mm)	1-1/2(38.10)/1-5/8(41.28)	1-1/2(38.10)/1-5/8(41.28)	1-1/2(38.10)/1-5/8(41.28)	1-1/2(38.10)/1-5/8(41.28)	1-5/8(41.28)/1-3/4(44.45)	1-5/8(41.28)/1-3/4(44.45)
	Balance pipe	Inch (mm)	1/4(6.35)	1/4(6.35)	1/4(6.35)	1/4(6.35)	1/4(6.35)	1/4(6.35)
Refrigerant (R410A) / CO <sub>2</sub> Eq.		kg / T	30.50/63.6840	33.20/69.3216	30.50/63.6840	33.20/69.3216	33.20/69.3216	33.20/69.3216
Maximum allowable indoor / outdoor capacity ratio % <sup>3)</sup>			50 ~ 130(200)	50 ~ 130(200)	50 ~ 130(200)	50 ~ 130(200)	50 ~ 130(200)	50 ~ 130(200)
Operating range	Cool Min ~ Max	°C	-10 ~ +52	-10 ~ +52	-10 ~ +52	-10 ~ +52	-10 ~ +52	-10 ~ +52
	Heat Min ~ Max	°C	-25 ~ +18	-25 ~ +18	-25 ~ +18	-25 ~ +18	-25 ~ +18	-25 ~ +18
RRP		€	46,255	47,682	49,376	50,803	52,637	53,924

Data is for reference. 1) EER and COP calculation is based in accordance to EN14511. 2) Pipe diameter under 90 m for ultimate indoor unit / over 90 m for ultimate indoor unit (if the longest piping equivalent length exceeds 90 m, increase the sizes of the main tubes by 1 rank for gas tubes and liquid tubes). 3) If the following conditions are satisfied, the effective range is above 130 % and below 200 %: A. Obey the limited number of connectable indoor units. B. The lower limit of operating range for heating outdoor temperature is limited to -10 °C WB (standard -25 °C WB). C. Simultaneous operation is limited to less than 130 % of connectable indoor units.

Rating Conditions: Cooling Indoor 27 °C DB / 19 °C WB. Cooling Outdoor 35 °C DB / 24 °C WB. Heating Indoor 20 °C DB. Heating Outdoor 7 °C DB / 6 °C WB. [DB: Dry Bulb; WB: Wet Bulb]. Specifications subject to change without notice. For detailed information about ErP / Energy Labelling, please visit our websites [www.aircon.panasonic.eu](http://www.aircon.panasonic.eu) or [www.ptc.panasonic.eu](http://www.ptc.panasonic.eu).



## 2-Pipe ECOi EX ME2 Series Space Saving Model Combination from 22 to 34 HP

			22 HP	24 HP	26 HP	28 HP	30 HP	32 HP	34 HP
Model name			U-10ME2E8	U-12ME2E8	U-10ME2E8	U-12ME2E8	U-14ME2E8	U-16ME2E8	U-14ME2E8
			U-12ME2E8	U-12ME2E8	U-16ME2E8	U-16ME2E8	U-16ME2E8	U-16ME2E8	U-20ME2E8
Power supply	Voltage	V	380-400-415	380-400-415	380-400-415	380-400-415	380-400-415	380-400-415	380-400-415
	Phase		Three phase	Three phase	Three phase	Three phase	Three phase	Three phase	Three phase
	Frequency	Hz	50	50	50	50	50	50	50
Cooling capacity		kW	61.5	68.0	73.0	78.5	85.0	90.0	96.0
EER <sup>1)</sup>		W/W	4.13	3.93	3.80	3.69	3.68	3.52	3.56
SEER <sup>2)</sup>			<b>6.90</b>	<b>6.86</b>	<b>6.62</b>	<b>6.60</b>	<b>6.88</b>	<b>6.55</b>	<b>7.21</b>
Running current cooling		A	23.10/22.30	26.60/25.60	30.10/29.00	33.10/31.90	36.60/35.30	40.20/38.70	41.90/40.40
Input power cooling		kW	14.90	17.30	19.20	21.30	23.10	25.60	27.00
Heating capacity		kW	69.0	76.5	81.5	87.5	93.0	100.0	108.0
COP <sup>1)</sup>		W/W	4.76	4.69	4.55	4.56	4.48	4.42	4.17
SCOP <sup>2)</sup>			<b>4.53</b>	<b>4.78</b>	<b>4.16</b>	<b>4.29</b>	<b>4.13</b>	<b>4.09</b>	<b>4.14</b>
Running current heating		A	22.70/21.90	25.30/24.40	28.40/27.40	30.10/29.00	33.60/32.40	35.80/34.60	40.60/39.20
Input power heating		kW	14.50	16.30	17.90	19.20	21.20	22.60	25.90
Starting current		A	2.00	2.00	3.00	3.00	4.00	4.00	4.00
External static pressure (Max)		Pa	80	80	80	80	80	80	80
Air flow		m <sup>3</sup> /min	456	464	456	464	464	464	637
Sound pressure	Normal / Silent mode	dB(A)	61.00/58.00	62.00/59.00	62.50/59.50	63.50/60.50	63.50/60.50	64.00/61.00	63.00/60.00
Sound power	Normal mode	dB(A)	82.00	83.00	83.50	84.50	84.50	85.00	84.00
Dimension / Net weight	HxWxD	mm / kg	1842x2010 x1000/480	1842x2420 x1000/540	1842x2010 x1000/525	1842x2420 x1000/585	1842x2420 x1000/630	1842x2420 x1000/630	1842x2780 x1000/690
Pipe diameter <sup>3)</sup>	Liquid pipe	Inch (mm)	5/8(15.88)/ 3/4(19.05)	5/8(15.88)/ 3/4(19.05)	3/4(19.05)/ 7/8(22.22)	3/4(19.05)/ 7/8(22.22)	3/4(19.05)/ 7/8(22.22)	3/4(19.05)/ 7/8(22.22)	3/4(19.05)/ 7/8(22.22)
	Gas pipe	Inch (mm)	1-1/8(28.58)/ 1-1/4(31.75)	1-1/8(28.58)/ 1-1/4(31.75)	1-1/4(31.75)/ 1-1/2(38.10)	1-1/4(31.75)/ 1-1/2(38.10)	1-1/4(31.75)/ 1-1/2(38.10)	1-1/4(31.75)/ 1-1/2(38.10)	1-1/4(31.75)/ 1-1/2(38.10)
	Balance pipe	Inch (mm)	1/4(6.35)	1/4(6.35)	1/4(6.35)	1/4(6.35)	1/4(6.35)	1/4(6.35)	1/4(6.35)
Refrigerant (R410A) / CO <sub>2</sub> Eq.		kg / T	13.90/23.3856	16.60/34.6608	13.90/29.0232	16.60/34.6608	16.60/34.6608	16.60/34.6608	17.80/37.1664
Maximum allowable indoor / outdoor capacity ratio % <sup>4)</sup>			50 ~ 130(200)	50 ~ 130(200)	50 ~ 130(200)	50 ~ 130(200)	50 ~ 130(200)	50 ~ 130(200)	50 ~ 130(200)
Operating range	Cool Min ~ Max	°C	-10 ~ +52	-10 ~ +52	-10 ~ +52	-10 ~ +52	-10 ~ +52	-10 ~ +52	-10 ~ +52
	Heat Min ~ Max	°C	-25 ~ +18	-25 ~ +18	-25 ~ +18	-25 ~ +18	-25 ~ +18	-25 ~ +18	-25 ~ +18
RRP		€	<b>19,293</b>	<b>20,720</b>	<b>22,414</b>	<b>23,841</b>	<b>25,675</b>	<b>26,962</b>	<b>28,434</b>

## 2-Pipe ECOi EX ME2 Series Space Saving Model Combination from 36 to 48 HP

			36 HP	38 HP	40 HP	42 HP	44 HP	46 HP	48 HP
Model name			U-16ME2E8	U-18ME2E8	U-20ME2E8	U-10ME2E8	U-12ME2E8	U-14ME2E8	U-16ME2E8
			U-20ME2E8	U-20ME2E8	U-20ME2E8	U-16ME2E8	U-16ME2E8	U-16ME2E8	U-16ME2E8
Power supply	Voltage	V	380-400-415	380-400-415	380-400-415	380-400-415	380-400-415	380-400-415	380-400-415
	Phase		Three phase	Three phase	Three phase	Three phase	Three phase	Three phase	Three phase
	Frequency	Hz	50	50	50	50	50	50	50
Cooling capacity		kW	101.0	107.0	113.0	118.0	124.0	130.0	135.0
EER <sup>1)</sup>		W/W	3.42	3.42	3.34	3.69	3.62	3.62	3.52
SEER <sup>2)</sup>			<b>6.86</b>	<b>7.32</b>	<b>7.16</b>	<b>6.57</b>	<b>6.6</b>	<b>6.7</b>	<b>6.55</b>
Running current cooling		A	45.30/43.70	48.10/46.30	51.40/49.50	50.20/48.40	53.20/51.30	56.90/54.90	60.20/58.10
Input power cooling		kW	25.9	31.3	33.8	32.0	34.3	35.9	38.4
Heating capacity		kW	113.0	119.0	127.0	132.0	138.0	145.0	150.0
COP <sup>1)</sup>		W/W	4.14	4.13	3.92	4.49	4.50	4.46	4.42
SCOP <sup>2)</sup>			<b>4.06</b>	<b>4.14</b>	<b>4.13</b>	<b>4.11</b>	<b>4.21</b>	<b>4.12</b>	<b>4.09</b>
Running current heating		A	42.40/40.80	44.70/43.10	49.80/48.00	46.60/44.90	48.20/46.40	51.50/49.70	53.80/51.80
Input power heating		kW	27.30	28.80	32.40	29.40	30.70	32.50	33.90
Starting current		A	4.00	4.00	4.00	5.00	5.00	6.00	6.00
External static pressure (Max)		Pa	80	80	80	80	80	80	80
Air flow		m <sup>3</sup> /min	637	810	810	688	696	696	696
Sound pressure	Normal / Silent mode	dB(A)	63.50/60.50	62.50/59.50	63.00/60.00	65.00/62.00	65.50/62.50	65.50/62.50	66.00/63.00
Sound power	Normal mode	dB(A)	84.50	83.50	84.00	86.00	86.50	86.50	87.00
Dimension / Net weight	HxWxD	mm / kg	1842x2780 x1000/690	1842x3140 x1000/750	1842x3140 x1000/750	1842x3250 x1000/840	1842x3660 x1000/900	1842x3660 x1000/945	1842x3660 x1000/945
Pipe diameter <sup>3)</sup>	Liquid pipe	Inch (mm)	3/4(19.05)/ 7/8(22.22)	3/4(19.05)/ 7/8(22.22)	3/4(19.05)/ 7/8(22.22)	3/4(19.05)/ 7/8(22.22)	3/4(19.05)/ 7/8(22.22)	3/4(19.05)/ 7/8(22.22)	3/4(19.05)/ 7/8(22.22)
	Gas pipe	Inch (mm)	1-1/2(38.10)/ 1-5/8(41.28)	1-1/2(38.10)/ 1-5/8(41.28)	1-1/2(38.10)/ 1-5/8(41.28)	1-1/2(38.10)/ 1-5/8(41.28)	1-1/2(38.10)/ 1-5/8(41.28)	1-1/2(38.10)/ 1-5/8(41.28)	1-1/2(38.10)/ 1-5/8(41.28)
	Balance pipe	Inch (mm)	1/4(6.35)	1/4(6.35)	1/4(6.35)	1/4(6.35)	1/4(6.35)	1/4(6.35)	1/4(6.35)
Refrigerant (R410A) / CO <sub>2</sub> Eq.		kg / T	17.80/37.1664	19.00/39.672	19.00/39.672	22.20/46.3536	24.90/51.9912	24.90/51.9912	24.90/51.9912
Maximum allowable indoor / outdoor capacity ratio % <sup>4)</sup>			50 ~ 130(200)	50 ~ 130(200)	50 ~ 130(200)	50 ~ 130(200)	50 ~ 130(200)	50 ~ 130(200)	50 ~ 130(200)
Operating range	Cool Min ~ Max	°C	-10 ~ +52	-10 ~ +52	-10 ~ +52	-10 ~ +52	-10 ~ +52	-10 ~ +52	-10 ~ +52
	Heat Min ~ Max	°C	-25 ~ +18	-25 ~ +18	-25 ~ +18	-25 ~ +18	-25 ~ +18	-25 ~ +18	-25 ~ +18
RRP		€	<b>29,721</b>	<b>30,867</b>	<b>32,480</b>	<b>35,895</b>	<b>37,322</b>	<b>39,156</b>	<b>40,443</b>

1) EER and COP calculation is based in accordance to EN14511. 2) SEER/SCOP is calculated based on the seasonal space cooling/heating efficiency "D" values of the COMMISSION REGULATION (EU) 2016/2281. SEER, SCOP = (D + Correction) × PEF. 3) Pipe diameter under 90 m for ultimate indoor unit / over 90 m for ultimate indoor unit (if the longest piping equivalent length exceeds 90 m, increase the sizes of the main tubes by 1 rank for gas tubes and liquid tubes). 4) If the following conditions are satisfied, the effective range is above 130 % and below 200 %: A. Obey the limited number of connectable indoor units. B. The lower limit of operating range for heating outdoor temperature is limited to -10 °C WB (standard -25 °C WB). C. Simultaneous operation is limited to less than 130 % of connectable indoor units.



## 2-Pipe ECOi EX ME2 Series Space Saving Model Combination from 50 to 64 HP

			50 HP	52 HP	54 HP	56 HP	58 HP	60 HP	62 HP	64 HP
Model name			U-14ME2E8	U-16ME2E8	U-14ME2E8	U-16ME2E8	U-18ME2E8	U-20ME2E8	U-14ME2E8	U-16ME2E8
			U-16ME2E8	U-16ME2E8	U-20ME2E8	U-20ME2E8	U-20ME2E8	U-20ME2E8	U-16ME2E8	U-16ME2E8
			U-20ME2E8	U-20ME2E8	U-20ME2E8	U-20ME2E8	U-20ME2E8	U-20ME2E8	U-16ME2E8	U-16ME2E8
Power supply	Voltage	V	380-400-415	380-400-415	380-400-415	380-400-415	380-400-415	380-400-415	380-400-415	380-400-415
	Phase		Three phase	Three phase	Three phase	Three phase	Three phase	Three phase	Three phase	Three phase
	Frequency	Hz	50	50	50	50	50	50	50	50
Cooling capacity		kW	140.0	145.0	151.0	156.0	162.0	168.0	174.0	180.0
EER <sup>1)</sup>		W/W	3.55	3.46	3.49	3.41	3.40	3.35	3.60	3.52
SEER <sup>2)</sup>			6.96	6.72	7.16	6.92	7.3	7.16	6.68	6.55
Running current cooling		A	61.10/58.90	65.00/62.70	66.50/64.10	70.30/67.80	73.10/70.40	76.10/73.40	75.80/73.00	80.30/77.40
Input power cooling		kW	39.40	41.90	43.30	45.80	47.60	50.10	48.30	51.20
Heating capacity		kW	155.0	160.0	169.0	175.0	182.0	189.0	195.0	201.0
COP <sup>1)</sup>		W/W	4.29	4.27	4.11	4.08	4.06	3.94	4.45	4.42
SCOP <sup>2)</sup>			4.08	4.05	4.13	4.07	4.13	4.13	4.11	4.09
Running current heating		A	56.60/54.60	58.80/56.70	63.80/61.50	66.60/64.20	69.50/67.00	73.70/71.00	69.50/67.00	72.20/69.60
Input power heating		kW	36.10	37.50	41.10	42.90	44.80	48.00	43.80	45.50
Starting current		A	6.00	6.00	6.00	6.00	6.00	6.00	8.00	8.00
External static pressure (Max)		Pa	80	80	80	80	80	80	80	80
Air flow		m <sup>3</sup> /min	869	869	1042	1042	1215	1215	928	928
Sound pressure	Normal / Silent mode	dB(A)	65.50/62.50	65.50/62.50	65.00/62.00	65.50/62.50	64.50/61.50	65.00/62.00	67.00/64.00	67.00/64.00
Sound power	Normal mode	dB(A)	86.50	86.50	86.00	86.50	85.50	86.00	88.00	88.00
Dimension / Net weight	H x W x D	mm / kg	1842 x 4020 x 1000 / 1005	1842 x 4020 x 1000 / 1005	1842 x 4380 x 1000 / 1065	1842 x 4380 x 1000 / 1065	1842 x 4740 x 1000 / 1125	1842 x 4740 x 1000 / 1125	1842 x 4900 x 1000 / 1260	1842 x 4900 x 1000 / 1260
Pipe diameter <sup>3)</sup>	Liquid pipe	Inch (mm)	3/4(19.05)/7/8(22.22)	3/4(19.05)/7/8(22.22)	3/4(19.05)/7/8(22.22)	3/4(19.05)/7/8(22.22)	3/4(19.05)/7/8(22.22)	3/4(19.05)/7/8(22.22)	3/4(19.05)/7/8(22.22)	3/4(19.05)/7/8(22.22)
	Gas pipe	Inch (mm)	1-1/2(38.10)/1-5/8(41.28)	1-1/2(38.10)/1-5/8(41.28)	1-1/2(38.10)/1-5/8(41.28)	1-1/2(38.10)/1-5/8(41.28)	1-1/2(38.10)/1-5/8(41.28)	1-1/2(38.10)/1-5/8(41.28)	1-5/8(41.28)/1-3/4(44.45)	1-5/8(41.28)/1-3/4(44.45)
	Balance pipe	Inch (mm)	1/4(6.35)	1/4(6.35)	1/4(6.35)	1/4(6.35)	1/4(6.35)	1/4(6.35)	1/4(6.35)	1/4(6.35)
Refrigerant (R410A) / CO <sub>2</sub> Eq.		kg / T	26.10/54.4968	26.10/54.4968	27.30/57.0024	27.30/57.0024	28.50/59.508	28.50/59.508	33.20/69.3216	33.20/69.3216
Maximum allowable indoor / outdoor capacity ratio % <sup>4)</sup>			50 ~ 130(200)	50 ~ 130(200)	50 ~ 130(200)	50 ~ 130(200)	50 ~ 130(200)	50 ~ 130(200)	50 ~ 130(200)	50 ~ 130(200)
Operating range	Cool Min ~ Max	°C	-10 ~ +52	-10 ~ +52	-10 ~ +52	-10 ~ +52	-10 ~ +52	-10 ~ +52	-10 ~ +52	-10 ~ +52
	Heat Min ~ Max	°C	-25 ~ +18	-25 ~ +18	-25 ~ +18	-25 ~ +18	-25 ~ +18	-25 ~ +18	-25 ~ +18	-25 ~ +18
RRP		€	41,915	43,202	44,674	45,961	47,107	48,720	52,637	53,924

## 2-Pipe ECOi EX ME2 Series Space Saving Model Combination from 66 to 80 HP

			66 HP	68 HP	70 HP	72 HP	74 HP	76 HP	78 HP	80 HP
Model name			U-10ME2E8	U-12ME2E8	U-10ME2E8	U-16ME2E8	U-16ME2E8	U-16ME2E8	U-18ME2E8	U-20ME2E8
			U-16ME2E8	U-16ME2E8	U-20ME2E8	U-16ME2E8	U-18ME2E8	U-20ME2E8	U-20ME2E8	U-20ME2E8
			U-20ME2E8	U-20ME2E8	U-20ME2E8	U-20ME2E8	U-20ME2E8	U-20ME2E8	U-20ME2E8	U-20ME2E8
			U-20ME2E8	U-20ME2E8	U-20ME2E8	U-20ME2E8	U-20ME2E8	U-20ME2E8	U-20ME2E8	U-20ME2E8
Power supply	Voltage	V	380-400-415	380-400-415	380-400-415	380-400-415	380-400-415	380-400-415	380-400-415	380-400-415
	Phase		Three phase	Three phase	Three phase	Three phase	Three phase	Three phase	Three phase	Three phase
	Frequency	Hz	50	50	50	50	50	50	50	50
Cooling capacity		kW	185.0	190.0	196.0	202.0	208.0	213.0	219.0	224.0
EER <sup>1)</sup>		W/W	3.52	3.49	3.47	3.42	3.42	3.39	3.38	3.35
SEER <sup>2)</sup>			6.92	6.91	7.09	6.86	7.03	7.01	7.18	7.16
Running current cooling		A	80.80/77.80	83.70/80.70	86.80/83.60	90.60/87.30	93.40/90.00	96.60/93.10	98.30/94.70	101.50/97.80
Input power cooling		kW	52.60	54.50	56.50	59.00	60.80	62.90	64.70	66.80
Heating capacity		kW	207.0	213.0	219.0	226.0	233.0	239.0	245.0	252.0
COP <sup>1)</sup>		W/W	4.16	4.18	4.05	4.14	4.12	4.03	4.03	3.94
SCOP <sup>2)</sup>			4.11	4.17	4.13	4.06	4.12	4.07	4.13	4.13
Running current heating		A	77.10/74.30	79.20/76.30	83.10/80.10	84.70/81.70	87.70/84.50	92.00/88.70	93.40/90.00	98.30/94.70
Input power heating		kW	49.70	51.00	54.10	54.60	56.50	59.30	60.80	64.00
Starting current		A	7.00	7.00	7.00	8.00	8.00	8.00	8.00	8.00
External static pressure (Max)		Pa	80	80	80	80	80	80	80	80
Air flow		m <sup>3</sup> /min	1266	1274	1439	1274	1447	1447	1620	1620
Sound pressure	Normal / Silent mode	dB(A)	66.00/63.00	66.50/63.50	65.50/62.50	66.50/63.50	66.50/63.50	66.50/63.50	66.00/63.00	66.00/63.00
Sound power	Normal mode	dB(A)	87.00	87.50	86.50	87.50	87.50	87.50	87.00	87.00
Dimension / Net weight	H x W x D	mm / kg	1842 x 5210 x 1000 / 1275	1842 x 5620 x 1000 / 1335	1842 x 5570 x 1000 / 1335	1842 x 5620 x 1000 / 1380	1842 x 5980 x 1000 / 1440	1842 x 5980 x 1000 / 1440	1842 x 6340 x 1000 / 1500	1842 x 6340 x 1000 / 1500
Pipe diameter <sup>3)</sup>	Liquid pipe	Inch (mm)	3/4(19.05)/7/8(22.22)	7/8(22.22)/1(25.04)	7/8(22.22)/1(25.04)	7/8(22.22)/1(25.04)	7/8(22.22)/1(25.04)	7/8(22.22)/1(25.04)	7/8(22.22)/1(25.04)	7/8(22.22)/1(25.04)
	Gas pipe	Inch (mm)	1-5/8(41.28)/1-3/4(44.45)	1-5/8(41.28)/1-3/4(44.45)	1-5/8(41.28)/1-3/4(44.45)	1-3/4(44.45)/2(50.80)	1-3/4(44.45)/2(50.80)	1-3/4(44.45)/2(50.80)	1-3/4(44.45)/2(50.80)	1-3/4(44.45)/2(50.80)
	Balance pipe	Inch (mm)	1/4(6.35)	1/4(6.35)	1/4(6.35)	1/4(6.35)	1/4(6.35)	1/4(6.35)	1/4(6.35)	1/4(6.35)
Refrigerant (R410A) / CO <sub>2</sub> Eq.		kg / T	32.90/68.6952	35.60/74.3328	34.10/19.836	35.80/68.6952	36.80/76.8384	36.80/76.8384	38.00/79.344	38.00/79.344
Maximum allowable indoor / outdoor capacity ratio % <sup>4)</sup>			50 ~ 130(200)	50 ~ 130(200)	50 ~ 130(200)	50 ~ 130(200)	50 ~ 130(200)	50 ~ 130(200)	50 ~ 130(200)	50 ~ 130(200)
Operating range	Cool Min ~ Max	°C	-10 ~ +52	-10 ~ +52	-10 ~ +52	-10 ~ +52	-10 ~ +52	-10 ~ +52	-10 ~ +52	-10 ~ +52
	Heat Min ~ Max	°C	-25 ~ +18	-25 ~ +18	-25 ~ +18	-25 ~ +18	-25 ~ +18	-25 ~ +18	-25 ~ +18	-25 ~ +18
RRP		€	54,894	56,321	57,653	59,442	60,588	62,201	63,347	64,960

1) EER and COP calculation is based in accordance to EN14511. 2) SEER/SCOP is calculated based on the seasonal space cooling/heating efficiency "D" values of the COMMISSION REGULATION (EU) 2016/2281. SEER, SCOP = (D + Correction) x PE. 3) Pipe diameter under 90 m for ultimate indoor unit / over 90 m for ultimate indoor unit (if the longest piping equivalent length exceeds 90 m, increase the sizes of the main tubes by 1 rank for gas tubes and liquid tubes). 4) If the following conditions are satisfied, the effective range is above 130 % and below 200 %: A. Obey the limited number of connectable indoor units. B. The lower limit of operating range for heating outdoor temperature is limited to -10 °C WB (standard -25 °C WB). C. Simultaneous operation is limited to less than 130 % of connectable indoor units.

## 3-Pipe ECOi EX MF3 Series



Simultaneous heating and cooling VRF system.  
The Panasonic 3-Pipe MF3 Series offers the best solution for the most demanding customers.



### Simultaneous heating and cooling VRF System

The Panasonic 3-Pipe ECOi EX MF3 series offers the ideal solution to meet customer's demand.

#### Upgraded energy efficiency utilized ECOi EX technology.


- SEER / SCOP improved in full capacities from 8 to 16 HP
- SEER / SCOP follows LOT21 from started from January 2018
- EER / COP is certified in Eurovent

#### Design flexibility.

- High reliability even under tough temperature condition
- Maximum 52 indoor units connectable
- Slim heat recovery box with just 200 mm height
- Farthest piping length between indoor units and outdoor units: 200 m

#### Excellent seasonal energy saving.


SEER / SCOP

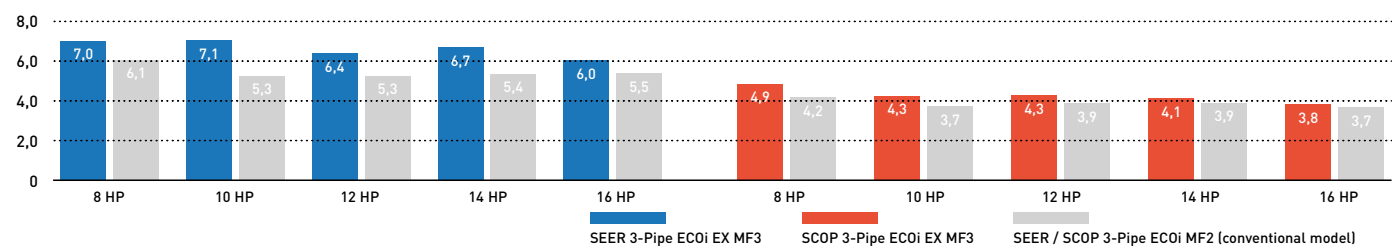

### Extended design operation conditions

Cooling design operation conditions: The cooling operation range has been extended to -10 °C ~ 52 °C by changing the outdoor fan to an Inverter type.

Heating design operation conditions: Stable heating operation even with an outside air temperature of -20 °C. The heating operation range has been extended to -20 °C by use of a compressor with a high-pressure vessel.

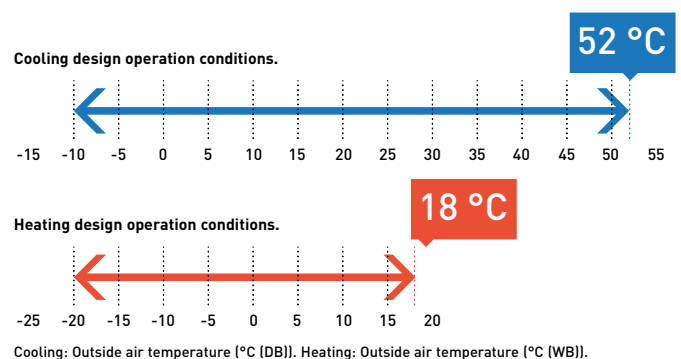

### Wide temperature setting range

Wired remote controller heating temperature setting range is 16 to 30 °C.

**4.9  
SCOP****3-Pipe ECOi EX MF3 Series****Simultaneous heating and cooling operation with heat recovery type.**

The 3-Pipe ECOi EX MF3 Series is one of the most advanced VRF systems.

Not only high-efficient performance for simultaneous heating and cooling, but also sophisticated installation and maintenance available.

			8 HP	10 HP	12 HP	14 HP	16 HP
Outdoor units			U-8MF3E8	U-10MF3E8	U-12MF3E8	U-14MF3E8	U-16MF3E8
Power supply	Voltage	V	380-400-415	380-400-415	380-400-415	380-400-415	380-400-415
	Phase		Three phase	Three phase	Three phase	Three phase	Three phase
	Frequency	Hz	50	50	50	50	50
Cooling capacity		kW	22.4	28.0	33.5	40.0	45.0
EER <sup>1)</sup>		W/W	5.11	4.72	3.91	3.70	3.49
SEER <sup>2)</sup>			<b>7.0</b>	<b>7.1</b>	<b>6.4</b>	<b>6.7</b>	<b>6.0</b>
Running current cooling		A	7.16/6.80/6.55	9.90/9.41/9.07	3.19/13.20/12.70	18.20/17.30/16.70	21.30/20.20/19.50
Input power cooling		kW	4.38	5.93	8.57	10.80	12.90
Heating capacity		kW	25.0	31.5	37.5	45.0	50.0
COP <sup>1)</sup>		W/W	5.25	5.17	4.51	4.21	4.17
SCOP <sup>2)</sup>			<b>4.9</b>	<b>4.3</b>	<b>4.3</b>	<b>4.1</b>	<b>3.8</b>
Running current heating		A	7.78/7.39/7.12	10.20/9.66/9.31	13.40/12.80/12.30	18.10/17.20/16.50	20.00/19.00/18.30
Input power heating		kW	4.76	6.09	8.32	10.70	12.00
Recommended Fuse		A	25	25	30	40	40
Starting current		A	1.00	1.00	1.00	2.00	2.00
External static pressure (Max)		Pa	80	80	80	80	80
Air flow		m <sup>3</sup> /min	210	220	232	232	232
Sound pressure	Normal mode	dB(A)	54.00	57.00	60.00	61.00	62.00
	Silent mode 1 / 2	dB(A)	51.00/49.00	54.00/52.00	57.00/55.00	58.00/56.00	59.00/57.00
Sound power	Normal mode	dB(A)	76.00	78.00	81.00	82.00	82.00
Dimension	H x W x D	mm	1842x1180x1000	1842x1180x1000	1842x1180x1000	1842x1180x1000	1842x1180x1000
Net weight		kg	261	262	286	334	334
Pipe diameter <sup>3)</sup>	Liquid pipe	Inch (mm)	3/8(9.52)/1/2(12.70)	3/8(9.52)/1/2(12.70)	1/2(12.70)/5/8(15.88)	1/2(12.70)/5/8(15.88)	1/2(12.70)/5/8(15.88)
	Discharge pipe	Inch (mm)	5/8(15.88)/3/4(19.05)	3/4(19.05)/7/8(22.22)	3/4(19.05)/7/8(22.22)	7/8(22.22)/1(25.40)	7/8(22.22)/1(25.40)
	Suction pipe	Inch (mm)	3/4(19.05)/7/8(22.22)	7/8(22.22)/1(25.40)	1(25.40)/1-1/8(28.58)	1(25.40)/1-1/8(28.58)	1-1/8(28.58)/1-1/4(31.75)
	Balance pipe	Inch (mm)	1/4(6.35)	1/4(6.35)	1/4(6.35)	1/4(6.35)	1/4(6.35)
Refrigerant (R410A) / CO <sub>2</sub> Eq.		kg / T	6.80/14.1984	6.80/14.1984	8.30/17.3304	8.30/17.3304	8.30/17.3304
Maximum allowable indoor / outdoor capacity ratio %			50 ~ 150	50 ~ 150	50 ~ 150	50 ~ 150	50 ~ 150
Operating range	Cool Min ~ Max	°C	-10 ~ +52	-10 ~ +52	-10 ~ +52	-10 ~ +52	-10 ~ +52
	Heat Min ~ Max	°C	-20 ~ +18	-20 ~ +18	-20 ~ +18	-20 ~ +18	-20 ~ +18
	Simultaneous op.	°C	-10 ~ +24	-10 ~ +24	-10 ~ +24	-10 ~ +24	-10 ~ +24
RRP		€	<b>8,647</b>	<b>9,435</b>	<b>10,516</b>	<b>12,281</b>	<b>14,035</b>

Solenoid valve kit			RRP €
KIT-P56HR3	KIT-P56HR3	3-Pipe control Solenoid valve kit (up to 5.6 kW)	<b>614</b>
	CZ-P56HR3	Solenoid valve kit (up to 5.6 kW)	<b>517</b>
	CZ-CAPE2	3-Pipe control PCB	<b>97</b>
KIT-P160HR3	KIT-P160HR3	3-Pipe control Solenoid valve kit (from 5.6 to 16.0 kW)	<b>700</b>
	CZ-P160HR3	Solenoid valve kit (from 5.6 kW to 16.0 kW)	<b>603</b>
	CZ-CAPE2	3-Pipe control PCB	<b>97</b>
CZ-CAPEK2 <sup>4)</sup>		3-Pipe control PCB for wall-mounted	<b>97</b>

3-Pipe control box kit			RRP €
KIT-P56HR3	CZ-P456HR3	4 ports 3 pipe box (up to 5.6 kW per port)	<b>2800</b>
	CZ-P656HR3	6 ports 3 pipe box (up to 5.6 kW per port)	<b>4282</b>
	CZ-P856HR3	8 ports 3 pipe box (up to 5.6 kW per port)	<b>5768</b>
	CZ-P4160HR3	4 ports 3 pipe box (up to 16.0 kW per port)	<b>3137</b>

1) EER and COP calculation is based in accordance to EN14511. 2) SEER/SCOP is calculated based on the seasonal space cooling/heating efficiency "D" values of the COMMISSION REGULATION (EU) 2016/2281. SEER, SCOP = (D + Correction) x PEF. 3) Pipe diameter under 90 m for ultimate indoor unit / over 90 m for ultimate indoor unit (if the longest piping equivalent length exceeds 90 m, increase the sizes of the main tubes by 1 rank for gas tubes and liquid tubes). 4) Available for S-45/56/73/106MK2E5B.

- Achieving SCOP 4.8 as the top class in the industry (LOT21 Seasonal heating efficiency value for 8 HP outdoor unit)
- Simultaneous cooling and heating operation with up to 39 indoor units
- Slim heat recovery boxes with just 200 mm height fit with the ceiling space limited in hotel applications
- Rotation operation function and back-up operation function provided

**Technical focus**

- High SEER/SCOP at full Load capacity (follows LOT21)
- EER, COP: Eurovent certified
- Standardisation of outdoor unit to one compact casing size
- The constant-speed compressor adopts a high-performance internal high-pressure scroll
- Up to 52 indoor units connectable
- High external static pressure 80 Pa with a newly designed fan, fan guard, motor, and casing
- Silent outdoor unit operation: Minimum 54 dB(A) for 8 HP
- Bluefin condenser outdoor unit

# Slim 3-Pipe Control Box Kit / Multiple connection type


Heat recovery Box to connect multiple indoor units with just one box, 4, 6 and up to 8 indoor units or groups.

The height is only 200 mm. This is good advantage specially in hotel applications, where space for connecting several boxes is limited.

## Individual control of multiple indoor units with solenoid valve kits.





- Any design and layout can be used in a single system.
- Cooling operation is possible up to an outdoor temperature of -10 °C.

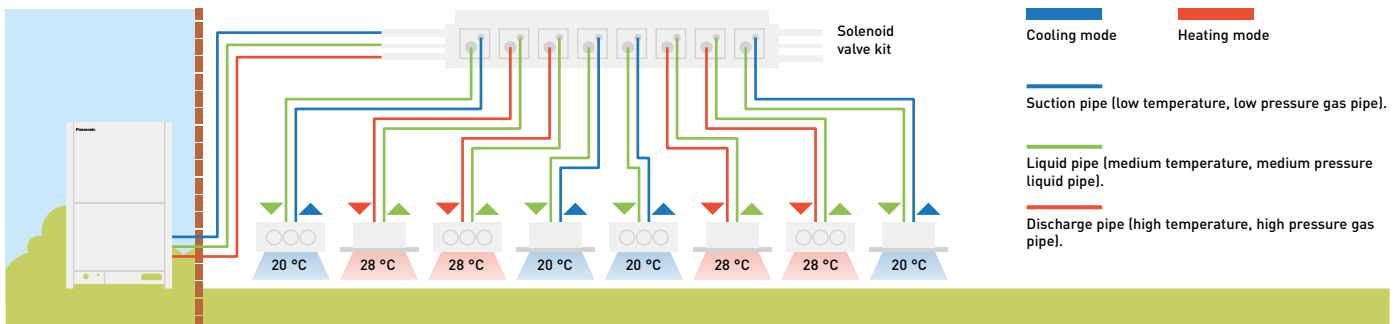System structure.




— Cooling mode  
— Heating mode

— Suction pipe (low temperature, low pressure gas pipe).  
— Liquid pipe (medium temperature, medium pressure liquid pipe).  
— Discharge pipe (high temperature, high pressure gas pipe).


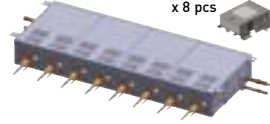
	 1 port	 x 4 pcs	 x 6 pcs	 x 8 pcs
56 type	CZ-P56HR3	CZ-P456HR3	CZ-P656HR3	CZ-P856HR3
160 type	CZ-P160HR3	CZ-P4160HR3	—	—

## Solenoid valve kit / wiring work

### Current model / single connection type.

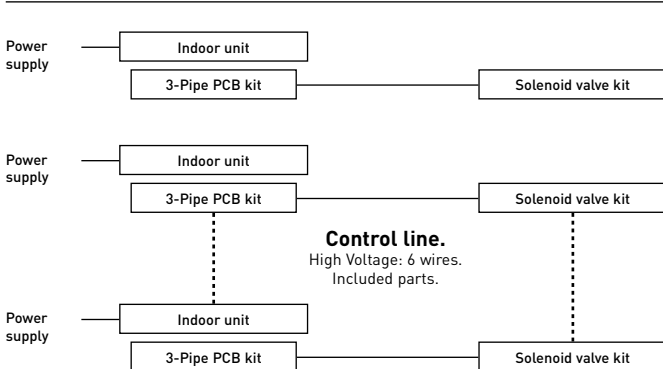

### New model / multiple connection type.

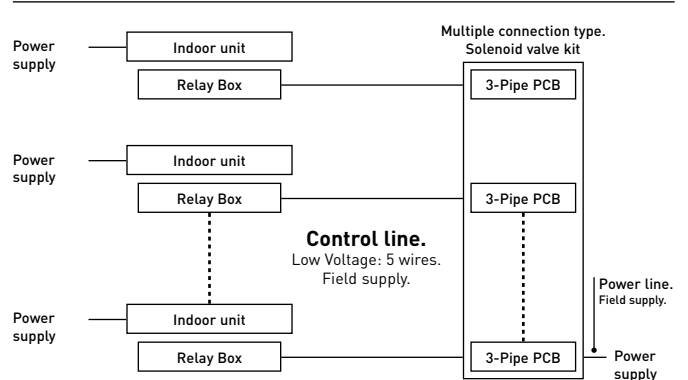



### 3-Pipe ECOi EX MF3 Series Combination from 18 to 32 HP

HP			18 HP	20 HP	22 HP	24 HP	26 HP	28 HP	30 HP	32 HP	
Model name			U-8MF3E8 U-10MF3E8	U-8MF3E8 U-12MF3E8	U-10MF3E8 U-12MF3E8	U-12MF3E8 U-12MF3E8	U-10MF3E8 U-16MF3E8	U-12MF3E8 U-16MF3E8	U-14MF3E8 U-16MF3E8	U-16MF3E8 U-16MF3E8	
Power supply	Voltage	V	380 - 400 - 415								
	Phase		Three phase			Three phase			Three phase		
	Frequency	Hz	50								
Cooling capacity		kW	50.0	56.0	61.5	68.0	73.0	78.5	85.0	90.0	
EER <sup>1)</sup>		W/W	4.90	4.31	4.24	3.89	3.88	3.65	3.59	3.49	
Running current cooling		A	16.8/16.0/15.4	21.0/20.0/19.2	23.7/22.5/21.7	28.3/26.9/25.9	31.0/29.5/28.4	35.1/33.4/32.2	39.6/37.6/36.2	42.6/40.5/39.0	
Input power cooling		kW	10.20	13.00	14.50	17.50	18.80	21.50	23.70	25.8	
Heating capacity		kW	56.0	63.0	69.0	76.5	81.5	87.5	95.0	100.0	
COP <sup>1)</sup>		W/W	5.23	4.77	4.79	4.47	4.50	4.31	4.19	4.17	
Running current heating		A	17.7/16.8/16.2	21.3/20.3/19.5	23.5/22.3/21.5	27.6/26.3/25.3	30.2/28.7/27.7	33.5/31.8/30.7	37.9/36.0/34.7	40.1/38.1/36.7	
Input power heating		kW	10.70	13.20	14.40	17.10	18.10	20.30	22.70	24.00	
Recommended Fuse		A									
Starting current		A	2.00	2.00	2.00	2.00	3.00	3.00	4.00	4.00	
External static pressure (Max)		Pa	80								
Air flow		m <sup>3</sup> /min	430								
Sound pressure	Normal mode	dB(A)	59.00								
	Silent mode 1 / 2	dB(A)	56.00/54.00								
Sound power	Normal mode	dB(A)	81.50								
Dimension	H x W x D	mm	1842 x 2360 (+60) x 1000		1842 x 2360 (+60) x 1000		1842 x 2360 (+60) x 1000		1842 x 2360 (+60) x 1000		
	Net weight	kg	523								
Pipe diameter <sup>2)</sup>	Liquid pipe	Inch (mm)	5/8 (15.88) / 3/4 (19.05)		5/8 (15.88) / 3/4 (19.05)		5/8 (15.88) / 3/4 (19.05)		3/4 (19.05) / 7/8 (22.22)		
	Discharge pipe	Inch (mm)	7/8 (22.22) / 1 (25.40)		7/8 (22.22) / 1 (25.40)		1 (25.40) / 1-1/8 (28.58)		1 (25.40) / 1-1/8 (28.58)		
	Suction pipe	Inch (mm)	1-1/8 (28.58) / 1-1/4 (31.75)		1-1/8 (28.58) / 1-1/4 (31.75)		1-1/8 (28.58) / 1-1/4 (31.75)		1-1/4 (31.75) / 1-1/2 (38.10)		
	Balance pipe	Inch (mm)	1/4 (6.35)								
Refrigerant [R410A] / CO <sub>2</sub> Eq.		kg / T	13.60/28.3968		15.10/31.5288		15.10/31.5288		16.60/34.6608		
Maximum allowable indoor / outdoor capacity ratio %			50 ~ 150								
Operating range	Cool Min ~ Max	°C	-10 ~ +52								
	Heat Min ~ Max	°C	-20 ~ +18								
	Simultaneous op.	°C	-10 ~ +24								
RRP		€	18,082	19,163	19,951	21,032	23,470	24,551	26,316	28,070	

### 3-Pipe ECOi EX MF3 Series Combination from 34 to 48 HP

HP			34 HP	36 HP	38 HP	40 HP	42 HP	44 HP	46 HP	48 HP	
Model name			U-8MF3E8 U-10MF3E8 U-16MF3E8	U-8MF3E8 U-12MF3E8 U-16MF3E8	U-10MF3E8 U-12MF3E8 U-16MF3E8	U-8MF3E8 U-16MF3E8 U-16MF3E8	U-10MF3E8 U-16MF3E8 U-16MF3E8	U-12MF3E8 U-16MF3E8 U-16MF3E8	U-14MF3E8 U-16MF3E8 U-16MF3E8	U-16MF3E8 U-16MF3E8 U-16MF3E8	
Power supply	Voltage	V	380 - 400 - 415								
	Phase		Three phase			Three phase			Three phase		
	Frequency	Hz	50								
Cooling capacity		kW	96.0	101.0	107.0	113.0	118.0	124.0	130.0	135.0	
EER <sup>1)</sup>		W/W	4.10	3.90	3.88	3.72	3.72	3.58	3.55	3.49	
Running current cooling		A	38.6/36.7/35.4	42.3/40.2/38.7	45.6/43.3/41.7	50.2/47.7/46.0	52.4/49.7/47.9	56.5/53.7/51.8	61.1/58.1/56.0	63.9/60.7/58.5	
Input power cooling		kW	23.40	25.90	27.60	30.40	31.70	34.60	36.60	38.70	
Heating capacity		kW	108.0	113.0	119.0	127.0	132.0	138.0	145.0	150.0	
COP <sup>1)</sup>		W/W	4.64	4.48	4.51	4.31	4.36	4.25	4.18	4.17	
Running current heating		A	38.9/37.0/35.6	41.6/39.5/38.1	43.6/41.4/39.9	49.3/46.8/45.1	50.6/48.1/46.3	53.7/51.0/49.1	57.9/55.0/53.0	60.1/57.1/55.0	
Input power heating		kW	23.30	25.20	26.40	29.50	30.30	32.50	34.70	36.00	
Recommended Fuse		A									
Starting current		A	4.00	4.00	4.00	5.00	5.00	5.00	6.00	6.00	
External static pressure (Max)		Pa	80								
Air flow		m <sup>3</sup> /min	662								
Sound pressure	Normal mode	dB(A)	64.00								
	Silent mode 1 / 2	dB(A)	61.00/59.00								
Sound power	Normal mode	dB(A)	84.50								
Dimension	H x W x D	mm	1842 x 3540 (+120) x 1000		1842 x 3540 (+120) x 1000		1842 x 3540 (+120) x 1000		1842 x 3540 (+120) x 1000		
	Net weight	kg	857								
Pipe diameter <sup>2)</sup>	Liquid pipe	Inch (mm)	3/4 (19.05) / 7/8 (22.22)		3/4 (19.05) / 7/8 (22.22)		3/4 (19.05) / 7/8 (22.22)		3/4 (19.05) / 7/8 (22.22)		
	Discharge pipe	Inch (mm)	1-1/8 (28.58) / 1-1/4 (31.75)		1-1/8 (28.58) / 1-1/4 (31.75)		1-1/4 (31.75) / 1-1/2 (38.10)		1-1/4 (31.75) / 1-1/2 (38.10)		
	Suction pipe	Inch (mm)	1-1/4 (31.75) / 1-1/2 (38.10)		1-1/2 (38.10) / 1-5/8 (41.28)		1-1/2 (38.10) / 1-5/8 (41.28)		1-1/2 (38.10) / 1-5/8 (41.28)		
	Balance pipe	Inch (mm)	1/4 (6.35)								
Refrigerant [R410A] / CO <sub>2</sub> Eq.		kg / T	21.90/45.72719		23.40/48.85919		23.40/48.85919		24.90/46.3536		
Maximum allowable indoor / outdoor capacity ratio %			50 ~ 150								
Operating range	Cool Min ~ Max	°C	-10 ~ +52								
	Heat Min ~ Max	°C	-20 ~ +18								
	Simultaneous op.	°C	-10 ~ +24								
RRP		€	32,117	33,198	33,986	36,717	37,505	38,586	40,351	42,105	

1) EER and COP calculation is based in accordance to EN14511. 2) Pipe diameter under 90 m for ultimate indoor unit / over 90 m for ultimate indoor unit (if the longest piping equivalent length exceeds 90 m, increase the sizes of the main tubes by 1 rank for gas tubes and liquid tubes).

Rating Conditions: Cooling Indoor 27 °C DB / 19 °C WB, Cooling Outdoor 35 °C DB / 24 °C WB, Heating Indoor 20 °C DB, Heating Outdoor 7 °C DB / 6 °C WB. [DB: Dry Bulb; WB: Wet Bulb]. Specifications subject to change without notice. For detailed information about ErP / Energy Labelling, please visit our websites [www.aircon.panasonic.eu](http://www.aircon.panasonic.eu) or [www.ptc.panasonic.eu](http://www.ptc.panasonic.eu).

# Eurovent certified technical data



Panasonic's VRF systems - ECOi range is now certified by Eurovent\*  
The Eurovent certification verifies the performance ratings of heating and cooling systems following European standards. Those data provides products efficiency with full transparency for the benefit of customers and professionals.



## Eurovent certified technical data: Mini ECOi LE Series 4 to 10 HP

HP			4 HP				5 HP				6 HP				8 HP		10 HP	
Outdoor units			U-4LE2E5		U-4LE2E8		U-5LE2E5		U-5LE2E8		U-6LE2E5		U-6LE2E8		U-8LE1E8		U-10LE1E8	
Indoor units combination			MF2	MU2	MF2	MU2	MF2	MU2	MF2	MU2	MF2	MU2	MF2	MU2	MF2	MU2	MF2	MU2
Cooling	Pc out <sup>1)</sup>	kW	12.1	12.1	12.1	12.1	14	14	14	14	15.5	15.5	15.5	15.5	22.4	22.4	28	28
	Pec out <sup>2)</sup>	kW	2.88	2.88	2.88	2.88	3.68	3.68	3.68	3.68	4.56	4.56	4.56	4.56	7.23	7.23	10.77	10.77
	EERout		4.2	4.2	4.2	4.2	3.8	3.8	3.8	3.8	3.4	3.4	3.4	3.4	3.1	3.1	2.6	2.6
Seasonal Cooling	SEER		7.8	7.8	7.8	7.8	7.5	7.5	7.5	7.5	7.2	7.2	7.2	7.2	6.3	6.3	6.4	6.4
	ηsc	%	311	311	311	311	296.2	296.2	296.2	296.2	286.8	286.8	286.8	286.8	247.9	247.9	251.8	251.8
Cooling PL Condition B	PcB	kW	8.9	8.9	8.9	8.9	10.3	10.3	10.3	10.3	11.4	11.4	11.4	11.4	16.5	16.5	20.6	20.6
	EERB		6.7	6.7	6.7	6.7	5.9	5.9	5.9	5.9	5.4	5.4	5.4	5.4	4.8	4.8	4.4	4.4
Cooling PL Condition C	PcC	kW	5.7	5.7	5.7	5.7	6.6	6.6	6.6	6.6	7.3	7.3	7.3	7.3	10.6	10.6	13.2	13.2
	EERC		12.1	12.1	12.1	12.1	11	11	11	11	10.2	10.2	10.2	10.2	7.8	7.8	8.2	8.2
Cooling PL Condition D	PcD	kW	2.7	2.7	2.7	2.7	2.9	2.9	2.9	2.9	3.4	3.4	3.4	3.4	8	8	9	9
	EERD		9.6	9.6	9.6	9.6	10.3	10.3	10.3	10.3	11.7	11.7	11.7	11.7	12.8	12.8	15.4	15.4
Seasonal Heating	Pdesignh	kW	10	10	10	10	12.5	12.5	12.5	12.5	13	13	13	13	17.5	17.5	19.6	19.6
	SCOP		4.9	4.9	4.9	4.9	4.4	4.4	4.4	4.4	4.2	4.2	4.2	4.2	4.2	4.2	4.3	4.3
	ηsc	%	191.8	191.8	191.8	191.8	172.9	172.9	172.9	172.9	166.7	166.7	166.7	166.7	166.4	166.4	169.5	169.5
Heating PL Condition A	PhA	kW	8.8	8.8	8.8	8.8	11	11	11	11	11.5	11.5	11.5	11.5	15.4	15.4	17.3	17.3
	COPA		3.5	3.5	3.5	3.5	2.8	2.8	2.8	2.8	2.6	2.6	2.6	2.6	2.7	2.7	2.6	2.6
Heating PL Condition B	PhB	kW	5.3	5.3	5.3	5.3	6.7	6.7	6.7	6.7	7	7	7	7	9.4	9.4	10.5	10.5
	COPB		4.1	4.1	4.1	4.1	3.7	3.7	3.7	3.7	3.6	3.6	3.6	3.6	3.8	3.8	3.9	3.9
Heating PL Condition C	PhC	kW	3.4	3.4	3.4	3.4	4.3	4.3	4.3	4.3	4.5	4.5	4.5	4.5	6	6	6.7	6.7
	COPC		7.7	7.7	7.7	7.7	7.5	7.5	7.5	7.5	7.4	7.4	7.4	7.4	6.6	6.6	6.8	6.8
Heating PL Condition D	PhD	kW	4.4	4.4	4.4	4.4	4.4	4.4	4.4	4.4	4.4	4.4	4.4	4.4	6.4	6.4	6.6	6.6
	COPD		9.8	9.8	9.8	9.8	9.8	9.8	9.8	9.8	9.8	9.8	9.8	9.8	8.1	8.1	8.9	8.9
T bivalent	Tbiv	°C	-10	-10	-10	-10	-9	-9	-9	-9	-7	-7	-7	-7	-7	-7	-7	-7
	PhTbiv	kW	10	10	10	10	12	12	12	12	11.5	11.5	11.5	11.5	15.4	15.4	17.3	17.3
	COPTbiv		2.9	2.9	2.9	2.9	2.6	2.6	2.6	2.6	2.6	2.6	2.6	2.6	2.7	2.7	2.6	2.6
Psbcb	W	9	9	9	9	9	9	9	9	9	9	9	9	18	18	18	18	
Psbh	W	33	33	33	33	33	33	33	33	33	33	33	33	48	48	48	48	
Poffc	W	9	9	9	9	9	9	9	9	9	9	9	9	18	18	18	18	
Poffh	W	33	33	33	33	33	33	33	33	33	33	33	33	48	48	48	48	
Ptoc	W	33	33	33	33	33	33	33	33	33	33	33	33	48	48	48	48	
Ptoch	W	33	33	33	33	33	33	33	33	33	33	33	33	48	48	48	48	
Pckc	W	33	33	33	33	33	33	33	33	33	33	33	33	48	48	48	48	
Pckh	W	33	33	33	33	33	33	33	33	33	33	33	33	48	48	48	48	
PSB	W	33	33	33	33	33	33	33	33	33	33	33	33	48	48	48	48	
Sound power level	dB(A)		69	69	69	69	71	71	71	71	73	73	73	73	79	79	83	83
Sound power level in heating	dB(A)		72	72	72	72	75	75	75	75	75	75	75	75	83	83	84	84





# Panasonic introducing the gas driven VRF

ECO G gas VRF is specially designed for buildings where the electricity is restricted or CO<sub>2</sub> emissions must be reduced.



## 1 Limited electric supply

Electric consumption of ECO G is only 9 % compared to ECOi because gas engine is utilized for the compressor driving source.

## 2 High demand of DHW with heating and cooling cogeneration

DHW is produced effectively thanks to heat from engine exhaust during heating and cooling.

## 3 Open and flexible design

ECO G system is designed to connect various Indoor units and controllers which is available for ECOi system. With GE3 series, Pump Down system has been implemented to answer commercial needs.



### 2-Pipe ECO G GE3 Series

Designed for better energy efficiency. SEER has been increased by maximum 120 %.


## 4 Quick start up in heating at low ambient temperature

Gas heat pump systems make your building comfortably warm with a quick start by using waste heat from engine.

Heating mode works from -21 °C of ambient temperature.

#### Comparison of heating capacity.

Room temperature °C

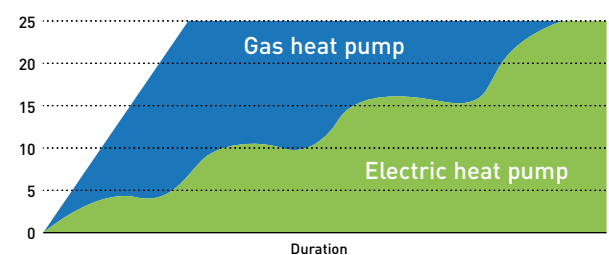

### 3-Pipe ECO G GF3 Series

3 Way heat recovery system with simultaneous heating and cooling.



## 2-Pipe ECO G GE3 Series

The GE3 Series has a top level of seasonal efficiency in this category. In addition, this product fits with special needs for commercial application thanks to DHW priority setting and auto pump down functions.

HP			16 HP	20 HP	25 HP	30 HP
Model			U-16GE3E5	U-20GE3E5	U-25GE3E5	U-30GE3E5
Power supply	Voltage	V	220 - 230 - 240	220 - 230 - 240	220 - 230 - 240	220 - 230 - 240
	Phase		Single phase	Single phase	Single phase	Single phase
	Frequency	Hz	50	50	50	50
Cooling capacity		kW	45.0	56.0	71.0	85.0
Refrigeration load Pdesign		kW	45.0	56.0	71.0	85.0
<b>Ɖsc (LOT21) <sup>1)</sup></b>		<b>%</b>	<b>220.60</b>	<b>219.30</b>	<b>240.10</b>	<b>229.30</b>
Input power cooling		kW	1.17	1.12	1.80	1.80
Hot water in cooling mode (at 65 °C outlet)		kW	23.60	29.10	36.40	46.00
Max COP in hot water		W/W	1.55	1.55	1.49	1.47
Gas consumption cooling		kW	41.10	52.10	67.20	84.10
Heating capacity	Standard	kW	50.0	63.0	80.0	95.0
	Low temperature	kW	53.0	67.0	78.0	90.0
Refrigeration load Pdesign		kW	37.0	53.0	60.0	65.0
<b>Ɖsh (LOT21) <sup>1)</sup></b>		<b>%</b>	<b>150.60</b>	<b>143.70</b>	<b>146.90</b>	<b>151.30</b>
Input power heating		kW	0.56	1.05	0.91	1.75
Gas consumption heating	Standard	kW	38.00	51.10	68.60	75.30
	Low temperature	kW	45.40	62.70	60.70	73.90
Recommended Fuse		A				
Starter amperes		A	30	30	30	30
External static pressure		Pa	10	10	10	10
Air flow		m <sup>3</sup> /min	370	420	460	460
Sound power	Normal	dB(A)	80	80	84	84
	Silent mode	dB(A)	77	77	81	81
Dimension	HxWxD	mm	2255 x 1650 x 1000	2255 x 1650 x 1000	2255 x 2026 x 1000	2255 x 2026 x 1000
Net weight		kg	765	765	870	880
Pipe diameter	Liquid pipe	Inch (mm)	1/2 (12.70)	5/8 (15.88)	5/8 (15.88)	3/4 (19.05)
	Gas pipe	Inch (mm)	1-1/8 (28.58)	1-1/8 (28.58)	1-1/8 (28.58)	1-1/4 (31.75)
	Fuel gas	Inch (mm)	19.05 (R3/4)	19.05 (R3/4)	19.05 (R3/4)	19.05 (R3/4)
	Exhaust drain port	mm	25	25	25	25
	Hot water supply in/out		Rp3/4 (Nut. thread)	Rp3/4 (Nut. thread)	Rp3/4 (Nut. thread)	Rp3/4 (Nut. thread)
Elevation difference (in/out)			50	50	50	50
Refrigerant (R410A) / CO <sub>2</sub> Eq.		kg / T	11.50/24.00	11.50/24.00	11.50/24.00	11.50/24.00
Maximum number of connectable indoor units			26	33	41	50
Operating range	Cool Min ~ Max	°C (DB)	-10 ~ +43	-10 ~ +43	-10 ~ +43	-10 ~ +43
	Heat Min ~ Max	°C (WB)	-21 ~ +18	-21 ~ +18	-21 ~ +18	-21 ~ +18
<b>RRP</b>		<b>€</b>	<b>33,206</b>	<b>37,845</b>	<b>40,435</b>	<b>45,187</b>

1) SEER/SCOP is calculated based on the seasonal space cooling/heating efficiency "D" values of the COMMISSION REGULATION (EU) 2016/2281.

Hot water take out function added. EU safety regulation standard cleared. 25 HP chassis enlarged due to specification improvement. Pre-coat corrosion fin. Auto pump down function.

### Technical focus

- Superior seasonal energy efficiency, maximum 240,1 %
- DHW priority setting
- Operating range in heating down to -21 °C and up to +24 °C for air to water system
- No defrost cycle

- Capacity ratio 50 ~ 200 % <sup>1)</sup>
- Option of DX or chilled water for indoor heat exchange
- Maximum total piping length: 780 m

1) 50 ~ 200 % only when one outdoor unit is installed. In other cases 50 ~ 130 %.

## 2-Pipe ECO G GE3 Series combination from 32 to 60 HP

The GE3 Series has a top level of seasonal efficiency in this category. In addition, this product fits with special needs for commercial application thanks to DHW priority setting and Auto pump down functions.



HP			32 HP	36 HP	40 HP	45 HP	50 HP	55 HP	60 HP
Model			U-16GE3E5	U-16GE3E5	U-20GE3E5	U-20GE3E5	U-25GE3E5	U-25GE3E5	U-30GE3E5
Model			U-16GE3E5	U-20GE3E5	U-20GE3E5	U-25GE3E5	U-25GE3E5	U-30GE3E5	U-30GE3E5
Power supply	Voltage	V	220 - 230 - 240	220 - 230 - 240	220 - 230 - 240	220 - 230 - 240	220 - 230 - 240	220 - 230 - 240	220 - 230 - 240
	Phase		Single phase	Single phase	Single phase	Single phase	Single phase	Single phase	Single phase
	Frequency	Hz	50	50	50	50	50	50	50
Cooling capacity		kW	90.0	101.0	112.0	127.0	142.0	156.0	170.0
Input power cooling		kW	2.34	2.29	2.24	2.92	3.60	3.60	3.60
Hot water in cooling mode (at 65 °C outlet)		kW	47.20	52.70	58.20	65.50	72.80	82.40	92.00
Max COP in hot water		W/W	1.55	1.55	1.55	1.52	1.49	1.48	1.47
Gas consumption cooling		kW	82.20	93.20	104.20	119.30	134.40	151.30	168.20
Heating capacity	Standard	kW	100.0	113.0	126.0	143.0	160.0	175.0	190.0
	Low temperature	kW	106.0	120.0	134.0	145.0	156.0	168.0	180.0
Input power heating		kW	1.12	1.61	2.10	1.96	1.82	2.66	3.50
Gas consumption heating	Standard	kW	76.00	89.10	102.20	119.70	137.20	143.90	150.60
	Low temperature	kW	90.80	108.10	125.40	123.40	121.40	134.60	147.80
Recommended Fuse		A							
Starter amperes		A	30	30	30	30	30	30	30
External static pressure		Pa	10	10	10	10	10	10	10
Air flow		m <sup>3</sup> /min	370/370	370/420	420/420	420/460	460/460	460/460	460/460
Sound power	Normal	dB(A)	83	83	83	86	87	87	87
	Silent mode	dB(A)	80	80	80	83	84	84	84
Dimension	Height	mm	2255	2255	2255	2255	2255	2255	2255
	Width	mm	1650+100 +1650	1650+100 +1650	1650+100 +1650	1650+100 +2026	2026+100 +2026	2026+100 +2026	2026+100 +2026
	Depth	mm	1000	1000	1000	1000	1000	1000	1000
	Net weight	kg	1530(765+765)	1530(765+765)	1530(765+765)	1635(765+870)	1740(870+870)	1750(870+880)	1760(880+880)
Pipe diameter	Liquid pipe	Inch (mm)	3/4(19.05)	3/4(19.05)	3/4(19.05)	3/4(19.05)	3/4(19.05)	7/8(22.22)	7/8(22.22)
	Gas pipe	Inch (mm)	1-1/4(31.75)	1-1/4(31.75)	1-1/2(38.10)	1-1/2(38.10)	1-1/2(38.10)	1-1/2(38.10)	1-1/2(38.10)
	Fuel gas	Inch (mm)	19.05(R3/4)	19.05(R3/4)	19.05(R3/4)	19.05(R3/4)	19.05(R3/4)	19.05(R3/4)	19.05(R3/4)
	Exhaust drain port	mm	25	25	25	25	25	25	25
	Hot water supply in/out		Rp3/4 (Nut. thread)	Rp3/4 (Nut. thread)	Rp3/4 (Nut. thread)	Rp3/4 (Nut. thread)	Rp3/4 (Nut. thread)	Rp3/4 (Nut. thread)	Rp3/4 (Nut. thread)
Elevation difference (in/out)			50	50	50	50	50	50	50
Refrigerant (R410A) / CO <sub>2</sub> Eq.	kg / T		2x11.50/24.00	2x11.50/24.00	2x11.50/24.00	2x11.50/24.00	2x11.50/24.00	2x11.50/24.00	2x11.50/24.00
Maximum number of connectable indoor units			52	59	64	64	64	64	64
Operating range	Cool Min - Max	°C	-10 ~ +43	-10 ~ +43	-10 ~ +43	-10 ~ +43	-10 ~ +43	-10 ~ +43	-10 ~ +43
	Heat Min - Max	°C	-21 ~ +18	-21 ~ +18	-21 ~ +18	-21 ~ +18	-21 ~ +18	-21 ~ +18	-21 ~ +18
RRP	€		66,412	71,051	75,690	78,280	80,870	85,622	90,374

Data is for reference. Hot water take out function added. EU safety regulation standard cleared. 25 HP chassis enlarged due to specification improvement. Pre-coat corrosion fin. Auto pump down function.

### Technical focus

- Maximum 60 HP combination
- Superior seasonal energy efficiency, maximum 240,1 %
- DHW priority setting
- Operating range in heating down to -21 °C and up to +24 °C for air to water system
- No defrost cycle
- Option of DX or chilled water for indoor heat exchange
- Maximum total piping length: 780 m



## 3-Pipe ECO G GF3 Series

**DHW available in all seasons.**

Domestic hot water can be taken out from waste heat of engine effectively in heating & cooling - all year round.

HP			16 HP	20 HP	25 HP	
<b>Model</b>			<b>U-16GF3E5</b>	<b>U-20GF3E5</b>	<b>U-25GF3E5</b>	
Power supply	Voltage	V	220 - 230 - 240	220 - 230 - 240	220 - 230 - 240	
	Phase		Single phase	Single phase	Single phase	
	Frequency	Hz	50	50	50	
Cooling capacity		kW	45.0	56.0	71.0	
Refrigeration load Pdesign		kW	45.0	56.0	71.0	
<b>Ɖsc (LOT21) <sup>1)</sup></b>		<b>%</b>	<b>185.20</b>	<b>198.80</b>	<b>204.90</b>	
Input power cooling		kW	1.17	1.40	1.80	
Hot water in cooling mode (at 65 °C outlet)		kW	23.60	27.10	40.50	
Gas consumption cooling		kW	45.80	54.80	73.70	
Heating capacity	Standard	kW	50.0	63.0	80.0	
	Low temperature	kW	53.0	67.0	78.0	
Refrigeration load Pdesign		kW	38.0	52.0	60.0	
<b>Ɖsh (LOT21) <sup>1)</sup></b>		<b>%</b>	<b>139.20</b>	<b>140.20</b>	<b>150.90</b>	
Input power heating		kW	0.56	1.05	0.91	
Gas consumption heating	Standard	kW	42.20	51.10	68.60	
Recommended Fuse		A				
Starter amperes		A	30	30	30	
Air flow		m <sup>3</sup> /min	370	400	460	
Sound power	Normal	dB(A)	80	81	84	
	Silent mode	dB(A)	77	78	81	
Dimension	HxWxD	mm	2255 x 1650 x 1000	2255 x 1650 x 1000	2255 x 2026 x 1000	
Net weight		kg	775	775	880	
Pipe diameter	Liquid pipe	Inch (mm)	3/4 (19.05)	3/4 (19.05)	3/4 (19.05)	
	Gas pipe	Inch (mm)	1 1/8 (28.58)	1 1/8 (28.58)	1 1/8 (28.58)	
	Discharge	Inch (mm)	7/8 (22.22)	1 (25.40)	1 (25.40)	
	Fuel gas	Inch (mm)	19.05 (R3/4)	19.05 (R3/4)	19.05 (R3/4)	
	Exhaust drain port	mm	25	25	25	
	Hot water supply in/out		Rp3/4 (Nut. thread)	Rp3/4 (Nut. thread)	Rp3/4 (Nut. thread)	
Elevation difference (in/out)		m	50	50	50	
Refrigerant (R410A) / CO <sub>2</sub> Eq.		kg / T	11.50 / 24.00	11.50 / 24.00	11.50 / 24.00	
Maximum number of connectable indoor units			24	24	24	
Operating range	Cool Min ~ Max	°C	-10 ~ +43	-10 ~ +43	-10 ~ +43	
	Heat Min ~ Max	°C	-21 ~ +18	-21 ~ +18	-21 ~ +18	
<b>RRP</b>		<b>€</b>	<b>35,228</b>	<b>39,140</b>	<b>42,392</b>	
<b>Solenoid valve kit</b>			<b>RRP €</b>	<b>3-Pipe control box kit</b>		
KIT-P56HR3	KIT-P56HR3	3-Pipe control Solenoid valve kit (up to 5.6 kW)	614	CZ-P456HR3	4 ports 3 pipe box (up to 5.6 kW per port)	2800
	CZ-P56HR3	Solenoid valve kit (up to 5.6 kW)	517	CZ-P656HR3	6 ports 3 pipe box (up to 5.6 kW per port)	4282
	CZ-CAPE2	3-Pipe control PCB	97	CZ-P856HR3	8 ports 3 pipe box (up to 5.6 kW per port)	5768
KIT-P160HR3	KIT-P160HR3	3-Pipe control Solenoid valve kit (from 5.6 to 16.0 kW)	700	CZ-P4160HR3	4 ports 3 pipe box (up to 16.0 kW per port)	3137
	CZ-P160HR3	Solenoid valve kit (from 5.6 kW to 16.0 kW)	603			
	CZ-CAPE2	3-Pipe control PCB	97			
CZ-CAPEK2 <sup>4)</sup>		3-Pipe control PCB for wall-mounted	97			

1) SEER/SCOP is calculated based on the seasonal space cooling/heating efficiency "Ɖ" values of the COMMISSION REGULATION (EU) 2016/2281. 2) Available for S-45/56/73/106MK2E5B.

Hot water take out function added, EU safety regulation standard cleared. 25 HP chassis enlarged due to specification improvement. Pre-coat corrosion fin. Auto pump down function.

### Outstanding seasonal energy efficiency, maximum 204,9 %

- Capacity ratio 50 ~ 200 %
- No defrost cycle
- Maximum total piping length: 780 m


### Flexible installation

- Full heating capacity down to -21 °C (WB)
- DHW production for all the year
- Maximum 24 indoor units connectable



# Panasonic GHP/EHP Hybrid System. First intelligent technology

Taking advantage of Gas and Electricity to achieve better energy saving ever.



**It is time to save energy utilising the advantages from gas and electricity by Panasonic reliable ECO G / ECOi technology**

Hybrid system can offer intelligent operation logic for better economy and efficiency by taking the best of ECO G and ECOi. This is like a hybrid car in heating and cooling system.

**GHP**  
GAS



**U-20GES3E5 (20 HP)**

+

**EHP**  
ELECTRIC



**U-10MES2E8 (10 HP)**


+



**Intelligent controller CZ-256ESMC3**

- Master unit GHP**
- Load calculation of GHP&EHP
  - Operation in accordance with the upper limit setting.
  - Individual capacity control
  - Device control
  - Special control (Defrost, Oil recovery, 4Way-valve matching / Abnormality processing)

- Slave Unit EHP**
- Intelligent controller**
- Demand monitoring
  - Indoor/Total load calculation
  - Operation Ratio Indication upper limit setting of MAP according to:
    - Energy unit RRP
    - Electric power demand
    - Air conditioning load

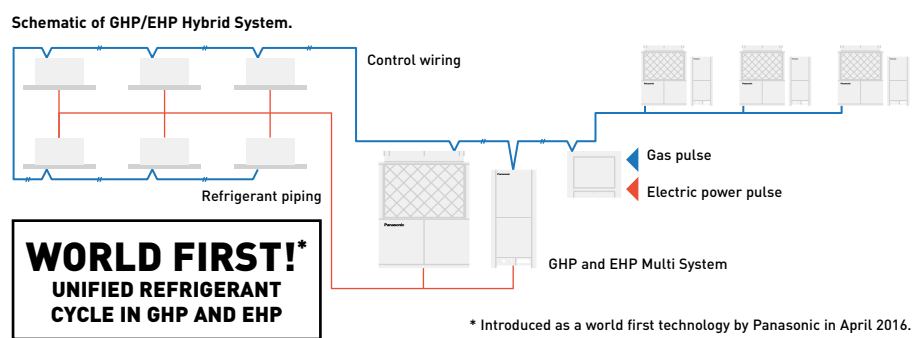

**2-Pipe Hybrid GHP/EHP**

- Extended lifespan with intelligent energy management. The goal is for the EHP and GHP to work at optimal speeds
- Low energy cost
- Low emissions

HP			Hybrid GHP	Hybrid EHP
Outdoor units			20 HP	10 HP
			U-20GES3E5	U-10MES2E8
Power supply	Voltage	V	220 - 230 - 240	220 - 230 - 240
	Phase		Single phase	Three phase
	Frequency	Hz	50	50
Cooling capacity		kW	56,0	28,0
<b>Dsh (LOT21) <sup>1)</sup></b>		<b>%</b>	<b>211,80</b>	<b>275,40</b>
Running current cooling		A	5,18	10,70/10,20/9,80
Input power cooling		kW	1,12	6,41
Hot water in cooling mode (at 65 °C outlet)		kW	26,20	—
Gas consumption cooling		kW	52,10	—
Heating capacity		kW	63,0	31,5
<b>Dsh (LOT21) <sup>1)</sup></b>		<b>%</b>	<b>143,20</b>	<b>167,60</b>
Running current heating		A	4,79	11,10/10,50/10,10
Input power heating		kW	1,05	6,62
Gas consumption heating	Standard	kW	51,10	—
Recommended Fuse		A		
Starting current		A	30	1
Air flow		m <sup>3</sup> /min	420	224
Sound pressure	Normal mode	dB(A)	58	56
Sound power	Normal mode	dB(A)	80	77
Dimension	H x W x D	mm	2255 x 1650 x 1000	1842 x 770 x 1000
Net weight		kg	765	210
Pipe diameter <sup>2)</sup>	Liquid pipe	Inch (mm)	5/8 (15,88)	3/8 (9,52)
	Gas pipe	Inch (mm)	1 1/8 (28,58)	7/8 (22,22)
	Balance pipe	Inch (mm)	1/4 (6,35)	1/4 (6,35)
Drain heater		W	40	—
Refrigerant (R410A) / CO <sub>2</sub> Eq.		kg / T	11,05/23,0724	5,60/11,6928
Maximum allowable indoor / outdoor capacity ratio %			50 ~ 130	50 ~ 130
Operating range	Cool Min ~ Max	°C	-10 ~ +43	-10 ~ +43
	Heat Min ~ Max	°C	-21 ~ +18	-21 ~ +18
<b>RRP</b>		<b>€</b>	<b>39,556</b>	<b>9,508</b>

1) SEER/SCOP is calculated based on the seasonal space cooling/heating efficiency "D" values of the COMMISSION REGULATION (EU) 2016/2281.

2) Please refer service manual when the maximum piping length exceeds 90 meters (equivalent length).

**Technical focus**

- 4 different setting (Economy, Efficiency, GHP first mode, EHP first mode)
- DHW energy recovery 26,2 kW (at 65 °C) by waste heat of engine
- Unified refrigerant cycle in GHP and EHP for easy installation
- DHW priority mode with WHE system
- Up to 48 indoor units connectable



## ECOi 2-Pipe with water heat exchanger for chilled and hot water production

**Water heat exchanger (WHE) for hydronic applications.**  
WHE for ECOi system controlled by a timer remote control CZ-RTC5B.

Energy-efficient capacity control with superior external static pressure is now ready.



Hydrokit with A class water pump			PAW-250WP5G1	PAW-500WP5G1
Hydrokit without pump			PAW-250W5G1	PAW-500W5G1
Cooling capacity at 35 °C, water outlet 7 °C	kW		25,0	50,0
Heating capacity	kW		28,0	56,0
Heating capacity at +7 °C, heating water temperature at 45 °C	kW		28,0	56,0
COP at +7 °C with heating water temperature at 45 °C	W/W		2,97	3,10
<b>Heating Energy Efficiency class at 35 °C<sup>1)</sup></b>			<b>A++</b>	<b>A++</b>
Øsh (LOT1) <sup>2)</sup>	%		152,00	152,00
Dimension	HxWxD	mm	1000 x 575 x 1110	1000 x 575 x 1110
Net weight		kg	135 (140 with pump)	155 (165 with pump)
Water pipe connector			Rp2 Female Thread (50A)	Rp2 Female Thread (50A)
Heating water flow (ΔT=5 K, 35 °C)	m <sup>3</sup> /h		5,16	10,32
Capacity of integrated electric heater	kW		Not equipped	Not equipped
Flow switch			Equipped	Equipped
Water filter			Equipped	Equipped
Input power with A class water pump / without pump	kW		0,329 / 0,024	0,574 / 0,024
Maximum current with A class water pump / without pump	A		1,43 / 0,10	2,50 / 0,10
<b>Outdoor unit</b>			<b>U-10ME2E8</b>	<b>U-20ME2E8</b>
Sound pressure		dB(A)	56	60
Dimension	HxWxD	mm	1842 x 770 x 1000	1842 x 770 x 1000
Net weight		kg	210	375
Pipe diameter	Liquid pipe	Inch (mm)	3/8(9,52)	5/8(15,88)
	Gas pipe	Inch (mm)	7/8(22,22)	1-1/8(28,58)
Refrigerant (R410A) / CO <sub>2</sub> Eq.		kg	5,6 *Need Additional gas amount at site	9,5 *Need Additional gas amount at site
Pipe length range / Elevation difference (in/out)		m	170 / 50 (OD above) 35 (OD below)	170 / 50 (OD above) 35 (OD below)
Pipe length for nominal capacity		m	7,5	7,5
Pipe length for additional gas / Additional gas amount (R410A)		m / g/m	0 < / Refer to manual	0 < / Refer to manual
Operation range	Heat Min ~ Max	°C	-11 ~ +15 <sup>3)</sup>	-11 ~ +15 <sup>3)</sup>
Water outlet temperature range	Cool Min ~ Max	°C	+5 ~ +15	+5 ~ +15
	Heat Min ~ Max	°C	+35 ~ +45	+35 ~ +45
<b>Hydrokit with A class water pump RRP</b>			<b>10,744</b>	<b>11,363</b>
<b>Hydrokit without pump RRP</b>			<b>10,207</b>	<b>10,796</b>
<b>Outdoor unit RRP</b>			<b>8,933</b>	<b>16,240</b>


Accessories		RRP €
PAW-3WSK	Stacking kit for vertically stacking up to 3 WHE (4 pieces per Kit)	158

1) Unit efficiency energy level: Scale from A+++ to D. 2) Seasonal space cooling/heating energy efficiency following COMMISSION REGULATION (EU) 813/2013. 3) With accessory low temperature kit -25 ~ +15 °C. Available only as a spare part.

Performance calculation in agreement with Eurovent. Sound pressure measured at 1 m from the outdoor unit and at 1,5 m height.

### Stacking kit PAW-3WSK.

It is possible to stack up to 3 units. When stacking units, always anchor the bottom unit to the ground using the anchor holes.

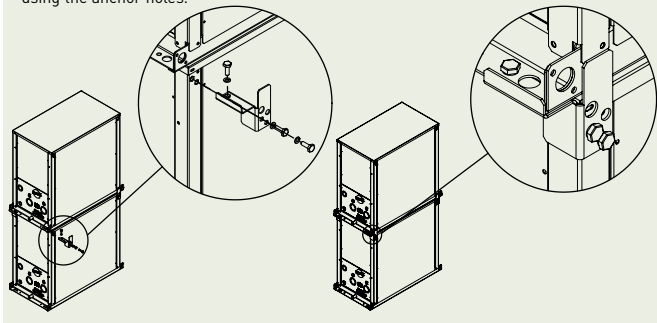

Availability of easy vertical stacking allows installations in a limited space (up to 3 units)\*.

Stainless steel plate heat exchanger with anti-freeze protection control.

Change over between heating and cooling operation.

\* Stacking kit (PAW-3WSK) is necessary.

### Technical focus

Heating, cooling and DHW — A class water pump included (only in P model) — Flexible modularity from 25 kW — Better partial load vs standard chiller system — Compatible with all centralized controllers — Maximum distance between outdoor unit and WHE: 170 m — Maximum hot water outlet temperature: 45 °C — Minimum chilled water outlet temperature: 5 °C — Outdoor temperature range in heating mode: -11 °C to +15 °C (with low temperature kit -25 °C\*)

\* Available as a spare part.





**ECO G with water heat exchanger for chilled and hot water production****Water heat exchanger (WHE) for hydronic applications.**

WHE for ECO G system controlled by a timer remote control CZ-RTC5B.

Energy-efficient capacity control with superior external static pressure is now ready.

Hydrokit with A class water pump			PAW-500WP5G1	PAW-710WP5G1
Hydrokit without pump			PAW-500W5G1	PAW-710W5G1
Heating capacity	kW		60,0	80,0
Heating capacity at +7 °C, heating water temperature at 35 °C	kW		60,9	81,2
COP at +7 °C with heating water temperature at 35 °C	W/W		1,15	1,18
Heating capacity at +7 °C, heating water temperature at 45 °C	kW		60,0	80,0
COP at +7 °C with heating water temperature at 45 °C	W/W		1,02	1,04
Heating capacity at -7 °C, heating water temperature at 35 °C	kW		48,2	50,8
COP at -7 °C, heating water temperature at 35 °C	W/W		0,80	0,80
Heating capacity at -15 °C, heating water temperature at 35 °C	kW		46,3	50,0
COP at -15 °C with heating water temperature at 35 °C	W/W		0,80	0,80
Refrigeration load Pdesign	kW		48,0	—
<b>Heating Energy Efficiency class at 35 °C <sup>1)</sup></b>			<b>A+</b>	<b>—</b>
Dsh (LOT1) <sup>2)</sup>	%		<b>130,00</b>	<b>128,00</b>
Cooling capacity	kW		—	—
Cooling capacity at +35 °C, outlet temperature 7 °C, inlet temperature 12 °C	kW		50,0	67,0
EER at +35 °C, outlet temperature 7 °C, inlet temperature 12 °C	W/W		0,78	0,89
Dimension	HxWxD	mm	1000 x 575 x 1110	1000 x 575 x 1110
Net weight		kg	155 (165 with pump)	160 (175 with pump)
Water pipe connector			Rp2 Female Thread (50A)	Rp2 Female Thread (50A)
Heating water flow (ΔT=5 K, 35 °C)	m <sup>3</sup> /h		10,32	13,76
Capacity of integrated electric heater	kW		Not equipped	Not equipped
Flow switch			Equipped	Equipped
Water filter			Equipped	Equipped
Input power with A class water pump / without pump	kW		0,574 / 0,024	0,824 / 0,024
Maximum current with A class water pump / without pump	A		2,50 / 0,10	3,60 / 0,10
<b>Outdoor unit</b>			<b>U-20GE3E5</b>	<b>U-30GE3E5</b>
Sound power	Normal / Silent	dB(A)	80 / 77	84 / 81
Dimension	HxWxD	mm	2255 x 1650 x 1000	2255 x 2026 x 1000
Net weight		kg	765	880
Pipe diameter	Liquid pipe	Inch (mm)	5/8 (15,88)	3/4 (19,05)
	Gas pipe	Inch (mm)	1-1/8 (28,58)	1-1/4 (31,75)
Pipe length / Pipe length for nominal capacity		m	7 / 170	7 / 170
Elevation difference (in/out)		m	50 (OD above) 35 (OD below)	50 (OD above) 35 (OD below)
Operation range	Heat Min ~ Max	°C	-21 ~ +24 (until outlet temperature 45)	-21 ~ +24 (until outlet temperature 45)
Water outlet temperature range	Cool Min ~ Max	°C	-15 ~ +15	-15 ~ +15
	Heat Min ~ Max	°C	+35 ~ +55	+35 ~ +55
<b>Hydrokit with A class pump RRP</b>			<b>11,363</b>	<b>13,069</b>
<b>Hydrokit without pump RRP</b>			<b>10,796</b>	<b>12,415</b>
<b>Outdoor unit RRP</b>			<b>37,845</b>	<b>45,187</b>

**Accessories**

		RRP €
<b>PAW-3WSK</b>	Stacking kit for vertically stacking up to 3 WHE (4 pieces per Kit)	<b>158</b>

1) Unit efficiency energy level: Scale from A+++ to D. 2) Seasonal space cooling/heating energy efficiency following COMMISSION REGULATION (EU) 813/2013.

Performance calculation in agreement with Eurovent. Sound pressure measured at 1 m from the outdoor unit and at 1,5 m height.

Availability of easy vertical stacking allows installations in a limited space (up to 3 units)\*.

Stainless steel plate heat exchanger with anti-freeze protection control.

Change over between heating and cooling operation.






















































\* Stacking kit (PAW-3WSK) is necessary.

**Technical focus**

Heating, cooling and DHW — A class water pump included (only in P model) — No cascade installation up to 80 kW — Free DHW from waste heat of engine — Compatible with all centralized controllers — Maximum distance between outdoor unit and WHE: 170 m — Hot water outlet temperatures from 35 °C to 55 °C — Chilled water outlet temperatures from -15 °C to +15 °C — Minimum outdoor temperature in heating mode: -21 °C







































# ECOi and ECO G systems indoor units range

Page		1.5 kW	2.2 kW	2.8 kW	3.0 kW	3.6 kW	4.0 kW	4.5 kW
P. 141	<b>NEW</b> U2 Type 4 way 90x90 cassette • R32/R410A		 S-22MU2E5B	 S-28MU2E5B		 S-36MU2E5B		 S-45MU2E5B
P. 142	<b>NEW</b> Y2 Type 4 way 60x60 cassette • R32/R410A	 S-15MY2E5B	 S-22MY2E5B	 S-28MY2E5B		 S-36MY2E5B		 S-45MY2E5B
P. 143	L1 Type 2 way cassette • R410A		 S-22ML1E5	 S-28ML1E5		 S-36ML1E5		 S-45ML1E5
P. 144	D1 Type 1 way cassette • R410A			 S-28MD1E5		 S-36MD1E5		 S-45MD1E5
P. 145	<b>NEW</b> F3 Type variable static pressure adaptive duct • R32/R410A	 S-15MF3E5B  S-15MF3E5A	 S-22MF3E5B  S-22MF3E5A	 S-28MF3E5B  S-28MF3E5A		 S-36MF3E5B  S-36MF3E5A		 S-45MF3E5B  S-45MF3E5A
P. 146	<b>NEW</b> M1 Type Slim variable static pressure hide-away • R32/R410A	 S-15MM1E5B	 S-22MM1E5B	 S-28MM1E5B		 S-36MM1E5B		 S-45MM1E5B
P. 147	E2 Type high static pressure hide-away • R410A							
P. 148	Heat recovery with DX Coil • R410A				 PAW-500ZDX3N		 PAW-800ZDX3N	 PAW-01KZDX3N
P. 149	T2 Type ceiling • R410A					 S-36MT2E5A		 S-45MT2E5A
P. 150	<b>NEW</b> K2 Type wall- mounted • R32/ R410A	 S-15MK2E5B	 S-22MK2E5B	 S-28MK2E5B		 S-36MK2E5B		 S-45MK2E5B
P. 151	G1 Type floor console • R410A		 S-22MG1E5N	 S-28MG1E5N		 S-36MG1E5N		 S-45MG1E5N
P. 152	P1 Type floor- standing • R410A		 S-22MP1E5	 S-28MP1E5		 S-36MP1E5		 S-45MP1E5
P. 152	R1 Type concealed floor-standing • R410A		 S-22MR1E5	 S-28MR1E5		 S-36MR1E5		 S-45MR1E5
P. 153	Hydrokit for ECOi. water at 45 °C • R410A							



OPTIONAL UNITS ON VENTILATION SECTION

5.6 kW	6.0 kW	7.3 kW	9.0 kW	10.6 kW	14.0 kW	16.0 kW	22.4 kW	28.0 kW
 S-56MU2E5B	 S-60MU2E5B	 S-73MU2E5B	 S-90MU2E5B	 S-106MU2E5B	 S-140MU2E5B	 S-160MU2E5B		
 S-56MY2E5B								
 S-56ML1E5		 S-73ML1E5						
 S-56MD1E5		 S-73MD1E5						
 S-56MF3E5B S-56MF3E5A	 S-60MF3E5B S-60MF3E5A	 S-73MF3E5B S-73MF3E5A	 S-90MF3E5B S-90MF3E5A	 S-106MF3E5B S-106MF3E5A	 S-140MF3E5B S-140MF3E5A	 S-160MF3E5B S-160MF3E5A		
 S-56MM1E5B								
							 S-224ME2E5	 S-280ME2E5
 S-56MT2E5A		 S-73MT2E5A		 S-106MT2E5A	 S-140MT2E5A			
 S-56MK2E5B		 S-73MK2E5B		 S-106MK2E5B				
 S-56MG1E5N								
 S-56MP1E5		 S-71MP1E5						
 S-56MR1E5		 S-71MR1E5						
			 S-80MW1E5	 S-125MW1E5				

# Bringing nature's balance indoors



## nanoe™ X, technology with the benefits of hydroxyl radicals.

Abundant in nature, hydroxyl radicals (also known as OH radicals) have the capacity to inhibit pollutants, viruses, and bacteria to clean and deodorise. nanoe™ X, technology can bring these incredible benefits indoors so that hard surfaces, soft furnishings, and the indoor environment can be a cleaner and pleasant place to be, whether at home, at work, or visiting hotels, shops, restaurants etc.



### A naturally occurring process

Hydroxyl radicals are unstable molecules looking to react with other elements like hydrogen, capturing it. Thanks to this reaction, hydroxyl radicals have the potential to inhibit the growth of pollutants such as bacteria, viruses, moulds, and odours, breaking them down and neutralising the unpleasant effects. This naturally occurring process has major benefits to improve indoor environments.


**Panasonic's nanoe™ X technology takes this a step further and brings nature's detergent – hydroxyl radicals – indoors to help create an ideal environment.**

### Panasonic's nanoe™ X technology takes this a step further and brings nature's detergent – hydroxyl radicals – indoors to help create an ideal environment

Thanks to the nanoe™ X properties, several types of pollutants can be inhibited such as certain types of bacteria, viruses, mould, allergens, pollen and certain hazardous substances.



nanoe™ X reliably reaches pollutants.



Hydroxyl radicals denature pollutants' proteins.



Pollutants activity is inhibited.



### nanoe™ X: improving protection 24/7

#### Built-in nanoe X Generator Mark 2.

U2 Type 4 way 90x90 cassette. Built-in:

S-\*\*\*MU2E5B. 11 capacities: 2.2 - 16.0 kW.

F3 Type variable static pressure adaptive duct. Built-in:

S-\*\*\*MF3E5B. 12 capacities: 1.5 - 16.0 kW.

#### Built-in nanoe X Generator Mark 1.

Floor console. Built-in: S-\*\*\*MG1E5N. 5 capacities: 2,2 - 5.6 kW.



NEW 2021



NEW U2 Type 4 way 90x90 cassette • R32/R410A

The 4 way 90x90 cassettes with integrated nanoe X Generator Mark 2 and new panel design.

Panasonic introduces a modern flat panel design to blend into any space. These cassettes have been developed to satisfy today's customer needs such as high energy saving, comfort and better indoor air quality.



COMPATIBLE WITH ALL PANASONIC CONNECTIVITY SOLUTIONS. FOR DETAILED INFORMATION GO TO THE CONTROL SYSTEMS SECTION

Model	S . .MU2E5B	22	28	36	45	56	60	73	90	106	140	160	
Cooling capacity	kW	2.2	2.8	3.6	4.5	5.6	6.0	7.3	9.0	10.6	14.0	16.0	
Input power cooling	W	20.00	20.00	20.00	20.00	25.00	35.00	40.00	40.00	90.00	95.00	105.00	
Current (cool)	A	0.21	0.21	0.21	0.21	0.23	0.33	0.36	0.38	0.71	0.74	0.82	
Heating capacity	kW	2.5	3.2	4.2	5.0	6.3	7.1	8.0	10.0	11.4	16.0	18.0	
Input power heating	W	20.00	20.00	20.00	20.00	25.00	35.00	40.00	40.00	85.00	90.00	100.00	
Current (heat)	A	0.20	0.20	0.20	0.20	0.22	0.32	0.35	0.37	0.69	0.72	0.80	
Fan type		Turbo fan	Turbo fan	Turbo fan	Turbo fan	Turbo fan	Turbo fan	Turbo fan	Turbo fan	Turbo fan	Turbo fan	Turbo fan	
nanoe X Generator		Mark 2	Mark 2	Mark 2	Mark 2	Mark 2	Mark 2	Mark 2	Mark 2	Mark 2	Mark 2	Mark 2	
Air flow	Hi/Med/Lo	m³/min	14.50/ 13.00/ 11.50	14.50/ 13.00/ 11.50	14.50/ 13.00/ 11.50	15.50/ 13.00/ 11.50	16.50/ 13.50/ 11.50	21.00/ 16.00/ 13.00	22.50/ 16.00/ 13.00	23.00/ 18.50/ 14.00	34.00/ 25.00/ 19.00	36.00/ 26.00/ 20.00	37.00/ 28.00/ 24.00
Recommended Fuse	A												
Sound pressure	Hi/Med/Lo	dB(A)	30/29/28	30/29/28	30/29/28	31/29/28	32/30/28	36/32/29	37/32/29	38/35/32	44/38/34	45/39/35	46/40/38
Sound power	Hi/Med/Lo	dB(A)	45/44/43	45/44/43	45/44/43	46/44/43	47/45/43	51/47/44	52/47/44	53/50/47	59/53/49	60/54/50	61/55/53
Dimension (H x W x D)	Indoor	mm	256 x 840 x 840	256 x 840 x 840	256 x 840 x 840	256 x 840 x 840	256 x 840 x 840	256 x 840 x 840	256 x 840 x 840	256 x 840 x 840	319 x 840 x 840	319 x 840 x 840	319 x 840 x 840
	Panel	mm	33.5 x 950 x 950	33.5 x 950 x 950	33.5 x 950 x 950	33.5 x 950 x 950	33.5 x 950 x 950	33.5 x 950 x 950	33.5 x 950 x 950	33.5 x 950 x 950	33.5 x 950 x 950	33.5 x 950 x 950	33.5 x 950 x 950
Net weight (Panel)	kg	19 (5)	19 (5)	19 (5)	19 (5)	19 (5)	20 (5)	20 (5)	20 (5)	25 (5)	25 (5)	25 (5)	
Pipe diameter	Liquid	Inch (mm)	1/4 (6.35)	1/4 (6.35)	1/4 (6.35)	1/4 (6.35)	1/4 (6.35)	3/8 (9.52) <sup>1)</sup>	3/8 (9.52) <sup>1)</sup>	3/8 (9.52) <sup>1)</sup>	3/8 (9.52)	3/8 (9.52)	3/8 (9.52)
	Gas	Inch (mm)	1/2 (12.70)	1/2 (12.70)	1/2 (12.70)	1/2 (12.70)	1/2 (12.70)	5/8 (15.88) <sup>1)</sup>	5/8 (15.88) <sup>1)</sup>	5/8 (15.88) <sup>1)</sup>	5/8 (15.88)	5/8 (15.88)	5/8 (15.88)
Indoor unit RRP	€	942	966	1,020	1,124	1,155	1,176	1,198	1,275	1,351	1,564	1,747	
CZ-KPU3W panel RRP	€	216	216	216	216	216	216	216	216	216	216	216	

Accessories		RRP €
CZ-RTC6	CONEX wired remote controller (non-wireless)	148
CZ-RTC6BL	CONEX wired remote controller with Bluetooth®	177
CZ-RTC5B	Wired remote controller with Econavi function	129
CZ-RWS3 + CZ-RWRU3W	Infrared remote controller	292
PAW-RE2C4	Wired remote controller for hotel application	457

Accessories		RRP €
CZ-KPU3W	Standard panel.	216
CZ-KPU3AW	Econavi exclusive panel	270
CZ-CENSC1	Econavi energy savings sensor	159
CZ-FDU3+CZ-ATU2	Fresh air-intake kit	663

1) When the pipe diameter is (Liquid) Ø6,35(1/4) - (Gas) Ø12,7(1/2), connect the liquid socket tube (Ø6,35 - Ø9,52) to the liquid tubing side indoor unit and connect the gas socket tube (Ø12,7 - Ø15,88) to the gas tubing side indoor unit.

Technical focus

- High performance turbo fan, new path system for heat exchanger
- Lower noise in slow fan operation
- Ceiling height up to 5.0 m
- Industry top light weight, easy piping
- Econavi: Floor temperature and humidity sensor added. Activity amount detection and new circulator
- nanoe™ X (Generator Mark 2= 9.6 trillion hydroxyl radicals/sec) as standard for better indoor air quality, indoor unit internal cleaning with nanoe™ X and dry operation
- Powerful drain pump gives 850 mm lift
- Fresh air knockout
- Branch duct connection
- High volume fresh air input with optional air-intake plenum and chamber (CZ-FDU3+CZ-ATU2)

Panel design


Flat design, well-matched with interior, building. Position of 4 air wings can be set individually.

2 types of body with height difference

25,6 cm and 31,9 cm.

The drain pipe can be raised to a maximum height of 850 mm from the bottom of the ceiling

Do not attempt to raise it higher than 850 mm. Doing so will result in water leakage.

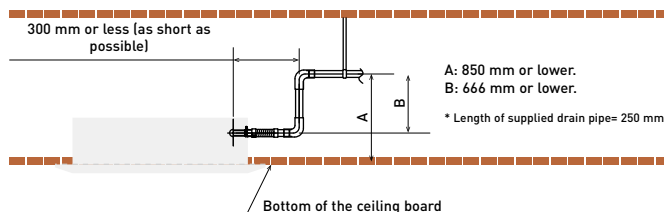

ECONAVI, nanoe™ X and INTERNET CONTROL: Optional.

Rating Conditions: Cooling Indoor 27 °C DB / 19 °C WB. Cooling Outdoor 35 °C DB / 24 °C WB. Heating Indoor 20 °C DB. Heating Outdoor 7 °C DB / 6 °C WB. (DB: Dry Bulb, WB: Wet Bulb). Specifications subject to change without notice. For detailed information about ErP / Energy Labelling, please visit our websites www.aircon.panasonic.eu or www.ptc.panasonic.eu.

NEW  
2021

## NEW Y2 Type 4 way 60x60 cassette • R32/R410A

**Designed to fit exactly into a 600 x 600 mm ceiling grid without the need to alter the bar configuration.**

The Y2 is ideal for small commercial and retrofit applications. In addition, the improvements to efficiency make this one of the most advanced units in the industry.



COMPATIBLE WITH ALL PANASONIC CONNECTIVITY SOLUTIONS. FOR DETAILED INFORMATION GO TO THE CONTROL SYSTEMS SECTION

Model			S-15MY2E5B	S-22MY2E5B	S-28MY2E5B	S-36MY2E5B	S-45MY2E5B	S-56MY2E5B
Cooling capacity		kW	1.5	2.2	2.8	3.6	4.5	5.6
Input power cooling		W	35.00	35.00	35.00	40.00	40.00	45.00
Operating current cooling		A	0.30	0.30	0.30	0.30	0.32	0.35
Heating capacity		kW	1.7	2.5	3.2	4.2	5.0	6.3
Input power heating		W	30.00	30.00	30.00	35.00	35.00	40.00
Operating current heating		A	0.25	0.25	0.30	0.30	0.30	0.30
Fan type			Centrifugal fan	Centrifugal fan	Centrifugal fan	Centrifugal fan	Centrifugal fan	Centrifugal fan
Air flow (Hi / Med / Lo)	Cool	m³/min	8.90/8.20/5.60	9.10/8.20/5.60	9.30/8.40/5.60	9.70/8.70/6.00	10.00/9.30/8.20	10.40/9.80/8.50
	Heat	m³/min	9.10/8.40/5.60	9.30/8.40/5.60	9.60/8.70/5.60	9.90/9.10/6.00	10.30/9.60/8.20	11.10/9.80/8.70
Recommended Fuse		A						
Sound pressure	Hi / Med / Lo	dB(A)	34/31/25	35/31/25	35/31/25	36/32/26	38/34/28	40/37/34
	Hi / Med / Lo	dB(A)	49/46/40	50/46/40	50/46/40	51/47/41	53/49/43	55/52/49
Dimension (H x W x D)	Indoor	mm	288 x 583 x 583	288 x 583 x 583	288 x 583 x 583	288 x 583 x 583	288 x 583 x 583	288 x 583 x 583
	Panel AW	mm	31 x 700 x 700	31 x 700 x 700	31 x 700 x 700	31 x 700 x 700	31 x 700 x 700	31 x 700 x 700
	Panel BW	mm	31 x 625 x 625	31 x 625 x 625	31 x 625 x 625	31 x 625 x 625	31 x 625 x 625	31 x 625 x 625
Net weight		kg	20.4(18+2.4)	20.4(18+2.4)	20.4(18+2.4)	20.4(18+2.4)	20.4(18+2.4)	20.4(18+2.4)
Pipe diameter	Liquid pipe	Inch (mm)	1/4(6.35)	1/4(6.35)	1/4(6.35)	1/4(6.35)	1/4(6.35)	1/4(6.35)
	Gas pipe	Inch (mm)	1/2(12.70)	1/2(12.70)	1/2(12.70)	1/2(12.70)	1/2(12.70)	1/2(12.70)
Indoor unit RRP		€	839	862	886	908	984	1,089
CZ-KPY3AW / CZ-KPY3BW panel RRP		€	248 / 216	248 / 216	248 / 216	248 / 216	2248 / 216	248 / 216

Accessories		RRP €
CZ-RTC6	CONEX wired remote controller (non-wireless)	148
CZ-RTC6BL	CONEX wired remote controller with Bluetooth®	177
CZ-RTC5B	Wired remote controller with Econavi function	129
CZ-RWS3	Infrared remote controller	119


Accessories		RRP €
PAW-RE2C4	Wired remote controller for hotel application	457
CZ-KPY3AW	Panel 700 x 700 mm	248
CZ-KPY3BW	Panel 625 x 625 mm	216
CZ-CENSC1	Econavi energy savings sensor	159

### Technical focus

- Mini cassette fits into a 600 x 600 mm ceiling grid
- Fresh air distribution
- Multidirectional airflow
- Powerful drain pump gives 850 mm lift
- Turbo fans and heat exchanger fins with improved design
- DC fan motors with variable speed, new heat exchangers, etc. ensure an efficient power consumption

### A drain height of approximately 850 mm from the ceiling surface

The drain height can be increased by approximately 350 mm over the conventional value by using a high-lift drain pump, and long horizontal piping is possible. A lightweight unit at 18.4 kg the unit is also very slim with a height of only 288 mm, making installation possible even in narrow ceilings.

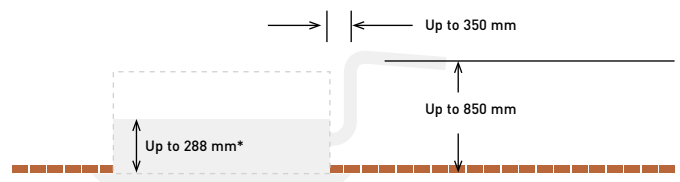

ECONAVI and INTERNET CONTROL: Optional.



L1 Type 2 way cassette • R410A



**Slim, compact and lightweight units.**

Remarkable size and weight reductions have been achieved by improvement of the design around the fan, the weight of all models now being 30 kg.



COMPATIBLE WITH ALL PANASONIC CONNECTIVITY SOLUTIONS. FOR DETAILED INFORMATION GO TO THE CONTROL SYSTEMS SECTION

Model			S-22ML1E5	S-28ML1E5	S-36ML1E5	S-45ML1E5	S-56ML1E5	S-73ML1E5
Cooling capacity		kW	2.2	2.8	3.6	4.5	5.6	7.3
Input power cooling		W	90.00	92.00	93.00	97.00	97.00	145.00
Operating current cooling		A	0.45	0.45	0.45	0.45	0.45	0.65
Heating capacity		kW	2.5	3.2	4.2	5.0	6.3	8.0
Input power heating		W	58.00	60.00	61.00	65.00	65.00	109.00
Operating current heating		A	0.29	0.29	0.29	0.29	0.29	0.48
Fan type			Sirocco fan	Sirocco fan	Sirocco fan	Sirocco fan	Sirocco fan	Sirocco fan
Recommended Fuse		A	5	5	5	5	5	5
Air flow	Hi / Med / Lo	m³/min	8.00/7.00/6.00	9.00/8.00/7.00	9.70/8.70/7.70	11.00/9.00/8.00	11.00/9.00/8.00	19.00/16.00/14.00
Sound pressure	Hi / Med / Lo	dB(A)	30/27/24	33/29/26	34/31/28	35/33/29	35/33/29	38/35/33
Dimension (H x W x D)	Indoor	mm	350 x 840 x 600	350 x 840 x 600	350 x 840 x 600	350 x 840 x 600	350 x 840 x 600	350 x 1140 x 600
	Panel	mm	8 x 1060 x 680	8 x 1060 x 680	8 x 1060 x 680	8 x 1060 x 680	8 x 1060 x 680	8 x 1360 x 680
Net weight (Panel)		kg	26.0 (8.0)	26.0 (8.0)	26.0 (8.0)	26.0 (8.0)	26.0 (8.0)	26.0 (8.0)
Pipe diameter	Liquid pipe	Inch (mm)	1/4 (6.35)	1/4 (6.35)	1/4 (6.35)	1/4 (6.35)	1/4 (6.35)	3/8 (9.52)
	Gas pipe	Inch (mm)	1/2 (12.70)	1/2 (12.70)	1/2 (12.70)	1/2 (12.70)	1/2 (12.70)	5/8 (15.88)
<b>Indoor unit RRP</b>		<b>€</b>	<b>1,193</b>	<b>1,219</b>	<b>1,290</b>	<b>1,407</b>	<b>1,447</b>	<b>1,487</b>
<b>CZ-02KPL2 panel RRP</b>		<b>€</b>	<b>384</b>	<b>384</b>	<b>384</b>	<b>384</b>	<b>384</b>	<b>384</b>
<b>CZ-03KPL2 panel RRP</b>		<b>€</b>	<b>—</b>	<b>—</b>	<b>—</b>	<b>—</b>	<b>—</b>	<b>460</b>

Accessories		RRP €
<b>CZ-RTC6</b>	CONEX wired remote controller (non-wireless)	<b>148</b>
<b>CZ-RTC6BL</b>	CONEX wired remote controller with Bluetooth®	<b>177</b>
<b>CZ-RTC5B</b>	Wired remote controller with Econavi function	<b>129</b>
<b>CZ-RWS3 + CZ-RWRL3</b>	Infrared remote controller	<b>304</b>

Accessories		RRP €
<b>PAW-RE2C4</b>	Wired remote controller for hotel application	<b>457</b>
<b>CZ-02KPL2</b>	Panel for S-22 to S-56 models	<b>384</b>
<b>CZ-03KPL2</b>	Panel for S-73 model	<b>460</b>

**Technical focus**


- Airflow and distribution is automatically altered depending on the operational mode of the unit
- Drain up is possible up to 500 mm from the drain port
- Simple maintenance

**Simple maintenance**

The drain pan is equipped with site wiring and can be removed. The fan case has a split construction, and the fan motor can be removed easily when the lower case is removed.


**Auto flap control**

Airflow and distribution is automatically altered depending on the operational mode of the unit.

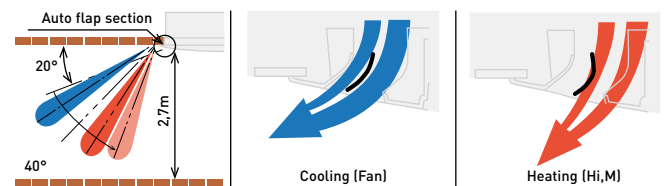

**Drain up is possible up to 500 mm from the drain port**

Maintenance of the drain pump is possible from two sides, from the left side (piping side) and from the inside of the unit.

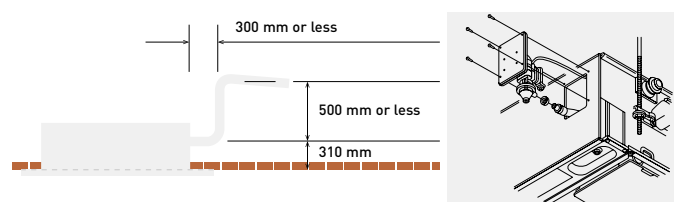

INTERNET CONTROL: Optional.

Rating Conditions: Cooling Indoor 27 °C DB / 19 °C WB. Cooling Outdoor 35 °C DB / 24 °C WB. Heating Indoor 20 °C DB. Heating Outdoor 7 °C DB / 6 °C WB. (DB: Dry Bulb, WB: Wet Bulb). Specifications subject to change without notice. For detailed information about ErP / Energy Labelling, please visit our websites www.aircon.panasonic.eu or www.ptc.panasonic.eu.

## D1 Type 1 way cassette • R410A

Designed for installation within the ceiling void, the D1 range of slimline 1 way blow cassettes feature powerful yet quiet fans for up to 4.2 m.



COMPATIBLE WITH ALL PANASONIC CONNECTIVITY SOLUTIONS. FOR DETAILED INFORMATION GO TO THE CONTROL SYSTEMS SECTION

Model			S-28MD1E5	S-36MD1E5	S-45MD1E5	S-56MD1E5	S-73MD1E5
Cooling capacity		kW	2.8	3.6	4.5	5.6	7.3
Input power cooling		W	51.00	51.00	51.00	60.00	87.00
Operating current cooling		A	0.39	0.39	0.39	0.46	0.70
Heating capacity		kW	3.2	4.2	5.0	6.3	8.0
Input power heating		W	40.00	40.00	40.00	48.00	76.00
Operating current heating		A	0.35	0.35	0.35	0.41	0.65
Fan type			Sirocco fan	Sirocco fan	Sirocco fan	Sirocco fan	Sirocco fan
Recommended Fuse		A	5	5	5	5	5
Air flow	Hi / Med / Lo	m <sup>3</sup> /min	12.00/10.00/9.00	12.00/10.00/9.00	12.00/11.00/10.00	13.00/11.50/10.00	18.00/15.00/13.00
Sound pressure	Hi / Med / Lo	dB(A)	36/34/33	36/34/33	36/35/34	38/36/34	45/40/36
Dimension (H x W x D)	Indoor	mm	200 x 1000 x 710	200 x 1000 x 710	200 x 1000 x 710	200 x 1000 x 710	200 x 1000 x 710
	Panel	mm	20 x 1230 x 800	20 x 1230 x 800	20 x 1230 x 800	20 x 1230 x 800	20 x 1230 x 800
Net weight (Panel)		kg	23.5(7.5)	23.5(7.5)	23.5(7.5)	23.5(7.5)	24.5(7.5)
Pipe diameter	Liquid pipe	Inch (mm)	1/4(6.35)	1/4(6.35)	1/4(6.35)	1/4(6.35)	3/8(9.52)
	Gas pipe	Inch (mm)	1/2(12.70)	1/2(12.70)	1/2(12.70)	1/2(12.70)	5/8(15.88)
<b>Indoor unit RRP</b>		<b>€</b>	<b>1,276</b>	<b>1,372</b>	<b>1,426</b>	<b>1,463</b>	<b>1,626</b>
<b>CZ-KPD2 panel RRP</b>		<b>€</b>	<b>406</b>	<b>406</b>	<b>406</b>	<b>406</b>	<b>406</b>


Accessories		RRP €
<b>CZ-RTC6</b>	CONEX wired remote controller (non-wireless)	148
<b>CZ-RTC6BL</b>	CONEX wired remote controller with Bluetooth®	177
<b>CZ-RTC5B</b>	Wired remote controller with Econavi function	129

Accessories		RRP €
<b>CZ-RWS3 + CZ-RWRD3</b>	Infrared remote controller	298
<b>PAW-RE2C4</b>	Wired remote controller for hotel application	457
<b>CZ-KPD2</b>	Panel	406

## Technical focus

- Ultra-Slim
- Suitable for standard and high ceilings
- Built-in drain pump provides 590 mm lift
- Easy to install and maintain
- Hanging height can be easily adjusted
- Uses a DC fan motor to improve energy-efficiency

## Drain height

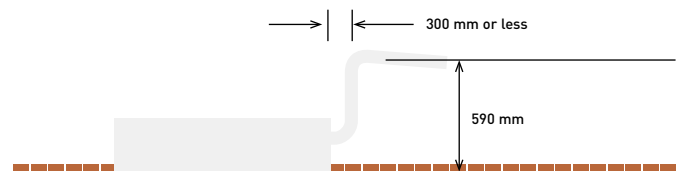

## With 3 types of air-blow systems, the units can be used in various ways



**1. One-direction "down-blow" system.**  
Powerful one-direction "down-blow" system reaches the floor even from high ceilings (up to 4,2 m).



**2. Two-direction ceiling-mounted system.**  
"Down-blow" and "front-blow" systems are combined in a ceiling-mounted unit to blow air over a wide area.



**3. One-direction ceiling-mounted system.**  
This powerful ceiling-mounted "front-blow" system efficiently air-conditions the space in front of the unit. [Additional accessories required].



INTERNET CONTROL: Optional.





NEW 2021



**NEW F3 Type variable static pressure adaptive duct**  
• R32/R410A

**New design adaptive ducted F3 range.**

2 installation possibilities (horizontal / vertical) with high ESP 150Pa allows flexible installation.



COMPATIBLE WITH ALL PANASONIC CONNECTIVITY SOLUTIONS. FOR DETAILED INFORMATION GO TO THE CONTROL SYSTEMS SECTION

R32 model*	S .MF3E5B	15	22	28	36	45	56	60	73	90	106	140	160
R410A model	S .MF3E5A	15	22	28	36	45	56	60	73	90	106	140	160
Cooling capacity	kW	1.5	2.2	2.8	3.6	4.5	5.6	6.0	7.3	9.0	10.6	14.0	16.0
Input power cooling	W	63.00	63.00	63.00	63.00	63.00	103.00	79.00	79.00	147.00	127.00	265.00	336.00
Current (cool)	A												
Heating capacity	kW	1.7	2.5	3.2	4.2	5.0	6.3	7.1	8.0	10.0	11.4	16.0	18.0
Input power heating	W	63.00	63.00	63.00	63.00	63.00	103.00	79.00	79.00	147.00	127.00	265.00	336.00
Current (heat)	A												
R 32 leakage Sensors		2	2	2	2	2	2	2	2	2	2	2	2
Fan type													
nanoe X Generator		Mark 2	Mark 2	Mark 2	Mark 2	Mark 2	Mark 2	Mark 2	Mark 2	Mark 2	Mark 2	Mark 2	Mark 2
Recommended Fuse	A												
Air flow <sup>1)</sup>	Hi/Med/Lo	m <sup>3</sup> /min											
External static pressure		Pa											
Sound pressure	Hi/Med/Lo	dB(A)	32/-/22	32/-/22	32/-/22	32/-/22	32/-/22	35/-/25	33/-/25	35/-/26	36/-/29	39/-/32	43/-/33
Sound power	Hi/Med/Lo	dB(A)	55/51/44	55/51/44	55/51/44	55/51/44	56/54/47	56/54/47	57/54/48	59/56/50	60/56/53	61/57/54	62/58/55
Dimension	HxWxD	mm	250x800x730	250x800x730	250x800x730	250x800x730	250x800x730	250x800x730	250x1000x730	250x1000x730	250x1400x730	250x1400x730	250x1400x730
Net weight		kg	26	26	26	26	26	31	31	31	40	40	40
Pipe diameter	Liquid	Inch (mm)	1/4(6.35)	1/4(6.35)	1/4(6.35)	1/4(6.35)	1/4(6.35)	1/4(6.35)	1/4(6.35)	1/4(6.35)	3/8(9.52)	3/8(9.52)	3/8(9.52)
	Gas	Inch (mm)	1/2(12.70)	1/2(12.70)	1/2(12.70)	1/2(12.70)	1/2(12.70)	1/2(12.70)	1/2(12.70)	1/2(12.70)	5/8(15.88)	5/8(15.88)	5/8(15.88)
<b>R32 model RRP</b>	<b>€</b>	<b>1,176</b>	<b>1,210</b>	<b>1,249</b>	<b>1,290</b>	<b>1,403</b>	<b>1,490</b>	<b>1,545</b>	<b>1,586</b>	<b>1,630</b>	<b>1,753</b>	<b>1,890</b>	<b>1,995</b>
<b>R410A model RRP</b>	<b>€</b>	<b>1,029</b>	<b>1,053</b>	<b>1,078</b>	<b>1,103</b>	<b>1,219</b>	<b>1,320</b>	<b>1,344</b>	<b>1,379</b>	<b>1,398</b>	<b>1,524</b>	<b>1,697</b>	<b>1,820</b>

Tentative data

Accessories		RRP €
<b>CZ-RTC6</b>	CONEX wired remote controller (non-wireless)	148
<b>CZ-RTC6BL</b>	CONEX wired remote controller with Bluetooth®	177
<b>CZ-RTC5B</b>	Wired remote controller with Econavi function	129

Accessories		RRP €
<b>CZ-RWS3 + CZ-RWRC3</b>	Infrared remote controller	298
<b>PAW-RE2C4</b>	Wired remote controller for hotel application	457
<b>CZ-CENSC1</b>	Econavi energy savings sensor	159

1) Value referred to standard settings at shipment (H curve 8, M curve 5, L curve 1). \* Available in summer 2021.

**Technical focus**

- 4 installation possibilities with horizontal and vertical mounting and selectable rear or bottom air inlet
- Industry leading low noise with super quiet operation, minimum 22 dB(A)
- Only 250 mm height and lightweight unit from 26 to 42 kg
- Integrated R32 leak detector for the R32 version
- Improved drain pan suitable for both horizontal / vertical installation
- Drain pump included <sup>1)</sup>
- nanoe™ X (Generator Mark 2= 9.6 trillion hydroxyl radicals/sec) as standard, effective even at duct connections up to 10 m and 3 bends <sup>2)</sup>

1) For use with horizontal installation only  
2) Panasonic internal survey.


**Vertical Installation**

New vertical installation option. Variable external static pressure to support ducted installations with bends.



**Improved drain pan design**

Drain pan is shared in both cases horizontal and vertical installation. No need to alternate anymore.



ECONAVI and INTERNET CONTROL: Optional.

Rating Conditions: Cooling Indoor 27 °C DB / 19 °C WB. Cooling Outdoor 35 °C DB / 24 °C WB. Heating Indoor 20 °C DB. Heating Outdoor 7 °C DB / 6 °C WB. [DB: Dry Bulb; WB: Wet Bulb]. Specifications subject to change without notice. For detailed information about ErP / Energy Labelling, please visit our websites www.aircon.panasonic.eu or www.ptc.panasonic.eu.

NEW  
2021**NEW M1 Type slim variable static pressure hide-away concealed duct • R32/R410A****The ultra slim M1 type is one of the leading products of its type in the industry.**

With a depth of only 200 mm it provides greater flexibility and can be used in far more applications.



COMPATIBLE WITH ALL PANASONIC CONNECTIVITY SOLUTIONS. FOR DETAILED INFORMATION GO TO THE CONTROL SYSTEMS SECTION

Model			S-15MM1E5B	S-22MM1E5B	S-28MM1E5B	S-36MM1E5B	S-45MM1E5B	S-56MM1E5B
Cooling capacity		kW	1.5	2.2	2.8	3.6	4.5	5.6
Input power cooling		W	36.00	36.00	40.00	42.00	49.00	64.00
Operating current cooling		A	0.26	0.26	0.30	0.31	0.37	0.48
Heating capacity		kW	1.7	2.5	3.2	4.2	5.0	6.3
Input power heating		W	26.00	26.00	30.00	32.00	39.00	54.00
Operating current heating		A	0.23	0.23	0.27	0.28	0.34	0.45
Fan type			Sirocco fan	Sirocco fan	Sirocco fan	Sirocco fan	Sirocco fan	Sirocco fan
Recommended Fuse		A						
Air flow	Hi / Med / Lo	m <sup>3</sup> /min	8.00/7.00/6.00	8.00/7.00/6.00	8.50/7.50/6.50	9.00/8.00/7.00	10.50/9.50/8.00	12.50/11.50/10.00
External static pressure		Pa	10(30)	10(30)	15(30)	15(40)	15(40)	15(40)
Sound pressure	Hi / Med / Lo <sup>1)</sup>	dB(A)	28/27/25 (30/29/27)	28/27/25 (30/29/27)	30/29/27 (32/31/29)	32/30/28 (34/32/30)	34/32/30 (36/34/32)	35/33/31 (37/35/32)
Sound power	Hi / Med / Lo	dB(A)	43/42/40	43/42/40	45/44/42	47/45/43	49/47/45	50/48/46
Dimension	H x W x D	mm	200 x 750 x 640	200 x 750 x 640	200 x 750 x 640	200 x 750 x 640	200 x 750 x 640	200 x 750 x 640
Net weight		kg	19	19	19	19	19	19
Pipe diameter	Liquid pipe	Inch (mm)	1/4(6.35)	1/4(6.35)	1/4(6.35)	1/4(6.35)	1/4(6.35)	1/4(6.35)
	Gas pipe	Inch (mm)	1/2(12.70)	1/2(12.70)	1/2(12.70)	1/2(12.70)	1/2(12.70)	1/2(12.70)
RRP		€	807	832	856	894	930	973

Accessories		RRP €
<b>CZ-RTC6</b>	CONEX wired remote controller (non-wireless)	148
<b>CZ-RTC6BL</b>	CONEX wired remote controller with Bluetooth®	177
<b>CZ-RTC5B</b>	Wired remote controller with Econavi function	129

Accessories		RRP €
<b>CZ-RWS3 + CZ-RWRC3</b>	Infrared remote controller	298
<b>PAW-RE2C4</b>	Wired remote controller for hotel application	457
<b>CZ-CENSC1</b>	Econavi energy savings sensor	159

1) By DIP switches or by RC setting.


**Technical focus**

- Ultra-slim profile: 200 mm for all models
- DC fan motor greatly reduces power consumption
- Ideal for hotel application with very narrow false ceilings
- Easy maintenance and service by external electrical box
- 40 Pa static pressure enables ductwork to be fitted
- Includes drain pump


**Air outlet & inlet plenum**

	Diameters	Air outlet plenum	Diameters	Air inlet plenum
22, 28 & 36	2 x Ø200	CZ-DUMPA22MMS2	2 x Ø200	CZ-DUMPA22MMR2
45 & 56	3 x Ø160	CZ-DUMPA45MMS3	2 x Ø200	CZ-DUMPA45MMR3

In addition, its high-efficiency and extremely quiet sound levels make it very popular with many users, including hotels and small offices.

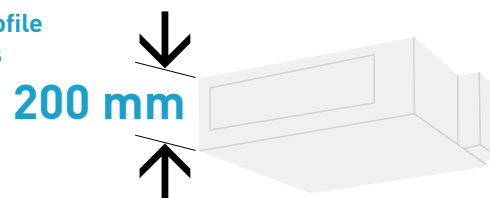**Ultra-slim profile for all models****Drain pump with increased power!**

By adoption of a high-lift drain pump, the drain piping rise height can be increased to 785 mm from the lower surface of the body.

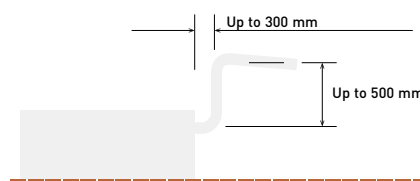

ECONAVI and INTERNET CONTROL: Optional.



E2 Type high static pressure hide-away • R410A



High pressure duct and 100 % Fresh air duct function.

The E2 range of ducted units offers improved design flexibility for extended duct layouts as a result of their increased external static pressures and reduces energy consumption



COMPATIBLE WITH ALL PANASONIC CONNECTIVITY SOLUTIONS. FOR DETAILED INFORMATION GO TO THE CONTROL SYSTEMS SECTION

Model	100 % Fresh air duct function (by using Kit for 100 % fresh air)						High pressure duct			
	S-224ME2E5		S-280ME2E5		S-224ME2E5		S-280ME2E5			
	Cooling	Heating	Cooling	Heating	Cooling	Heating	Cooling	Heating	Cooling	Heating
Capacity	kW		22.4	21.2	28.0	26.5	22.4	25.0	28.0	31.5
Input power	W		290.00	290.00	350.00	350.00	440.00	440.00	715.00	715.00
Operating current	A		1.85	1.85	2.20	2.20	2.45	2.45	3.95	3.95
Recommended Fuse	A		5	5	5	5	5	5	5	5
Air flow	Hi / Med / Lo	m <sup>3</sup> /min	28.30 / - / -		35.00 / - / -		56.00 / 51.00 / 44.00		72.00 / 63.00 / 53.00	
External static pressure	Pa		200		200		140 (60 - 270) <sup>1)</sup>		140 (72 - 270) <sup>1)</sup>	
Sound pressure <sup>2)</sup>	Hi / Med / Lo	dB(A)	43 / - / -		44 / - / -		45 / 43 / 41		49 / 47 / 43	
Sound power	Hi / Med / Lo	dB(A)	75 / - / -		76 / - / -		77 / 75 / 73		81 / 79 / 75	
Dimension	H x W x D	mm	479 x 1453 x 1205		479 x 1453 x 1205		479 x 1453 x 1205		479 x 1453 x 1205	
Net weight	kg		102		106		102		106	
Pipe diameter	Liquid pipe	Inch (mm)	3/8 (9.52)		3/8 (9.52)		3/8 (9.52)		3/8 (9.52)	
	Gas pipe	Inch (mm)	3/4 (19.05)		7/8 (22.22)		3/4 (19.05)		7/8 (22.22)	
RRP	€		5,025		5,744		5,025		5,744	

Accessories		RRP €
CZ-RTC6	CONEX wired remote controller (non-wireless)	148
CZ-RTC6BL	CONEX wired remote controller with Bluetooth®	177
CZ-RTC5B	Wired remote controller with Econavi function	129

Accessories		RRP €
CZ-RWS3 + CZ-RWRC3	Infrared remote controller	298
PAW-RE2C4	Wired remote controller for hotel application	457
CZ-CENSC1	Econavi energy savings sensor	159


Rating Conditions for 100 % Fresh air duct function: Cooling Outdoor 33 °C DB / 28 °C WB. Heating Outdoor 0 °C DB / -2.9 °C WB.  
 1) Available to select the setting by initial setup. 2) Values with 140 Pa setting. \* No filter included. \*\* No compatible with 3-Pipe ECO G GF3.

Technical focus

- No need of rap valve
- 100 % fresh air duct function
- DC fan motor for more savings
- Complete flexibility for ductwork design
- Can be located into a weatherproof housing for external sitting
- Air OFF sensor avoids cold air dumping
- Configurable air temperature control

System example

An inspection port (450 x 450 mm or more) is required at the lower side of the indoor unit body (field supply).

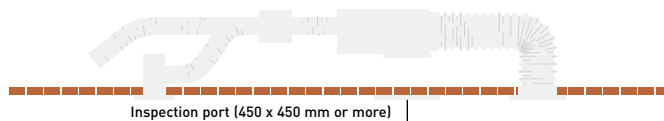

100 % fresh air duct function

The E2 duct with 100 % fresh air duct function have exceptional discharge temperature.

	Discharge Range		
	Min	Max	Default
Cooling	15 °C	24 °C	18 °C
Heating	17 °C	45 °C	40 °C

Kit for 100 % Fresh air function

Kit for 100 % fresh air function for 2 Way systems		RRP €
2x CZ-P160RVK2	Rap valve kit	1,152
2x CZ-CAPE2	3 Way control PCB	194
CZ-P680BK2BM	Distribution Joint kit	113
	1x Remote controller	

Kit for 100 % fresh air function for 3 Way systems		RRP €
2x CZ-P160HR3	3 way valve Kit	1,206
2x CZ-CAPE2	3 Way control PCB	194
CZ-P680BH2BM	Distribution Joint kit	113
	1x Remote controller	

Plenums

Air outlet plenum (suitable for rigid + flexible duct)		
	Number of exits with diameters	Model
S-224ME2E5 / S-280ME2E5	1 x 500 mm	CZ-TREMIESPW706



ECONAVI and INTERNET CONTROL: Optional.

Rating Conditions: Cooling Indoor 27 °C DB / 19 °C WB. Cooling Outdoor 35 °C DB / 24 °C WB. Heating Indoor 20 °C DB. Heating Outdoor 7 °C DB / 6 °C WB. (DB: Dry Bulb, WB: Wet Bulb). Specifications subject to change without notice. For detailed information about ErP / Energy Labelling, please visit our websites www.aircon.panasonic.eu or www.ptc.panasonic.eu.

## Heat recovery with DX Coil • R410A



Motorised heat recovery by-pass device automatically controlled by unit control to use fresh air free-cooling when convenient.



COMPATIBLE WITH ALL PANASONIC CONNECTIVITY SOLUTIONS. FOR DETAILED INFORMATION GO TO THE CONTROL SYSTEMS SECTION

Model			PAW-500ZDX3N		PAW-800ZDX3N		PAW-01KZDX3N	
Power source	Voltage	V	230		230		230	
	Phase		Single phase		Single phase		Single phase	
	Frequency	Hz	50		50		50	
Air flow		m <sup>3</sup> /min	8.33		13.33		16.67	
External static pressure <sup>1)</sup>		Pa	90		120		115	
Maximum current	Total full load	A	0.6		1.4		2.1	
		W	150		320		390	
Sound pressure <sup>2)</sup>		dB(A)	39		42		43	
Pipe diameter	Liquid pipe	Inch (mm)	1/4 (6.35)		1/4 (6.35)		1/4 (6.35)	
	Gas pipe	Inch (mm)	1/2 (12.70)		1/2 (12.70)		1/2 (12.70)	
<b>Heat recovery</b>			<b>Cooling</b>	<b>Heating</b>	<b>Cooling</b>	<b>Heating</b>	<b>Cooling</b>	<b>Heating</b>
Temperature efficiency	%		76	76	76	76	76	76
Enthalpy efficiency	%		63	67	63	65	60	62
Saved power summer mode or winter mode*	kW		1.70	4.30 (4.80)	2.50	6.50 (7.30)	3.20	8.20 (9.00)
<b>DX Coil</b>								
Total / Sensible capacity	kW		3.00/2.10	2.50/2.70	5.10/3.50	4.40/4.80	5.80/4.10	5.20/6.70
OFF temperature	°C		15.9	28.0 (27.3)	15.5	29.6 (29.0)	16.2	28.5 (27.8)
OFF relative humidity	%		90	16 (15)	90	14 (13)	89	15 (14)
<b>RRP</b>	<b>€</b>		<b>4,161</b>		<b>5,432</b>		<b>5,989</b>	

Accessories		RRP €
<b>CZ-RTC6</b>	CONEX wired remote controller (non-wireless)	148
<b>CZ-RTC6BL</b>	CONEX wired remote controller with Bluetooth®	177

Accessories		RRP €
<b>CZ-RTC5B</b>	Wired remote controller with Econavi function	129
<b>PAW-RE2C4</b>	Wired remote controller for hotel application	457

Nominal summer conditions: Outside air: 32 °C DB, RH 50 %. Ambient air: 26 °C DB, RH 50 %. Nominal winter conditions: Outside air: -5 °C DB, RH 80 %. Ambient air: 20 °C DB, RH 50 %. Cooling mode air inlet condition: 28.5 °C DB, RH 50 %; evaporating temperature 7 °C. Heating mode air inlet condition: 13 °C DB, RH 40 % (11 °C DB, RH 45 %); condensating temperature 40 °C. DB: Dry Bulb; RH: Relative Humidity. 1) Referred to the nominal air flow after filter and plate heat exchanger. 2) Sound pressure level calculated at 1 m far from: ducted supply exhaust air ducted return - first air intake / service side, at normal condition. \* Tentative data.

### Technical focus


- Galvanized steel self-supporting panels, internally and externally insulated
- High efficiency enthalpic heat recover, static cross flow type, made by membrane with high moisture permeability, good air tightness, excellent tear resistance, and aging resistance, it is structures with flat plates and corrugated plates. Total heat exchange with temperature efficiency up to 76 % and enthalpy efficiency up to 67 %, also at high level during summer season
- ISO16890 ePm2,5 95 % (F9 EN 779) efficiency class filter with synthetic cleanable media and COARSE 50 % (G3 EN 779) pre-filter ON fresh air, COARSE 50 % filter on return air intake
- Removable side panel to access filters and heat recovery in the event of scheduled maintenance
- Low consumption, high efficiency & low noise direct driven fans
- Supply section complete with DX Coil (R410A) fitted with solenoid control valve, freon filter, contact temperature sensors on liquid and gas line, NTC sensors upstream and downstream airflow

- Built-in electric box equipped with PCB to control internal fan speed and to interconnect outdoor/indoor units
- Duct connection by circular plastic collars

### Balanced ventilation



### Interconnection to outdoor/indoor units

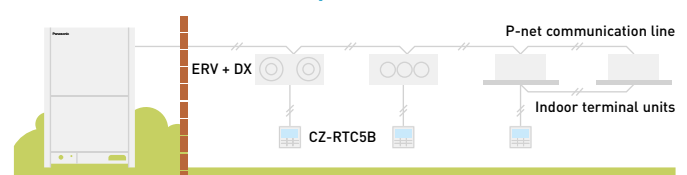

INTERNET CONTROL: Optional.



T2 Type ceiling • R410A



The T2 Type ceiling mounted units feature a DC fan motor for increased efficiency and reduced operating sound levels.

All the units are the same height and depth for a uniform appearance in mixed installations and feature a fresh air knockout for improved air quality.



COMPATIBLE WITH ALL PANASONIC CONNECTIVITY SOLUTIONS. FOR DETAILED INFORMATION GO TO THE CONTROL SYSTEMS SECTION

Model			S-36MT2E5A	S-45MT2E5A	S-56MT2E5A	S-73MT2E5A	S-106MT2E5A	S-140MT2E5A
Cooling capacity		kW	3.6	4.5	5.6	7.3	10.6	14.0
Input power cooling		W	35.00	40.00	40.00	55.00	80.00	100.00
Operating current cooling		A	0.36	0.38	0.38	0.44	0.67	0.79
Heating capacity		kW	4.2	5.0	6.3	8.0	11.4	16.0
Input power heating		W	35.00	40.00	40.00	55.00	80.00	100.00
Operating current heating		A	0.36	0.38	0.38	0.44	0.67	0.79
Fan type			Sirocco fan	Sirocco fan	Sirocco fan	Sirocco fan	Sirocco fan	Sirocco fan
Recommended Fuse		A	5	5	5	5	5	5
Air flow	Hi / Med / Lo	m <sup>3</sup> /min	14.00/12.00/10.50	15.00/12.50/10.50	15.00/12.50/10.50	21.00/18.00/15.50	30.00/25.00/23.00	32.00/28.00/24.00
Sound pressure	Hi / Med / Lo	dB(A)	36/32/30	37/33/30	37/33/30	39/35/33	42/37/36	46/40/37
Sound power	Hi / Med / Lo	dB(A)	54/50/48	55/51/48	55/51/48	57/53/51	60/55/54	62/58/55
Dimension	H x W x D	mm	235 x 960 x 690	235 x 960 x 690	235 x 960 x 690	235 x 1275 x 690	235 x 1590 x 690	235 x 1590 x 690
Net weight		kg	27	27	27	33	40	40
Pipe diameter	Liquid pipe	Inch (mm)	1/4(6.35)	1/4(6.35)	1/4(6.35)	3/8(9.52)	3/8(9.52)	3/8(9.52)
	Gas pipe	Inch (mm)	1/2(12.70)	1/2(12.70)	1/2(12.70)	5/8(15.88)	5/8(15.88)	5/8(15.88)
RRP		€	1,307	1,372	1,438	1,504	1,831	2,090


Accessories		RRP €
CZ-RTC6	CONEX wired remote controller (non-wireless)	148
CZ-RTC6BL	CONEX wired remote controller with Bluetooth®	177
CZ-RTC5B	Wired remote controller with Econavi function	129

Accessories		RRP €
CZ-RWS3 + CZ-RWRT3	Infrared remote controller	304
PAW-RE2C4	Wired remote controller for hotel application	457
CZ-CENSC1	Econavi energy savings sensor	159

Technical focus

- Low sound levels
- New design, all units just 235 mm high
- Large and wide air distribution
- Easy to install and maintain
- Fresh air knockout



Air distribution is altered depending on the operational mode

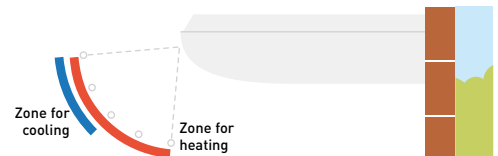

Further comfort improvement with airflow distribution

Horizontal air flow reaches maximum 9,5 m. This is ideal for wide rooms.

The wide air discharge opening expands the air flow to the left and the right. The unpleasant feeling caused when the air flow directly hits the human body is prevented by the "Draft prevention position", which changes the swing width, so that the degree of comfort is increased.

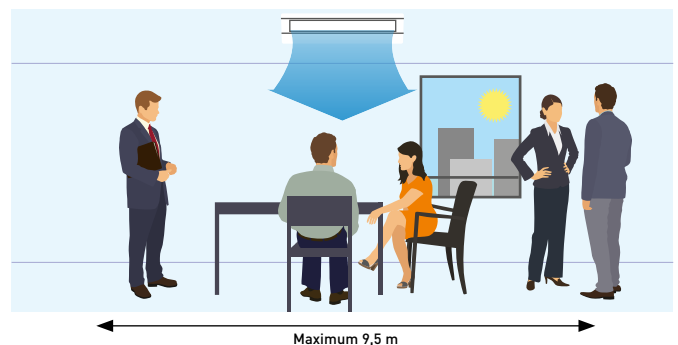

ECONAVI and INTERNET CONTROL: Optional.

Rating Conditions: Cooling Indoor 27 °C DB / 19 °C WB. Cooling Outdoor 35 °C DB / 24 °C WB. Heating Indoor 20 °C DB. Heating Outdoor 7 °C DB / 6 °C WB. [DB: Dry Bulb, WB: Wet Bulb]. Specifications subject to change without notice. For detailed information about ErP / Energy Labelling, please visit our websites www.aircon.panasonic.eu or www.ptc.panasonic.eu.

NEW  
2021

## NEW K2 Type wall-mounted • R32/R410A

The wall-mounted unit has a stylish smooth panel that looks good and easy to clean.

The unit is also smaller, lighter and substantially quieter than previous models making it ideal for small offices and other commercial applications.



COMPATIBLE WITH ALL PANASONIC CONNECTIVITY SOLUTIONS. FOR DETAILED INFORMATION GO TO THE CONTROL SYSTEMS SECTION

Model			S-15MK2E5B	S-22MK2E5B	S-28MK2E5B	S-36MK2E5B	S-45MK2E5B	S-56MK2E5B	S-73MK2E5B	S-106MK2E5B
Cooling capacity		kW	1.5	2.2	2.8	3.6	4.5	5.6	7.3	10.6
Input power cooling		W	25.00	25.00	25.00	30.00	30.00	35.00	55.00	80.00
Operating current cooling		A	0.20	0.21	0.23	0.25	0.32	0.35	0.51	0.70
Heating capacity		kW	1.7	2.5	3.2	4.2	5.0	6.3	8.0	11.4
Input power heating		W	25.00	25.00	25.00	30.00	30.00	35.00	55.00	80.00
Operating current heating		A	0.20	0.21	0.23	0.25	0.32	0.35	0.51	0.70
Fan type			Cross flow	Cross flow	Cross flow	Cross flow	Cross flow	Cross flow	Cross flow	Cross flow
Recommended Fuse		A	5	5	5	5	5	5	5	5
Air flow	Cool Hi / Med / Lo	m <sup>3</sup> /min	7.90/7.40/ 6.50	9.00/7.50/ 6.50	9.50/8.30/ 6.50	10.90/9.00/ 6.50	14.50/12.50/ 10.00	16.00/14.00/ 12.00	19.50/17.00/ 14.00	21.50/18.50/ 15.00
	Heat Hi / Med / Lo	m <sup>3</sup> /min	9.00/7.70/ 6.80	9.20/8.30/ 6.80	9.70/8.50/ 6.80	11.20/9.50/ 6.80	14.50/12.50/ 10.00	16.00/14.00/ 12.00	19.50/17.00/ 14.00	21.50/18.50/ 15.00
Sound pressure	Hi / Med / Lo	dB(A)	34/32/29	36/33/29	37/34/29	40/36/29	38/35/33	40/37/35	47/44/40	49/46/42
Sound power	Hi / Med / Lo	dB(A)	49/47/44	51/48/44	52/49/44	55/51/44	53/50/48	55/52/50	62/59/55	64/61/57
Dimension	HxWxD	mm	290x870 x214	290x870 x214	290x870 x214	290x870 x214	302x1120 x236	302x1120 x236	302x1120 x236	302x1120 x236
Net weight		kg	9	9	9	9	13	13	14	14
Pipe diameter	Liquid pipe	Inch (mm)	1/4(6.35)	1/4(6.35)	1/4(6.35)	1/4(6.35)	1/4(6.35)	1/4(6.35)	3/8(9.52) <sup>1)</sup>	3/8(9.52)
	Gas pipe	Inch (mm)	1/2(12.70)	1/2(12.70)	1/2(12.70)	1/2(12.70)	1/2(12.70)	1/2(12.70)	5/8(15.88) <sup>1)</sup>	5/8(15.88)
RRP		€	673	697	723	758	847	900	1,005	1,124

Accessories		RRP €
CZ-RTC6	CONEX wired remote controller (non-wireless)	148
CZ-RTC6BL	CONEX wired remote controller with Bluetooth®	177
CZ-RTC5B	Wired remote controller with Econavi function	129
CZ-RWS3	Infrared remote controller	119


Accessories		RRP €
PAW-RE2C4	Wired remote controller for hotel application	457
CZ-CENSC1	Econavi energy savings sensor	159
CZ-P56SVK2	External valve for model sizes 15 to 56	191
CZ-P160SVK2	External valve for model sizes 73 to 106	243

1) When the pipe diameter is [Liquid] Ø6,35(1/4) - [Gas] Ø12,7(1/2), connect the liquid socket tube (Ø6,35 - Ø9,52) to the liquid tubing side indoor unit and connect the gas socket tube (Ø12,7 - Ø15,88) to the gas tubing side indoor unit.

### Technical focus

- Closed discharge port
- Lighter and smaller units make the installation easy
- Quiet operation
- Smooth and durable design
- Piping outlet in three directions
- Air distribution is automatically altered depending on the operational mode

Air distribution is automatically altered depending on the operational mode of the unit



### Quiet operation

These units are among the quietest in the industry, making them ideal for hotels and hospitals.

### Closed discharge port

When the unit is turned OFF, the flap closes completely to prevent entry of dust into the unit and to keep the equipment clean. Lighter and smaller units make the installation easy. The width has been decreased by 17% and the units are lighter.



### Piping outlet in six directions

Piping outlet is possible in the six directions of right, right rear, right bottom, left, left rear and left bottom, making the installation work easier.

### External valve (optional)

CZ-P56SVK2 (model sizes 15 to 56)  
CZ-P160SVK2 (model sizes 73 to 106)



ECONAVI and INTERNET CONTROL: Optional.



nanoe™ X as a standard.



G1 Type floor console • R410A

The stylish and compact unit profile, also used for residential market range, is easy to integrate into any design of building.

Compact and versatile, this system is capable of being installed in an area with limited space. It is a perfect solution for retrofit, replacing existing radiator panels.



COMPATIBLE WITH ALL PANASONIC CONNECTIVITY SOLUTIONS. FOR DETAILED INFORMATION GO TO THE CONTROL SYSTEMS SECTION

Model		S-22MG1E5N	S-28MG1E5N	S-36MG1E5N	S-45MG1E5N	S-56MG1E5N
Cooling capacity	kW	2.2	2.8	3.6	4.5	5.6
Input power cooling	W	20.00	20.00	22.00	28.00	31.00
Operating current cooling	A	0.20	0.20	0.23	0.25	0.28
Heating capacity	kW	2.5	3.2	4.2	5.0	6.3
Input power heating	W	21.00	21.00	23.00	29.00	32.00
Operating current heating	A	0.20	0.20	0.24	0.26	0.28
Fan type		Cross flow	Cross flow	Cross flow	Cross flow	Cross flow
nanoe X Generator		Mark 1	Mark 1	Mark 1	Mark 1	Mark 1
Recommended Fuse	A	5	5	5	5	5
Air flow	Cool (Hi / Med / Lo)	m³/min 9.20/7.50/6.00	9.20/7.50/6.00	9.70/8.20/6.00	10.50/9.00/6.50	12.00/9.50/6.50
	Heat (Hi / Med / Lo)	m³/min 9.70/8.00/6.50	9.70/8.00/6.50	10.20/8.70/6.50	11.00/9.50/7.00	12.50/10.00/7.00
Sound pressure	Hi / Med / Lo	dB(A) 38/34/29	38/34/29	39/35/29	42/37/30	44/38/30
Dimension	HxWxD	mm 600x750x207	600x750x207	600x750x207	600x750x207	600x750x207
Net weight		kg 14	14	14	14	14
Pipe diameter	Liquid pipe	Inch (mm) 1/4(6.35)	1/4(6.35)	1/4(6.35)	1/4(6.35)	1/4(6.35)
	Gas pipe	Inch (mm) 1/2(12.70)	1/2(12.70)	1/2(12.70)	1/2(12.70)	1/2(12.70)
RRP	€	1,384	1,456	1,532	1,557	1,727

Accessories		RRP €
CZ-RTC6	CONEX wired remote controller (non-wireless)	148
CZ-RTC6BL	CONEX wired remote controller with Bluetooth®	177
CZ-RTC5B	Wired remote controller with Econavi function	129

Accessories		RRP €
CZ-RWS3*	Infrared remote controller	119
PAW-RE2C4	Wired remote controller for hotel application	457
CZ-CENSC1	Econavi energy savings sensor	159

\* Infrared remote controller (CZ-RWS3) doesn't need receiver as an optional. Receiver is included in the unit shipment.

1 nanoe™ X: Bringing nature's balance indoors

Panasonic's nanoe™ X technology brings nature's detergent – hydroxyl radicals – indoors to help improve protection 24/7 against several types of pollutants can be inhibited such as certain types of bacteria, viruses, mould, allergens, pollen or hazardous substances.

2 Stylish and simple

- Clean and modern European design with slim depth
- Modern matt white color panel
- Washable air filter

The stylish and compact unit profile, also used for residential market range, is easy to integrate into any design of building.




**Dimension:**  
W x H x D = 750 x 600 x 207 mm

**Weight:**  
14kg

3 Flexible easy installation

- Four different mounting styles possible:
- Exposed (floor or wall)
  - Semi-recessed
  - Recessed

Flexible installation with 4 different options.

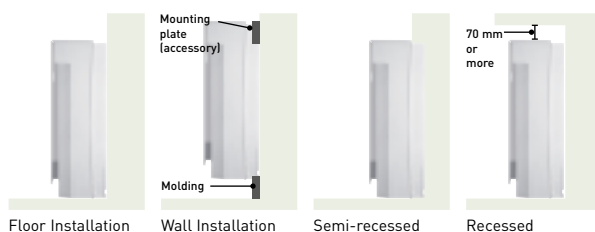

4 Functions for comfort

- Double Air Flow direction to maximize comfort
- Self-cleaning function
- Compatible with Commercial Wi-Fi Adaptor for cloud control

Self-cleaning function.

- Self cleaning function can be pre-scheduled with remote controller, up to a maximum of 90 minutes following cooling/dry operation
- Air flow will not blow directly at occupants during self-cleaning



ECONAVI and INTERNET CONTROL: Optional.

Rating Conditions: Cooling Indoor 27 °C DB / 19 °C WB. Cooling Outdoor 35 °C DB / 24 °C WB. Heating Indoor 20 °C DB. Heating Outdoor 7 °C DB / 6 °C WB. (DB: Dry Bulb; WB: Wet Bulb). Specifications subject to change without notice. For detailed information about ErP / Energy Labelling, please visit our websites www.aircon.panasonic.eu or www.ptc.panasonic.eu.

## P1 Type floor-standing • R410A

The compact floor-standing P1 units are the ideal solution for providing perimeter air conditioning.

## R1 Type concealed floor-standing • R410A

At just 229 mm deep, the R1 unit can be easily concealed in perimeter areas to provide powerful and effective air conditioning.



COMPATIBLE WITH ALL PANASONIC CONNECTIVITY SOLUTIONS. FOR DETAILED INFORMATION GO TO THE CONTROL SYSTEMS SECTION

Model P1 Type			S-22MP1E5	S-28MP1E5	S-36MP1E5	S-45MP1E5	S-56MP1E5	S-71MP1E5
Model R1 Type			S-22MR1E5	S-28MR1E5	S-36MR1E5	S-45MR1E5	S-56MR1E5	S-71MR1E5
Cooling capacity		kW	2.2	2.8	3.6	4.5	5.6	7.1
Input power cooling		W	56.00	56.00	85.00	126.00	126.00	160.00
Operating current cooling		A	0.25	0.25	0.38	0.56	0.56	0.72
Heating capacity		kW	2.5	3.2	4.2	5.0	6.3	8.0
Input power heating		W	40.00	40.00	70.00	91.00	91.00	120.00
Operating current heating		A	0.18	0.18	0.31	0.41	0.41	0.54
Fan type			Sirocco fan	Sirocco fan	Sirocco fan	Sirocco fan	Sirocco fan	Sirocco fan
Recommended Fuse		A	5	5	5	5	5	5
Air flow	Hi / Med / Lo	m <sup>3</sup> /min	7.00/6.00/5.00	7.00/6.00/5.00	9.00/7.00/6.00	12.00/9.00/8.00	15.00/13.00/11.00	17.00/14.00/12.00
External static pressure		Pa	15	15	15	15	15	15
Sound pressure	Hi / Med / Lo	dB(A)	33/30/28	33/30/28	39/35/29	38/35/31	39/36/31	41/38/35
Dimensions P1	HxWxD	mm	615x1065x230	615x1065x230	615x1065x230	615x1380x230	615x1380x230	615x1380x230
Net weight P1		kg	29	29	29	39	39	39
Dimensions R1	HxWxD	mm	616x904x229	616x904x229	616x904x229	616x1219x229	616x1219x229	616x1219x229
Net weight R1		kg	21	21	21	28	28	28
Pipe diameter	Liquid pipe	Inch (mm)	1/4(6.35)	1/4(6.35)	1/4(6.35)	1/4(6.35)	1/4(6.35)	3/8(9.52)
	Gas pipe	Inch (mm)	1/2(12.70)	1/2(12.70)	1/2(12.70)	1/2(12.70)	1/2(12.70)	5/8(15.88)
P1 Type RRP		€	1,187	1,210	1,258	1,385	1,419	1,477
R1 Type RRP		€	1,100	1,092	1,146	1,231	1,307	1,347

Accessories		RRP €
CZ-RTC6	CONEX wired remote controller (non-wireless)	148
CZ-RTC6BL	CONEX wired remote controller with Bluetooth®	177
CZ-RTC5B	Wired remote controller with Econavi function	129
CZ-RWS3 + CZ-RWRC3	Infrared remote controller	298

Accessories		RRP €
PAW-RE2C4	Wired remote controller for hotel application	457
CZ-RTC2	Timer remote controller. For floor-standing (P1) indoor units.	132

## Technical focus



- Pipes can be connected to either side of the unit from the bottom or rear
- Easy to install
- Front panel opens fully for easy maintenance
- Removable air discharge grille gives flexible airflow
- Room for condensate pump
- The standard wired controller can be incorporated into the body of the unit. For build-in remote control, only CZ-RTC2 is suitable

## Technical focus

- Chassis unit for discreet installation
- Complete with removable filters
- Pipes can be connected to either side of the unit from the bottom or rear
- Easy to install

## Perimeter air conditioning with high interior quality

## Effective perimeter handling

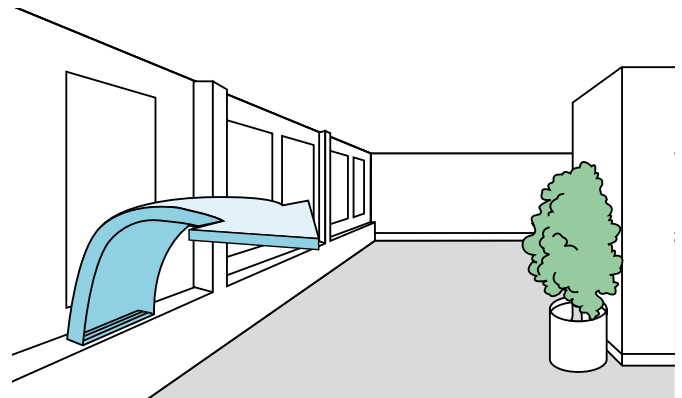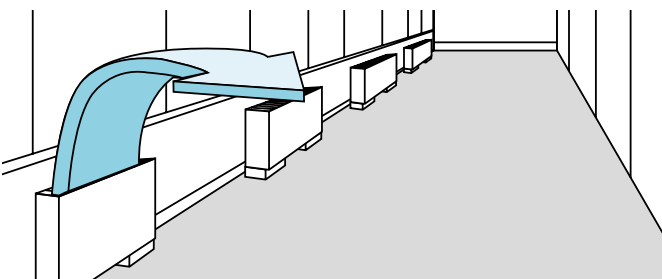

INTERNET CONTROL: Optional.



**Hydrokit for ECOi, water at 45 °C • R410A****Connect the Hydrokit to your VRF system, together with other indoor units.**

Total system performs high energy efficiency by this heat recovering operation, and it gives an advantage for sustainability related assessment methods, such as BREEAM in UK.



COMPATIBLE WITH ALL PANASONIC CONNECTIVITY SOLUTIONS. FOR DETAILED INFORMATION GO TO THE CONTROL SYSTEMS SECTION

Model				S-80MW1E5	S-125MW1E5
Power source				230 V / Single phase / 50 Hz	
Cooling capacity				8,0	12,5
Heating capacity				9,0	14,0
Maximum temperature				-45 / -65 <sup>1)</sup>	-45 / -65 <sup>1)</sup>
Dimension	HxWxD			892x502x353	
Water pipe connector				R 1 ¼	
Water pump (built-in)				DC motor (A class)	
Water flow rate	Cool			22,90	35,80
	Heat			25,80	40,10
Pipe diameter	Liquid pipe			3/8 (9,52)	
	Gas pipe			5/8 (15,88)	
	Drain piping			15 ~ 17 mm (inner size)	
Operation range	Cool	Ambient	°C	+10 ~ +43	
		Water	°C	+5 ~ +20	
	Heat	Ambient	°C	-20 ~ +43	
		Water	°C	+25 ~ +45	
Connectable system				3-Pipe (heat recovery type) VRF System (system capable up to 48 HP)	
Maximum Indoor ratio (connectable hydrokit module capacity ratio)				Total indoor unit + Hydrokit capacity: up to 130 % (** ~ **% vs total outdoor unit capacity)	
RRP				3,678	4,413

Accessories	RRP €
<b>CZ-RTC5B</b> Wired remote controller with Econavi function	129

Accessories	RRP €
<b>PAW-RE2C4</b> Wired remote controller for hotel application	457

1) Maximum 45 °C by refrigerant circuit (heat pump cycle), over 45 °C is provided by electric heater operation.

**Basic principle & advantage.**

Hydrokit module provides hot water by using waste heat that is recovered from standard air-conditioning indoor unit in cooling mode.

**Technical focus**

- Only with 3-Pipe ECOi EX MF3 Series outdoor units
- Remote controller CZ-RTC5B common use with DX Coil indoor units ECOi and PACi


**Hydrokit control function / CZ-RTC5B**

- CZ-RTC5B is updated version from CZ-RTC3. It can be used for hydrokit and also normal indoor unit. CZ-RTC5B checks the type of connected unit and switch hydrokit or air conditioner style of display automatically

- Operating mode on hydrokit style to be set at initial setting of the system from following modes: tank mode or air conditioning mode

**Overview: hydromodule in VRF system**

- Multiple hydromodule connection in same circuit is available
- Each module can be set different operation mode either hot water supply mode or space heating mode (both operation modes are not able to set at 1 hydromodule)
- 3-Pipe control solenoid valve kit is necessary for each indoor unit and hydromodule

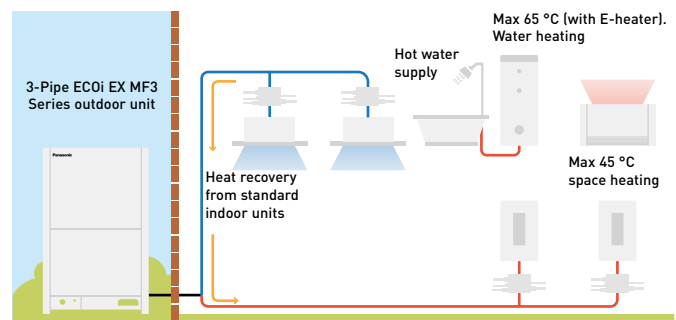



## PRO-HT TANK

## PRO-HT Tank DHW

**Enjoy an efficient DHW and heating and cooling tank.**  
Panasonic commercial PRO-HT Tank solutions meet all needs of your hot water applications providing maximum water temperature 65 °C.

**High temperature hot water is efficiently produced without any boosters.**

Can be combined with ECOi 3-Pipe to adapt various projects from high-end residential to offices and hotels.

PRO-HT Tank			PAW-VP750LDHW-1	PAW-VP1000LDHW-1
Outdoor Unit			U-16MF3E8	U-16MF3E8
Volume	L		726	933
Height	H x W	mm	1855 x 990	2210 x 990
Connections to the water supply network			1 1/4"	1 1/4"
Net weight / with water	kg		179/929	191/1121
Nominal electrical power	kW		5.12	6.14
Reference tapping cycle			2XL	2XL
Energy consumption by chosen cycle A7 / W10-55	kWh		4.14	5.10
Energy consumption by chosen cycle A15 / W10-55	kWh		3.50	4.61
COP DHW [A7 / W10-55] EN 16147 <sup>1)</sup>			5.29	4.81
COP DHW [A15 / W10-55] EN 16147 <sup>2)</sup>			7.01	5.32
Standby input power according to EN16147	W/h		77	80
Sound pressure at 1 m	dB(A)		52	52
Quantity of refrigerant	Kg		8.3	8.3
Average insulation thickness	mm		100	100
Heat exchanger connection for inlet / outlet	Inch (mm)		1/2(12.70) / 3/4(19.05)	1/2(12.70) / 3/4(19.05)
Maximum power consumption without heater	kWh		20.4	20.4
Maximum power consumption with heater	kWh		26.4	26.4
Number of electrical heaters x power	W		1 x 6000	1 x 6000
Voltage / Frequency	V / Hz		400/50	400/50
Electrical fuse rating	A		16	16
Moisture protection			IP24	IP24
Maximum pipe length	m		50	50
Elevation difference (in/out)	m		30/30	30/30
Operating range - outdoor temperature	°C		-20 ~ +35	-20 ~ +35
Maximum water temperature (heat pump)	°C		65	65
Maximum water temperature (electrical heater)	°C		85	85
Refrigerant (R410A) / CO <sub>2</sub> Eq.	kg / T		8.3/17.1	8.3/17.1
<b>PRO-HT Tank RRP</b>	<b>€</b>		<b>10,342</b>	<b>11,016</b>
<b>Outdoor unit RRP</b>	<b>€</b>		<b>14,035</b>	<b>14,035</b>

Accessories	RRP €
PAW-VP-RTC5B-VRF Tank Controller for ECOi system	1,186
PAW-VP-VALV-160 Expansion valve kit 16 kW	33

Accessories	RRP €
PAW-VP-VALV-280 Expansion valve kit 28 kW	88


1) Heating of sanitary water up to 55 °C with inlet air temperature at 7 °C, humidity at 89 % and inlet water temperature at 10 °C. According to EN16147. 2) Heating of sanitary water up to 55 °C with inlet air temperature at 15 °C, humidity at 74 % and inlet water temperature at 10 °C. According to EN16147.  
This product is designed to meet the European Drinking Directive 98/83/EC amended by 2015/1787/EU. The lifespan of the product is not guaranteed in the case of the use of groundwater, such as spring water or well water, the use of tap water when salt or other impurities are contained, nor in areas of acidic water quality. Maintenance and warranty costs related to these cases are the customer's responsibility.  
\* When connected as pressurised, safety valve is mandatory.

## Solution example DHW tank 1000 L + ECOi 3-Pipe

- Ideal offer for hotel projects
- DHW production under spontaneous heating and cooling
- Hot water up to 65 °C is efficiently produced by heat recovery
- A7 COP 6,7 considering heat recovery

## Technical focus

- Water volume 750L and 1000L
- Maximum hot water production 65 °C without boosters
- Heating coil 52 m (750L) and 63 m (1000L)
- Tank material 3 mm
- ABS external case

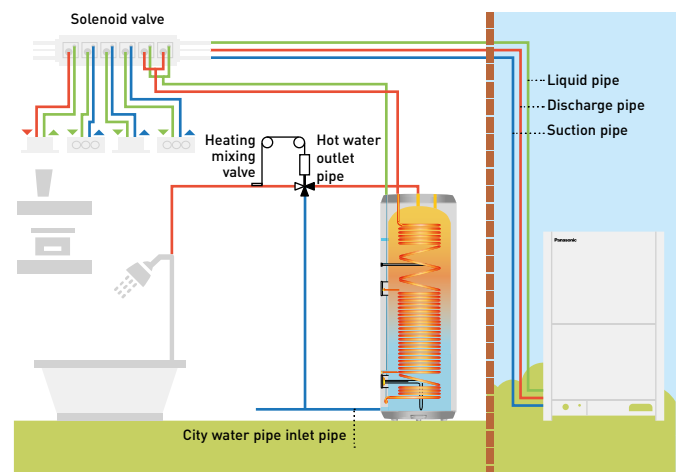



# BMS interface with P-Link

BMS interface with Panasonic communication bus helps you to get significant savings.



## 1 Direct connection to P-Communication bus

- No need for additional gateway (CZ-CFUNC2)
- Significant 50 % cost saving for BMS interface\*
- Avoid mistakes and reduce configuration time.

\* In the case of PAW-AC2-BAC-16P by Panasonic calculation.

## 2 Upgraded specifications and easy configuration

- Base PCB board with MCU, Ethernet, RS485, RS232 & USB
- Configuration by IP or USB
- Single configuration tool for all models (IntesisBox MAPS)
- Modular expansion PCBs (KNX, RS485, DALI, MBUS, LON, ANYBUS)


## 3 BTL certified for BACnet

- BACnet: Version 14 and BTL certified

### Direct connection to P-Communication bus


The interface can provide faster, cheaper, easier solution in your projects!

Conventional interface.

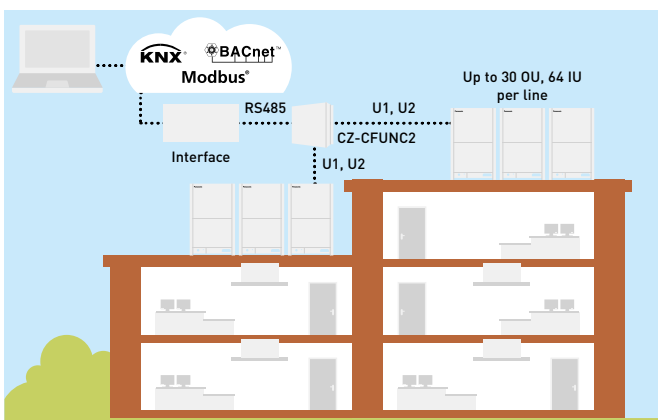

Maximum 128 indoor units can be connected. Panasonic Gateway, CZ-CFUNC2 is required.

Interface with P-communication bus.

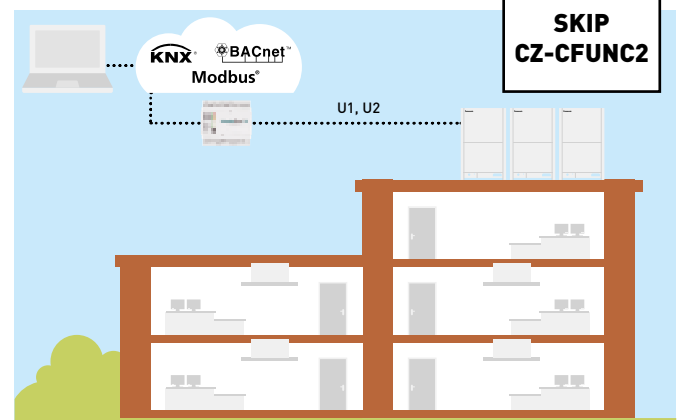

U1U2 link is connected directly to IntesisBox. Support from 16 to 128 per each box.

### Upgraded specifications and easy configuration

- Base PCB board with MCU, Ethernet, RS485, RS232 and USB
- Modular expansion PCBs (KNX, RS485, DALI, MBUS, LON, ANYBUS)
- Frontal PCB with all LEDs, buttons and USB console Port
- Single configuration tool for all models (IntesisBox MAPS)

- Improved version of the current communication Stacks, BTL and KNX Certifications will be possible
- Recovery of current configuration project working in V6
- Local logging of interface data via USB without the need for a PC
- Configuration by IP or USB (old generation RS232)
- CB Certification for EU, US, CA and AU. Also UL marked product

PAW-AC2-BAC-16P	BACnet Interface for 16 indoors
PAW-AC2-BAC-64P	BACnet Interface for 64 indoors
PAW-AC2-BAC-128P	BACnet Interface for 128 indoors

PAW-AC2-MBS-16P	Modbus Interface 16 indoor units
PAW-AC2-MBS-64P	Modbus Interface 64 indoor units
PAW-AC2-MBS-128P	Modbus Interface 128 indoor units

PAW-AC2-KNX-16P	KNX Interface for 16 indoors
PAW-AC2-KNX-64P	KNX Interface for 64 indoors

## Fan coils highlighted features

Designed with user in mind, perfectly designed to adapt to any installation. Providing comfort to hotels, shops, restaurants, offices or residential applications.



MORE FAN COIL OPTIONS  
IN CHILLERS SECTION



### 1 Innovation for an optimum comfort

Range of fan coil for heating and cooling with capacities from 0,5 to 21,9 kW in cooling and from 0,6 to 21,5 kW in heating. Bring full year comfort with water based systems.

### 2 Energy efficient and low noise fan

Dynamically balanced and specially designed fans, reinforced acoustic insulation and optimised fan speed staging for lower noise levels. Improved efficiency with optional EC fan motor.

### 3 Quality and efficient coil

Constructed from staggered copper tubes, mechanically expanded into aluminium fins, providing maximum heat transfer efficiency, durability and hygiene.

### 4 Flexible installation

Various types of unit to fit your needs with flexible installation options. A choice of service side for hydraulic connections, piping configuration and horizontal or vertical installation for ducted units.

Offering a great range of capacities and performance, presented in a wide range of designs, the fan coils are perfectly adapted to fit within almost any location. Whether the requirements are for cooling only, or for both heating and cooling, there is a fan coil to suit. With a variety of piping and fan configuration, the range is capable of meeting the most stringent of requirement. Line up available in AC and EC fans, it is possible to achieve both powerful performance, but with sustainability in mind.

**Wide range of controllers with sophisticated designs, provide a user friendly interface while enabling an easy and low cost integration to building management systems.**



#### PAW-FC-RC1

Optional wired remote controller for AC fan, 2-pipe and 4-pipe application.



#### PAW-FC-TC903

Optional wired remote controller for AC fan 2-pipe application.




#### PAW-FC-907TC

Optional wired remote controller for EC fan, 2-pipe and 4-pipe application.



## Smart fan coils



Built-in advanced thermostat.

			PAW-AAIR-200-2	PAW-AAIR-700-2	PAW-AAIR-900-2
Total cooling capacity	Lo/Med/Hi	W	0.2/0.3/0.6	0.8/1.0/1.2	1.2/1.5/1.7
Sensible cooling capacity	Lo/Med/Hi	W	0.2/0.3/0.5	0.6/0.9/1.1	1.1/1.4/1.6
Water flow	Lo/Med/Hi	kg/h	40.0/59.0/95.0	129.0/178.0/207.0	198.0/261.0/300.0
Water pressure drop	Lo/Med/Hi	kPa	0.4/2.0/2.9	1.0/2.0/2.0	6.0/9.0/12.0
Inlet water temperature		°C	10	10	10
Outlet water temperature		°C	15	15	15
Inlet air temperature		°C	27.0	27.0	27.0
Outlet air temperature	Lo/Med/Hi	°C	15.0/17.0/18.0	14.0/16.0/17.0	16.0/17.0/18.0
Relative humidity of inlet air		%	47	47	47
Total heating capacity	Lo/Med/Hi	W	0.2/0.5/0.6	0.7/1.0/1.2	0.9/1.4/1.7
Water flow	Lo/Med/Hi	kg/h	37.3/80.8/98.0	121.8/177.5/204.3	152.4/244.2/292.9
Water pressure drop	Lo/Med/Hi	kPa	0.4/2.0/2.9	0.3/0.8/1.0	0.5/1.6/2.2
Inlet water temperature		°C	35	35	35
Outlet water temperature		°C	30	30	30
Inlet air temperature		°C	19.0	19.0	19.0
Outlet air temperature	Lo/Med/Hi	°C	38.9/32.0/30.0	33.3/31.8/30.6	30.2/31.1/30.6
Air flow	Lo/Med/Hi	m <sup>3</sup> /min	0.9/1.9/2.7	2.6/4.2/5.3	4.1/6.1/7.7
Maximum input power	Lo/Med/Hi	W	7.0/9.0/13.0	14.0/18.0/22.0	16.0/20.0/24.0
Sound pressure	Lo/Med/Hi	dB(A)	23/33/40	24/36/42	25/36/44
Dimension (HxWxD)		mm	735x579x129	935x579x129	1135x579x129
Net weight		kg	17	20	23
3 Ways valve included			Yes	Yes	Yes
Touch screen thermostat			Yes	Yes	Yes
<b>RRP</b>		<b>€</b>	<b>682</b>	<b>741</b>	<b>885</b>

Accessories	RRP €
<b>PAW-AAIR-LEGS-1</b> Kits of 2 legs to protect the water pipings	<b>53</b>

Accessories	RRP €
<b>PAW-AAIR-RHCABLE</b> Motor connection cable for units with hydraulic connections on the right	<b>24</b>

\* Smart fan coils is produced by Innova.


### Stylish floor-standing fan coils with advanced controller

The slimline of Smart fan coils delivers high efficiency climate control.

With a depth of just under 13cm they are at the cutting edge of the market. Blending easily into the home, Smart fan coil's elegant design and product refinements are clear to see in every detail.


Exceptional ventilation efficiency means the motor uses considerably less energy (low wattage). The fan speed is continuously modulated by the temperature controller with proportional integral logic, with undoubted advantages for regulating the temperature and humidity in summer mode.

With standard cast radiators.



Water at 65 °C needed.

With Smart fan coil.



Water at 35 °C needed.

### Technical focus

- 4 operation modes (auto, silent, night-time and maximum ventilation speed)
- Exclusive design
- Extremely compact (only 12,9cm deep)
- Cooling and dehumidification functions possible (drain is needed)
- 3-way valve included (no overflow valve needed on the

- installation if more than 3 units installed)
- Touch screen thermostat

**All temperature curves and capacity are available on [www.panasonicproclub.com](http://www.panasonicproclub.com)**

Fan coils - ducted (AC)



Optional controller.  
Wired remote controller.  
PAW-FC-903TC



Optional controller.  
Advanced wired remote controller.  
PAW-FC-RC1

	Left connection (PAW-)		FC2A-D010L	FC2A-D020L	FC2A-D030L	FC2A-D040L	FC2A-D050L	FC2A-D060L	FC2A-D070L	FC2A-D080L
	Right connection (PAW-)		FC2A-D010R	FC2A-D020R	FC2A-D030R	FC2A-D040R	FC2A-D050R	FC2A-D060R	FC2A-D070R	FC2A-D080R
Total cooling capacity <sup>1)</sup>	Med/S-Hi	kW	1.0/1.5	1.2/1.7	2.0/2.5	2.4/3.2	3.2/4.6	4.6/5.8	6.1/7.3	6.1/8.1
Sensible capacity <sup>1)</sup>	Med/S-Hi	kW	0.8/1.1	0.9/1.3	1.5/1.9	1.8/2.3	2.2/3.3	3.3/4.5	4.3/5.1	4.6/6.3
Water flow	Med/S-Hi	l/h	172/250	213/289	341/430	413/547	544/798	784/1003	1058/1252	1048/1400
Water pressure drop	Med/S-Hi	kPa	19.5/39.2	3.9/6.3	19.3/28.8	17.1/28.0	22.8/46.9	37.4/60.2	15.4/21.5	19.3/32.5
Heating capacity <sup>2)</sup>	Med/S-Hi	kW	1.4/2.0	1.5/2.2	2.4/3.1	2.9/4.0	4.1/5.7	5.3/7.1	7.9/9.3	8.1/11.6
<b>Sound levels</b>										
Global sound power level	S-Lo/Med/S-Hi	dB(A)	33/40/49	31/43/50	30/45/52	30/44/51	34/46/56	38/51/58	43/56/61	50/55/64
Global sound pressure level <sup>3)</sup>	S-Lo/Med/S-Hi	dB(A)	24/31/40	22/34/41	21/36/43	21/35/42	25/37/47	29/42/49	34/47/52	41/46/55
<b>Fan</b>										
Number			1	1	1	2	2	2	2	3
Air flow	Med/S-Hi	m <sup>3</sup> /h	190/283	179/265	274/390	357/499	486/716	640/933	893/1064	936/1397
Maximum external pressure		Pa	55	55	65	85	85	115	125	70
Filter			G2	G2	G2	G2	G2	G2	G2	G2
<b>Electrical data</b>										
Power supply	Voltage	V	230	230	230	230	230	230	230	230
	Phase		Single phase	Single phase	Single phase	Single phase	Single phase	Single phase	Single phase	Single phase
	Frequency	Hz	50/60	50/60	50/60	50/60	50/60	50/60	50/60	50/60
Power consumption	Med/S-Hi	W	24/36	18/29	37/45	37/56	55/72	75/105	100/147	112/188
<b>Water connections</b>										
Type			Female gas threaded	Female gas threaded	Female gas threaded	Female gas threaded	Female gas threaded	Female gas threaded	Female gas threaded	Female gas threaded
Water connections		Inch	1/2	1/2	1/2	1/2	1/2	1/2	3/4	3/4
<b>Dimensions and weight</b>										
Dimensions	H x W x D	mm	430 x 220 x 570	430 x 220 x 570	430 x 220 x 730	430 x 220 x 938	430 x 220 x 1122	430 x 220 x 1307	530 x 220 x 1121	530 x 220 x 1316
Weight		kg	13	13	15	20	22	26	27	38
Left connection RRP		€	283	297	318	370	414	449	509	731
Right connection RRP		€	312	317	341	398	445	485	550	785

Accessories		RRP €
PAW-FC-RC1	Advanced wired remote controller for fan coil	96
PAW-FC-903TC	Wired remote controller for fan coil	85
PAW-FC-2WY-11/55-1	2 way valve + drain pan for models 010-060	67

Accessories		RRP €
PAW-FC-2WY-65/90-1	2 way valve + drain pan for models 070-080	76
PAW-FC-3WY-11/55-1	3 way valve + drain pan for models and 010-060	97
PAW-FC-3WY-65/90-1	3 way valve + drain pan for models 070-080	111

1) According to Eurovent standard. Air: 27 °C DB / 19 °C WB. Water in/ out: 7 °C / 12 °C. 2) Air: 20 °C. Water in/out: 50 °C / 45 °C. 3) The sound pressure levels are based on (NR) characteristics of a room having volume of 100 m<sup>3</sup> with reverberation of 0,5 seconds. Values indicated are for 0 Pa external static pressure, for additional pressure characteristics, please refer the technical data manual.\*\* Fan coil units are produced by Systemair.

Technical focus

- Cooling capacity from 0.7 to 8.1 kW
- Heating capacity from 0.7 to 10.3 kW
- 5-speed AC fan motor(s)

Main features and accessories

- 2 and 4-pipe configurations
- Left or right hand arrangements
- Ease of installation
- Very low acoustic levels
- 2 way or 3 way ON/OFF valves
- Auxiliary drain pan
- Air intake with removable grid
- G2 filter

Operating limits	
Entering water temperature	From 5 to 90 °C
Indoor air temperature	From 5 to 32 °C





## Fan coils - wall-mounted (AC)



Optional controller.  
Wired remote  
controller.  
PAW-FC-903TC



Optional controller.  
Advanced wired  
remote controller.  
PAW-FC-RC1



Infrared remote  
supplied with IR  
versions.  
IR Controller

2-pipe			PAW-FC2A-K007	PAW-FC2A-K009	PAW-FC2A-K018	PAW-FC2A-K022
			PAW-FC2A-K007IR	PAW-FC2A-K009IR	PAW-FC2A-K018IR	PAW-FC2A-K022IR
Total cooling capacity <sup>1)</sup>	Med/Hi	kW	1.3/1.7	1.7/2.4	3.0/3.5	3.1/3.9
Sensible capacity <sup>1)</sup>	Med/Hi	kW	1.0/1.2	1.3/1.9	2.3/2.7	2.5/3.1
Water flow	Med/Hi	l/h	231/287	291/418	508/609	535/669
Water pressure drop	Med/Hi	kPa	24.9/30.9	27.0/40.0	41.3/55.6	33.7/45.2
Heating capacity <sup>2)</sup>	Med/Hi	kW	1.7/2.0	2.0/2.7	3.2/4.0	3.7/4.4
<b>Sound levels</b>						
Sound power level	Lo/Med/Hi	dB(A)	45/49/51	47/52/57	49/53/56	53/57/63
Sound pressure level <sup>3)</sup>	Lo/Med/Hi	dB(A)	30/33/35	32/36/40	39/41/43	39/43/48
<b>Fan</b>						
Number			1	1	1	1
Air flow	Med/Hi	m <sup>3</sup> /h	321/360	413/551	592/680	709/850
Filter			G1	G1	G1	G1
<b>Electrical data</b>						
Power supply	Voltage	V	230	230	230	230
	Phase		Single phase	Single phase	Single phase	Single phase
	Frequency	Hz	50	50	50	50
Fuse Rating		A	3	3	3	3
Power consumption	Med/Hi	W	42/62	47/59	50/55	55/70
<b>Water connections</b>						
Type			Female gas threaded	Female gas threaded	Female gas threaded	Female gas threaded
Connections		Inch	1/2	1/2	1/2	1/2
<b>Dimensions and weight</b>						
Dimensions	H x W x D	mm	275 x 180 x 845	275 x 180 x 845	298 x 200 x 940	298 x 200 x 940
Weight		kg	11	11	13	13
RRP		€	393	434	488	530
RRP with IR Controller		€	434	471	520	567

Accessories	RRP €
PAW-FC2-2WY-K007 2 way valve + drain pan	78

Accessories	RRP €
PAW-FC2-3WY-K007 3 way valve + drain pan	126

1) According to Eurovent standard. Air: 27 °C DB / 19 °C WB. Water in/out: 7 °C / 12 °C. 2) According to Eurovent standard. Air: 20 °C. Water in/out: 45 °C / 40 °C. 3) Sound pressure considering a local of 100 m<sup>3</sup> a reverberation time of 0,5 seconds and a distance of 1 m.

### Technical focus

- 4 sizes
- Cooling capacity from 1.0 to 3.9 kW
- Heating capacity from 1.4 to 4.1 kW
- Version: 2-pipes, AC fan

### Main features and accessories

- 2 way or 3 way valve ON/OFF
- 3-speed AC fan motor
- Silent unit for optimum customer comfort
- Aesthetic design suitable for residential and hotel applications
- Compatible with IR controller (supplied with IR versions)
- Coil with hydrophilic fins to improve the condensate flow

### Operating limits

Entering water temperature	From 5 to 60 °C
Indoor air temperature	From 6 to 40 °C



# Panasonic ventilation solutions



## AHU connection kit 16, 28 and 56 kW for ECOi and ECO G

		RRP €
<b>PAW-160MAH2</b>	AHU Kit for 16 kW (IP 65, 0-10 V demand control*, Outdoor temperature shift compensation. Cold draft prevention)	<b>1,862</b>
<b>PAW-280MAH2</b>	AHU Kit for 28 kW (IP 65, 0-10 V demand control*, Outdoor temperature shift compensation. Cold draft prevention)	<b>2,074</b>
<b>PAW-560MAH2</b>	AHU Kit for 56 kW (IP 65, 0-10 V demand control*, Outdoor temperature shift compensation. Cold draft prevention)	<b>2,213</b>
<b>PAW-160MAH2M</b>	AHU Kit for 16 kW (IP 65, 0-10 V demand control*)	<b>1,676</b>
<b>PAW-280MAH2M</b>	AHU Kit for 28 kW (IP 65, 0-10 V demand control*)	<b>1,868</b>
<b>PAW-560MAH2M</b>	AHU Kit for 56 kW (IP 65, 0-10 V demand control*)	<b>2,103</b>
<b>PAW-160MAH2L</b>	AHU Kit for 16 kW (IP 65)	<b>1,504</b>
<b>PAW-280MAH2L</b>	AHU Kit for 28 kW (IP 65)	<b>1,631</b>
<b>PAW-560MAH2L</b>	AHU Kit for 56 kW (IP 65)	<b>1,828</b>

\* With CZ-CAPBC2.





## Air curtain with DX Coil

Outdoor unit			4 HP	4 HP	5 HP	8 HP
Air outlet height 2.7 m			PAW-10EAIRC-LS	PAW-15EAIRC-LS	PAW-20EAIRC-LS	PAW-25EAIRC-LS
Cooling capacity <sup>1)</sup>	Max	kW	6.1	9.7	13.0	17.0
Heating capacity <sup>2)</sup>	Max	kW	7.9	12.0	15.0	19.0
Air flow	High	m <sup>3</sup> /h	1800	2700	3600	4500
Heat Exchanger	Volume	L	1.67	2.85	3.94	5.03
Electric consumption fan	230 V / 50Hz	kW	0.30	0.50	0.60	0.80
Current	230 V / 50Hz	A	2.10	3.10	4.10	5.10
Sound pressure <sup>3)</sup>	Max	dB(A)	65	66	67	69
Air outlet height 3.0 m			PAW-10EAIRC-HS	PAW-15EAIRC-HS	PAW-20EAIRC-HS	PAW-25EAIRC-HS
Cooling capacity <sup>1)</sup>	Max	kW	9.1	13.0	19.5	23.7
Heating capacity <sup>2)</sup>	Max	kW	11.8	15.8	23.6	27.6
Air flow	High	m <sup>3</sup> /h	2700	3600	5400	6300
Heat Exchanger	Volume	L	1.67	2.85	3.94	5.12
Electric consumption fan	230 V / 50Hz	kW	0.75	1.00	1.50	1.75
Current	230 V / 50Hz	A	4.10	5.50	8.20	9.60
Sound pressure <sup>3)</sup>	Max	dB(A)	66	67	68	68
Common data						
Dimension <sup>4)</sup>	HxWxD	mm	260 (+140) x 1000 x 460	260 (+140) x 1500 x 460	260 (+140) x 2000 x 460	260 (+140) x 2500 x 460
Net weight	Air outlet height 2.7 m	kg	50	65	80	95
	Air outlet height 3.0 m	kg	55	65	85	110
Fan type			EC	EC	EC	EC
Pipe diameter	Liquid pipe / Gas pipe	Inch (mm)	3/8(9.52) / 5/8(15.88)	3/8(9.52) / 3/4 (19.05)	3/8(9.52) / 7/8 (22.22)	3/8(9.52) / 7/8 (22.22)
Door width		m	1.0	1.5	2.0	2.5
Refrigerant			R410A	R410A	R410A	R410A
RRP air outlet height 2.7 m		€	8,013	9,464	10,650	11,915
RRP air outlet height 3.0 m		€	8,349	9,727	11,111	12,156

Accessories		RRP €
PAW-AIR1-DP	Optional drain pump	522

1) Cooling capacity DX Coil, air temperature in/out +27/+18 °C, R32 and R410. 2) Heating capacity condenser, air temperature in/out +20/+33 °C, R32 and R410. In the case of lower outdoor temperatures, an outdoor model with higher capacity may be necessary. 3) Measured in distance up to 5.0 m, direction factor 2, absorbing surfaces 200 m<sup>2</sup>, Min / Max air volume. 4) 140 mm is the height of an electrical box if it is installed on the top.



## Energy recovery ventilation system

Rated flow rate			250 m <sup>3</sup> /h			350 m <sup>3</sup> /h			500 m <sup>3</sup> /h			800 m <sup>3</sup> /h			1000 m <sup>3</sup> /h		
Models			FY-250ZDY8R			FY-350ZDY8R			FY-500ZDY8R			FY-800ZDY8R			FY-01KZDY8R		
Power source			220V / 240 V / 50Hz			220V / 240 V / 50Hz			220V / 240 V / 50Hz			220V / 240 V / 50Hz			220V / 240 V / 50Hz		
			E-high	High	Low	E-high	High	Low	E-high	High	Low	E-high	High	Low	E-high	High	Low
Input power	W		112.0/	108.0/	87.0/	182.0/	178.0/	175.0/	263.0/	204.0/	165.0/	387.0/	360.0/	293.0/	437.0/	416.0/	301.0/
			128.0	123.0	96.0	190.0	185.0	168.0	289.0	225.0	185.0	418.0	378.0	295.0	464.0	432.0	311.0
Air flow	m <sup>3</sup> /h		250	250	190	350	350	240	500	500	440	800	800	630	1000	1000	700
Air Volume	l/s		69	69	53	97	97	67	138	138	122	222	222	175	278	278	194
External static pressure	Pa		105	95	45	140	60	45	120	60	35	140	110	55	105	80	75
Sound power	Heat exchange	dB(A)	30.0/	29.5/	23.5/	32.5/	30.5/	22.5/	36.5/	34.5/	31.0/	37.0/	36.5/	33.5/	37.5/	37.0/	33.5/
			31.5	30.5	26.5	33.0	31.0	25.5	37.5	35.5	32.5	37.5	37.0	34.5	38.5	37.5	34.5
Sound power	Normal	dB(A)	30.0/	29.5/	23.5/	32.5/	30.5/	22.5/	37.5/	37.0/	31.0/	37.0/	36.5/	33.5/	39.5/	39.0/	35.5/
			31.5	30.5	26.5	33.0	31.0	25.5	38.5	38.0	32.5	37.5	37.0	34.5	40.5	39.5	36.5
Temperature exchange efficiency	Heat exchange	%	75	75	77	75	75	78	75	75	76	75	75	76	75	75	79
	Normal	%	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
Dimension	HxWxD	mm	270x882x599			317x1050x804			317x1090x904			388x1322x884			388x1322x1134		
Net weight		kg	29			49			57			71			83		
RRP		€	1,324			1,671			1,944			2,595			3,247		

This noise of the product is the value which was measured at the acoustic room. Actually, in the established condition, that undergo influence by the echoing of the room and so that become bigger than the display numerical value. The input, the current and the exchange efficiency are values at the time of the mentioned air volume. The noise level shall be measured 1.5 m below the centre of the unit. The temperature exchange efficiency averages that of when cooling and when heating.

# Control and connectivity

A wide variety of control options to meet the requirements of different applications.

## Centralized control systems

### BMS system. PC base.



**PAIMS core software.**  
Up to 1024 indoor units.  
CZ-CSWKC2



**Seri-Para I/O unit for outdoor unit.**  
Up to 4 outdoor units.  
CZ-CAPDC2



**ON/OFF control for external devices such as ERV.**  
Controls 1 unit.  
CZ-CAPC3



**Mini Seri-Para I/O Unit 0 - 10 V.**  
Controls 1 indoor unit or a group of 8 indoor units.  
CZ-CAPBC2



**Communication Adaptor.**  
Up to 128 groups.  
Controls 128 units.  
CZ-CFUNC2



**Cloud internet control.**  
Up to 128 groups. Controls 128 units.  
CZ-CFUSCC1

### Connection with 3rd party controller.


### AC Smart Cloud.

## Domestic integration to P-Link - CZ-CAPRA1

Can connect RAC range to P-Link. Full control is now possible.

### Integrates any unit in big system control.

- TKEA / PKEA server room integration
- Small offices with domestic indoors
- Tender for refurbishment (old system domestic and VRF in one installation)

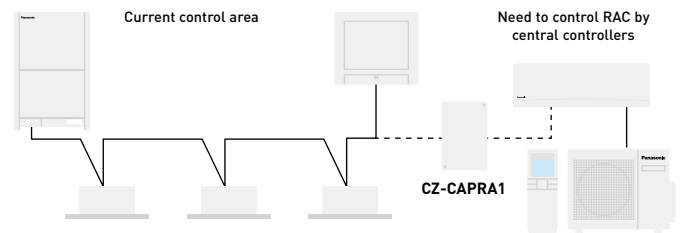

Current system for PACi / VRF. Central controller can connect to P-Link line to control units directly.

RAC units cannot connect directly to P-Link to be managed by central controllers.

It's necessary to have interface between P-Link and RAC protocol to cover basic operating items.

**Basic operation items:** ON/OFF, Mode select, Temperature setting, Fan speed, Flap setting, Remote control prohibit.

**External input:** ON/OFF control signal, Abnormal stop signal.

**External output for Relay <sup>1)</sup>:** Operation status (ON/OFF), Alarm status output.



<sup>1)</sup> Because current CN-CNT connector can not provide the power for external output relay, additional Input power for external relay is necessary.

<p><b>Centralized control systems: 64 indoor units</b></p>	<p><b>Intelligent controller / Web server: 256 indoor units</b></p>	<p><b>P-AIMS: 1024 indoor units</b></p>
--	---	---







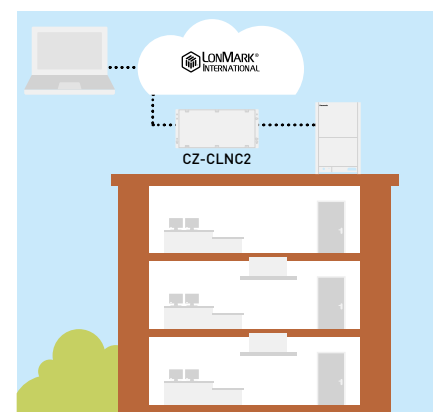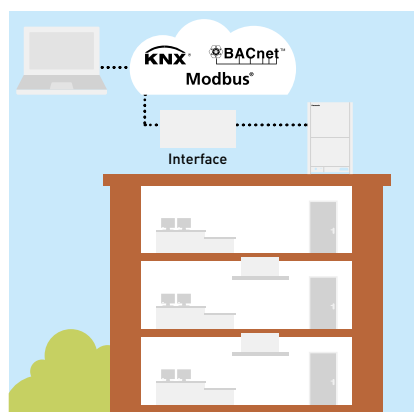


## Easy connection to KNX, Modbus, LonWorks and BACnet

Great flexibility for integration into your KNX / Modbus / LonWorks / BACnet projects allows fully bi-directional monitoring and control of all the functioning parameters.

**For more information, contact Panasonic.**





			Econavi control	Built-in thermostat	Indoor units which can be controlled	Use limitations	Function ON/OFF	Mode setting	Fan speed setting	Temperature setting	Air flow direction	Permit/Prohibit switching	Weekly program	BMS protocol	
<b>Individual controllers</b>															
Touch room controller for hotel with Dry Contacts		PAW-RE2C4-MOD-WH PAW-RE2C4-MOD-BK WH: White, BK: Black. Bespoke finish available on request.	—	✓	1 indoor unit	—	✓	✓	✓	✓	—	✓	—	Modbus + 4 digital I/O signals	
Touch display control for hotel with Dry Contacts		PAW-RE2D4-WH PAW-RE2D4-BK WH: White, BK: Black. Bespoke finish available on request.	—	✓	1 indoor unit	—	✓	✓	✓	✓	—	✓	—	Stand Alone + 2 digital inputs	
Design wired remote controller		CZ-RTC5B	✓	✓	1 group, 8 units	· Up to 2 controllers can be connected per group	✓	✓	✓	✓	✓	—	✓	—	
Wired remote controller		CZ-RTC6 Non-wireless	✓	✓	1 group, 8 units	· Up to 2 controllers can be connected per group	✓	✓	✓	✓	✓	—	—	—	
		CZ-RTC6BL With Bluetooth®	✓	✓	1 group, 8 units	· Up to 1 controller can be connected per group	✓	✓	✓	✓	✓	—	✓	—	
Wired remote controller		CZ-RTC2 For floor-standing (MP1) indoor units	—	✓	1 group, 8 units	· Up to 2 controllers can be connected per group	✓	✓	✓	✓	✓	—	✓	—	
Infrared remote controller		CZ-RWS3 + CZ-RWRU3W CZ-RWS3 CZ-RWS3 + CZ-RWRL3 CZ-RWS3 + CZ-RWRD3 CZ-RWS3 + CZ-RWRT3 CZ-RWS3 + CZ-RWRC3	✓	—	1 group, 8 units	· Up to 2 controllers can be connected per group	✓	✓	✓	✓	✓ <sup>1)</sup>	—	—	—	
<b>Centralized controllers</b>															
System controller with weekly timer		CZ-64ESMC3	✓	—	64 groups, maximum 64 units	· Up to 10 controllers, can be connected to one system · Main unit/sub unit (1 main unit + 1 sub unit) connection is possible · Use without remote controller is possible	✓	✓	✓	✓	✓ <sup>1)</sup>	✓	✓	—	
Central ON/OFF controller		CZ-ANC3	—	—	16 groups, maximum 64 units	· Up to 8 controllers (4 main units + 4 sub units) can be connected to one system · Use without remote controller is impossible	✓	—	—	—	—	✓	—	—	
Intelligent controller (touch screen/web server)		CZ-256ESMC3	✓	—	Main unit: 128. Up to 256 units can be expanded	· Communication adaptor CZ-CFUNC2 is necessary for connection with more than 128 units	✓	✓	✓	✓	✓ <sup>1)</sup>	✓	✓	—	

1. Setting is not possible when a remote controller unit is present (use the remote controller for setting). \* All specifications subject to change without notice.

# Accessories and control

## Distribution joint kits





<b>2-Pipe ME2 for outdoor units (68,0 kW or less).</b> ----- CZ-P680PH2BM 166 €	<b>2-Pipe ME2 for outdoor units (more than 68,0 kW).</b> ----- CZ-P1350PH2BM 166 €	<b>2-Pipe ME2 for indoor units (22,4 kW or less*).</b> ----- CZ-P224BK2BM 133 €	<b>2-Pipe ME2 for indoor units (68,0 kW or less*).</b> ----- CZ-P680BK2BM 133 €
<b>2-Pipe ME2 for indoor units (more than 68,0 kW*).</b> ----- CZ-P1350BK2BM 133 €	<b>3-Pipe MF3 for outdoor units (68,0 kW or less).</b> ----- CZ-P680PJ2BM 208 €	<b>3-Pipe MF3 for outdoor units (greater than 68,0 kW and no more than 135,0 kW).</b> ----- CZ-P1350PJ2BM 208 €	<b>3-Pipe MF3 for indoor units (22,4 kW or less).</b> ----- CZ-P224BH2BM 166 €
<b>3-Pipe MF3 for indoor units (greater than 22,4 kW and no more than 68,0 kW).</b> ----- CZ-P680BH2BM 166 €	<b>3-Pipe MF3 for indoor units (greater than 68,0 kW and no more than 135,0 kW).</b> ----- CZ-P1350BH2BM 166 €	<b>2-Pipe ME2 and Mini ECOi for indoor units (22,4 kW or less*).</b> ----- CZ-P160BK2BM 73 €	<b>3-Pipe MF3 Header Pipe.</b> ----- CZ-P4 HP3C2BM 261 €

\* In case the total capacity of indoor units connected after distribution exceeds the total capacity of the outdoor units, select the distribution piping size for the total capacity of the outdoor units.

## Heat recovery box

<b>Box recovery kit (up to 5,6 kW).</b> CZ-P56HR3 + CZ-CAPE2. ----- KIT-P56HR3 609 €	 <b>Heat recovery box (up to 5,6 kW).</b> ----- CZ-P56HR3 517 €	 <b>Heat recovery PCB.</b> ----- CZ-CAPE2 97 €
<b>Box recovery kit (from 5,6 kW to 16,0 kW).</b> CZ-P160HR3 + CZ-CAPE2. ----- KIT-P160HR3 700 €	<b>Solenoid valve kit (from 5,6 kW to 16,0 kW).</b> ----- CZ-P160HR3 603 €	<b>3-Pipe control PCB for wall-mounted.</b> ----- CZ-CAPEK2 97 €
 <b>4 ports 3 pipe box (up to 5,6 kW per port).</b> ----- CZ-P456HR3 2,800 €	 <b>6 ports 3 pipe box (up to 5,6 kW per port).</b> ----- CZ-P656HR3 4,282 €	 <b>8 ports 3 pipe box (up to 5,6 kW per port).</b> ----- CZ-P856HR3 5,768 €
<b>4 ports 3 pipe box (up to 16,0 kW per port).</b> ----- CZ-P4160HR3 3,137 €		

## Panels

 <b>Standard panel for 4 way 90x90 cassette.</b> ----- CZ-KPU3W 216 €	 <b>Econavi panel for 4 way 90x90 cassette.</b> ----- CZ-KPU3AW 270 €	 <b>Panel for 60x60 cassette size 700x700 mm.</b> ----- CZ-KPY3AW 248 €	 <b>Panel for 60x60 cassette size 625x625 mm.</b> ----- CZ-KPY3BW 216 €
---	---	--	--



 <p><b>Panel for 2 way cassette (for S-22 to S-56 models).</b></p> <p>----- CZ-02KPL2                      384 €</p>	 <p><b>Panel for 2 way cassette (for S-73 model).</b></p> <p>----- CZ-03KPL2                      460 €</p>	 <p><b>Panel for 1 way cassette.</b></p> <p>----- CZ-KPD2                              406 €</p>	 <p><b>nanoe X Generator Mark 1 kit for 4 way 90x90 cassette U2 type (S-***MU2E5A).</b></p> <p>----- CZ-CNEXU1                      158 €</p>
---	--	--	--




Sensors

 <p><b>Refrigerant leak detector for MU2, MY2, MK2 and MM1 models.</b></p> <p>----- CZ-CGLSC1                      379 €</p>	 <p><b>Econavi energy savings sensor.</b></p> <p>----- CZ-CENSC1                      159 €</p>	 <p><b>Remote temperature sensor.</b></p> <p>----- CZ-CSRC3                              115 €</p>
---	---	---

Plenums

		
<p><b>Air inlet plenum for S . .MF3E5B 15, 22, 28, 36, 45 and 56.</b></p> <p>----- CZ-DUMPA56MF2                      TBC €</p>	<p><b>Air inlet plenum for S . .MM1E5B 22, 28 and 36.</b></p> <p>----- CZ-DUMPA22MMR2                      280 €</p>	<p><b>Air outlet plenum for S . .MM1E5B 22, 28 and 36.</b></p> <p>----- CZ-DUMPA22MMS2                      438 €</p>
<p><b>Air inlet plenum for S . .MF3E5B 60, 73 and 90.</b></p> <p>----- CZ-DUMPA90MF2                      274 €</p>	<p><b>Air inlet plenum for S . .MM1E5B 45 and 56.</b></p> <p>----- CZ-DUMPA45MMS3                      561 €</p>	<p><b>Air outlet plenum for S . .MM1E5B 45 and 56.</b></p> <p>----- CZ-DUMPA45MMS3                      561 €</p>
<p><b>Air inlet plenum for S . .MF3E5B 106, 140 and 160.</b></p> <p>----- CZ-DUMPA160MF2                      295 €</p>	<p><b>Air outlet plenum for S-224ME1E5A / S-280ME1E5.</b></p> <p>----- CZ-TREMIESPW706                      TBC €</p>	

Valves

 <p><b>E2 Type high static pressure hide-away rap valve kit for 100 % Fresh air function.</b></p> <p>----- CZ-P160RVK2                      576 €</p>	 <p><b>Wall-mounted external valve for model sizes 15 to 56.</b></p> <p>----- CZ-P56SVK2                              191 €</p>	 <p><b>Wall-mounted external valve for model sizes 73 to 106.</b></p> <p>----- CZ-P160SVK2                      243 €</p>
--	---	--

# Accessories and control

## VRF Smart Connectivity+



**Remote controller Panasonic Net Con, RH, No PIR, R1/R2.**

-----  
SER8150R0B1194

-----  
384 €

**Remote controller Panasonic Net Con, RH, PIR, R1/R2.**

-----  
SER8150R5B1194

-----  
410 €

**Wireless ZigBee® Pro module / Green Com card.**

-----  
VCM8000V5094P

-----  
190 €



**Hotel Room Expansion Module 14 indoor units.**

-----  
HRCEP14R

-----  
338 €

**Hotel Room Controller w/Display 42 indoor units.**

-----  
HRCPDG42R

-----  
1,150 €



**Door / window wireless sensor.**

-----  
SED-WDC-G-5045

-----  
221 €



**Wall / ceiling (motion) wireless sensor.**

-----  
SED-MTH-G-5045

-----  
221 €

**Hotel Room Controller 28 indoor units.**

-----  
HRCPBG28R

-----  
901 €



**CO<sub>2</sub> sensor.**

-----  
SED-CO2-G-5045

-----  
688 €



**Sensor with room temperature and humidity.**

-----  
SED-TRH-G-5045

-----  
204 €



**Water leakage sensor.**

-----  
SED-WLS-G-5045

-----  
208 €



**Cover frame. Silver.**

-----  
FAS-00

-----  
42 €

**Cover frame. Glossy translucent white.**

-----  
FAS-03

-----  
78 €

**Cover frame. Dark brown wood.**

-----  
FAS-06

-----  
60 €

**Cover frame. Brushed steel finish.**

-----  
FAS-10

-----  
78 €

**Cover frame. White.**

-----  
FAS-01

-----  
42 €

**Cover frame. Light tan wood.**

-----  
FAS-05

-----  
60 €

**Cover frame. Dark black wood.**

-----  
FAS-07

-----  
60 €



Controller and touch controllers for hotels with dry contacts



**Modbus RS-485 touch room controller with I/O, White.**

PAW-RE2C4-MOD-WH 457 €

**Touch display control with 2 digital inputs, White.**

PAW-RE2D4-WH 279 €



**Modbus RS-485 touch room controller with I/O, Black.**

PAW-RE2C4-MOD-BK 457 €

**Touch display control with 2 digital inputs, Black.**

PAW-RE2D4-BK 279 €

Hotel sensors for dry contacts



**Wall motion sensor 24 V.**

PAW-WMS-DC 190 €

**Wall motion sensor 240 V AC.**

PAW-WMS-AC 190 €



**Ceiling motion sensor 24 V.**

PAW-CMS-DC 190 €

**Ceiling motion sensor 240 V AC.**

PAW-CMS-AC 192 €



**Power supply 24 V.**

PAW-24DC 68 €



**Door or window contact.**

PAW-DWC 18 €

Centralised controls




**System controller for 64 indoor units with weekly timer.**

CZ-64ESMC3 812 €



**Central ON/OFF controller, up to 16 groups, 64 indoor units.**

CZ-ANC3 473 €



**Intelligent controller (touch screen/web server) to control up to 256 indoors with included load distribution ratio (LDR).**

CZ-256ESMC3 3,237 €

Centralised controls. BMS system. PC base



**PAIMS core software: Centralised software to control up to 1024 indoor units.**

CZ-CSWKC2 4,415 €

**PAIMS communication adaptor.**

CZ-CFUNC2 1,262 €

**PAIMS consumption calculation extension.**

CZ-CSWAC2 2,523 €

**PAIMS BACnet extension.**

CZ-CSWBC2 5,044 €

**PAIMS layout display extension.**

CZ-CSWGC2 1,894 €

**PAIMS web application extension.**

CZ-CSWWC2 1,894 €

# Accessories and control

## Panasonic AC Smart Cloud



**Panasonic AC Smart Cloud. Cloud internet control. Up to 128 groups. Controls 128 units.**

CZ-CFUSCC1

1,576 €

## Accessories interfaces



**Modbus Interface for 16 indoors.**

PAW-AC2-MBS-16P

2,501 €

**KNX Interface for 16 indoors.**

PAW-AC2-KNX-16P

2,501 €

**BACnet Interface for 16 indoors.**

PAW-AC2-BAC-16P

2,501 €

**Modbus Interface for 64 indoors.**

PAW-AC2-MBS-64P

3,615 €

**KNX Interface for 64 indoors.**

PAW-AC2-KNX-64P

3,615 €

**BACnet Interface for 64 indoors.**

PAW-AC2-BAC-64P

3,615 €

**Modbus Interface for 128 indoors.**

PAW-AC2-MBS-128P

4,838 €

**BACnet Interface for 128 indoors.**

PAW-AC2-BAC-128P

4,838 €



**Commercial Wi-Fi Adaptor.**

CZ-CAPWFC1

264 €



**KNX Interface.**

PAW-RC2-KNX-1i

388 €



**Modbus Interface.**

PAW-RC2-MBS-1

388 €



**Modbus interface to control 4 indoor/groups.**

PAW-RC2-MBS-4

883 €

**KNX Interface for 64 indoor units.**

PAW-AC-KNX-64 3,619 €

**KNX Interface for 128 indoor units.**

PAW-AC-KNX-128 4,705 €

**Modbus Interface for 64 indoor units.**

PAW-AC-MBS-64 3,100 €

**Modbus Interface for 128 indoor units.**

PAW-AC-MBS-128 4,098 €

**Modbus Interface for 64 indoor units.**

PAW-TM-MBS-RTU-64 1,163 €

**Modbus Interface for 128 indoor units.**

PAW-TM-MBS-TCP-128 1,809 €



**Modbus RTU to TCP gateway.**

PAW-MBS-TCP2RTU

1,059 €



**BACnet Interface.**

PAW-RC2-BAC-1

615 €

**BACnet Interface for 64 IU.**

PAW-AC-BAC-64P

TBC €

**BACnet Interface for 128 IU.**

PAW-AC-BAC-128P

TBC €



**RAC interface adapter for integration into P-Link, plus external input and alarm/status output.**

CZ-CAPRA1

190 €



**LonWorks® Interface controls up to 16 groups and 64 indoor units.**

CZ-CLNC2

1,262 €









Centralised controls. Connection with 3rd party controller

 <p><b>Serial parallel device controlling outdoor units, up to 4 units.</b></p> <p>----- CZ-CAPDC2                      633 €</p>	 <p><b>Adaptor for ON/OFF control of external devices.</b></p> <p>----- CZ-CAPC3                      350 €</p>	 <p><b>Mini series parallel device controlling indoor units, maximum 1 group and 8 indoor unit.</b></p> <p>----- CZ-CAPBC2                      242 €</p>	 <p><b>Communication Adaptor. Up to 128 groups. Controls 128 units.</b></p> <p>----- CZ-CFUNC2                      1,262 €</p>
--	--	---	--

Individual controls

 <p><b>CONEX wired remote controller (non-wireless).</b></p> <p>----- CZ-RTC6                      148 €</p>	 <p><b>CONEX wired remote controller with Bluetooth®.</b></p> <p>----- CZ-RTC6BL                      177 €</p>	 <p><b>Standard wired remote controller for floor-standing (P1) indoor units.</b></p> <p>----- CZ-RTC2                      109 €</p>	 <p><b>Design wired remote controller with Econavi function and datanavi.</b></p> <p>----- CZ-RTC5B                      129 €</p>
---	--	---	---

 <p><b>Infrared remote controller for 4 way 90x90 cassette.</b></p> <p>----- CZ-RWS3 + CZ-RWRU3W                      292 €</p>	 <p><b>Infrared remote controller for wall-mounted and 4 Way 60x60 with panel.</b></p> <p>----- CZ-RWS3                      119 €</p>	 <p><b>Infrared remote controller for 2 way cassette.</b></p> <p>----- CZ-RWS3 + CZ-RWRL3                      304 €</p>
--	---	---

 <p><b>Infrared remote controller for 1 way cassette.</b></p> <p>----- CZ-RWS3 + CZ-RWRD3                      304 €</p>	 <p><b>Infrared remote controller for ceiling.</b></p> <p>----- CZ-RWS3 + CZ-RWRT3                      304 €</p>	 <p><b>Infrared remote controller for all indoor units.</b></p> <p>----- CZ-RWS3 + CZ-RWRC3                      298 €</p>
---	--	---

# Accessories and control

## Accessories PCB



**T10 interface PCB with digital and relay connections.**

PAW-T10


102 €

**PCB for fan speed control of external EC Fan.**

PAW-ECF

527 €

## R-22 Replacement Kit



**Replacement kit for R-22.**

CZ-SLK2

380 €

## Accessories cables



**Cable for all the T10 functions.**

CZ-T10

52 €



**Cable to operate external EC fan.**

PAW-FDC

52 €



**Cable for all option monitoring signals.**

PAW-OCT

52 €

**Cable with force thermo OFF/leakage detection.**

PAW-EXCT

52 €

## ECOi Pump Down System



**2-Pipe Pump Down for 1 outdoor unit.**

PAW-PUDME1A-1

6,556 €

**3-Pipe Pump Down for 3 outdoor units.**

PAW-PUDMF2A-3

10,717 €

**3-Pipe Pump Down for 1 outdoor unit + Receiver Kit 30 L.**

PAW-PUDMF2A-1R

9,141 €

**2-Pipe Pump Down for 2 outdoor units.**

PAW-PUDME1A-2

8,448 €

**2-Pipe Pump Down for 1 outdoor unit + Receiver Kit 30 L.**

PAW-PUDME1A-1R

8,763 €

**3-Pipe Pump Down for 2 outdoor units + Receiver Kit 30 L.**

PAW-PUDMF2A-2R

11,032 €

**2-Pipe Pump Down for 3 outdoor units.**

PAW-PUDME1A-3

10,339 €

**2-Pipe Pump Down for 2 outdoor units + Receiver Kit 30 L.**

PAW-PUDME1A-2R

10,654 €

**3-Pipe Pump Down for 3 outdoor units + Receiver Kit 30 L.**

PAW-PUDMF2A-3R

12,923 €

**3-Pipe Pump Down for 1 outdoor unit.**

PAW-PUDMF2A-1

6,934 €

**2-Pipe Pump Down for 3 outdoor units + Receiver Kit 30 L.**

PAW-PUDME1A-3R

12,545 €

**Receiver Kit 30 L.**

PAW-PUDRK30L

2,207 €


**3-Pipe Pump Down for 2 outdoor units.**

PAW-PUDMF2A-2

8,826 €



Water heat exchanger accessories



Stacking kit for vertically stacking up to 3 WHE (4 pieces per Kit).

PAW-3WSK 158 €

PRO-HT Tank accessories

Tank Controller for ECOi system.

PAW-VP-RTC5B-VRF 1,186 €

Expansion valve kit 16 kW.

PAW-VP-VALV-160 33 €

Expansion valve kit 28 kW.

PAW-VP-VALV-280 88 €

Smart fan coil accessories

Kits of 2 legs to protect the water pipings.

PAW-AAIR-LEGS-1 53 €

Motor connection cable for units with hydraulic connections on the right.

PAW-AAIR-RHCABLE 24 €

Fan coil accessories



Wired remote controller for fan coil.

PAW-FC-903TC 85 €



Advanced wired remote controller for fan coil.

PAW-FC-RC1 96 €



Optional wired remote controller for EC fan.

PAW-FC-907TC 252 €



Infrared remote supplied with IR versions.

IR Controller PAW-FC-907TC TBC €

2 way valve + drain pan for ducted models 010-060.

PAW-FC-2WY-11/55-1 67 €

2 way valve + drain pan for ducted models 070-080.

PAW-FC-2WY-65/90-1 76 €

2 way valve + drain pan for wall-mounted.

PAW-FC2-2WY-K007 78 €

3 way valve + drain pan for ducted models and 010-060.

PAW-FC-3WY-11/55-1 97 €

3 way valve + drain pan for ducted models 070-080.

PAW-FC-3WY-65/90-1 111 €

3 way valve + drain pan for wall-mounted.

PAW-FC2-3WY-K007 126 €

# Dimensions and tube sizes of branches and headers for ECOi 2-Pipe Systems

## Optional distribution joint kits


See the installation instructions packaged with the distribution joint kit for the installation procedure.

Model name	Cooling capacity after distribution	Remarks
1. CZ-P680PH2BM	68,0 kW or less	For outdoor unit
2. CZ-P1350PH2BM	From 68,0 kW to 168,0 kW	For outdoor unit
3. CZ-P224BK2BM	22,4 kW or less	For indoor unit
4. CZ-P680BK2BM	From 22,4 kW to 68,0 kW	For indoor unit
5. CZ-P1350BK2BM	From 68,0 kW to 168,0 kW	For indoor unit


## Tube size (with thermal insulation)

1. CZ-P680PH2BM: For outdoor unit side (Capacity after distribution joint is 68,0 kW or less).

Gas tubing

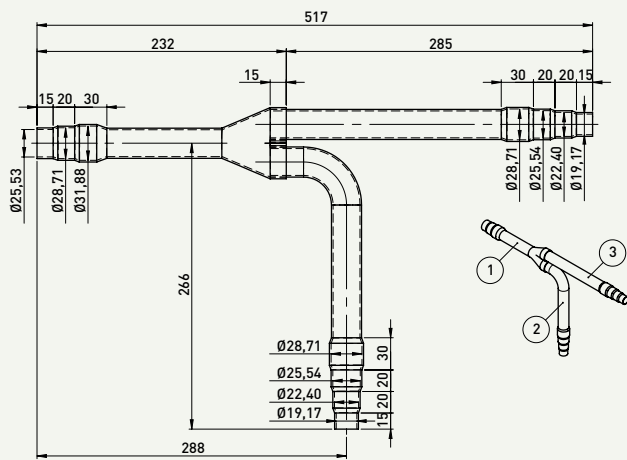


Liquid tubing

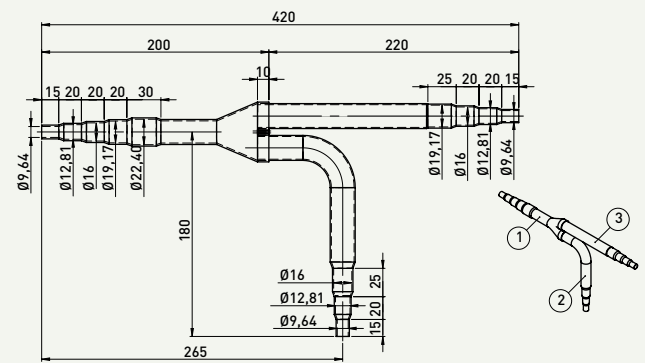


Unit: mm

2. CZ-P1350PH2BM: For outdoor unit side (Capacity after distribution joint is greater than 68,0 kW and no more than 168,0 kW).

Gas tubing

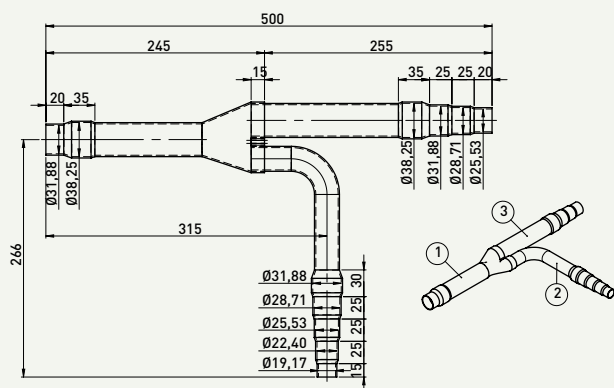


Liquid tubing

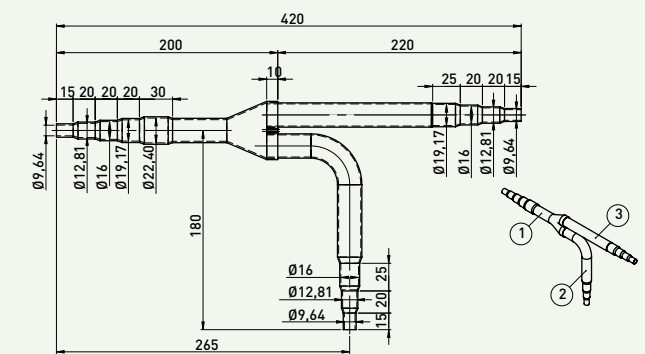


Unit: mm

3. CZ-P224BK2BM: For indoor unit side (Capacity after distribution joint is 22,4 kW or less).

Gas tubing

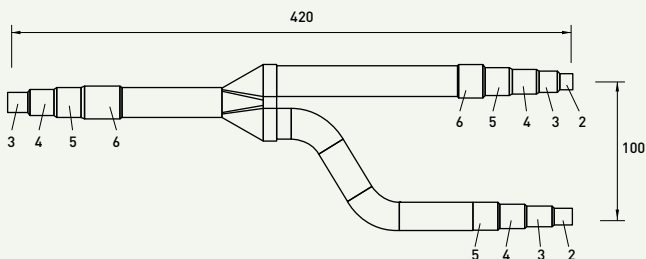

Liquid tubing

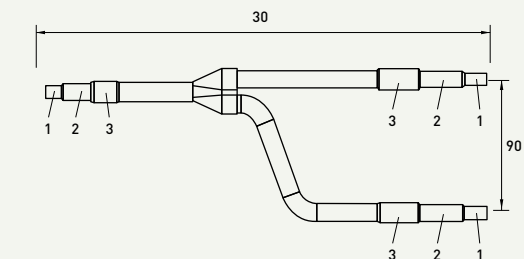


Unit: mm




**4. CZ-P680BK2BM:** For indoor unit side (Capacity after distribution joint is greater than 22,4 kW and no more than 68,0 kW).

Gas tubing

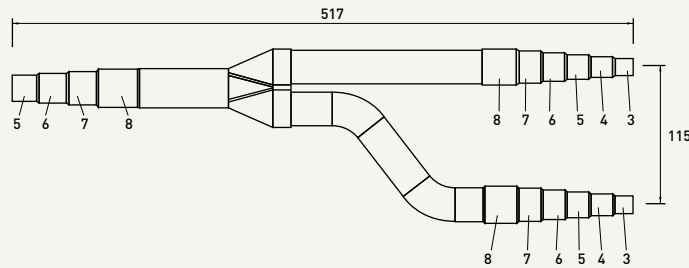


Liquid tubing

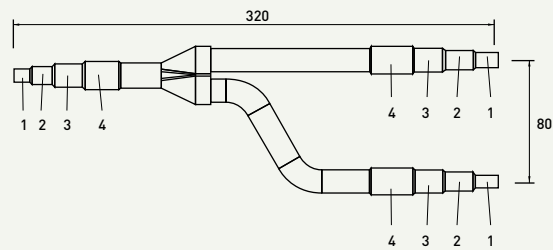


Unit: mm

**5. CZ-P1350BK2BM:** For indoor unit side (Capacity after distribution joint is greater than 68,0 kW and no more than 168,0 kW).

Gas tubing

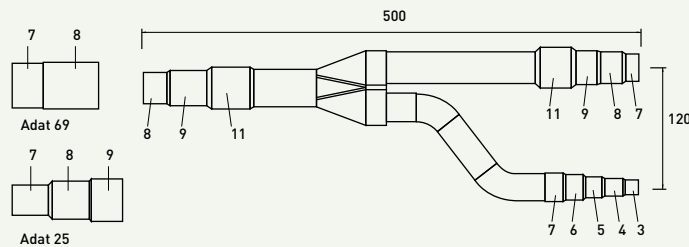

Liquid tubing


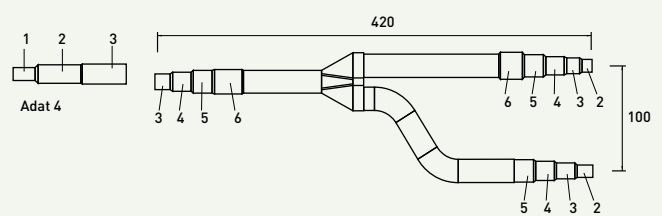


Unit: mm

Diameters		Diameters		Diameters	
1	6.35 mm 1/4"	6	22.40 mm 7/8"	11	38.10 mm 1"1/2
2	9.52 mm 3/8"	7	25.40 mm 1"	12	41.28 mm 1"5/8
3	12.70 mm 1/2"	8	28.57 mm 1" 1/8	13	44.45 mm 1"3/4
4	15.88 mm 5/8"	9	31.75 mm 1" 1/4	14	50.80 mm 2"
5	19.05 mm 3/4"	10	34.92 mm 1"3/8		

### Header pipe set for ECOi 2-Pipe system

**CZ-P4HP4C2BM:** Header pipe models for 2-Pipe systems.

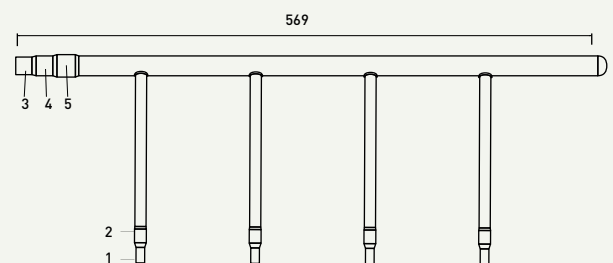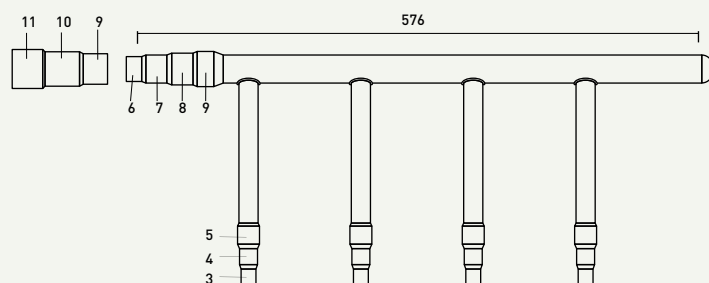

Diameters		Diameters		Diameters	
1	6.35 mm 1/4"	5	19.05 mm 3/4"	9	31.75 mm 1" 1/4
2	9.52 mm 3/8"	6	22.40 mm 7/8"	10	34.92 mm 1"3/8
3	12.70 mm 1/2"	7	25.40 mm 1"	11	38.10 mm 1"1/2
4	15.88 mm 5/8"	8	28.57 mm 1" 1/8		

# Branches and headers for 3-Pipe ECOi and Mini ECOi

## Optional distribution joint kits for 3-Pipe ECOi EX MF3 Series

See the installation instructions packaged with the distribution joint kit for the installation procedure.


\* In case the total capacity of indoor units connected after distribution exceeds the total capacity of the outdoor units, select the distribution piping size for the total capacity of the outdoor units.

Model name	Cooling capacity after distribution	Remarks
1. CZ-P680PJ2BM	68,0 kW or less	For outdoor unit
2. CZ-P1350PJ2BM	Greater than 68,0 kW and no more than 135,0 kW	For outdoor unit
3. CZ-P224BH2BM	22,4 kW or less	For indoor unit
4. CZ-P680BH2BM	Greater than 22,4 kW and no more than 68,0 kW	For indoor unit
5. CZ-P1350BH2BM	Greater than 68,0 kW and no more than 135,0 kW	For indoor unit

## Piping size for 3-Pipe ECOi EX MF3 Series

### 1. CZ-P680PJ2BM


For outdoor unit side (capacity after distribution joint is 68,0 kW or less).

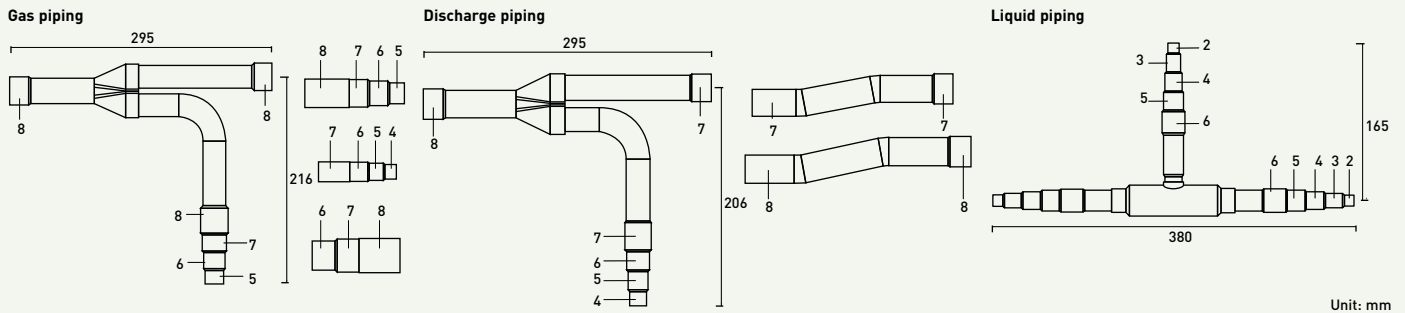

Unit: mm

### 2. CZ-P1350PJ2BM


For outdoor unit side (capacity after distribution joint is greater than 68,0 kW and no more than 135,0 kW).

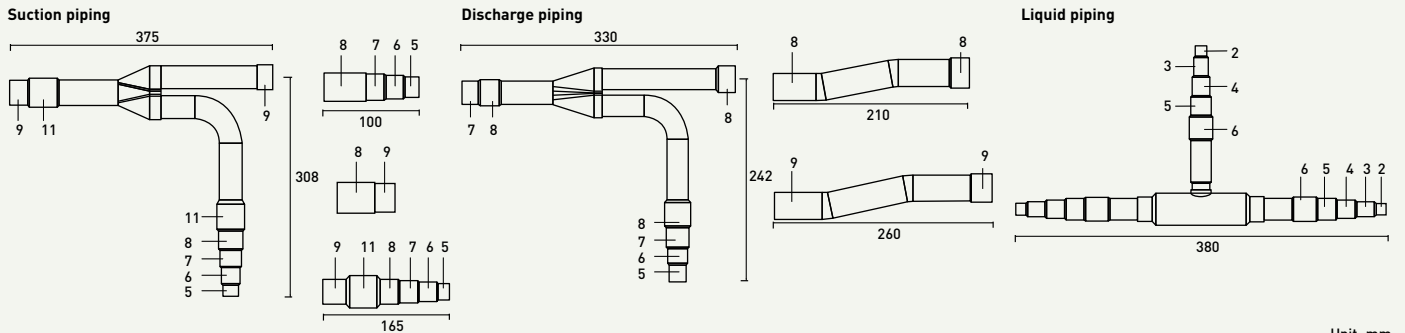

Unit: mm

### 3. CZ-P224BH2BM

For indoor unit side (capacity after distribution joint is 22,4 kW or less).

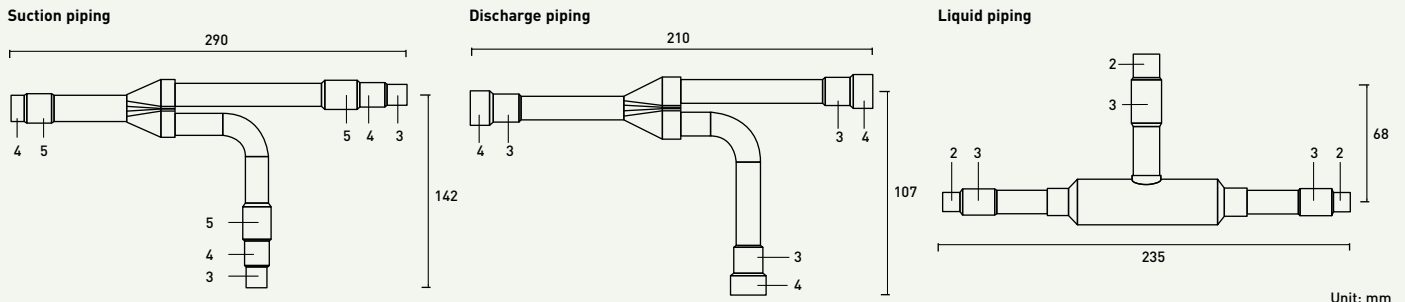

Unit: mm


## Size of connection point on each part (shown are inside diameters of piping)

Size	Part 1	Part 2	Part 3	Part 4	Part 5	Part 6	Part 7	Part 8	Part 9	Part 10	Part 11	Part 12	Part 13	Part 14
Dimension	mm	6.35	9.52	12.70	15.88	19.05	22.40	25.40	28.57	31.75	34.92	38.10	41.28	44.45
	Inches	1/4	3/8	1/2	5/8	3/4	7/8	1	1 1/8	1 1/4	13/8	11/2	15/8	13/4



**4. CZ-P680BH2BM**


For indoor unit side (capacity after distribution joint is greater than 22,4 kW and no more than 68,0 kW).

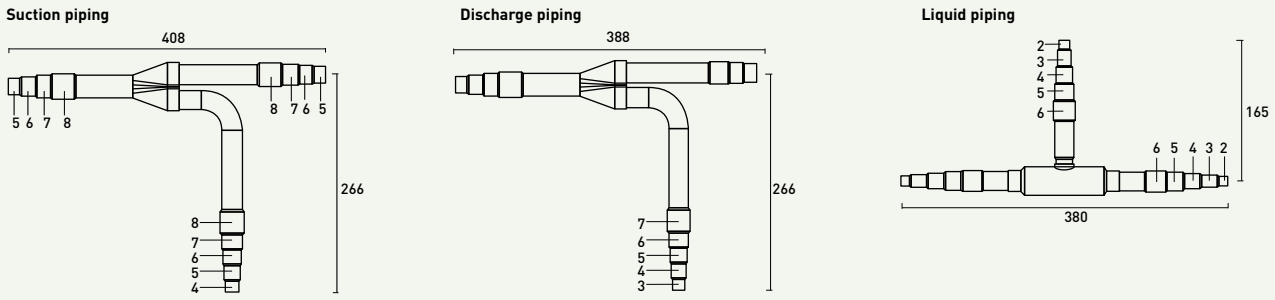

Unit: mm

**5. CZ-P1350BH2BM**

For indoor unit side (capacity after distribution joint is greater than 68,0 kW and no more than 135,0 kW).

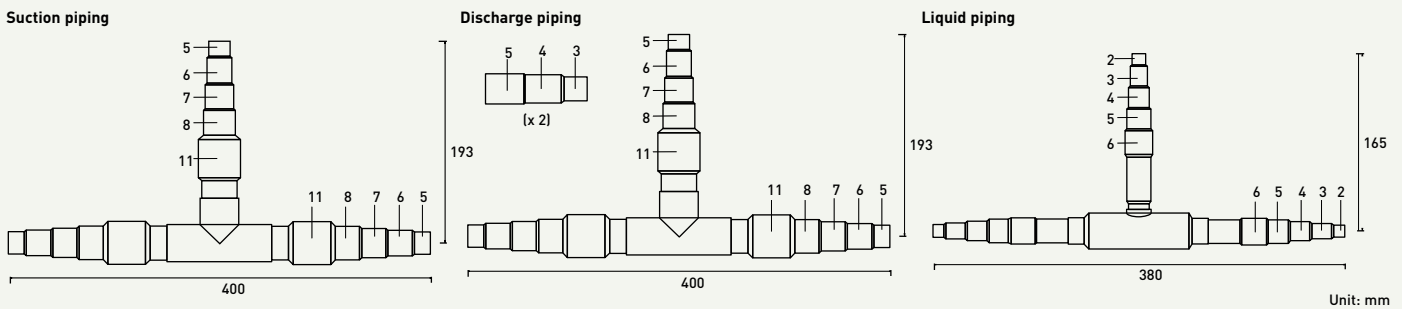


Unit: mm

**Header pipe set for 3-Pipe ECOi EX MF3 Series**

**CZ-P4HP3C2BM**

Header pipe model for 3-Pipe systems.

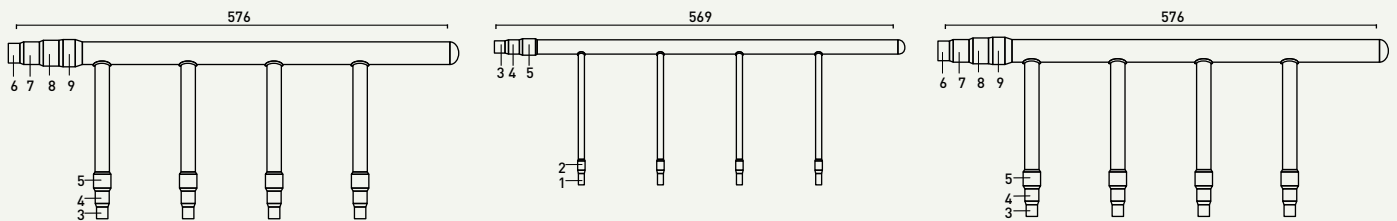


Size of connection point on each part (shown are inside diameters of piping)

Size	Part 1	Part 2	Part 3	Part 4	Part 5	Part 6	Part 7	Part 8	Part 9	Part 10	Part 11	
Dimension	mm	6.35	9.52	12.70	15.88	19.05	22.40	25.40	28.57	31.75	34.92	38.10
	Inches	1/4	3/8	1/2	5/8	3/4	7/8	1	1 1/8	1 1/4	13/8	11/2

**Distribution joint Kits for Mini ECOi LE Series**

**CZ-P160BK2BM**

For indoor unit (capacity after distribution joint is 22,4 kW or less).

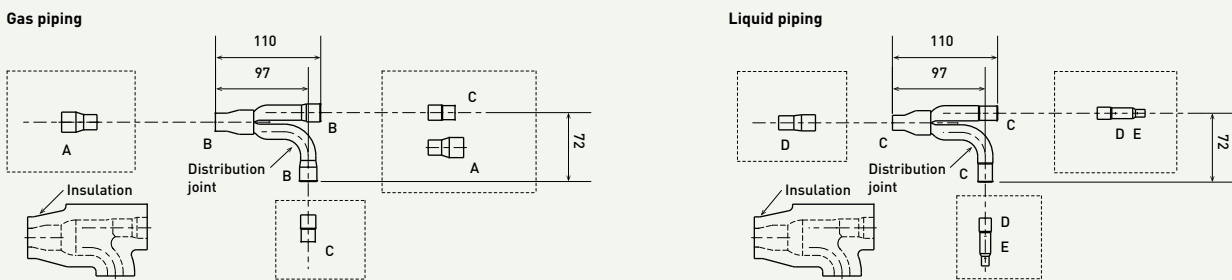

Unit: mm

Size of connection point on each part (shown are inside diameters of piping)

Size	Part A	Part B	Part C	Part D	Part E	
Dimension	mm	19.05	15.88	12.70	9.52	6.35
	Inches	3/4	5/8	1/2	3/8	1/4

*ECO i - W*





# Discover a new era of ECOi, the ECOi-W.

## Heat pumps and cooling only chillers

Panasonic introduces the new ECOi-W heat pumps and cooling only chiller series.

These new series provides a wide variety of HVAC system solutions, to meet all of your residential, commercial and industrial needs.

ECOi-W the solution for hotels, offices and industry	→ 178
Range of ECOi-W outdoor units	→ 180
<b>ECOi-W heat pump outdoor units</b>	→ 182
U - 020/025/030/035/040 CW	→ 184
U - 045/055/065/075 CW	→ 185
U - 090/105/125 CW	→ 186
U - 140/150/170/190/210 CW	→ 187
Options for heat pump outdoor units	→ 188
<b>ECOi-W cooling only outdoor units</b>	→ 190
U - 020/025/030/035/040 CV	→ 192
U - 045/055/065/075 CV	→ 193
U - 090/105/125 CV	→ 194
U - 140/150/170/190/210 CV	→ 195
Options for cooling only outdoor units	→ 196
<b>Fan coils</b>	→ 198
Range of fan coils	→ 200
Fan coils - ducted	→ 202
Fan coils - high static pressure ducted	→ 204
Fan coils - 4 way cassette	→ 206
Fan coils - ceiling chassis	→ 208
Fan coils - floor-standing chassis	→ 210
Fan coils - wall-mounted	→ 212
Smart fan coils	→ 213
Wired controllers for AC and EC fan coils	→ 214
Fan coil valve accessories	→ 215

# ECOi-W the solution for hotels, offices and industry



- 1 High energy saving and comfort**
- High SEER/SCOP
  - Quiet operation
  - Integration with ECOi VRF systems via BMS control


- 2 High flexibility**
- Capacity range from 20 kW to 210 kW
  - Customisable design
  - Operating range: -17 °C (heating) to 50 °C (cooling)
  - Wide range of hydraulic options
  - Wide range of communication protocols

- 3 High quality**
- Defrost limiting coil design (140 to 210)
  - Optimised design for service and maintenance
  - Compact footprint

## Operating conditions

Panasonic ECOi-W provides a wide operation range from -17 °C in heating to 50 °C in cooling.

Water outlet temperature in cooling: A uniqueness of ECOi-W, is the water outlet temperature down to -10 °C in cooling. It can ensure the operation temperature of the process equipment in factories.

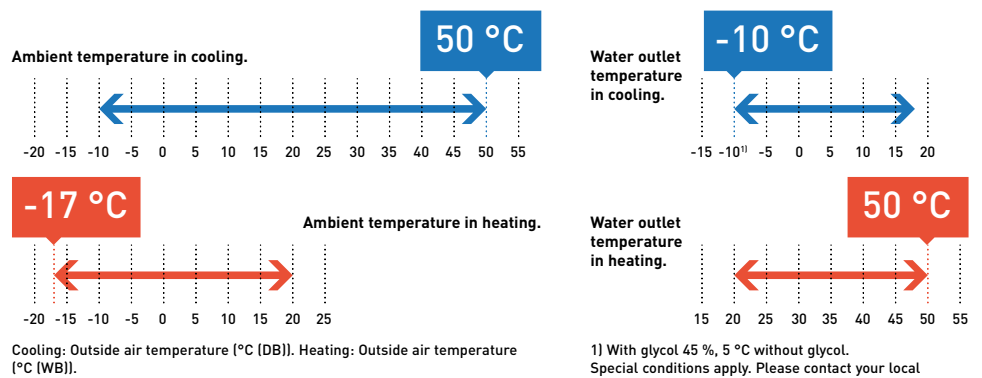

## ECOi-W the solution for hotels, offices and industry



Hotels.



Offices.



Industry.




Unrivaled Reliability and Quality.

Panasonic solutions can be enjoyed for years to come, even in the most extreme climates. Panasonic does not compromise on product quality, safety or durability, in order to provide the ultimate comfort when you need it most.

*ECOi-W*

**ECOi-W line-up**

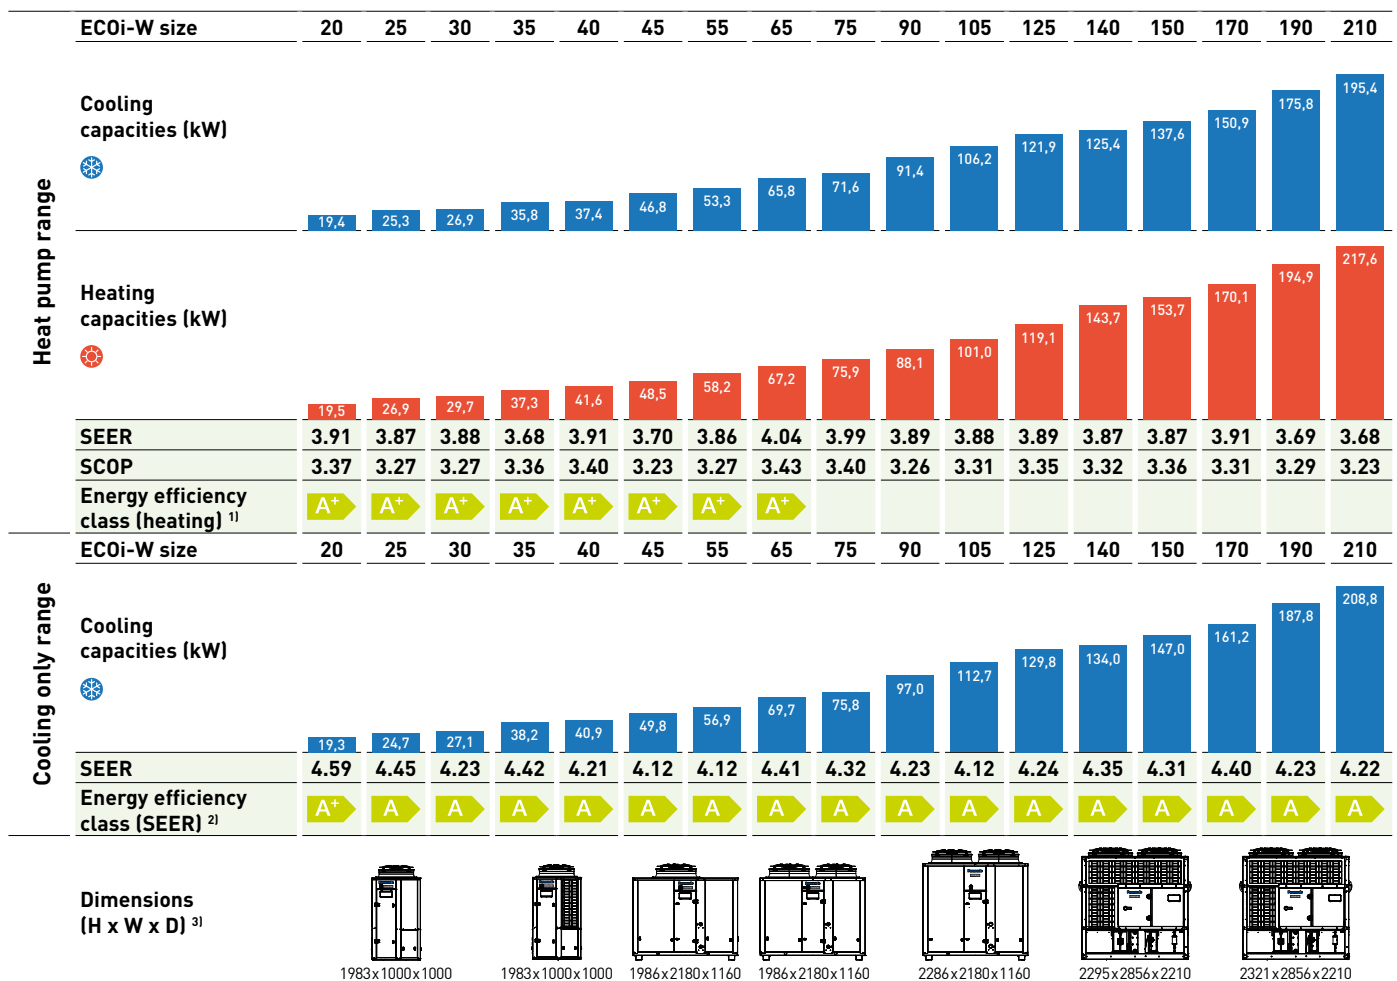

1) According to Eurovent and COMMISSION REGULATION (EU) No 813/2013 for low-temperature heat pumps. 2) According to Eurovent and COMMISSION REGULATION (EU) No 2016/2281 for comfort application chillers <400 kW. 3) Without buffer tanks.



**Simple user friendly control**

Main features	
Basic operation	ON/OFF setting
	Cooling / Heating mode setting
Energy Saving	Intelligent logic control for inlet water temperature
	Night setback operation to reduce electrical consumption and noise
	Part load operating mode
	Maximum discharge temperature control
Service / Maintenance	Automatic test operation at the push of a button
	Alarm notice with the latest 10 alarms
	Counter for operating hours of compressor and pump
Others	Compressor operating limits saved in a flash memory
	BMS compatible (RS485 Modbus RTU or BacNet MSTP protocol)



A control panel with intuitive design is equipped on all ECOi-W systems as standard. The microprocessor based control has a IHM logic and implements a smart handling for your demand.

## Range of ECOi-W outdoor units

Page	Outdoor units	20 kW	25 kW	30 kW	35 kW	40 kW	45 kW	55 kW	65 kW	75 kW
	ECOi-W 20 to 40									
<b>P. 184</b>	Heat pump	U-020CWNB U-020CWBS	U-025CWNB U-025CWBS	U-030CWNB U-030CWBS	U-035CWNB U-035CWBS	U-040CWNB U-040CWBS				
<b>P. 192</b>	Cooling only	U-020CVNB U-020CVBS	U-025CVNB U-025CVBS	U-030CVNB U-030CVBS	U-035CVNB U-035CVBS	U-040CVNB U-040CVBS				
	ECOi-W 45 to 75									
<b>P. 185</b>	Heat pump						U-045CWNB U-045CWBM	U-055CWNB U-055CWBM	U-065CWNB U-065CWBM	U-075CWNB U-075CWBM
<b>P. 193</b>	Cooling only						U-045CVNB U-045CVBM	U-055CVNB U-055CVBM	U-065CVNB U-065CVBM	U-075CVNB U-075CVBM
	ECOi-W 90 to 125									
<b>P. 186</b>	Heat pump									
<b>P. 194</b>	Cooling only									
	ECOi-W 140 to 210									
<b>P. 187</b>	Heat pump									
<b>P. 195</b>	Cooling only									



90 kW	105 kW	125 kW	140 kW	150 kW	170 kW	190 kW	210 kW
-------	--------	--------	--------	--------	--------	--------	--------



U-090CWNB U-090CWBM	U-105CWNB U-105CWBM	U-125CWNB U-125CWBM
U-090CVNB U-090CVBM	U-105CVNB U-105CVBM	U-125CVNB U-125CVBM



U-140CWNB U-140CWBL	U-150CWNB U-150CWBL	U-170CWNB U-170CWBL	U-190CWNB U-190CWBL	U-210CWNB U-210CWBL
U-140CVNB U-140CVBL	U-150CVNB U-150CVBL	U-170CVNB U-170CVBL	U-190CVNB U-190CVBL	U-210CVNB U-210CVBL



# Features of ECOi-W heat pump outdoor units

## ECOi-W heat pump outdoor units.

- High seasonal efficiency in cooling and heating
- Eurovent certified
- Ambient temperature operation range: -10 to +50 °C in cooling, -17 to +20 °C in heating
- Water outlet temperature range: -10 to +18 °C in cooling, +20 to +50 °C<sup>1)</sup> in heating
- Optimised design for service and maintenance
- Simple user friendly control as standard
- Modbus RTU as standard

## Technical focus:

- Chiller type: heat pump
- Refrigeration type: R410A
- Heat exchanger: stainless steel plate heat exchanger
- Flow switch, water safety & air purge valves included
- Water filter included (mandatory to be installed on site)
- Night mode setting to save energy and reduce noise level
- Water compensation curve control
- Bluefin anti-corrosion coating
- Optional hydraulic kit
- Optional finned coil treatment

## U - 020/025/030/035/040 CW

- Super quiet operation

### Technical focus:

- Compressor type (number of compressors): Scroll compressors (2)

- Refrigerant circuit: 1
- Fan type (number of fans): axial fan (1)
- Optional Modbus TCP/IP, BACnet IP and BACnet MSTP
- Optional remote LAN connection

## U - 045/055/065/075 CW

- Optional extra-low noise kit available

### Technical focus:

- Compressor type (number of compressors): Scroll compressors (2)

- Refrigerant circuit: 1
- Fan type (number of fans): axial fan (1 for 45/55, 2 for 65/75)
- Optional Modbus TCP/IP, BACnet IP and BACnet MSTP
- Optional remote LAN connection

## U - 090/105/125 CW

- Optional extra-low noise kit available

### Technical focus:

- Compressor type (number of compressors): Scroll compressors (2)

- Refrigerant circuit: 1
- Fan type (number of fans): axial fan (2)
- Optional Modbus TCP/IP, BACnet IP and BACnet MSTP
- Optional remote LAN connection

## U - 140/150/170/190/210 CW

- Smart defrost:  
Defrost limiting design to ensure a constant water outlet temperature even at very low temperatures

**1 DEFROST CYCLE  
EVERY 130 MINUTES.**

**Heating Capacity: +22 %  
Integrated COP: +15 %  
Improved SCOP Class**

- Super quiet operation
- Victaulic water connections
- Modbus TCP/IP as standard

### Technical focus:

- Compressor type (number of compressors): Scroll compressors (4)
- Refrigerant circuit: 2
- Fan type (number of fans): axial fan (4)
- Optional gauges hydraulic and refrigerant
- Optional BACnet
- Remote LAN connection as standard

1) Special condition apply. Please contact an authorized Panasonic dealer in the case of condition →50 °C.



SEE MORE OPTIONS FOR HEAT PUMP OUTDOOR UNITS

**Available options for U - 020/025/030/035/040 CW**

Options				
Pump	Pump drive	Hydraulic options	Ambient options	Miscellaneous options
Single pump (as standard)	Fixed speed	Low water pressure sensor	Finned coil treatment - epoxy	Soft starter
	Variable twin speed	Water isolation valves	Rubber pads	Power supply w/o neutral
	Variable capacity		Spring damper	Modbus TCP/IP
	Constant outlet pressure		All seasons	BACnet MSTP
	Constant differential pressure		Nordic pack	BACnet IP
		High pressure fan*	Remote LAN connection	

\* Available on models 25 - 40.

**Available options for U - 045/055/065/075 CW**

Options				
Pump	Pump drive	Hydraulic options	Ambient options	Miscellaneous options
Single pump	Fixed speed	Low water pressure sensor	Finned coil treatment - epoxy	Soft starter
Double pump	Variable twin speed	Water isolation valves	Outdoor coil protection grid	Power supply w/o neutral
	Variable capacity	Electrical heater low power (only with buffer tank)	Rubber pads	Modbus TCP/IP
	Constant outlet pressure	Electrical heater high power (only with buffer tank)	Spring damper	BACnet MSTP
	Constant differential pressure		All seasons fan control	BACnet IP
			Extra-low noise kit	Remote LAN connection
		High pressure fan	Container transport	
				Refrigerant gauge

**Available options for U - 090/105/125 CW**

Options				
Pump	Pump drive	Hydraulic options	Ambient options	Miscellaneous options
Single pump	Fixed speed	Low water pressure sensor	Finned coil treatment - epoxy	Soft starter
Double pump	Variable twin speed	Water isolation valves	Outdoor coil protection grid	Power supply w/o neutral
	Variable capacity	Electrical heater low power (only with buffer tank)	Rubber pads	Modbus TCP/IP
	Constant outlet pressure	Electrical heater high power (only with buffer tank)	Spring damper	BACnet MSTP
	Constant differential pressure		All seasons fan control	BACnet IP
			Extra-low noise kit	Remote LAN connection
		High pressure fan	Container transport	
				Refrigerant gauge

**Available options for U - 140/150/170/190/210 CW**

Options				
Pump	Pump drive	Hydraulic options	Ambient options	Miscellaneous options
Single pump low pressure	Fixed speed	Low water pressure sensor	Finned coil treatment - epoxy	Soft starter
Single pump high pressure	Variable twin speed	Water isolation valves	Outdoor coil protection grid	Power supply w/o neutral
Double pump low pressure	Variable capacity	Hydraulic gauges	Rubber pads	Modbus TCP/IP
Double pump high pressure	Constant outlet pressure		Spring damper	BACnet IP
	Constant differential pressure		All seasons fan control	Refrigerant gauge
		Nordic pack		
		High pressure fan		



## U - 020/025/030/035/040 CW

Cooling capacity: 19.4 to 37.4 kW

Heating capacity: 19.5 to 41.6 kW

Compact and powerful heat pump chiller series with Panasonic quality verification.

ECOi-W Series guarantees quiet operation.

Please contact Panasonic for RRP.



Model			20	25	30	35	40
<b>Standard without buffer tank</b>			<b>U-020CWNB</b>	<b>U-025CWNB</b>	<b>U-030CWNB</b>	<b>U-035CWNB</b>	<b>U-040CWNB</b>
<b>With buffer tank</b>			<b>U-020CWBS</b>	<b>U-025CWBS</b>	<b>U-030CWBS</b>	<b>U-035CWBS</b>	<b>U-040CWBS</b>
Power supply	Voltage	V	400	400	400	400	400
	Phase		Three phase	Three phase	Three phase	Three phase	Three phase
	Frequency	Hz	50	50	50	50	50
Cooling capacity <sup>1)</sup>		kW	19.4	25.3	26.9	35.8	37.4
Input power cooling <sup>1)</sup>		kW	6.10	8.61	9.34	13.51	13.64
Total EER 100 % <sup>1)</sup>			3.18	2.94	2.88	2.65	2.74
<b>SEER <sup>2)</sup></b>			<b>3.91</b>	<b>3.87</b>	<b>3.88</b>	<b>3.68</b>	<b>3.91</b>
Ɖ <sub>sc</sub> <sup>2)</sup>		%	153	152	152	144	153
Heating capacity <sup>3)</sup>		kW	19.5	26.9	29.7	37.3	41.6
Input power heating <sup>3)</sup>		kW	6.11	9.28	9.93	13.23	13.51
<b>SCOP <sup>4)</sup></b>			<b>3.37</b>	<b>3.27</b>	<b>3.27</b>	<b>3.36</b>	<b>3.40</b>
Ɖ <sub>sh</sub> <sup>4)</sup>		%	132	128	128	132	133
Energy efficiency class (Scale A+++ to D) <sup>5)</sup>			A+	A+	A+	A+	A+
Startup type			Direct	Direct	Direct	Direct	Direct
Maximum operating current		A	17.71	22.21	24.29	31.84	33.84
Startup current w/o softstarter / w softstarter		A	52.71/28.11	63.71/35.21	77.29/48.79	118.34/52.99	119.34/53.99
Sound power level (w standard fans)		dB(A)	75.0	75.0	75.0	76.0	76.0
Sound pressure level (w standard fans) <sup>6)</sup>		dB(A)	42.8	42.8	42.8	43.8	43.8
Dimensions (w standard fans) w/o buffer tank	H x W x D	mm	1983x1000x1000	1983x1000x1000	1983x1000x1000	1983x1000x1000	1983x1000x1000
Dimensions (w standard fans) w buffer tank	H x W x D	mm	1983x1000x1507	1983x1000x1507	1983x1000x1507	1983x1000x1507	1983x1000x1507
Weight (w 1 pump) w/o buffer tank		kg	280	290	320	330	330
Weight (w 1 pump) w buffer tank		kg	345	355	385	395	395
Refrigerant (R410A)		kg	6.5	8.4	8.4	9.1	9.2
Number of refrigerant circuit			1	1	1	1	1
<b>Compressors</b>							
Number			2	2	2	2	2
Type			Scroll	Scroll	Scroll	Scroll	Scroll
Part load step		%	0/50/100	0/50/100	0/50/100	0/50/100	0/50/100
Crankcase heater		W	2x40	2x40	2x49	2x49	2x49
<b>Evaporator</b>							
Number			1	1	1	1	1
Type			Plate	Plate	Plate	Plate	Plate
Nominal water flow (cooling)		m <sup>3</sup> /h	3.35	4.36	4.64	6.16	6.44
Water pressure drop (cooling)		kPa	23	37	22	37	40
Water volume		l	1.78	1.78	2.55	2.55	2.55
Antifreeze heater		W	30	30	30	30	30
<b>Coils</b>							
Number			1	1	1	1	1
Frontal surface		m <sup>2</sup>	2.4	2.4	2.4	2.8	2.8
Number of rows			2	2	2	2	2
<b>Fans standard</b>							
Number			1	1	1	1	1
Air flow		m <sup>3</sup> /h	9000	13000	13000	16000	16000
Rotation speed		r.p.m.	900	900	900	650	650
Power input (each fan)		W	620	940	940	930	930
<b>Water connections</b>							
Type			Male gas threaded BSPP ISO 228	Male gas threaded BSPP ISO 228	Male gas threaded BSPP ISO 228	Male gas threaded BSPP ISO 228	Male gas threaded BSPP ISO 228
Inlet - diameter		Inch	1 1/2	1 1/2	1 1/2	1 1/2	1 1/2
Outlet - diameter		Inch	1 1/2	1 1/2	1 1/2	1 1/2	1 1/2

## Accessories

PAW-SYSREMKIT Remote control

## Accessories

PAW-SYSSOV1 Shut off valves kit for model 20 - 40

1) Data refers to 7 °C leaving chilled water temperature and 35 °C condenser air temperature, according EN14511 standard. 2) Following COMMISSION REGULATION (EU) No 2016/2281 for comfort application chillers. 3) Data refers to 45 °C leaving warm water temperature and 7 °C ambient coil air temperature with 87 % R.H., according EN14511 standard. 4) Following COMMISSION REGULATION (EU) No 813/2013 for low-temperature heat pumps. 5) Following COMMISSION REGULATION (EU) No 811/2013 for low-temperature heat pumps. Scale from A+++ to D, as of 26th September 2019. 6) Sound pressure levels calculated at 10 meters. Sound pressure levels refer to ISO standard 3744 with parallel piped shape.

\* w: with, w/o: without.





**U - 045/055/065/075 CW****Cooling capacity: 46.8 to 71.6 kW****Heating capacity: 48.5 to 75.9 kW**

High seasonal efficiency in cooling, maximum SEER 4,04 in this range. ECOi-W Series offers a variety of options to meet your needs.

Please contact Panasonic for RRP.

Model		45	55	65	75	
<b>Standard without buffer tank</b>		<b>U-045CWNB</b>	<b>U-055CWNB</b>	<b>U-065CWNB</b>	<b>U-075CWNB</b>	
<b>With buffer tank</b>		<b>U-045CWBM</b>	<b>U-055CWBM</b>	<b>U-065CWBM</b>	<b>U-075CWBM</b>	
Power supply	Voltage	V	400	400	400	400
	Phase		Three phase	Three phase	Three phase	Three phase
	Frequency	Hz	50	50	50	50
Cooling capacity <sup>1)</sup>	kW	46.8	53.3	65.8	71.6	
Input power cooling <sup>1)</sup>	kW	16.90	19.67	22.10	24.26	
Total EER 100 % <sup>1)</sup>		2.77	2.71	2.98	2.95	
<b>SEER <sup>2)</sup></b>		<b>3.70</b>	<b>3.86</b>	<b>4.04</b>	<b>3.99</b>	
Ɛsc <sup>2)</sup>	%	145	151	159	157	
Heating capacity <sup>3)</sup>	kW	48.5	58.2	67.2	75.9	
Input power heating <sup>3)</sup>	kW	17.32	20.35	22.47	24.33	
<b>SCOP <sup>4)</sup></b>		<b>3.23</b>	<b>3.27</b>	<b>3.43</b>	<b>3.40</b>	
Ɛsh <sup>4)</sup>	%	126	128	134	133	
Energy efficiency class (Scale A+++ to D) <sup>5)</sup>		A+	A+	A+	—	
Startup type		Direct	Direct	Direct	Direct	
Maximum operating current	A	40.20	44.20	59.43	64.43	
Startup current w/o softstarter / w softstarter	A	133.20/65.80	140.20/72.80	201.43/101.03	206.43/106.03	
Sound power level (w standard fans)	dB(A)	80.0	80.0	80.0	80.0	
Sound pressure level (w standard fans) <sup>6)</sup>	dB(A)	47.8	47.8	47.8	47.8	
Dimensions (w standard fans) w/o buffer tank	H x W x D	mm	1986 x 2180 x 1160	1986 x 2180 x 1160	1986 x 2180 x 1160	1986 x 2180 x 1160
Dimensions (w standard fans) w buffer tank	H x W x D	mm	1986 x 2680 x 1160	1986 x 2680 x 1160	1986 x 2680 x 1160	1986 x 2680 x 1160
Weight (w 1 pump) w/o buffer tank	kg	540	540	610	610	
Weight (w 1 pump) w buffer tank	kg	700	700	770	770	
Refrigerant (R410A)	kg	14.0	14.3	18.9	19.3	
Number of refrigerant circuit		1	1	1	1	
<b>Compressors</b>						
Number		2	2	2	2	
Type		Scroll	Scroll	Scroll	Scroll	
Part load step	%	0/50/100	0/43/57/100	0/40/60/100	0/45/55/100	
Crankcase heater	W	2 x 66	2 x 66	2 x 66	2 x 66	
<b>Evaporator</b>						
Number		1	1	1	1	
Type		Plate	Plate	Plate	Plate	
Nominal water flow (cooling)	m <sup>3</sup> /h	8.06	9.18	11.30	12.31	
Water pressure drop (cooling)	kPa	30	35	28	37	
Water volume	l	4.10	4.10	6.10	6.10	
Antifreeze heater	W	30	30	2 x 30	2 x 30	
<b>Coils</b>						
Number		1	1	2	2	
Frontal surface	m <sup>2</sup>	4.20	4.20	5.55	5.55	
Number of rows		2	2	2	2	
<b>Fans standard</b>						
Number		1	1	2	2	
Air flow	m <sup>3</sup> /h	22500	22500	15000	15000	
Rotation speed	r.p.m.	790	790	650	650	
Power input (each fan)	W	1650	1650	930	930	
<b>Water connections</b>						
Type		Male gas threaded BSPP ISO 228	Male gas threaded BSPP ISO 228	Male gas threaded BSPP ISO 228	Male gas threaded BSPP ISO 228	
Inlet - diameter	Inch	2	2	2	2	
Outlet - diameter	Inch	2	2	2	2	

**Accessories****PAW-SYSREMKIT** Remote control**Accessories****PAW-SYSSOV2** Shut off valves kit for model 45 - 75

1) Data refers to 7 °C leaving chilled water temperature and 35 °C condenser air temperature, according EN14511 standard. 2) Following COMMISSION REGULATION (EU) No 2016/2281 for comfort application chillers. 3) Data refers to 45 °C leaving warm water temperature and 7 °C ambient coil air temperature with 87 % R.H., according EN14511 standard. 4) Following COMMISSION REGULATION (EU) No 813/2013 for low-temperature heat pumps. 5) Following COMMISSION REGULATION (EU) No 811/2013 for low-temperature heat pumps. Scale from A+++ to D, as of 26th September 2019. 6) Sound pressure levels calculated at 10 meters. Sound pressure levels refer to ISO standard 3744 with parallel piped shape.

\* w: with, w/o: without.



**U - 090/105/125 CW****Cooling capacity: 91.4 to 121.9 kW****Heating capacity: 88.1 to 119.1 kW**

Customizable design gives high flexibility. Wide range of communication protocols fulfill the requirements in hotels, offices, industry applications.

Please contact Panasonic for RRP.



Model			90	105	125
<b>Standard without buffer tank</b>			<b>U-090CWNB</b>	<b>U-105CWNB</b>	<b>U-125CWNB</b>
<b>With buffer tank</b>			<b>U-090CWBM</b>	<b>U-105CWBM</b>	<b>U-125CWBM</b>
Power supply	Voltage	V	400	400	400
	Phase		Three phase	Three phase	Three phase
	Frequency	Hz	50	50	50
Cooling capacity <sup>1)</sup>		kW	91.4	106.2	121.9
Input power cooling <sup>1)</sup>		kW	34.36	38.06	46.35
Total EER 100 % <sup>1)</sup>			2.66	2.79	2.63
<b>SEER <sup>2)</sup></b>			<b>3.89</b>	<b>3.88</b>	<b>3.89</b>
Ɖsc <sup>2)</sup>		%	153	152	153
Heating capacity <sup>3)</sup>		kW	88.1	101.0	119.1
Input power heating <sup>3)</sup>		kW	33.75	38.40	45.46
<b>SCOP <sup>4)</sup></b>			<b>3.26</b>	<b>3.31</b>	<b>3.35</b>
Ɖsh <sup>4)</sup>		%	128	129	131
Startup type			Direct	Direct	Direct
Maximum operating current		A	77.90	85.96	101.96
Startup current w/o softstarter / w softstarter		A	264.90/127.30	311.96/145.76	349.96/182.56
Sound power level (w standard fans)		dB(A)	83.0	83.0	83.0
Sound pressure level (w standard fans) <sup>5)</sup>		dB(A)	50.8	50.8	50.8
Dimensions (w standard fans) w/o buffer tank	H x W x D	mm	2286x2180x1160	2286x2180x1160	2286x2180x1160
Dimensions (w standard fans) w buffer tank	H x W x D	mm	2286x2680x1160	2286x2680x1160	2286x2680x1160
Weight (w 1 pump) w/o buffer tank		kg	790	900	920
Weight (w 1 pump) w buffer tank		kg	950	1060	1080
Refrigerant (R410A)		kg	22.0	32.3	33.0
Number of refrigerant circuit			1	1	1
<b>Compressors</b>					
Number			2	2	2
Type			Scroll	Scroll	Scroll
Part load step		%	0/45/55/100	0/38/62/100	0/33/67/100
Crankcase heater		W	66/82	66/95	66/95
<b>Evaporator</b>					
Number			1	1	1
Type			Plate	Plate	Plate
Nominal water flow (cooling)		m <sup>3</sup> /h	15.73	18.25	20.95
Water pressure drop (cooling)		kPa	26	34	45
Water volume		l	10.80	10.80	10.80
Antifreeze heater		W	2x30	2x30	2x30
<b>Coils</b>					
Number			2	2	2
Frontal surface		m <sup>2</sup>	6.4	6.4	6.4
Number of rows			2	3	3
<b>Fans standard</b>					
Number			2	2	2
Air flow		m <sup>3</sup> /h	21000	21000	21000
Rotation speed		r.p.m.	790	790	790
Power input (each fan)		W	1650	1650	1650
<b>Water connections</b>					
Type			Male gas threaded BSPP ISO 228	Male gas threaded BSPP ISO 228	Male gas threaded BSPP ISO 228
Inlet - diameter		Inch	2 1/2	2 1/2	2 1/2
Outlet - diameter		Inch	2 1/2	2 1/2	2 1/2

**Accessories****PAW-SYSREMKIT** Remote control**Accessories****PAW-SYSSOV3** Shut off valves kit for model 90 - 125

1) Data refers to 7 °C leaving chilled water temperature and 35 °C condenser air temperature, according EN14511 standard. 2) Following COMMISSION REGULATION (EU) No 2016/2281 for comfort application chillers. 3) Data refers to 45 °C leaving warm water temperature and 7 °C ambient coil air temperature with 87 % R.H., according EN14511 standard. 4) Following COMMISSION REGULATION (EU) No 813/2013 for low-temperature heat pumps. 5) Sound pressure levels calculated at 10 meters. Sound pressure levels refer to ISO standard 3744 with parallel piped shape.

\* w: with, w/o: without.





**U - 140/150/170/190/210 CW**

**Cooling capacity: 125.4 to 195.4 kW**  
**Heating capacity: 143.7 to 217.6 kW**

Heat pump chiller series with powerful operation by 4 scroll compressors. Maximum water outlet temperature in heating is up to 55 °C <sup>1)</sup>. Defrost limiting design ensures to provide stable hot water even at low ambient conditions.

Please contact Panasonic for RRP.

Model		140	150	170	190	210
<b>Standard without buffer tank</b>		<b>U-140CWNB</b>	<b>U-150CWNB</b>	<b>U-170CWNB</b>	<b>U-190CWNB</b>	<b>U-210CWNB</b>
<b>With buffer tank</b>		<b>U-140CWBL</b>	<b>U-150CWBL</b>	<b>U-170CWBL</b>	<b>U-190CWBL</b>	<b>U-210CWBL</b>
Power supply	Voltage	V	400	400	400	400
	Phase		Three phase	Three phase	Three phase	Three phase
	Frequency	Hz	50	50	50	50
Cooling capacity <sup>1)</sup>	kW	125.4	137.6	150.9	175.8	195.4
Input power cooling <sup>1)</sup>	kW	43.55	47.77	52.73	64.83	72.54
Total EER 100 % <sup>1)</sup>		2.88	2.88	2.86	2.71	2.69
<b>SEER <sup>2)</sup></b>		<b>3.87</b>	<b>3.87</b>	<b>3.91</b>	<b>3.69</b>	<b>3.68</b>
Esc <sup>2)</sup>	%	152	152	153	145	144
Heating capacity <sup>3)</sup>	kW	143.7	153.7	170.1	194.9	217.6
Input power heating <sup>3)</sup>	kW	45.80	50.20	55.40	67.50	78.30
<b>SCOP <sup>4)</sup></b>		<b>3.32</b>	<b>3.36</b>	<b>3.31</b>	<b>3.29</b>	<b>3.23</b>
Esc <sup>4)</sup>	%	130	132	129	129	126
Startup type		Direct	Direct	Direct	Direct	Direct
Maximum operating current	A	108.00	119.00	136.00	153.00	170.00
Startup current w/o softstarter / w softstarter	A	251.00/130.00	262.00/141.00	324.00/161.00	341.00/178.00	396.00/201.00
Sound power level (w standard fans)	dB(A)	85.4	85.4	87.0	88.1	88.1
Sound pressure level (w standard fans) <sup>5)</sup>	dB(A)	53.4	53.4	55.0	56.1	56.1
Dimensions (w standard fans) w/o buffer tank	H x W x D	mm	2295 x 2856 x 2210	2295 x 2856 x 2210	2295 x 2856 x 2210	2295 x 2856 x 2210
Dimensions (w standard fans) w buffer tank	H x W x D	mm	2295 x 3666 x 2210	2295 x 3666 x 2210	2295 x 3666 x 2210	2295 x 3666 x 2210
Weight (w 1 low Pa pump) w/o buffer tank	kg	1512	1515	1605	1677	1937
Weight (w 1 low Pa pump) w buffer tank	kg	1644	1647	1737	1809	2069
Refrigerant (R410A)	kg	2 x 24.7	2 x 24.7	24.7/33.3	2 x 33.3	2 x 33.3
Number of refrigerant circuit		2	2	2	2	2
<b>Compressors</b>						
Number		4	4	4	4	4
Type		Scroll	Scroll	Scroll	Scroll	Scroll
Part load step	%	0 / 24 / 26 / 48 / 50 / 52 / 74 / 76 / 100	0 / 23 / 27 / 46 / 50 / 54 / 73 / 77 / 100	0 / 20 / 24 / 44 / 45 / 55 / 69 / 80 / 100	0 / 22 / 28 / 44 / 50 / 56 / 72 / 78 / 100	0 / 19 / 31 / 38 / 50 / 62 / 69 / 81 / 100
Crankcase heater	W	4 x 66	4 x 66	3 x 66 / 82	2 x 82 / 2 x 66	2 x 95 / 2 x 66
<b>Evaporator</b>						
Number		1	1	1	1	1
Type		Plate	Plate	Plate	Plate	Plate
Nominal water flow (cooling)	m <sup>3</sup> /h	21.56	23.65	25.95	30.24	33.62
Water pressure drop (cooling)	kPa	33	39	24	32	40
Water volume	l	8.49	8.49	12.21	12.21	12.21
Antifreeze heater	W	60	60	120	120	120
<b>Coils</b>						
Number		4	4	4	4	4
Frontal surface	m <sup>2</sup>	11.88	11.88	11.88	11.88	11.88
Number of rows		2+2	2+2	2+3	3+3	3+3
<b>Fans standard</b>						
Number		4	4	4	4	4
Air flow	m <sup>3</sup> /h	56000	56000	71000	86000	83000
Rotation speed	r.p.m.	900	900	900	900	900
Power input (each fan)	W	940	940	940 - 1650	1650	1650
<b>Water connections</b>						
Type		Victaulic	Victaulic	Victaulic	Victaulic	Victaulic
Inlet - diameter	Inch	2 1/2	2 1/2	2 1/2	2 1/2	2 1/2
Outlet - diameter	Inch	2 1/2	2 1/2	2 1/2	2 1/2	2 1/2

**Accessories**

**PAW-SYSREMKIT** Remote control

**Accessories**

**PAW-SYSVICTH** Victaulic connection kit for model 140 - 210

1) Data refers to 7 °C leaving chilled water temperature and 35 °C condenser air temperature, according EN14511 standard. 2) Following COMMISSION REGULATION (EU) No 2016/2281 for comfort application chillers. 3) Data refers to 45 °C leaving warm water temperature and 7 °C ambient coil air temperature with 87 % R.H., according EN14511 standard. 4) Following COMMISSION REGULATION (EU) No 813/2013 for low-temperature heat pumps. 5) Sound pressure levels calculated at 10 meters. Sound pressure levels refer to ISO standard 3744 with parallel piped shape.

\* w: with, w/o: without.





# Options for heat pump outdoor units

## Options table 20 - 125

Option	Type	Ref.	Description	Model																			
				20	25	30	35	40	45	55	65	75	90	105	125								
1	Capacity																						
2	Refrigerant & compressor type	W	R410A, fixed speed, heat pump	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•				
		NB	No buffer	Std	Std	Std	Std	Std	Std	Std	Std	Std	Std	Std	Std	Std	Std	Std	Std				
3	Buffer tank option	BS	Buffer tank (small)	•	•	•	•	•															
		BM	Buffer tank (medium)						•	•	•	•	•	•	•	•	•	•	•				
4	Pump option		No pump	•	•	•	•	•	Std	Std	Std	Std	Std	Std	Std	Std	Std	Std	Std				
			Single pump	Std	Std	Std	Std	Std	•	•	•	•	•	•	•	•	•	•	•				
5	Pump drive option		Double pump						•	•	•	•	•	•	•	•	•	•	•				
			Pump drive - fixed speed <sup>1)</sup>	Std	Std	Std	Std	Std	Std	Std	Std	Std	Std	Std	Std	Std	Std	Std	Std	Std			
			Pump drive - variable twin speed (single pump)	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•		
			Pump drive - variable twin speed (double pump)								•	•	•	•	•	•	•	•	•	•	•		
			Pump drive - variable speed capacity (single pump)	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•		
			Pump drive - variable speed capacity (double pump)								•	•	•	•	•	•	•	•	•	•	•		
			Pump drive - constant outlet pressure (single pump)	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•		
			Pump drive - constant outlet pressure (double pump)								•	•	•	•	•	•	•	•	•	•	•		
6	Hydraulic options		Pump drive - constant differential pressure (single pump) <sup>2)</sup>	SO	SO	SO	SO	SO	SO	SO	SO	SO	SO	SO	SO	SO	SO	SO	SO				
			No hydraulic options	Std	Std	Std	Std	Std	Std	Std	Std	Std	Std	Std	Std	Std	Std	Std	Std	Std			
			Low water pressure sensor	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•		
			Water isolation valves	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•		
			Electric heater - low power (buffer tank required)								•	•	•	•	•	•	•	•	•	•	•		
7	Ambient options		Electric heater - high power (buffer tank required)																				
			No ambient options	Std	Std	Std	Std	Std	Std	Std	Std	Std	Std	Std	Std	Std	Std	Std	Std	Std	Std		
			Finned coil treatment - epoxy	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	
			Outdoor coil protection grid	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	
			Rubber pads	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	
			Spring damper	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	
			Fan speed control (FSC)	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	
			Nordic pack <sup>3)</sup>	•	•	•	•	•															
8	Miscellaneous options		Low noise	Std	Std	Std	Std	Std	•	•	•	•	•	•	•	•	•	•	•	•			
			High pressure fan <sup>4)</sup>	SO	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	
			No miscellaneous options	Std	Std	Std	Std	Std	Std	Std	Std	Std	Std	Std	Std	Std	Std	Std	Std	Std	Std	Std	
			Soft starter	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
			Power supply w/o neutral <sup>5)</sup>	SO	SO	SO	SO	SO	SO	SO	SO	SO	SO	SO	SO	SO	SO	SO	SO	SO	SO	SO	SO
			Standard BMS option (Modbus RTU)	Std	Std	Std	Std	Std	Std	Std	Std	Std	Std	Std	Std	Std	Std	Std	Std	Std	Std	Std	Std
			Modbus TCP/IP	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
			BACnet MSTP	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
	BACnet IP	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•		
	Remote LAN connection	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•		
	Container transport								•	•	•	•	•	•	•	•	•	•	•	•	•		
	Refrigerant gauge								•	•	•	•	•	•	•	•	•	•	•	•	•		

1) Fixed speed pump drive is supplied as standard when selecting a pump. Please select an alternative pump drive if alternate operation is required.

2) Constant differential pump drive option is only available on a special order and requires additional production time. Please contact your local sales representative.

3) The Nordic pack is not required on models 45 - 125 due to model design.

4) High pressure fan is not available on model 20 due to body design.

5) Power supply without Neutral is only available on a special order basis, and requires additional production time. Please contact your local sales representative.

Std: Standard item included.

••: Optional item that can be selected.

SO: Special order item.



## Options table 140 - 210

Option	Type	Ref.	Description	Model				
				140	150	170	190	210
1	Capacity							
2	Refrigerant & compressor type	W	R410A, fixed speed, heat pump	•	•	•	•	•
3	Buffer tank option	NB	No buffer	Std	Std	Std	Std	Std
		BL	Buffer tank (large)	•	•	•	•	•
4	Pump option		No pump	•	•	•	•	•
			Single pump low pressure	•	•	•	•	•
			Single pump high pressure	•	•	•	•	•
			Double pump low pressure	•	•	•	•	•
			Double pump high pressure	•	•	•	•	•
			Pump drive - fixed speed <sup>1)</sup>	Std	Std	Std	Std	Std
5	Pump drive option		Pump drive - variable twin speed (single pump)	•	•	•	•	•
			Pump drive - variable twin speed (double pump)	•	•	•	•	•
			Pump drive - variable speed capacity (single pump)	•	•	•	•	•
			Pump drive - variable speed capacity (double pump)	•	•	•	•	•
			Pump drive - constant outlet pressure (single pump)	•	•	•	•	•
			Pump drive - constant outlet pressure (double pump)	•	•	•	•	•
			Pump drive - constant differential pressure (single pump) <sup>2)</sup>	S0	S0	S0	S0	S0
			Pump drive - constant differential pressure (double pump) <sup>2)</sup>	S0	S0	S0	S0	S0
6	Hydraulic options		No hydraulic options	Std	Std	Std	Std	Std
			Low water pressure sensor	•	•	•	•	•
			Water isolation valves	•	•	•	•	•
			Hydraulic gauges	•	•	•	•	•
7	Ambient options		No ambient options	Std	Std	Std	Std	Std
			Finned coil treatment - epoxy	•	•	•	•	•
			Outdoor coil protection grid <sup>3)</sup>	•	•	•	•	•
			Rubber pads	•	•	•	•	•
			Spring damper	•	•	•	•	•
			Fan speed control (FSC)	•	•	•	•	•
			Nordic pack	•	•	•	•	•
8	Miscellaneous options		Low noise	Std	Std	Std	Std	Std
			High pressure fan	•	•	•	•	•
			No miscellaneous options	Std	Std	Std	Std	Std
			Soft starter	•	•	•	•	•
			Power supply w/o neutral	•	•	•	•	•
			Standard BMS option (Modbus RTU)	Std	Std	Std	Std	Std
			Modbus TCP/IP	•	•	•	•	•
			BACnet IP	•	•	•	•	•
	Remote LAN connection	•	•	•	•	•		
	Refrigerant gauge	•	•	•	•	•		

1) Fixed speed pump drive is standard when selecting a pump. Please select an alternative pump drive if required.

2) Constant differential pump drive options are only available on a special order and requires additional production time. Please contact your local sales representative.

3) Not available when using Nordic pack.

Std: Standard item included.

•: Optional item that can be selected.

S0: Special order item.



# Features of ECOi-W cooling only outdoor units

## ECOi-W cooling only outdoor units.

- High seasonal efficiency
- Ambient temperature operation range: -10 to +50 °C
- Water outlet temperature range: -10 to +18 °C
- Optimised design for service and maintenance
- Simple user friendly control as standard
- Modbus RTU as standard

## Technical focus:

- Chiller type: cooling only
- Refrigeration type: R410A
- Heat exchanger: stainless steel plate heat exchanger
- Flow switch, water safety & air purge valves included
- Water filter included (mandatory to be installed on site)
- Night mode setting to save energy and reduce noise level
- Water compensation curve control
- Optional hydraulic kit
- Optional finned coil treatment

## U - 020/025/030/035/040 CV

- Super quiet operation

### Technical focus:

- Compressor type (number of compressors): Scroll compressors (2)

- Refrigerant circuit: 1
- Fan type (number of fans): axial fan (1)
- Optional Modbus TCP/IP, BACnet IP and BACnet MSTP
- Optional remote LAN connection

## U - 045/055/065/075 CV

- Optional extra-low noise kit available

### Technical focus:

- Compressor type (number of compressors): Scroll compressors (2)

- Refrigerant circuit: 1
- Fan type (number of fans): axial fan (1 for 45/55, 2 for 65/75)
- Optional Modbus TCP/IP, BACnet IP and BACnet MSTP
- Optional remote LAN connection

## U - 090/105/125 CV

- Optional extra-low noise kit available

### Technical focus:

- Compressor type (number of compressors): Scroll compressors (2)

- Refrigerant circuit: 1
- Fan type (number of fans): axial fan (2)
- Optional Modbus TCP/IP, BACnet IP and BACnet MSTP
- Optional remote LAN connection

## U - 140/150/170/190/210 CV

- Super quiet operation
- Victaulic water connections
- Modbus TCP/IP as standard

### Technical focus:

- Compressor type (number of compressors): Scroll compressors (4)

- Refrigerant circuit: 2
- Fan type (number of fans): axial fan (4)
- Optional gauges hydraulic and refrigerant
- Optional BACnet
- Remote LAN connection as standard



SEE MORE OPTIONS FOR COOLING ONLY OUTDOOR UNITS

**Available options for U - 020/025/030/035/040 CV**

Options				
Pump	Pump drive	Hydraulic options	Ambient options	Miscellaneous options
Single pump (as standard)	Fixed speed	Low water pressure sensor	Finned coil treatment - epoxy	Soft starter
	Variable twin speed	Water isolation valves	Rubber pads	Power supply w/o neutral
	Variable capacity		Spring damper	Modbus TCP/IP
	Constant outlet pressure		All seasons	BACnet MSTP
Constant differential pressure		High pressure fan*	BACnet IP	Remote LAN connection

\* Available on models 25 - 40.

**Available options for U - 045/055/065/075 CV**

Options				
Pump	Pump drive	Hydraulic options	Ambient options	Miscellaneous options
Single pump	Fixed speed	Low water pressure sensor	Finned coil treatment - epoxy	Soft starter
Double pump	Variable twin speed	Water isolation valves	Outdoor coil protection grid	Power supply w/o neutral
	Variable capacity		Rubber pads	Modbus TCP/IP
	Constant outlet pressure	Spring damper	BACnet MSTP	
	Constant differential pressure	All seasons fan control	BACnet IP	Remote LAN connection
		Extra-low noise kit	Container transport	Refrigerant gauge
		High pressure fan		

**Available options for U - 090/105/125 CV**

Options				
Pump	Pump drive	Hydraulic options	Ambient options	Miscellaneous options
Single pump	Fixed speed	Low water pressure sensor	Finned coil treatment - epoxy	Soft starter
Double pump	Variable twin speed	Water isolation valves	Outdoor coil protection grid	Power supply w/o neutral
	Variable capacity		Rubber pads	Modbus TCP/IP
	Constant outlet pressure	Spring damper	BACnet MSTP	
	Constant differential pressure	All seasons fan control	BACnet IP	Remote LAN connection
		Extra-low noise kit	Container transport	Refrigerant gauge
		High pressure fan		

**Available options for U - 140/150/170/190/210 CV**

Options				
Pump	Pump drive	Hydraulic options	Ambient options	Miscellaneous options
Single pump Low Pressure	Fixed speed	Low water pressure sensor	Finned coil treatment - epoxy	Soft starter
Single pump High Pressure	Variable twin speed	Water isolation valves	Outdoor coil protection grid	Power supply w/o neutral
Double pump Low Pressure	Variable capacity	Hydraulic gauges	Rubber pads	Modbus TCP/IP
Double pump High Pressure	Constant outlet pressure		Spring damper	BACnet IP
	Constant differential pressure	All seasons fan control	Refrigerant gauge	
		High pressure fan		



## U - 020/025/030/035/040 CV

Cooling capacity: 19.3 to 40.9 kW

Compact and highly efficient chiller series, with SEER up to 4,59.

Please contact Panasonic for RRP.



Model			20	25	30	35	40
<b>Standard without buffer tank</b>			<b>U-020CVNB</b>	<b>U-025CVNB</b>	<b>U-030CVNB</b>	<b>U-035CVNB</b>	<b>U-040CVNB</b>
<b>With buffer tank</b>			<b>U-020CVBS</b>	<b>U-025CVBS</b>	<b>U-030CVBS</b>	<b>U-035CVBS</b>	<b>U-040CVBS</b>
Power supply	Voltage	V	400	400	400	400	400
	Phase		Three phase	Three phase	Three phase	Three phase	Three phase
	Frequency	Hz	50	50	50	50	50
Cooling capacity <sup>1)</sup>		kW	19.3	24.7	27.1	38.2	40.9
Input power cooling <sup>1)</sup>		kW	6.10	7.69	9.00	12.20	13.40
Total EER 100 % <sup>1)</sup>			3.16	3.21	3.01	3.13	3.05
<b>SEER <sup>2)</sup></b>			<b>4.59</b>	<b>4.45</b>	<b>4.23</b>	<b>4.42</b>	<b>4.21</b>
Ɖsc <sup>2)</sup>		%	181	175	166	174	166
Energy efficiency class (Scale A+++ to D) <sup>3)</sup>			A+	A	A	A	A
Startup type			Direct	Direct	Direct	Direct	Direct
Maximum operating current		A	17.71	22.21	24.29	31.84	33.84
Startup current w/o softstarter / w softstarter		A	52.71/28.11	63.71/35.21	77.29/48.79	118.34/52.99	119.34/53.99
Sound power level (w standard fans)		dB(A)	75.0	75.0	75.0	76.0	76.0
Sound pressure level (w standard fans) <sup>4)</sup>		dB(A)	42.8	42.8	42.8	43.8	43.8
Dimensions (w standard fans) w/o buffer tank	H x W x D	mm	1983x1000x1000	1983x1000x1000	1983x1000x1000	1983x1000x1000	1983x1000x1000
Dimensions (w standard fans) w buffer tank	H x W x D	mm	1983x1000x1507	1983x1000x1507	1983x1000x1507	1983x1000x1507	1983x1000x1507
Weight (w 1 pump) w/o buffer tank		kg	280	290	320	330	330
Weight (w 1 pump) w buffer tank		kg	345	355	385	395	395
Refrigerant (R410A)		kg	6.5	8.4	8.4	9.1	9.2
Number of refrigerant circuit			1	1	1	1	1
<b>Compressors</b>							
Number			2	2	2	2	2
Type			Scroll	Scroll	Scroll	Scroll	Scroll
Part load step		%	0/50/100	0/50/100	0/50/100	0/50/100	0/50/100
Crankcase heater		W	2x40	2x40	2x49	2x49	2x49
<b>Evaporator</b>							
Number			1	1	1	1	1
Type			Plate	Plate	Plate	Plate	Plate
Nominal water flow (cooling)		m <sup>3</sup> /h	3.35	4.36	4.64	6.16	6.44
Water pressure drop (cooling)		kPa	23	37	22	37	40
Water volume		l	1.78	1.78	2.55	2.55	2.55
Antifreeze heater		W	30	30	30	30	30
<b>Coils</b>							
Number			1	1	1	1	1
Frontal surface		m <sup>2</sup>	2.4	2.4	2.4	2.8	2.8
Number of rows			2	2	2	2	2
<b>Fans standard</b>							
Number			1	1	1	1	1
Air flow		m <sup>3</sup> /h	9000	13000	13000	16000	16000
Rotation speed		r.p.m.	900	900	900	650	650
Power input (each fan)		W	620	940	940	930	930
<b>Water connections</b>							
Type			Male gas threaded BSPP ISO 228	Male gas threaded BSPP ISO 228	Male gas threaded BSPP ISO 228	Male gas threaded BSPP ISO 228	Male gas threaded BSPP ISO 228
Inlet - diameter		Inch	1 1/2	1 1/2	1 1/2	1 1/2	1 1/2
Outlet - diameter		Inch	1 1/2	1 1/2	1 1/2	1 1/2	1 1/2

**Accessories****PAW-SYSREMKIT** Remote control**Accessories****PAW-SYSSOV1** Shut off valves kit for model 20 - 40

1) Data refers to 7 °C leaving chilled water temperature and 35 °C condenser air temperature, according EN14511 standard. 2) Following COMMISSION REGULATION (EU) No 2016/2281 for comfort application chillers. 3) Following COMMISSION REGULATION (EU) No 811/2013 for low-temperature heat pumps. Scale from A+++ to D, as of 26th September 2019. 4) Sound pressure levels calculated at 10 meters. Sound pressure levels refer to ISO standard 3744 with parallel piped shape.

\* w: with, w/o: without.





**U - 045/055/065/075 CV****Cooling capacity: 49.8 to 75.8 kW**

High seasonal efficiency and wide range options to meet the exact requirements of your project.

Please contact Panasonic for RRP.

Model		45	55	65	75
<b>Standard without buffer tank</b>		<b>U-045CVNB</b>	<b>U-055CVNB</b>	<b>U-065CVNB</b>	<b>U-075CVNB</b>
<b>With buffer tank</b>		<b>U-045CVBM</b>	<b>U-055CVBM</b>	<b>U-065CVBM</b>	<b>U-075CVBM</b>
Power supply	Voltage	V	400	400	400
	Phase		Three phase	Three phase	Three phase
	Frequency	Hz	50	50	50
Cooling capacity <sup>1)</sup>	kW	49.8	56.9	69.7	75.8
Input power cooling <sup>1)</sup>	kW	16.70	18.80	22.10	22.10
Total EER 100 % <sup>1)</sup>		2.98	3.03	3.15	3.13
<b>SEER <sup>2)</sup></b>		<b>4.12</b>	<b>4.12</b>	<b>4.41</b>	<b>4.32</b>
Esc <sup>2)</sup>	%	162	162	174	170
Energy efficiency class (Scale A+++ to D) <sup>3)</sup>		A	A	A	A
Startup type		Direct	Direct	Direct	Direct
Maximum operating current	A	40.20	44.20	59.43	64.43
Startup current w/o softstarter / w softstarter	A	133.20/65.80	140.20/72.80	201.43/101.03	206.43/106.03
Sound power level (w standard fans)	dB(A)	80.0	80.0	80.0	80.0
Sound pressure level (w standard fans) <sup>4)</sup>	dB(A)	47.8	47.8	47.8	47.8
Dimensions (w standard fans) w/o buffer tank	H x W x D	mm	1986 x 2180 x 1160	1986 x 2180 x 1160	1986 x 2180 x 1160
Dimensions (w standard fans) w buffer tank	H x W x D	mm	1986 x 2680 x 1160	1986 x 2680 x 1160	1986 x 2680 x 1160
Weight (w 1 pump) w/o buffer tank	kg	540	540	610	610
Weight (w 1 pump) w buffer tank	kg	700	700	770	770
Refrigerant (R410A)	kg	14.0	14.3	18.9	19.3
Number of refrigerant circuit		1	1	1	1
<b>Compressors</b>					
Number		2	2	2	2
Type		Scroll	Scroll	Scroll	Scroll
Part load step	%	0/50/100	0/43/57/100	0/40/60/100	0/45/55/100
Crankcase heater	W	2 x 66	2 x 66	2 x 66	2 x 66
<b>Evaporator</b>					
Number		1	1	1	1
Type		Plate	Plate	Plate	Plate
Nominal water flow (cooling)	m <sup>3</sup> /h	8.06	9.18	11.30	12.31
Water pressure drop (cooling)	kPa	30	35	28	37
Water volume	l	4.10	4.10	6.10	6.10
Antifreeze heater	W	30	30	2 x 30	2 x 30
<b>Coils</b>					
Number		1	1	2	2
Frontal surface	m <sup>2</sup>	4.20	4.20	5.55	5.55
Number of rows		2	2	2	2
<b>Fans standard</b>					
Number		1	1	2	2
Air flow	m <sup>3</sup> /h	22500	22500	15000	15000
Rotation speed	r.p.m.	790	790	650	650
Power input (each fan)	W	1650	1650	930	930
<b>Water connections</b>					
Type		Male gas threaded BSPP ISO 228	Male gas threaded BSPP ISO 228	Male gas threaded BSPP ISO 228	Male gas threaded BSPP ISO 228
Inlet - diameter	Inch	2	2	2	2
Outlet - diameter	Inch	2	2	2	2

**Accessories****PAW-SYSREMKIT** Remote control**Accessories****PAW-SYSSOV2** Shut off valves kit for model 45 - 75

1) Data refers to 7 °C leaving chilled water temperature and 35 °C condenser air temperature, according EN14511 standard. 2) Following COMMISSION REGULATION (EU) No 2016/2281 for comfort application chillers. 3) Following COMMISSION REGULATION (EU) No 811/2013 for low-temperature heat pumps. Scale from A+++ to D, as of 26th September 2019. 4) Sound pressure levels calculated at 10 meters. Sound pressure levels refer to ISO standard 3744 with parallel piped shape.

\* w: with, w/o: without.





## U - 090/105/125 CV

Cooling capacity: 97.0 to 129.8 kW

Customizable design gives high flexibility. Wide range of communication protocols fulfill the requirements in hotels, offices, industry applications.

Please contact Panasonic for RRP.



Model			90	105	125
<b>Standard without buffer tank</b>			<b>U-090CVNB</b>	<b>U-105CVNB</b>	<b>U-125CVNB</b>
<b>With buffer tank</b>			<b>U-090CVBM</b>	<b>U-105CVBM</b>	<b>U-125CVBM</b>
Power supply	Voltage	V	400	400	400
	Phase		Three phase	Three phase	Three phase
	Frequency	Hz	50	50	50
Cooling capacity <sup>1)</sup>		kW	97.0	112.7	129.8
Input power cooling <sup>1)</sup>		kW	24.20	32.50	38.60
Total EER 100 % <sup>1)</sup>			2.98	2.92	2.93
<b>SEER <sup>2)</sup></b>			<b>4.23</b>	<b>4.12</b>	<b>4.24</b>
Ɖsc <sup>2)</sup>		%	166	162	167
Energy efficiency class (Scale A+++ to D) <sup>3)</sup>			A	A	A
Startup type			Direct	Direct	Direct
Maximum operating current		A	77.90	86.00	102.00
Startup current w/o softstarter / w softstarter		A	264.90 / 127.30	311.96 / 145.76	349.96 / 182.56
Sound power level (w standard fans)		dB(A)	83.0	83.0	83.0
Sound pressure level (w standard fans) <sup>4)</sup>		dB(A)	50.8	50.8	50.8
Dimensions (w standard fans) w/o buffer tank	H x W x D	mm	2286 x 2180 x 1160	2286 x 2180 x 1160	2286 x 2180 x 1160
Dimensions (w standard fans) w buffer tank	H x W x D	mm	2286 x 2680 x 1160	2286 x 2680 x 1160	2286 x 2680 x 1160
Weight (w 1 pump) w/o buffer tank		kg	790	900	920
Weight (w 1 pump) w buffer tank		kg	950	1060	1080
Refrigerant (R410A)		kg	22.0	32.3	33.0
Number of refrigerant circuit			1	1	1
<b>Compressors</b>					
Number			2	2	2
Type			Scroll	Scroll	Scroll
Part load step		%	0/45/55/100	0/38/62/100	0/33/67/100
Crankcase heater		W	66/82	66/95	66/95
<b>Evaporator</b>					
Number			1	1	1
Type			Plate	Plate	Plate
Nominal water flow (cooling)		m <sup>3</sup> /h	15.73	18.25	20.95
Water pressure drop (cooling)		kPa	26	34	45
Water volume		l	10.80	10.80	10.80
Antifreeze heater		W	2 x 30	2 x 30	2 x 30
<b>Coils</b>					
Number			2	2	2
Frontal surface		m <sup>2</sup>	6.4	6.4	6.4
Number of rows			2	3	3
<b>Fans standard</b>					
Number			2	2	2
Air flow		m <sup>3</sup> /h	21000	21000	21000
Rotation speed		r.p.m.	790	790	790
Power input (each fan)		W	1650	1650	1650
<b>Water connections</b>					
Type			Male gas threaded BSPP ISO 228	Male gas threaded BSPP ISO 228	Male gas threaded BSPP ISO 228
Inlet - diameter		Inch	2 1/2	2 1/2	2 1/2
Outlet - diameter		Inch	2 1/2	2 1/2	2 1/2

### Accessories

**PAW-SYSREMKIT** Remote control

### Accessories

**PAW-SYSSOV3** Shut off valves kit for model 90 - 125

1) Data refers to 7 °C leaving chilled water temperature and 35 °C condenser air temperature, according EN14511 standard. 2) Following COMMISSION REGULATION (EU) No 2016/2281 for comfort application chillers. 3) Following COMMISSION REGULATION (EU) No 811/2013 for low-temperature heat pumps. Scale from A+++ to D, as of 26th September 2019. 4) Sound pressure levels calculated at 10 meters. Sound pressure levels refer to ISO standard 3744 with parallel piped shape.

\* w: with, w/o: without.





**U - 140/150/170/190/210 CV**

**Cooling capacity: 134.0 to 208.8 kW**

Powerful and efficient operation with 4 scroll compressors and superior flexibility with plug and play hydraulic options.

Please contact Panasonic for RRP.



Model		140	150	170	190	210
<b>Standard without buffer tank</b>		<b>U-140CVNB</b>	<b>U-150CVNB</b>	<b>U-170CVNB</b>	<b>U-190CVNB</b>	<b>U-210CVNB</b>
<b>With buffer tank</b>		<b>U-140CVBL</b>	<b>U-150CVBL</b>	<b>U-170CVBL</b>	<b>U-190CVBL</b>	<b>U-210CVBL</b>
Power supply	Voltage	V	400	400	400	400
	Phase		Three phase	Three phase	Three phase	Three phase
	Frequency	Hz	50	50	50	50
Cooling capacity <sup>1)</sup>	kW	134.0	147.0	161.2	187.8	208.8
Input power cooling <sup>1)</sup>	kW	44.15	49.00	53.70	64.50	72.30
Total EER 100 % <sup>1)</sup>		3.03	3.00	3.00	2.91	2.89
<b>SEER <sup>2)</sup></b>		<b>4.35</b>	<b>4.31</b>	<b>4.40</b>	<b>4.23</b>	<b>4.22</b>
Esc <sup>2)</sup>	%	171	169	173	166	166
Energy efficiency class (Scale A+++ to D) <sup>3)</sup>		A	A	A	A	A
Startup type		Direct	Direct	Direct	Direct	Direct
Maximum operating current	A	108.00	119.00	136.00	153.00	170.00
Startup current w/o softstarter / w softstarter	A	251.00/130.00	262.00/141.00	324.00/161.00	341.00/178.00	396.00/201.00
Sound power level (w standard fans)	dB(A)	85.4	85.4	87.0	88.1	88.1
Sound pressure level (w standard fans) <sup>4)</sup>	dB(A)	53.4	53.4	55.0	56.1	56.1
Dimensions (w standard fans) w/o buffer tank	H x W x D mm	2295 x 2856 x 2210	2295 x 2856 x 2210	2295 x 2856 x 2210	2295 x 2856 x 2210	2295 x 2856 x 2210
Dimensions (w standard fans) w buffer tank	H x W x D mm	2295 x 3666 x 2210	2295 x 3666 x 2210	2295 x 3666 x 2210	2295 x 3666 x 2210	2295 x 3666 x 2210
Weight (w 1 low Pa pump) w/o buffer tank	kg	1512	1515	1605	1677	1937
Weight (w 1 low Pa pump) w buffer tank	kg	1644	1647	1737	1809	2069
Refrigerant (R410A)	kg	2x24.7	2x24.7	24.7/33.3	2x33.3	2x33.3
Number of refrigerant circuit		2	2	2	2	2
<b>Compressors</b>						
Number		4	4	4	4	4
Type		Scroll	Scroll	Scroll	Scroll	Scroll
Part load step	%	0 / 24 / 26 / 48 / 50 / 52 / 74 / 76 / 100	0 / 23 / 27 / 46 / 50 / 54 / 73 / 77 / 100	0 / 20 / 24 / 44 / 45 / 55 / 69 / 80 / 100	0 / 22 / 28 / 44 / 50 / 56 / 72 / 78 / 100	0 / 19 / 31 / 38 / 50 / 62 / 69 / 81 / 100
Crankcase heater	W	4 x 66	4 x 66	3 x 66/82	2 x 82/2 x 66	2 x 95/2 x 66
<b>Evaporator</b>						
Number		1	1	1	1	1
Type		Plate	Plate	Plate	Plate	Plate
Nominal water flow (cooling)	m <sup>3</sup> /h	21.56	23.65	25.95	30.24	33.62
Water pressure drop (cooling)	kPa	33	39	24	32	40
Water volume	l	8.49	8.49	12.21	12.21	12.21
Antifreeze heater	W	60	60	120	120	120
<b>Coils</b>						
Number		4	4	4	4	4
Frontal surface	m <sup>2</sup>	11.88	11.88	11.88	11.88	11.88
Number of rows		2+2	2+2	2+3	3+3	3+3
<b>Fans standard</b>						
Number		4	4	4	4	4
Air flow	m <sup>3</sup> /h	56000	56000	71000	86000	83000
Rotation speed	r.p.m.	900	900	900	900	900
Power input (each fan)	W	940	940	940 - 1650	1650	1650
<b>Water connections</b>						
Type		Victaulic	Victaulic	Victaulic	Victaulic	Victaulic
Inlet - diameter	Inch	2 1/2	2 1/2	2 1/2	2 1/2	2 1/2
Outlet - diameter	Inch	2 1/2	2 1/2	2 1/2	2 1/2	2 1/2

Accessories	
<b>PAW-SYSREMKIT</b>	Remote control

Accessories	
<b>PAW-SYSVICTH</b>	Victaulic connection kit for model 140 - 210

1) Data refers to 7 °C leaving chilled water temperature and 35 °C condenser air temperature, according EN14511 standard. 2) Following COMMISSION REGULATION (EU) No 2016/2281 for comfort application chillers. 3) Following COMMISSION REGULATION (EU) No 811/2013 for low-temperature heat pumps. Scale from A+++ to D, as of 26th September 2019. 4) Sound pressure levels calculated at 10 meters. Sound pressure levels refer to ISO standard 3744 with parallel piped shape. \* w: with, w/o: without.





# Options for cooling only outdoor units

## Options table 20 - 125

Option	Type	Ref.	Model															
			20	25	30	35	40	45	55	65	75	90	105	125				
1	Capacity																	
2	Refrigerant & compressor type	V	R410A, fixed speed, cooling only															
3	Buffer tank option	NB	No buffer															
		BS	Buffer tank (small)															
		BM	Buffer tank (medium)															
4	Pump option		No pump <sup>1)</sup>															
			Single pump															
			Double pump															
5	Pump drive option		Pump drive - fixed speed <sup>2)</sup>															
			Pump drive - variable twin speed (single pump) <sup>3)</sup>															
			Pump drive - variable twin speed (double pump)															
			Pump drive - variable speed capacity (single pump)															
			Pump drive - variable speed capacity (double pump)															
			Pump drive - constant outlet pressure (single pump)															
			Pump drive - constant outlet pressure (double pump)															
6	Hydraulic options		Pump drive - constant differential pressure (single pump) <sup>4)</sup>															
			No hydraulic options															
			Low water pressure sensor															
			Water isolation valves															
		7	Ambient options		No ambient options													
					Finned coil treatment - epoxy													
					Outdoor coil protection grid													
	Rubber pads																	
	Spring damper																	
	Fan speed control (FSC)																	
	Low noise																	
8	Miscellaneous options		High pressure fan <sup>5)</sup>															
			No miscellaneous options															
			Soft starter															
			Power supply w/o neutral <sup>4)</sup>															
			Standard BMS option (Modbus RTU)															
			Modbus TCP/IP															
			BACnet MSTP															
	BACnet IP																	
	Remote LAN connection																	
	Container transport																	
	Refrigerant gauge																	

1) The system may be supplied without a pump, but in order to meet EU ErP compliance, the installation must include a variable speed pump.

2) Fixed speed pump drive on cooling only chiller, is only suitable installation outside if the EU due to ErP compliance.

3) Constant differential pump drive option is only available on a special order and requires additional production time. Please contact your local sales representative.

4) High pressure fan is not available on model 20 due to body design.

5) Power supply without Neutral is only available on a special order and requires additional production time. Please contact your local sales representative.

Std: Standard item included.

•: Optional item that can be selected.

S0: Special order item.



**Options table 140 - 210**

Option	Type	Ref.	Description	Model				
				140	150	170	190	210
1	Capacity							
2	Refrigerant & compressor type	V	R410A, fixed speed, cooling only	•	•	•	•	•
3	Buffer tank option	NB	No buffer	Std	Std	Std	Std	Std
		BL	Buffer tank (large)	•	•	•	•	•
			No pump <sup>1)</sup>	•	•	•	•	•
4	Pump option		Single pump low pressure	•	•	•	•	•
			Single pump high pressure	•	•	•	•	•
			Double pump low pressure	•	•	•	•	•
			Double pump high pressure	•	•	•	•	•
			Pump drive - fixed speed <sup>2)</sup>	Std	Std	Std	Std	Std
5	Pump drive option		Pump drive - variable twin speed (single pump)	•	•	•	•	•
			Pump drive - variable twin speed (double pump)	•	•	•	•	•
			Pump drive - variable speed capacity (single pump)	•	•	•	•	•
			Pump drive - variable speed capacity (double pump)	•	•	•	•	•
			Pump drive - constant outlet pressure (single pump)	•	•	•	•	•
			Pump drive - constant outlet pressure (double pump)	•	•	•	•	•
			Pump drive - constant differential pressure (single pump) <sup>3)</sup>	S0	S0	S0	S0	S0
	Pump drive - constant differential pressure (double pump) <sup>3)</sup>	S0	S0	S0	S0	S0		
6	Hydraulic options		No hydraulic options	Std	Std	Std	Std	Std
			Low water pressure sensor	•	•	•	•	•
			Water isolation valves	•	•	•	•	•
			Hydraulic gauges	•	•	•	•	•
7	Ambient options		No ambient options	Std	Std	Std	Std	Std
			Finned coil treatment - epoxy	•	•	•	•	•
			Outdoor coil protection grid	•	•	•	•	•
			Rubber pads	•	•	•	•	•
			Spring damper	•	•	•	•	•
			Fan speed control (FSC)	•	•	•	•	•
			Low noise	Std	Std	Std	Std	Std
	High pressure fan	•	•	•	•	•		
8	Miscellaneous options		No miscellaneous options	Std	Std	Std	Std	Std
			Soft starter	•	•	•	•	•
			Power supply w/o neutral	•	•	•	•	•
			Standard BMS option (Modbus RTU)	Std	Std	Std	Std	Std
			Modbus TCP/IP	•	•	•	•	•
			BACnet IP	•	•	•	•	•
	Remote LAN connection	Std	Std	Std	Std	Std		
	Refrigerant gauge	•	•	•	•	•		

1) The system may be supplied without a pump, but in order to meet EU ErP compliance, the installation must include a variable speed pump.

2) Fixed speed pump drive on cooling only chiller, is only suitable for installation outside of the EU due to ErP compliance.

3) Constant differential pump drive option is only available on a special order and requires additional production time. Please contact your local sales representative.

Std: Standard item included.

•: Optional item that can be selected.

S0: Special order item.

## Fan coils highlighted features





Designed with user in mind, perfectly designed to adapt to any installation. Providing comfort to hotels, shops, restaurants, offices or residential applications.



## 1 Innovation for an optimum comfort

Range of fan coil for heating and cooling with capacities from 0.5 to 21.9 kW in cooling and from 0.6 to 21.5 kW in heating. Bring full year comfort with water based systems.

## 2 Energy efficient and low noise fan

Dynamically balanced and specially designed fans, reinforced acoustic insulation and optimised fan speed staging for lower noise levels. Improved efficiency with optional EC fan motor.

## 3 Quality and efficient coil

Constructed from staggered copper tubes, mechanically expanded into aluminium fins, providing maximum heat transfer efficiency, durability and hygiene.

## 4 Flexible installation

Various types of unit to fit your needs with flexible installation options. A choice of service side for hydraulic connections, piping configuration and horizontal or vertical installation for ducted units.

Offering a great range of capacities and performance, presented in a wide range of designs, the fan coils are perfectly adapted to fit within almost any location. Whether the requirements are for cooling only, or for both heating and cooling, there is a fan coil to suit. With a variety of piping and fan configuration, the range is capable of meeting the most stringent of requirement. Line up available in AC and EC fans, it is possible to achieve both powerful performance, but with sustainability in mind.

**Wide range of controllers with sophisticated designs, provide a user friendly interface while enabling an easy and low cost integration to building management systems.**



**PAW-FC-RC1**  
Optional wired remote controller for AC fan, 2-pipe and 4-pipe application.



**PAW-FC-TC903**  
Optional wired remote controller for AC fan 2-pipe application.



**PAW-FC-907TC**  
Optional wired remote controller for EC fan, 2-pipe and 4-pipe application.

# Range of fan coils


Page	Fan Type	Operation	Capacity range	0 kW	1 kW	2 kW	3 kW	4 kW	
P. 202	Ducted 	AC	Cooling	0.7 to 8.1 kW	[Blue bar from 0.7 to 8.1 kW]				
		AC	Heating	0.7 to 10.3 kW	[Red bar from 0.7 to 10.3 kW]				
	EC	Cooling	0.5 to 9.6 kW	[Blue bar from 0.5 to 9.6 kW]					
		EC	Heating	0.6 to 13.6 kW	[Red bar from 0.6 to 13.6 kW]				
P. 204	High static ducted 	AC	Cooling	4.1 to 21.9 kW				[Blue bar from 4.1 to 21.9 kW]	
		AC	Heating	4.7 to 21.5 kW				[Red bar from 4.7 to 21.5 kW]	
	EC	Cooling	6.6 to 21.4 kW				[Blue bar from 6.6 to 21.4 kW]		
		EC	Heating	5.9 to 21.4 kW				[Red bar from 5.9 to 21.4 kW]	
P. 206	Cassette 	AC	Cooling	1.4 to 8.6 kW			[Blue bar from 1.4 to 8.6 kW]		
		AC	Heating	1.1 to 12.8 kW			[Red bar from 1.1 to 12.8 kW]		
	EC	Cooling	1.4 to 9.4 kW			[Blue bar from 1.4 to 9.4 kW]			
		EC	Heating	1.1 to 14.0 kW			[Red bar from 1.1 to 14.0 kW]		
P. 208	Ceiling chassis 	AC	Cooling	0.7 to 8.1 kW	[Blue bar from 0.7 to 8.1 kW]				
		AC	Heating	0.7 to 10.3 kW	[Red bar from 0.7 to 10.3 kW]				
	EC	Cooling	0.5 to 9.6 kW	[Blue bar from 0.5 to 9.6 kW]					
		EC	Heating	0.6 to 13.6 kW	[Red bar from 0.6 to 13.6 kW]				
P. 210	Floor-standing 	AC	Cooling	0.7 to 8.1 kW	[Blue bar from 0.7 to 8.1 kW]				
		AC	Heating	0.7 to 10.3 kW	[Red bar from 0.7 to 10.3 kW]				
	EC	Cooling	0.5 to 9.6 kW	[Blue bar from 0.5 to 9.6 kW]					
		EC	Heating	0.6 to 13.6 kW	[Red bar from 0.6 to 13.6 kW]				
P. 212	Wall-mounted 	AC	Cooling	1.0 to 3.9 kW			[Blue bar from 1.0 to 3.9 kW]		
		AC	Heating	1.4 to 4.1 kW			[Red bar from 1.4 to 4.1 kW]		
P. 213	Smart fan coils 	AC	Cooling	0.2 to 1.7 kW			[Blue bar from 0.2 to 1.7 kW]		
		AC	Heating	0.2 to 1.7 kW			[Red bar from 0.2 to 1.7 kW]		

Values indicated are for the full operating range. The data shown within the tables following are indicative of specific installation conditions. For full details relating to performance and operating conditions, please refer to the technical data manual.





5 kW 6 kW 7 kW 8 kW 9 kW 10kW 11kW 12kW 13kW 14kW 15kW 16kW 17kW 18kW 19kW 20kW 21kW 22kW

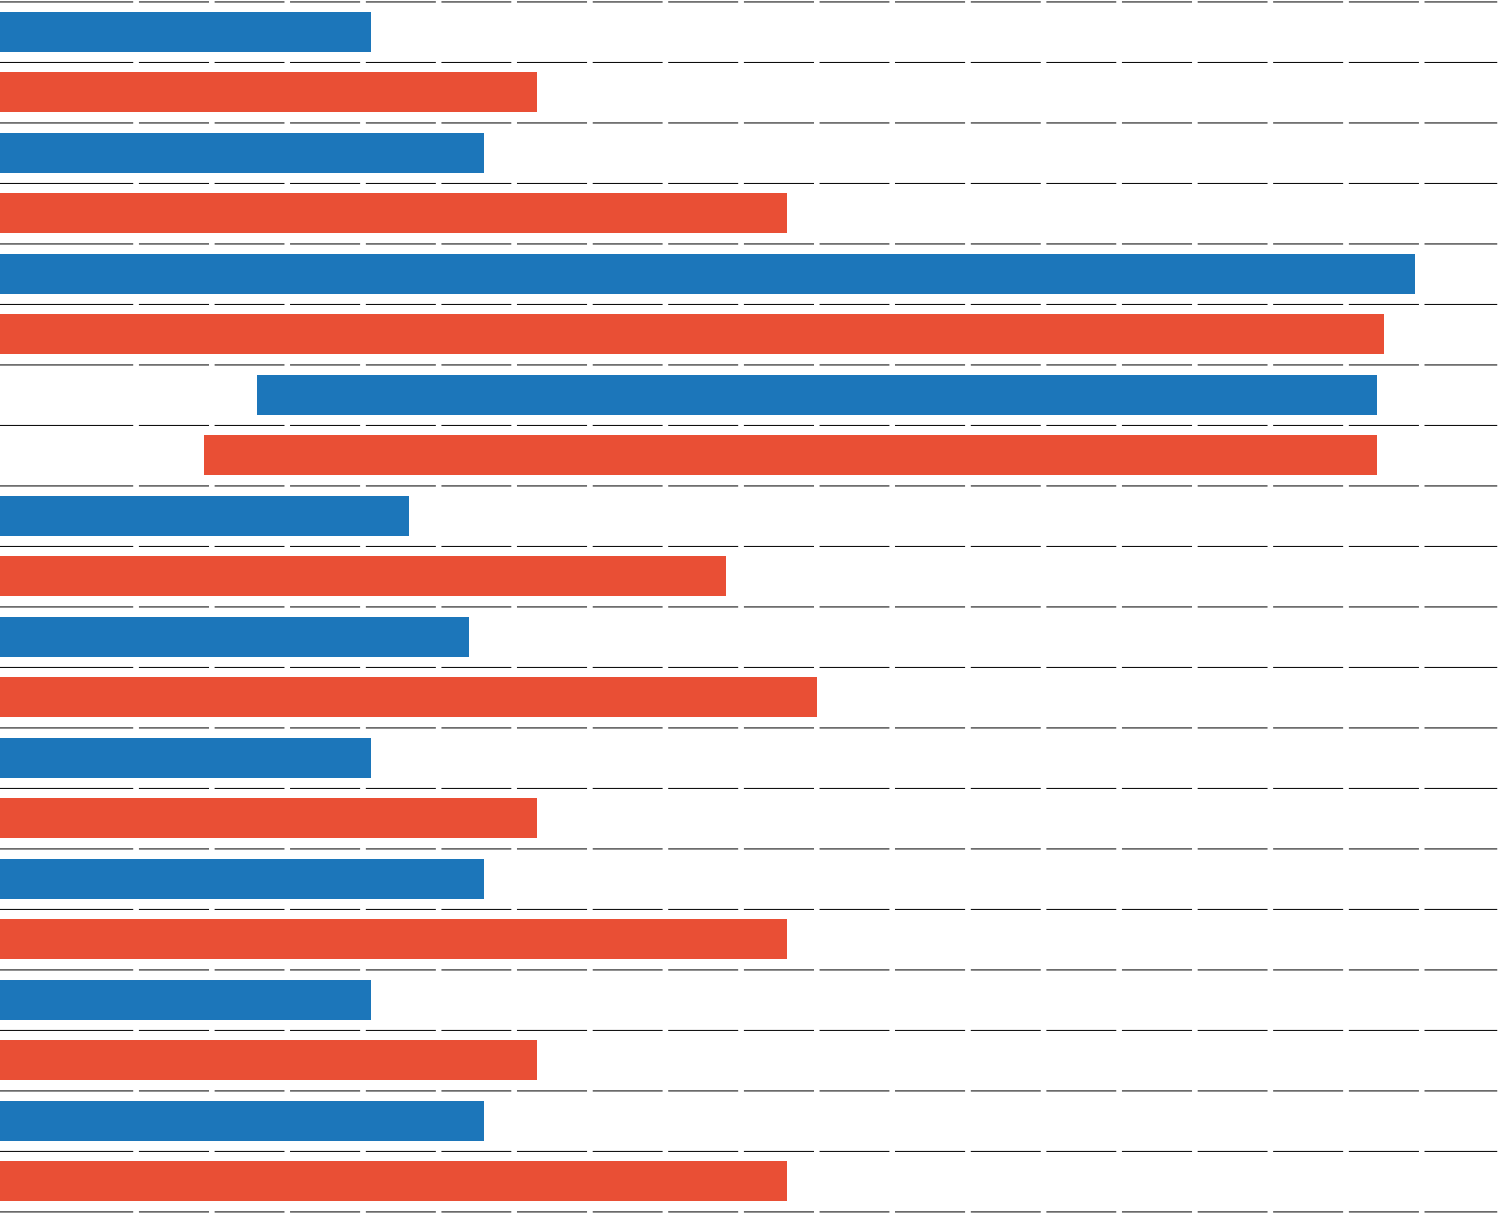

Fan coils - ducted (AC)



Optional controller.  
Wired remote controller.  
PAW-FC-903TC



Optional controller.  
Advanced wired remote controller.  
PAW-FC-RC1

2-pipe	Left connection (PAW-)		FC2A-D010L	FC2A-D020L	FC2A-D030L	FC2A-D040L	FC2A-D050L	FC2A-D060L	FC2A-D070L	FC2A-D080L
	Right connection (PAW-)		FC2A-D010R	FC2A-D020R	FC2A-D030R	FC2A-D040R	FC2A-D050R	FC2A-D060R	FC2A-D070R	FC2A-D080R
Total cooling capacity <sup>1)</sup>	Med/S-Hi	kW	1.0/1.5	1.2/1.7	2.0/2.5	2.4/3.2	3.2/4.6	4.6/5.8	6.1/7.3	6.1/8.1
Sensible capacity <sup>1)</sup>	Med/S-Hi	kW	0.8/1.1	0.9/1.3	1.5/1.9	1.8/2.3	2.2/3.3	3.3/4.5	4.3/5.1	4.6/6.3
Water flow	Med/S-Hi	l/h	172/250	213/289	341/430	413/547	544/798	784/1003	1058/1252	1048/1400
Water pressure drop	Med/S-Hi	kPa	19.5/39.2	3.9/6.3	19.3/28.8	17.1/28.0	22.8/46.9	37.4/60.2	15.4/21.5	19.3/32.5
Heating capacity <sup>2)</sup>	Med/S-Hi	kW	1.4/2.0	1.5/2.2	2.4/3.1	2.9/4.0	4.1/5.7	5.3/7.1	7.9/9.3	8.1/11.6
4-pipe	Left connection (PAW-)		FC4A-D010L	FC4A-D020L	FC4A-D030L	FC4A-D040L	FC4A-D050L	FC4A-D060L	FC4A-D070L	FC4A-D080L
	Right connection (PAW-)		FC4A-D010R	FC4A-D020R	FC4A-D030R	FC4A-D040R	FC4A-D050R	FC4A-D060R	FC4A-D070R	FC4A-D080R
Total cooling capacity <sup>1)</sup>	Med/S-Hi	kW	0.9/1.3	1.1/1.6	1.9/2.4	2.3/3.0	3.0/4.3	4.4/5.6	5.9/6.9	5.9/8.0
Sensible capacity <sup>1)</sup>	Med/S-Hi	kW	0.7/1.0	0.8/1.2	1.5/1.8	1.7/2.2	2.2/3.1	3.2/4.3	4.2/4.9	4.4/6.2
Water flow	Med/S-Hi	l/h	159/225	192/268	327/414	388/517	522/748	756/967	1019/1193	1020/1380
Water pressure drop	Med/S-Hi	kPa	15.2/29.0	3.4/5.6	9.5/14.4	22.3/36.8	12.8/25.1	27.7/44.5	17.9/24.4	31.1/53.6
Heating capacity <sup>2)</sup>	Med/S-Hi	kW	0.7/1.0	0.9/1.1	1.4/1.6	1.6/2.1	2.3/2.6	2.9/3.3	3.6/4.0	5.6/6.1
Water flow	Med/S-Hi	l/h	127/178	146/190	232/274	273/354	401/443	505/560	626/682	963/1052
Water pressure drop	Med/S-Hi	kPa	3.5/5.6	3.2/5.3	9.0/11.9	26.5/42.7	24.6/29.5	43.9/52.9	117.9/137.8	63.7/75
Sound levels										
Global sound power	S-Lo/Med/S-Hi	dB(A)	33/40/49	31/43/50	30/45/52	30/44/51	34/46/56	38/51/58	43/56/61	50/55/64
Global sound pressure <sup>3)</sup>	S-Lo/Med/S-Hi	dB(A)	24/31/40	22/34/41	21/36/43	21/35/42	25/37/47	29/42/49	34/47/52	41/46/55
Fan										
Number			1	1	1	2	2	2	2	3
Air flow 2-pipe	Med/S-Hi	m <sup>3</sup> /h	190/283	179/265	274/390	357/499	486/716	640/933	893/1064	936/1397
Air flow 4-pipe	Med/S-Hi	m <sup>3</sup> /h	168/253	161/241	263/369	335/467	466/542	614/723	859/944	905/1042
Maximum external pressure		Pa	55	55	65	85	85	115	125	70
Filter			G2	G2	G2	G2	G2	G2	G2	G2
Electrical data										
Power supply	Voltage	V	230	230	230	230	230	230	230	230
	Phase		Single phase	Single phase	Single phase	Single phase	Single phase	Single phase	Single phase	Single phase
	Frequency	Hz	50/60	50/60	50/60	50/60	50/60	50/60	50/60	50/60
Power consumption 2-pipe	Med/S-Hi	W	24/36	18/29	37/45	37/56	55/72	75/105	100/147	112/188
Power consumption 4-pipe	Med/S-Hi	W	24/36	18/28	37/44	37/55	54/70	74/104	99/145	112/188
Water connections										
Type			Female gas threaded	Female gas threaded	Female gas threaded	Female gas threaded	Female gas threaded	Female gas threaded	Female gas threaded	Female gas threaded
2-pipe		Inch	1/2	1/2	1/2	1/2	1/2	1/2	3/4	3/4
	Cooling	Inch	1/2	1/2	1/2	1/2	1/2	1/2	3/4	3/4
4-pipe	Heating	Inch	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2
Dimensions and weight										
Dimensions	H x W x D	mm	220 x 570 x 430	220 x 570 x 430	220 x 730 x 430	220 x 938 x 430	220 x 1122 x 430	220 x 1307 x 430	220 x 1121 x 530	220 x 1316 x 530
Weight	2 / 4-pipes	kg	13/14	13/14	15/16	20/22	22/24	26/28	27/29	38/40
2-pipe RRP		€	283	297	318	370	414	449	509	731
4-pipe RRP		€	312	317	341	398	445	485	550	785

1) According to Eurovent standard. Air: 27 °C DB / 19 °C WB. Water in/ out: 7 °C / 12 °C. 2) Air: 20 °C. Water in/out: 50 °C / 45 °C. 3) The sound pressure levels are based on (NR) characteristics of a room having volume of 100 m<sup>3</sup> with reverberation of 0,5 seconds. Values indicated are for 0 Pa external static pressure, for additional pressure characteristics, please refer the technical data manual.

Technical focus

- Cooling capacity from 0.7 to 8.1 kW
- Heating capacity from 0.7 to 10.3 kW
- 5-speed AC fan motor(s)

Operating limits

Entering water temperature	From 5 to 90 °C
Indoor air temperature	From 5 to 32 °C

Main features and accessories

- 2 and 4-pipe configurations
- Left or right hand arrangements
- Ease of installation
- Very low acoustic levels
- 2 way or 3 way ON/OFF valves
- Auxiliary drain pan
- Air intake with removable grid
- G2 filter





Fan coils - ducted (EC)



Optional controller.  
Wired remote controller for EC fans.  
PAW-FC-907TC

2-pipe	Left connection (PAW-)	FC2E-D010L	FC2E-D020L	FC2E-D030L	FC2E-D040L	FC2E-D050L	FC2E-D060L	FC2E-D070L	FC2E-D080L	FC2E-F040L	
	Right connection (PAW-)	FC2E-D010R	FC2E-D020R	FC2E-D030R	FC2E-D040R	FC2E-D050R	FC2E-D060R	FC2E-D070R	FC2E-D080R	FC2E-F040R	
Total cooling capacity <sup>1)</sup>	Med/S-Hi	kW	1.2/2.1	1.4/2.4	2.1/3.1	2.9/4.2	4.0/5.0	4.5/5.2	5.9/6.9	6.5/8.8	6.6/9.2
Sensible capacity <sup>1)</sup>	Med/S-Hi	kW	1.1/1.9	1.1/1.9	1.6/2.4	2.1/3.0	3.0/3.7	3.5/4.0	4.3/5.2	4.8/6.6	6.1/9.1
Water flow	Med/S-Hi	l/h	210/356	237/406	354/532	506/722	685/743	767/800	1008/1098	1111/1254	1284/1935
Water pressure drop	Med/S-Hi	kPa	28.2/76.9	4.6/11.0	20.5/42.1	24.4/46.3	35.1/41.0	35.8/38.8	14.0/16.6	21.4/26.6	51.2/93.8
Heating capacity <sup>2)</sup>	Med/S-Hi	kW	1.6/2.9	1.9/3.3	2.2/3.4	3.0/5.3	5.2/5.5	5.9/6.1	7.3/8.2	8.0/9.3	8.3/11.8
4-pipe	Left connection (PAW-)	FC4E-D010L	FC4E-D020L	FC4E-D030L	FC4E-D040L	FC4E-D050L	FC4E-D060L	FC4E-D070L	FC4E-D080L	FC4E-F040L	
	Right connection (PAW-)	FC4E-D010R	FC4E-D020R	FC4E-D030R	FC4E-D040R	FC4E-D050R	FC4E-D060R	FC4E-D070R	FC4E-D080R	FC4E-F040R	
Total cooling capacity <sup>1)</sup>	Med/S-Hi	kW	1.1/1.9	1.2/2.2	1.9/2.9	2.7/4.0	3.6/4.6	4.1/4.9	5.1/6.4	6.2/9.6	6.4/8.8
Sensible capacity <sup>1)</sup>	Med/S-Hi	kW	0.9/1.7	1.0/1.8	1.5/2.2	1.9/2.8	2.8/3.5	3.2/3.8	3.8/4.8	4.6/7.2	5.6/8.0
Water flow	Med/S-Hi	l/h	185/327	206/375	321/493	457/681	625/686	707/749	886/977	1070/1242	1093/1511
Water pressure drop	Med/S-Hi	kPa	20.1/59.2	3.7/9.7	9.2/19.7	29.6/60.1	17.9/21.3	24.3/27.2	13.6/16.5	33.9/44.3	47.2/86.7
Heating capacity <sup>2)</sup>	Med/S-Hi	kW	0.8/1.4	0.9/1.5	1.4/1.8	2.0/2.8	2.4/2.5	2.9/3.1	3.4/3.6	5.9/6.9	4.5/6.2
Water flow	Med/S-Hi	l/h	140/235	161/255	243/304	350/483	416/438	503/531	583/614	1011/1194	783/1065
Water pressure drop	Med/S-Hi	kPa	4.0/8.4	3.8/9.4	9.7/14.1	41.8/76.3	26.3/28.9	43.6/48.1	103.8/113.9	69.7/95.1	107.6/214.8
Sound levels											
Global sound power	S-Lo/Med/S-Hi	dB(A)	34/47/60	34/47/60	31/50/59	29/44/52	30/51/57	32/54/58	40/54/59	51/56/64	42/58/68 <sup>3)</sup>
Global sound pressure <sup>3)</sup>	S-Lo/Med/S-Hi	dB(A)	25/38/51	25/38/51	22/41/50	20/35/43	21/42/48	23/45/49	31/45/50	42/47/55	23/39/52
Fan											
Number			1	1	1	2	2	2	2	3	1
Air flow 2-pipe	Med/S-Hi	m <sup>3</sup> /h	228/417	234/413	380/585	412/678	645/702	737/779	850/950	927/1093	1284/1935
Air flow 4-pipe	Med/S-Hi	m <sup>3</sup> /h	199/379	200/380	342/540	369/627	587/646	668/716	798/894	884/1079	1222/1864
Maximum external pressure		Pa	75	75	75	105	70	105	115	115	190
Filter			G2	G2	G2	G2	G2	G2	G2	G2	G2
Electrical data											
Power supply	Voltage	V	230	230	230	230	230	230	230	230	230
	Phase		Single phase	Single phase	Single phase	Single phase	Single phase	Single phase	Single phase	Single phase	Single phase
	Frequency	Hz	50/60	50/60	50/60	50/60	50/60	50/60	50/60	50/60	50/60
Power consumption 2-pipe	Med/S-Hi	W	11/41	13/41	16/42	13/43	24/46	30/54	44/77	42/108	62/197
Power consumption 4-pipe	Med/S-Hi	W	11/39	13/40	15/40	12/42	23/44	28/52	43/75	41/116	60/188
Water connections											
Type			Female gas threaded	Female gas threaded	Female gas threaded	Female gas threaded	Female gas threaded	Female gas threaded	Female gas threaded	Female gas threaded	Female gas threaded
2-pipe		Inch	1/2	1/2	1/2	1/2	1/2	1/2	3/4	3/4	3/4
	Cooling	Inch	1/2	1/2	1/2	1/2	1/2	1/2	3/4	3/4	3/4
4-pipe		Inch	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2
	Heating	Inch	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2
Dimensions and weight											
Dimensions	H x W x D	mm	220 x 570 x 430	220 x 570 x 430	220 x 730 x 430	220 x 938 x 430	220 x 1122 x 430	220 x 1307 x 430	220 x 1121 x 530	220 x 1316 x 530	223 x 1233 x 653
Weight	2 / 4-pipes	kg	13/14	13/14	15/16	20/22	22/24	26/28	27/29	38/40	19/19
2-pipe RRP		€	455	469	490	542	586	621	684	906	1,059
4-pipe RRP		€	484	489	513	570	616	657	726	960	1,134

1) According to Eurovent standard. Air: 27 °C DB / 19 °C WB. Water in/ out: 7 °C / 12 °C. 2) Air: 20 °C. Water in/out: 50 °C / 45 °C. 3) The sound power levels indicated are from return and radiated measurements. 4) The sound pressure levels are based on (NR) characteristics of a room having volume of 100 m<sup>3</sup> with reverberation of 0,5 seconds. Values indicated are for 0 Pa external static pressure, for additional pressure characteristics, please refer the technical data manual.

Technical focus

- Cooling capacity from 0.5 to 9.6 kW
- Heating capacity from 0.6 to 13.6 kW
- Low energy consumption EC fan(s)

Operating limits

Entering water temperature	From 5 to 90 °C
Indoor air temperature	From 5 to 32 °C

Main features and accessories

- 2 and 4-pipe configurations
- Left or right hand arrangements
- Can be installed both horizontally and vertically\*
- Ease of installation
- Very low acoustic levels
- 2 way or 3 way ON/OFF valves
- Auxiliary drain pan
- Air intake with removable grid
- G2 filter

\* PAW-FC2E-F040 and PAW-FC4E-F040 may only be installed horizontally.



Fan coils - High Static Pressure Ducted (AC)



Optional controller.  
Wired remote controller.  
PAW-FC-903TC



Optional controller.  
Advanced wired remote controller.  
PAW-FC-RC1

2-pipe	Left connection		PAW-FC2A-E070L	PAW-FC2A-E150L	PAW-FC2A-E180L	PAW-FC2A-E210L	PAW-FC2A-E240L*	PAW-FC2A-E270L*
	Right connection		PAW-FC2A-E070R	PAW-FC2A-E150R	PAW-FC2A-E180R	PAW-FC2A-E210R	PAW-FC2A-E240R*	PAW-FC2A-E270R*
Total cooling capacity <sup>1)</sup>	Med/S-Hi	kW	5.5/6.4	11.5/14.2	11.5/15.0	13.7/18.6	19.8/23.3	23.0/27.5
Sensible capacity <sup>1)</sup>	Med/S-Hi	kW	4.2/5.1	9.2/12.2	9.5/13.1	9.9/13.7	14.9/17.8	16.3/19.7
Water flow	Med/S-Hi	l/h	951/1095	1979/2437	1979/2589	2357/3201	3410/4015	3951/4740
Water pressure drop	Med/S-Hi	kPa	42.5/56.2	19.9/29.3	19.6/32.0	28.8/51.5	25.2/34.2	25.2/35.3
Heating capacity <sup>2)</sup>	Med/S-Hi	kW	8.6/12.7	14.2/20.0	16.3/23.2	16.5/23.4	26.3/32.6	27.5/33.7
4-pipe	Left connection		PAW-FC4A-E070L	PAW-FC4A-E150L	PAW-FC4A-E180L	PAW-FC4A-E210L	PAW-FC4A-E240L*	PAW-FC4A-E270L*
	Right connection		PAW-FC4A-E070R	PAW-FC4A-E150R	PAW-FC4A-E180R	PAW-FC4A-E210R	PAW-FC4A-E240R*	PAW-FC4A-E270R*
Total cooling capacity <sup>1)</sup>	Med/S-Hi	kW	5.4/6.0	10.1/11.9	11.2/13.6	14.4/18.8	17.7/20.5	19.9/23.4
Sensible capacity <sup>1)</sup>	Med/S-Hi	kW	4.1/4.7	8.4/10.9	9.1/12.0	10.6/14.5	13.9/16.3	14.9/17.8
Water flow	Med/S-Hi	l/h	924/1035	1739/2044	1928/2335	2478/3241	3053/3526	3427/4032
Water pressure drop	Med/S-Hi	kPa	52.1/64.4	13.5/18.4	17.4/25.0	35.2/59.1	25.0/33.0	23.3/31.5
Heating capacity <sup>2)</sup>	Med/S-Hi	kW	6.0/7.4	11.8/15.9	11.9/15.9	11.9/16.0	11.1/13.5	11.1/13.5
Water flow	Med/S-Hi	l/h	1029/1266	2038/2746	2045/2745	2051/2747	1910/2329	1910/2329
Water pressure drop	Med/S-Hi	kPa	30.7/43.6	167.6/293.0	100.8/174.3	101.4/174.6	87.8/120.3	53.3/72.5
<b>Sound levels</b>								
Sound power return + radiated	S-Lo/Med/S-Hi	dB(A)	54/60/63	52/66/72	54/66/74	52/66/72	65/73/75	65/73/75
Sound power discharge	S-Lo/Med/S-Hi	dB(A)	53/59/62	52/64/71	52/64/71	52/64/71	64/72/75	64/72/75
Sound pressure <sup>3)</sup>	S-Lo/Med/S-Hi	dB(A)	33/39/42	31/45/51	31/45/51	31/45/51	44/52/54	44/52/54
<b>Fan</b>								
Number			1					
Air flow 2-pipe	Med/S-Hi	m <sup>3</sup> /h	1091/1562	2110/3197	2110/3197	2110/3197	3130/3923	3130/3923
Air flow 4-pipe	Med/S-Hi	m <sup>3</sup> /h	1132/1496	2110/3197	2110/3197	2110/3197	3130/3923	3130/3923
Maximum external pressure		Pa	110	200	200	200	220	220
Filter			G3	G3	G3	G3	G3	G3
<b>Electrical data</b>								
Power supply	Voltage	V	230	230	230	230	230	230
	Phase		Single phase	Single phase	Single phase	Single phase	Single phase	Single phase
	Frequency	Hz	50/60	50/60	50/60	50/60	50/60	50/60
Power consumption	Med/S-Hi	W	182/222	421/675	421/675	421/675	530/673	530/673
<b>Water connections</b>								
Type			Female gas threaded	Gas Male threaded	Gas Male threaded	Gas Male threaded	Gas Male threaded	Gas Male threaded
2-pipe		Inch	1/2	1	1 1/4	1 1/4	1 1/4	1 1/4
4-pipe	Cooling	Inch	1/2	1	1	1	1 1/4	1 1/4
	Heating	Inch	1/2	3/4	3/4	3/4	3/4	3/4
<b>Dimensions and weight</b>								
Dimensions	H x W x D	mm	250 x 698 x 1200	375 x 798 x 1380	375 x 798 x 1380	375 x 798 x 1380	450 x 798 x 1500	450 x 798 x 1500
Weight		kg	42	63	65	67	76	80
2-pipe RRP		€	862	1,075	1,175	1,242	1,370	1,460
4-pipe RRP		€	904	1,149	1,249	1,318	1,447	1,540

1) According to Eurovent standard. Air: 27 °C DB / 19 °C WB. Water in/ out: 7 °C / 12 °C. 2) Air: 20 °C. Water in/out: 50 °C / 45 °C. 3) Informative data: Considering an hypothetical sound attenuation of the room and installation of 21 dB. Values indicated are for 50 Pa external static pressure, for additional pressure characteristics, please refer the technical data manual. \* High fan speed used for capacity, water flow, sound and airflow values.

Technical focus

- 6 sizes
- Cooling capacity from 4.1 to 21.9 kW
- Heating capacity from 4.7 to 21.5 kW
- 5-speed AC fan motor

Main features and accessories

- 2 and 4-pipe, left & right hand configurations
- Static pressure up to 220Pa
- Double skin insulation
- 2 way or 3 way ON/OFF valves
- Auxiliary drain pan
- Air intake with removable grid
- G3 filter

Operating limits

Entering water temperature	From 5 to 90 °C
Indoor air temperature	From 5 to 32 °C





## Fan coils - High Static Pressure Ducted (EC)



Optional controller.  
Wired remote  
controller for EC fans.  
PAW-FC-907TC

2-pipe	Left connection		PAW-FC2E-E150L	PAW-FC2E-E180L	PAW-FC2E-E210L	PAW-FC2E-E240L	PAW-FC2E-E270L
	Right connection		PAW-FC2E-E150R	PAW-FC2E-E180R	PAW-FC2E-E210R	PAW-FC2E-E240R	PAW-FC2E-E270R
Total cooling capacity <sup>1)</sup>	Med/S-Hi	kW	11.3/14.5	13.1/17.3	14.2/19.0	16.1/20.3	18.1/23.1
Sensible capacity <sup>1)</sup>	Med/S-Hi	kW	9.1/12.1	10.3/14.1	10.9/15.0	12.4/16.2	13.6/17.8
Water flow	Med/S-Hi	l/h	1945/2498	2259/2979	2451/3275	2766/3498	3120/3972
Water pressure drop	Med/S-Hi	kPa	19.3/30.7	24.9/41.5	31.0/53.8	17.1/26.4	16.4/25.4
Heating capacity <sup>2)</sup>	Med/S-Hi	kW	15.8/20.7	17.9/24.3	19.4/26.8	20.8/27.5	22.8/30.4
4-pipe	Left connection		PAW-FC4E-E150L	PAW-FC4E-E180L	PAW-FC4E-E210L	PAW-FC4E-E240L	PAW-FC4E-E270L
	Right connection		PAW-FC4E-E150R	PAW-FC4E-E180R	PAW-FC4E-E210R	PAW-FC4E-E240R	PAW-FC4E-E270R
Total cooling capacity <sup>1)</sup>	Med/S-Hi	kW	9.1/11.6	10.2/13.0	12.6/16.4	14.0/17.5	15.3/19.5
Sensible capacity <sup>1)</sup>	Med/S-Hi	kW	7.6/10.1	8.4/11.2	9.9/13.4	11.0/14.2	11.8/15.5
Water flow	Med/S-Hi	l/h	1567/2005	1764/2243	2175/2826	2409/3020	2641/3359
Water pressure drop	Med/S-Hi	kPa	11.1/17.7	14.7/23.2	27.5/45.4	15.9/24.5	14.5/22.4
Heating capacity <sup>2)</sup>	Med/S-Hi	kW	5.8/7.3	10.0/12.8	10.1/12.9	8.3/10.3	8.2/10.5
Water flow	Med/S-Hi	l/h	991/1264	1729/2211	1734/2227	1421/1780	1407/1804
Water pressure drop	Med/S-Hi	kPa	45.6/70.1	74.1/116.4	74.5/118.0	55.9/78.7	33.9/48.9
<b>Sound levels</b>							
Sound power return + radiated	S-Lo/Med/S-Hi	dB(A)	56/67/74	56/67/74	56/67/74	58/69/76	58/69/76
Sound power discharge	S-Lo/Med/S-Hi	dB(A)	56/65/74	56/65/74	56/65/74	58/67/76	58/67/76
Sound pressure <sup>3)</sup>	S-Lo/Med/S-Hi	dB(A)	35/46/52	35/46/52	35/46/52	37/48/54	37/48/54
<b>Fan</b>							
Number			1				
Air flow 2-pipe	Med/S-Hi	m <sup>3</sup> /h	2418/3583	2418/3583	2418/3583	2700/3829	2700/3829
Air flow 4-pipe	Med/S-Hi	m <sup>3</sup> /h	2418/3583	2418/3583	2418/3583	2700/3829	2700/3829
Maximum external pressure		Pa	300	300	300	300	300
<b>Electrical data</b>							
Power supply	Voltage	V					
	Phase		Single phase	Single phase	Single phase	Single phase	Single phase
	Frequency	Hz	50/60	50/60	50/60	50/60	50/60
Power consumption	Med/S-Hi	W	172/246	172/246	172/246	237/364	237/364
<b>Water connections</b>							
Type			Gas Male threaded	Gas Male threaded	Gas Male threaded	Gas Male threaded	Gas Male threaded
2-pipe		Inch	1	1 1/4	1 1/4	1 1/4	1 1/4
	Cooling	Inch	1	1	1	1 1/4	1 1/4
4-pipe	Heating	Inch	3/4	3/4	3/4	3/4	3/4
<b>Dimensions and weight</b>							
Dimensions	H x W x D	mm	375 x 798 x 1380	375 x 798 x 1380	375 x 798 x 1380	450 x 798 x 1500	450 x 798 x 1500
Weight		kg	63	65	67	76	80
<b>2-pipe RRP</b>		€	<b>1,075</b>	<b>1,175</b>	<b>1,242</b>	<b>1,370</b>	<b>1,460</b>
<b>4-pipe RRP</b>		€	<b>1,075</b>	<b>1,175</b>	<b>1,242</b>	<b>1,370</b>	<b>1,460</b>

1) According to Eurovent standard. Air: 27 °C DB / 19 °C WB. Water in/ out: 7 °C / 12 °C. 2) Air: 20 °C. Water in/out: 50 °C / 45 °C. 3) Informative data: Considering an hypothetical sound attenuation of the room and installation of 21 dB.

Values indicated are for 50 Pa external static pressure, for additional pressure characteristics, please refer the technical data manual.

### Technical focus

- 5 sizes
- Cooling capacity from 6.6 to 19.9 kW
- Heating capacity from 5.9 to 21.4 kW
- Low energy consumption EC fan

### Main features and accessories

- 2 and 4-pipe, left & right hand configurations
- Static pressure up to 300Pa
- Double skin insulation
- 2 way or 3 way ON/OFF valves
- Auxiliary drain pan
- Air intake with removable grid
- G3 filter

#### Operating limits

Entering water temperature	From 5 to 90 °C
Indoor air temperature	From 5 to 32 °C



## Fan coils - 4 way cassette (AC)



Optional controller.  
Wired remote  
controller.  
PAW-FC-903TC



Optional controller.  
Advanced wired  
remote controller.  
PAW-FC-RC1

2-pipe			PAW-FC2A-U020	PAW-FC2A-U030	PAW-FC2A-U040	PAW-FC2A-U050	PAW-FC2A-U060	PAW-FC2A-U070
Total cooling capacity <sup>1)</sup>	Med/Hi	kW	1.8/2.4	2.7/4.0	3.5/4.7	4.4/6.1	5.4/7.2	6.5/8.6
Sensible capacity <sup>1)</sup>	Med/Hi	kW	1.5/2.0	2.2/3.0	2.6/3.6	3.4/4.8	4.0/5.4	4.8/6.4
Water flow	Med/Hi	l/h	303/404	493/683	597/801	762/1042	937/1233	1111/1476
Water pressure drop	Med/Hi	kPa	6.8/10.9	8.5/14.4	11.2/18.3	13/21.9	7.5/11.5	13/20.5
Heating capacity <sup>2)</sup>	Med/Hi	kW	2.5/3.25	3.7/4.5	4.6/6.2	6.0/8.1	7.4/10.0	9.2/12.0
4-pipe			PAW-FC4A-U020	PAW-FC4A-U030	PAW-FC4A-U040	—	PAW-FC4A-U060	PAW-FC4A-U070
Total cooling capacity <sup>1)</sup>	Med/Hi	kW	1.5/2.0	2.7/3.4	3.3/4.0	—	4.9/6.6	6.0/7.5
Sensible capacity <sup>1)</sup>	Med/Hi	kW	1.4/1.8	2.1/2.6	2.6/3.2	—	3.8/5.1	4.6/5.9
Water flow	Med/Hi	l/h	258/359	465/576	563/683	—	851/1137	1030/1294
Water pressure drop	Med/Hi	kPa	8.9/13.6	8.3/11.6	11.2/15.3	—	13.9/22.2	18.9/27.5
Heating capacity <sup>2)</sup>	Med/Hi	kW	0.9/1.2	3.1/3.8	3.5/4.1	—	5.5/7.0	7.1/8.9
Water flow	Med/Hi	l/h	153/201	530/658	603/699	—	939/1210	1214/1540
Water pressure drop	Med/Hi	kPa	33.4/53.6	24.2/35	30.9/39.8	—	13.8/20.7	20.8/30.9
Sound levels								
Global sound power level 2-pipe	Lo/Med/Hi	dB(A)	36/40/49	35/47/53	42/48/57	35/40/49	38/46/54	40/52/59
Global sound power level 4-pipe	Lo/Med/Hi	dB(A)	36/40/49	35/47/53	42/48/57	—	38/46/54	40/52/59
Global sound pressure level 2-pipe <sup>3)</sup>	Lo/Med/Hi	dB(A)	27/31/40	26/35/44	33/39/48	26/31/40	29/37/45	31/43/50
Global sound pressure level 4-pipe <sup>3)</sup>	Lo/Med/Hi	dB(A)	27/31/40	26/35/44	33/39/48	—	29/37/45	31/43/50
Fan								
Number			1	1	1	1	1	1
Air flow	Med/Hi	m <sup>3</sup> /h	450/659	504/734	626/900	720/979	824/1159	1080/1447
Filter			G1	G1	G1	G1	G1	G1
Electrical data								
Power supply	Voltage	V	230	230	230	230	230	230
	Phase		Single phase	Single phase	Single phase	Single phase	Single phase	Single phase
	Frequency	Hz	50	50	50	50	50	50
Power consumption 2-pipe	Med/Hi	W	35/58	34/58	58/99	41/66	61/88	92/125
Power consumption 4-pipe	Med/Hi	W	35/58	34/58	58/99	—	61/88	92/125
Water connections								
Type			Female gas threaded	Female gas threaded	Female gas threaded	Female gas threaded	Female gas threaded	Female gas threaded
2-pipe		Inch	3/4	3/4	3/4	1	1	1
4-pipe	Cooling	Inch	3/4	3/4	3/4	—	1	1
	Heating	Inch	1/2	1/2	1/2	—	3/4	3/4
Dimensions and weight								
Dimensions including panel	H x W x D	mm	334 x 720 x 720	334 x 720 x 720	334 x 720 x 720	339 x 960 x 960	339 x 960 x 960	339 x 960 x 960
Weight		kg	14.8	16.5	16.5	37.1	37.1	39.6
<b>2-pipe RRP</b>		€	<b>879</b>	<b>936</b>	<b>975</b>	<b>1,532</b>	<b>1,563</b>	<b>1,617</b>
<b>4-pipe RRP</b>		€	<b>966</b>	<b>1,029</b>	<b>1,071</b>	<b>-</b>	<b>1,674</b>	<b>1,719</b>

1) According to Eurovent standard. Air: 27 °C DB / 19 °C WB. Water in/out: 7 °C/12 °C. 2) According to Eurovent standard. Air: 20 °C. Water in/out: 45 °C / 40 °C. 3) Information data considering an hypothetical sound attenuation of the room and installation of -9 dB(A).

### Technical focus

- 6 sizes\*
- Cooling capacity from 1.4 to 8.6 kW
- Heating capacity from 1.1 to 12.8 kW
- 3-speed AC fan motor

### Main features and accessories

- 2 and 4-pipe configurations
- Very low acoustic levels
- Quick access, by simply removing the front grille
- All connections: located at the same side
- Galvanized steel sheet with thermal and acoustical insulation, avoiding condensation on the casing and providing good sound attenuation
- Cleanable synthetic-type air filter

#### Operating limits

Entering water temperature	From 5 to 90 °C
Indoor air temperature	From 5 to 32 °C

\* 5 sizes available for 4-pipe configuration.





## Fan coils - 4 way cassette (EC)



Optional controller.  
Wired remote  
controller for EC fans.  
PAW-FC-907TC

2-pipe			PAW-FC2E-U020	PAW-FC2E-U030	PAW-FC2E-U040	PAW-FC2E-U050	PAW-FC2E-U060	PAW-FC2E-U070
Total cooling capacity <sup>1)</sup>	Med/Hi	kW	1.8/2.4	2.9/4.0	3.5/4.7	4.4/6.1	5.5/7.2	6.5/9.6
Sensible capacity <sup>1)</sup>	Med/Hi	kW	1.5/2.0	2.2/3.1	2.7/3.6	3.5/4.7	4.1/5.4	4.9/7.2
Water flow	Med/Hi	l/h	306/409	497/688	604/808	765/1050	944/1243	1119/1649
Water pressure drop	Med/Hi	kPa	6.9/11.2	8.6/14.6	11.4/18.6	13.1/22.2	7.6/11.7	13.1/24.6
Heating capacity <sup>2)</sup>	Med/Hi	kW	2.5/3.2	3.7/4.5	4.6/6.2	6.0/8.1	7.4/10.0	9.2/13.0
4-pipe			PAW-FC4E-U020	PAW-FC4E-U030	PAW-FC4E-U040	—	PAW-FC4E-U060	PAW-FC4E-U070
Total cooling capacity <sup>1)</sup>	Med/Hi	kW	1.5/2.0	2.7/3.4	3.2/4.0	—	5.0/6.6	6.1/7.9
Sensible capacity <sup>1)</sup>	Med/Hi	kW	1.4/1.9	2.1/2.6	2.6/3.3	—	3.8/5.1	4.7/6.3
Water flow	Med/Hi	l/h	262/344	464/581	556/690	—	858/1144	1041/1366
Water pressure drop	Med/Hi	kPa	9.1/14.0	8.2/11.7	10.9/15.5	—	14.1/22.4	19.2/30.1
Heating capacity <sup>2)</sup>	Med/Hi	kW	0.9/1.2	3.1/3.8	3.5/4.1	—	5.5/7.0	7.1/9.8
Water flow	Med/Hi	l/h	153/201	530/658	603/699	—	939/1210	1214/1686
Water pressure drop	Med/Hi	kPa	33.4/53.6	24.2/35	30.9/39.8	—	13.8/20.7	20.8/36
Sound levels								
Global sound power level 2-pipe	Lo/Med/Hi	dB(A)	36/40/49	35/47/53	42/48/57	35/40/49	38/46/54	40/52/59
Global sound power level 4-pipe	Lo/Med/Hi	dB(A)	36/40/49	35/44/53	42/48/57	—	38/46/54	40/52/59
Global sound pressure level 2-pipe <sup>3)</sup>	Lo/Med/Hi	dB(A)	27/31/40	26/35/44	33/39/48	26/31/40	29/37/45	31/43/50
Global sound pressure level 4-pipe <sup>3)</sup>	Lo/Med/Hi	dB(A)	27/31/40	26/35/44	33/39/48	—	29/37/45	31/43/50
Fan								
Number			1					
Air flow	Med/Hi	m <sup>3</sup> /h	450/659	504/734	626/900	720/979	824/1159	1080/1598
Filter			G1					
Electrical data								
Power supply	Voltage	V	230	230	230	230	230	230
	Phase		Single phase	Single phase	Single phase	Single phase	Single phase	Single phase
	Frequency	Hz	50	50	50	50	50	50
Power consumption 2-pipe	Med/Hi	W	13/29	14/32	22/57	12/25	23/25	40/115
Power consumption 4-pipe	Med/Hi	W	13/29	14/32	22/57	—	23/46	40/115
Water connections								
Type			Female gas threaded	Female gas threaded	Female gas threaded	Female gas threaded	Female gas threaded	Female gas threaded
2-pipe		Inch	3/4	3/4	3/4	1	1	1
4-pipe	Cooling	Inch	3/4	3/4	3/4	—	1	1
	Heating	Inch	1/2	1/2	1/2	—	3/4	3/4
Dimensions and weight								
Dimensions including panel	H x W x D	mm	334 x 720 x 720	334 x 720 x 720	334 x 720 x 720	339 x 960 x 960	339 x 960 x 960	339 x 960 x 960
Weight		kg	14.8	16.5	16.5	37.1	37.1	39.6
2-pipe RRP		€	1,029	1,088	1,128	1,603	1,775	1,828
4-pipe RRP		€	1,111	1,165	1,208	-	1,894	1,913

1) According to Eurovent standard. Air: 27 °C DB / 19 °C WB. Water in/out: 7 °C/12 °C. 2) According to Eurovent standard. Air: 20 °C. Water in/out: 45 °C / 40 °C. 3) Information data considering a hypothetical sound attenuation of the room and installation of -9 dB(A).

### Technical focus

- 6 sizes\*
- Cooling capacity from 1.4 to 9.4 kW
- Heating capacity from 1.1 to 14.0 kW
- Low energy consumption EC fan

### Main features and accessories

- 2 and 4-pipe configurations
- Very low acoustic levels
- Quick access. by simply removing the front grille
- All connections: located at the same side
- Galvanized steel sheet with thermal and acoustical insulation. avoiding condensation on the casing and providing good sound attenuation
- Cleanable synthetic-type air filter

#### Operating limits

Entering water temperature	From 5 to 90 °C
Indoor air temperature	From 5 to 32 °C

\* 5 sizes available for 4-pipe configuration.



Fan coils - ceiling chassis (AC)



Optional controller.  
Wired remote controller.  
PAW-FC-903TC



Optional controller.  
Advanced wired remote controller.  
PAW-FC-RC1

2-pipe	Left connection (PAW-)		FC2A-T010L	FC2A-T020L	FC2A-T030L	FC2A-T040L	FC2A-T050L	FC2A-T060L	FC2A-T070L	FC2A-T080L
	Right connection (PAW-)		FC2A-T010R	FC2A-T020R	FC2A-T030R	FC2A-T040R	FC2A-T050R	FC2A-T060R	FC2A-T070R	FC2A-T080R
Total cooling capacity <sup>1)</sup>	Med/S-Hi	kW	1.0/1.5	1.2/1.7	2.0/2.5	2.4/3.2	3.2/4.6	4.6/5.8	6.1/7.3	6.1/8.1
Sensible capacity <sup>1)</sup>	Med/S-Hi	kW	0.8/1.1	0.9/1.3	1.5/1.9	1.8/2.3	2.2/3.3	3.3/4.5	4.3/5.1	4.6/6.3
Water flow	Med/S-Hi	l/h	172/250	213/289	341/430	413/547	544/798	784/1003	1058/1252	1048/1400
Water pressure drop	Med/S-Hi	kPa	19.5/39.2	3.9/6.3	19.3/28.8	17.1/28.0	22.8/46.9	37.4/60.2	15.4/21.5	19.3/32.5
Heating capacity <sup>2)</sup>	Med/S-Hi	kW	1.4/2.0	1.5/2.2	2.4/3.1	2.9/4.0	4.1/5.7	5.3/7.1	7.9/9.3	8.1/11.6
4-pipe	Left connection (PAW-)		FC4A-T010L	FC4A-T020L	FC4A-T030L	FC4A-T040L	FC4A-T050L	FC4A-T060L	FC4A-T070L	FC4A-T080L
	Right connection (PAW-)		FC4A-T010R	FC4A-T020R	FC4A-T030R	FC4A-T040R	FC4A-T050R	FC4A-T060R	FC4A-T070R	FC4A-T080R
Total cooling capacity <sup>1)</sup>	Med/S-Hi	kW	0.9/1.3	1.1/1.6	1.9/2.4	2.3/3.0	3.0/4.3	4.4/5.6	5.9/6.9	5.9/8.0
Sensible capacity <sup>1)</sup>	Med/S-Hi	kW	0.7/1.0	0.8/1.2	1.5/1.8	1.7/2.2	2.2/3.1	3.2/4.3	4.2/4.9	4.4/6.2
Water flow	Med/S-Hi	l/h	159/225	192/268	327/414	388/517	522/748	756/967	1019/1193	1020/1380
Water pressure drop	Med/S-Hi	kPa	15.2/29.0	3.4/5.6	9.5/14.4	22.3/36.8	12.8/25.1	27.7/44.5	17.9/24.4	31.1/53.6
Heating capacity <sup>2)</sup>	Med/S-Hi	kW	0.7/1.0	0.9/1.1	1.4/1.6	1.6/2.1	2.3/2.6	2.9/3.3	3.6/4.0	5.6/6.1
Water flow	Med/S-Hi	l/h	127/178	146/190	232/274	273/354	401/443	505/560	626/682	963/1052
Water pressure drop	Med/S-Hi	kPa	3.5/5.6	3.2/5.3	9.0/11.9	26.5/42.7	24.6/29.5	43.9/52.9	117.9/137.8	63.7/75
Sound levels										
Global sound power level	S-Lo/Med/S-Hi	dB(A)	33/40/49	31/43/50	30/45/52	30/44/51	34/46/56	38/51/58	43/56/61	50/55/64
Global sound pressure level <sup>3)</sup>	S-Lo/Med/S-Hi	dB(A)	24/31/40	22/34/41	21/36/43	21/35/42	25/37/47	29/42/49	34/47/52	41/46/55
Fan										
Number			1	1	1	2	2	2	2	3
Air flow 2-pipe	Med/S-Hi	m <sup>3</sup> /h	190/283	179/265	274/390	357/499	486/716	640/933	893/1064	936/1397
Air flow 4-pipe	Med/S-Hi	m <sup>3</sup> /h	168/253	161/241	263/369	335/467	466/542	614/723	859/944	905/1042
Filter			G2	G2	G2	G2	G2	G2	G2	G2
Electrical data										
Power supply	Voltage	V	230	230	230	230	230	230	230	230
	Phase		Single phase	Single phase	Single phase	Single phase	Single phase	Single phase	Single phase	Single phase
	Frequency	Hz	50/60	50/60	50/60	50/60	50/60	50/60	50/60	50/60
Power consumption 2-pipe	Med/S-Hi	W	24/36	18/29	37/45	37/56	55/72	75/105	100/147	112/188
Power consumption 4-pipe	Med/S-Hi	W	24/36	18/28	37/44	37/55	54/70	74/104	99/145	112/188
Water connections										
Type			Female gas threaded	Female gas threaded	Female gas threaded	Female gas threaded	Female gas threaded	Female gas threaded	Female gas threaded	Female gas threaded
2-pipe		Inch	1/2	1/2	1/2	1/2	1/2	1/2	3/4	3/4
4-pipe	Cooling	Inch	1/2	1/2	1/2	1/2	1/2	1/2	3/4	3/4
	Heating	Inch	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2
Dimensions and weight										
Dimensions	H x W x D	mm	477 x 225 x 766	766 x 225 x 477	477 x 225 x 951	477 x 225 x 1136	477 x 225 x 1321	477 x 225 x 1506	575 x 225 x 1319	575 x 225 x 1506
Weight	2 / 4-pipes	kg	19/20	19/20	22/23	27/29	30/32	35/37	35/37	47/49
2-pipe RRP		€	480	494	520	583	633	675	740	986
4-pipe RRP		€	509	514	542	611	664	711	782	1,039

1) According to Eurovent standard. Air: 27 °C DB / 19 °C WB. Water in/ out: 7 °C / 12 °C. 2) Air: 20 °C. Water in/out: 50 °C / 45 °C. 3) The sound pressure levels are based on (NR) characteristics of a room having volume of 100 m<sup>3</sup> with reverberation of 0.5 seconds.

Technical focus

- Cooling capacity from 0.7 to 8.1 kW
- Heating capacity from 0.7 to 10.3 kW
- 5-speed AC fan motor(s)

Main features and accessories

- 2 and 4-pipe configurations
- Left or right hand arrangements
- Ease of installation
- Very low acoustic levels
- 2 way or 3 way ON/OFF valves
- Auxiliary drain pan
- Air intake with removable grid
- G2 filter

Operating limits

Entering water temperature	From 5 to 90 °C
Indoor air temperature	From 5 to 32 °C







## Fan coils - ceiling chassis (EC)



Optional controller.  
Wired remote  
controller for EC fans.  
PAW-FC-907TC

2-pipe	Left connection (PAW-)		FC2E-T010L	FC2E-T020L	FC2E-T030L	FC2E-T040L	FC2E-T050L	FC2E-T060L	FC2E-T070L	FC2E-T080L
	Right connection (PAW-)		FC2E-T010R	FC2E-T020R	FC2E-T030R	FC2E-T040R	FC2E-T050R	FC2E-T060R	FC2E-T070R	FC2E-T080R
Total cooling capacity <sup>1)</sup>	Med/S-Hi	kW	1.2/2.1	1.4/2.4	2.1/3.1	2.9/4.2	4.0/5.0	4.5/5.2	5.9/6.9	6.5/8.8
Sensible capacity <sup>1)</sup>	Med/S-Hi	kW	1.1/1.9	1.1/1.9	1.6/2.4	2.1/3.0	3.0/3.7	3.5/4.0	4.3/5.2	4.8/6.6
Water flow	Med/S-Hi	l/h	210/356	237/406	354/532	506/722	685/743	767/800	1008/1098	1111/1254
Water pressure drop	Med/S-Hi	kPa	28.2/76.9	4.6/11.0	20.5/42.1	24.4/46.3	35.1/41.0	35.8/38.8	14.0/16.6	21.4/26.6
Heating capacity <sup>2)</sup>	Med/S-Hi	kW	1.6/2.9	1.9/3.3	2.2/3.4	3.0/5.3	5.2/5.5	5.9/6.1	7.3/8.2	8.0/9.3
4-pipe	Left connection (PAW-)		FC4E-T010L	FC4E-T020L	FC4E-T030L	FC4E-T040L	FC4E-T050L	FC4E-T060L	FC4E-T070L	FC4E-T080L
	Right connection (PAW-)		FC4E-T010R	FC4E-T020R	FC4E-T030R	FC4E-T040R	FC4E-T050R	FC4E-T060R	FC4E-T070R	FC4E-T080R
Total cooling capacity <sup>1)</sup>	Med/S-Hi	kW	1.1/1.9	1.2/2.2	1.9/2.9	2.7/4.0	3.6/4.6	4.1/4.9	5.1/6.4	6.2/9.6
Sensible capacity <sup>1)</sup>	Med/S-Hi	kW	0.9/1.7	1.0/1.8	1.5/2.2	1.9/2.8	2.8/3.5	3.2/3.8	3.8/4.8	4.6/7.2
Water flow	Med/S-Hi	l/h	185/327	206/375	321/493	457/681	625/686	707/749	886/977	1070/1242
Water pressure drop	Med/S-Hi	kPa	20.1/59.2	3.7/9.7	9.2/19.7	29.6/60.1	17.9/21.3	24.3/27.2	13.6/16.5	33.9/44.3
Heating capacity <sup>2)</sup>	Med/S-Hi	kW	0.8/1.4	0.9/1.5	1.4/1.8	2.0/2.8	2.4/2.5	2.9/3.1	3.4/3.6	5.9/6.9
Water flow	Med/S-Hi	l/h	140/235	161/255	243/304	350/483	416/438	503/531	583/614	1011/1194
Water pressure drop	Med/S-Hi	kPa	4.0/8.4	3.8/9.4	9.7/14.1	41.8/76.3	26.3/28.9	43.6/48.1	103.8/113.9	69.7/95.1
Sound levels										
Global sound power level	S-Lo/Med/S-Hi	dB(A)	34/47/60	34/47/60	31/50/59	29/44/52	30/51/57	32/54/58	40/54/59	51/56/64
Global sound pressure level <sup>3)</sup>	S-Lo/Med/S-Hi	dB(A)	25/38/51	25/38/51	22/41/50	20/35/43	21/42/48	23/45/49	31/45/50	42/47/55
Fan										
Number			1	1	1	2	2	2	2	3
Air flow 2-pipe	Med/S-Hi	m <sup>3</sup> /h	228/417	234/413	380/585	412/678	645/702	737/779	850/950	927/1093
Air flow 4-pipe	Med/S-Hi	m <sup>3</sup> /h	199/379	200/380	342/540	369/627	587/646	668/716	798/894	884/1079
Filter			G2	G2	G2	G2	G2	G2	G2	G2
Electrical data										
Power supply	Voltage	V	230	230	230	230	230	230	230	230
	Phase		Single phase	Single phase	Single phase	Single phase	Single phase	Single phase	Single phase	Single phase
	Frequency	Hz	50/60	50/60	50/60	50/60	50/60	50/60	50/60	50/60
Power consumption 2-pipe	Med/S-Hi	W	11/41	13/41	16/42	13/43	24/46	30/54	44/77	42/108
Power consumption 4-pipe	Med/S-Hi	W	11/39	13/40	15/40	12/42	23/44	28/52	43/75	41/116
Water connections										
Type			Female gas threaded	Female gas threaded	Female gas threaded	Female gas threaded	Female gas threaded	Female gas threaded	Female gas threaded	Female gas threaded
2-pipe		Inch	1/2	1/2	1/2	1/2	1/2	1/2	3/4	3/4
4-pipe	Cooling	Inch	1/2	1/2	1/2	1/2	1/2	1/2	3/4	3/4
	Heating	Inch	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2
Dimensions and weight										
Dimensions	H x W x D	mm	477 x 225 x 766	766 x 225 x 477	477 x 225 x 951	477 x 225 x 1136	477 x 225 x 1321	477 x 225 x 1506	575 x 225 x 1319	575 x 225 x 1506
Weight	2 / 4-pipes	kg	19/20	19/20	22/23	27/29	30/32	35/37	35/37	47/49
2-pipe RRP		€	652	666	691	755	805	847	916	1,162
4-pipe RRP		€	681	686	714	783	836	883	957	1,215

1) According to Eurovent standard. Air: 27 °C DB / 19 °C WB. Water in/ out: 7 °C / 12 °C. 2) Air: 20 °C. Water in/out: 50 °C / 45 °C. 3) The sound pressure levels are based on (NR) characteristics of a room having volume of 100 m<sup>3</sup> with reverberation of 0.5 seconds.

### Technical focus

- Cooling capacity from 0.5 to 9.6 kW
- Heating capacity from 0.6 to 13.6 kW
- Low energy consumption EC fan(s)

### Main features and accessories

- 2 and 4-pipe configurations
- Left or right hand arrangements
- Ease of installation
- Very low acoustic levels
- 2 way or 3 way ON/OFF valves
- Auxiliary drain pan
- Air intake with removable grid
- G2 filter

### Operating limits

Entering water temperature	From 5 to 90 °C
Indoor air temperature	From 5 to 32 °C





Fan coils - floor-standing chassis (AC)



Optional controller.  
Wired remote controller.  
PAW-FC-903TC



Optional controller.  
Advanced wired remote controller.  
PAW-FC-RC1



Optional controller.  
Integrated controller for Floor-standing fan coil (AC).  
PAW-FC-RCFS

2-pipe	Left connection (PAW-)		FC2A-P010L	FC2A-P020L	FC2A-P030L	FC2A-P040L	FC2A-P050L	FC2A-P060L	FC2A-P070L	FC2A-P080L
	Right connection (PAW-)		FC2A-P010R	FC2A-P020R	FC2A-P030R	FC2A-P040R	FC2A-P050R	FC2A-P060R	FC2A-P070R	FC2A-P080R
Total cooling capacity <sup>1)</sup>	Med/S-Hi	kW	1.0/1.5	1.2/1.7	2.0/2.5	2.4/3.2	3.2/4.6	4.6/5.8	6.1/7.3	6.1/8.1
Sensible capacity <sup>1)</sup>	Med/S-Hi	kW	0.8/1.1	0.9/1.3	1.5/1.9	1.8/2.3	2.2/3.3	3.3/4.5	4.3/5.1	4.6/6.3
Water flow	Med/S-Hi	l/h	172/250	213/289	341/430	413/547	544/798	784/1003	1058/1252	1048/1400
Water pressure drop	Med/S-Hi	kPa	19.5/39.2	3.9/6.3	19.3/28.8	17.1/28.0	22.8/46.9	37.4/60.2	15.4/21.5	19.3/32.5
Heating capacity <sup>2)</sup>	Med/S-Hi	kW	1.4/2.0	1.5/2.2	2.4/3.1	2.9/4.0	4.1/5.7	5.3/7.1	7.9/9.3	8.1/11.6
4-pipe	Left connection (PAW-)		FC4A-P010L	FC4A-P020L	FC4A-P030L	FC4A-P040L	FC4A-P050L	FC4A-P060L	FC4A-P070L	FC4A-P080L
	Right connection (PAW-)		FC4A-P010R	FC4A-P020R	FC4A-P030R	FC4A-P040R	FC4A-P050R	FC4A-P060R	FC4A-P070R	FC4A-P080R
Total cooling capacity <sup>1)</sup>	Med/S-Hi	kW	0.9/1.3	1.1/1.6	1.9/2.4	2.3/3.0	3.0/4.3	4.4/5.6	5.9/6.9	5.9/8.0
Sensible capacity <sup>1)</sup>	Med/S-Hi	kW	0.7/1.0	0.8/1.2	1.5/1.8	1.7/2.2	2.2/3.1	3.2/4.3	4.2/4.9	4.4/6.2
Water flow	Med/S-Hi	l/h	159/225	192/268	327/414	388/517	522/748	756/967	1019/1193	1020/1380
Water pressure drop	Med/S-Hi	kPa	15.2/29.0	3.4/5.6	9.5/14.4	22.3/36.8	12.8/25.1	27.7/44.5	17.9/24.4	31.1/53.6
Heating capacity <sup>2)</sup>	Med/S-Hi	kW	0.7/1.0	0.9/1.1	1.4/1.6	1.6/2.1	2.3/2.6	2.9/3.3	3.6/4.0	5.6/6.1
Water flow	Med/S-Hi	l/h	127/178	146/190	232/274	273/354	401/443	505/560	626/682	963/1052
Water pressure drop	Med/S-Hi	kPa	3.5/5.6	3.2/5.3	9.0/11.9	26.5/42.7	24.6/29.5	43.9/52.9	117.9/137.8	63.7/75
Sound levels										
Global sound power level	S-Lo/Med/S-Hi	dB(A)	33/40/49	31/43/50	30/45/52	30/44/51	34/46/56	38/51/58	43/56/61	50/55/64
Global sound pressure level <sup>3)</sup>	S-Lo/Med/S-Hi	dB(A)	24/31/40	22/34/41	21/36/43	21/35/42	25/37/47	29/42/49	34/47/52	41/46/55
Fan										
Number			1	1	1	2	2	2	2	3
Air flow 2-pipe	Med/S-Hi	m <sup>3</sup> /h	190/283	179/265	274/390	357/499	486/716	640/933	893/1064	936/1397
Air flow 4-pipe	Med/S-Hi	m <sup>3</sup> /h	168/253	161/241	263/369	335/467	466/542	614/723	859/944	905/1042
Filter			G2	G2	G2	G2	G2	G2	G2	G2
Electrical data										
Power supply	Voltage	V	230	230	230	230	230	230	230	230
	Phase		Single phase	Single phase	Single phase	Single phase	Single phase	Single phase	Single phase	Single phase
	Frequency	Hz	50/60	50/60	50/60	50/60	50/60	50/60	50/60	50/60
Power consumption 2-pipe	Med/S-Hi	W	24/36	18/29	37/45	37/56	55/72	75/105	100/147	112/188
Power consumption 4-pipe	Med/S-Hi	W	24/36	18/28	37/44	37/55	54/70	74/104	99/145	112/188
Water connections										
Type			Female gas threaded	Female gas threaded	Female gas threaded	Female gas threaded	Female gas threaded	Female gas threaded	Female gas threaded	Female gas threaded
2-pipe		Inch	1/2	1/2	1/2	1/2	1/2	1/2	3/4	3/4
4-pipe	Cooling	Inch	1/2	1/2	1/2	1/2	1/2	1/2	3/4	3/4
	Heating	Inch	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2
Dimensions and weight										
Dimensions	H x W x D	mm	477 x 225 x 766	766 x 225 x 477	477 x 225 x 951	477 x 225 x 1136	477 x 225 x 1321	477 x 225 x 1506	575 x 225 x 1319	575 x 225 x 1506
Weight	2 / 4-pipes	kg	19/20	19/20	22/23	27/29	30/32	35/37	35/37	47/49
2-pipe RRP		€	336	350	375	439	489	531	596	842
4-pipe RRP		€	365	370	398	467	520	567	638	895

1) According to Eurovent standard. Air: 27 °C DB / 19 °C WB. Water in/ out: 7 °C / 12 °C. 2) Air: 20 °C. Water in/out: 50 °C / 45 °C. 3) The sound pressure levels are based on (NR) characteristics of a room having volume of 100 m<sup>3</sup> with reverberation of 0.5 seconds.

Technical focus

- Cooling capacity from 0.7 to 8.1 kW
- Heating capacity from 0.7 to 10.3 kW
- 5-speed AC fan motor(s)

Main features and accessories

- 2 and 4-pipe configurations
- Left or right hand arrangements
- Ease of installation
- Very low acoustic levels
- 2 way or 3 way ON/OFF valves
- Auxiliary drain pan
- Air intake with removable grid
- G2 filter
- PAW-FC-SFS feet for floor-standing units

Operating limits

Entering water temperature	From 5 to 90 °C
Indoor air temperature	From 5 to 32 °C





Fan coils - floor-standing chassis (EC)



Optional controller.  
Wired remote  
controller for EC fans.  
PAW-FC-907TC

2-pipe			Left connection (PAW-)	FC2E-P010L	FC2E-P020L	FC2E-P030L	FC2E-P040L	FC2E-P050L	FC2E-P060L	FC2E-P070L	FC2E-P080L
			Right connection (PAW-)	FC2E-P010R	FC2E-P020R	FC2E-P030R	FC2E-P040R	FC2E-P050R	FC2E-P060R	FC2E-P070R	FC2E-P080R
Total cooling capacity <sup>1)</sup>	Med/S-Hi	kW		1.2/2.1	1.4/2.4	2.1/3.1	2.9/4.2	4.0/5.0	4.5/5.2	5.9/6.9	6.5/8.8
Sensible capacity <sup>1)</sup>	Med/S-Hi	kW		1.1/1.9	1.1/1.9	1.6/2.4	2.1/3.0	3.0/3.7	3.5/4.0	4.3/5.2	4.8/6.6
Water flow	Med/S-Hi	l/h		210/356	237/406	354/532	506/722	685/743	767/800	1008/1098	1111/1254
Water pressure drop	Med/S-Hi	kPa		28.2/76.9	4.6/11.0	20.5/42.1	24.4/46.3	35.1/41.0	35.8/38.8	14.0/16.6	21.4/26.6
Heating capacity <sup>2)</sup>	Med/S-Hi	kW		1.6/2.9	1.9/3.3	2.2/3.4	3.0/5.3	5.2/5.5	5.9/6.1	7.3/8.2	8.0/9.3
4-pipe			Left connection (PAW-)	FC4E-P010L	FC4E-P020L	FC4E-P030L	FC4E-P040L	FC4E-P050L	FC4E-P060L	FC4E-P070L	FC4E-P080L
			Right connection (PAW-)	FC4E-P010R	FC4E-P020R	FC4E-P030R	FC4E-P040R	FC4E-P050R	FC4E-P060R	FC4E-P070R	FC4E-P080R
Total cooling capacity <sup>1)</sup>	Med/S-Hi	kW		1.1/1.9	1.2/2.2	1.9/2.9	2.7/4.0	3.6/4.6	4.1/4.9	5.1/6.4	6.2/9.6
Sensible capacity <sup>1)</sup>	Med/S-Hi	kW		0.9/1.7	1.0/1.8	1.5/2.2	1.9/2.8	2.8/3.5	3.2/3.8	3.8/4.8	4.6/7.2
Water flow	Med/S-Hi	l/h		185/327	206/375	321/493	457/681	625/686	707/749	886/977	1070/1242
Water pressure drop	Med/S-Hi	kPa		20.1/59.2	3.7/9.7	9.2/19.7	29.6/60.1	17.9/21.3	24.3/27.2	13.6/16.5	33.9/44.3
Heating capacity <sup>2)</sup>	Med/S-Hi	kW		0.8/1.4	0.9/1.5	1.4/1.8	2.0/2.8	2.4/2.5	2.9/3.1	3.4/3.6	5.9/6.9
Water flow	Med/S-Hi	l/h		140/235	161/255	243/304	350/483	416/438	503/531	583/614	1011/1194
Water pressure drop	Med/S-Hi	kPa		4.0/8.4	3.8/9.4	9.7/14.1	41.8/76.3	26.3/28.9	43.6/48.1	103.8/113.9	69.7/95.1
Sound levels											
Global sound power level	S-Lo/Med/S-Hi	dB(A)		34/47/60	34/47/60	31/50/59	29/44/52	30/51/57	32/54/58	40/54/59	51/56/64
Global sound pressure level <sup>3)</sup>	S-Lo/Med/S-Hi	dB(A)		25/38/51	25/38/51	22/41/50	20/35/43	21/42/48	23/45/49	31/45/50	42/47/55
Fan											
Number				1	1	1	2	2	2	2	3
Air flow 2-pipe	Med/S-Hi	m <sup>3</sup> /h		228/417	234/413	380/585	412/678	645/702	737/779	850/950	927/1093
Air flow 4-pipe	Med/S-Hi	m <sup>3</sup> /h		199/379	200/380	342/540	369/627	587/646	668/716	798/894	884/1079
Filter				G2	G2	G2	G2	G2	G2	G2	G2
Electrical data											
Power supply	Voltage	V		230	230	230	230	230	230	230	230
	Phase			Single phase	Single phase	Single phase	Single phase	Single phase	Single phase	Single phase	Single phase
	Frequency	Hz		50/60	50/60	50/60	50/60	50/60	50/60	50/60	50/60
Power consumption 2-pipe	Med/S-Hi	W		11/41	13/41	16/42	13/43	24/46	30/54	44/77	42/108
Power consumption 4-pipe	Med/S-Hi	W		11/39	13/40	15/40	12/42	23/44	28/52	43/75	41/116
Water connections											
Type				Female gas threaded	Female gas threaded	Female gas threaded	Female gas threaded	Female gas threaded	Female gas threaded	Female gas threaded	Female gas threaded
2-pipe		Inch		1/2	1/2	1/2	1/2	1/2	1/2	3/4	3/4
4-pipe	Cooling	Inch		1/2	1/2	1/2	1/2	1/2	1/2	3/4	3/4
	Heating	Inch		1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2
Dimensions and weight											
Dimensions	H x W x D	mm		477 x 225 x 766	766 x 225 x 477	477 x 225 x 951	477 x 225 x 1136	477 x 225 x 1321	477 x 225 x 1506	575 x 225 x 1319	575 x 225 x 1506
Weight	2 / 4-pipes	kg		19/20	19/20	22/23	27/29	30/32	35/37	35/37	47/49
2-pipe RRP		€		508	522	547	611	660	703	771	1,017
4-pipe RRP		€		537	542	570	638	691	739	813	1,070

1) According to Eurovent standard. Air: 27 °C DB / 19 °C WB. Water in/ out: 7 °C / 12 °C. 2) Air: 20 °C. Water in/out: 50 °C / 45 °C. 3) The sound pressure levels are based on (NR) characteristics of a room having volume of 100 m<sup>3</sup> with reverberation of 0.5 seconds.

Technical focus

- Cooling capacity from 0.5 to 9.6 kW
- Heating capacity from 0.6 to 13.6 kW
- Low energy consumption EC fan(s)

Main features and accessories

- 2 and 4-pipe configurations
- Left or right hand arrangements
- Ease of installation
- Very low acoustic levels
- 2 way or 3 way ON/OFF valves
- Auxiliary drain pan
- Air intake with removable grid
- G2 filter
- PAW-FC-SFS feet for floor-standing units

Operating limits

Entering water temperature	From 5 to 90 °C
Indoor air temperature	From 5 to 32 °C



## Fan coils - wall-mounted (AC)



Optional controller.  
Wired remote  
controller.  
PAW-FC-903TC



Optional controller.  
Advanced wired  
remote controller.  
PAW-FC-RC1



Infrared remote  
supplied with IR  
versions.  
IR Controller

2-pipe			PAW-FC2A-K007	PAW-FC2A-K009	PAW-FC2A-K018	PAW-FC2A-K022
			PAW-FC2A-K007IR	PAW-FC2A-K009IR	PAW-FC2A-K018IR	PAW-FC2A-K022IR
Total cooling capacity <sup>1)</sup>	Med/Hi	kW	1.3/1.7	1.7/2.4	3.0/3.5	3.1/3.9
Sensible capacity <sup>1)</sup>	Med/Hi	kW	1.0/1.2	1.3/1.9	2.3/2.7	2.5/3.1
Water flow	Med/Hi	l/h	231/287	291/418	508/609	535/669
Water pressure drop	Med/Hi	kPa	24.9/30.9	27.0/40.0	41.3/55.6	33.7/45.2
Heating capacity <sup>2)</sup>	Med/Hi	kW	1.7/2.0	2.0/2.7	3.2/4.0	3.7/4.4
<b>Sound levels</b>						
Sound power level	Lo/Med/Hi	dB(A)	45/49/51	47/52/57	49/53/56	53/57/63
Sound pressure level <sup>3)</sup>	Lo/Med/Hi	dB(A)	30/33/35	32/36/40	39/41/43	39/43/48
<b>Fan</b>						
Number			1	1	1	1
Air flow	Med/Hi	m <sup>3</sup> /h	321/360	413/551	592/680	709/850
Filter			G1	G1	G1	G1
<b>Electrical data</b>						
Power supply	Voltage	V	230	230	230	230
	Phase		Single phase	Single phase	Single phase	Single phase
	Frequency	Hz	50	50	50	50
Fuse Rating		A	3	3	3	3
Power consumption	Med/Hi	W	42/62	47/59	50/55	55/70
<b>Water connections</b>						
Type			Female gas threaded	Female gas threaded	Female gas threaded	Female gas threaded
Connections		Inch	1/2	1/2	1/2	1/2
<b>Dimensions and weight</b>						
Dimensions	H x W x D	mm	275 x 180 x 845	275 x 180 x 845	298 x 200 x 940	298 x 200 x 940
Weight		kg	11	11	13	13
<b>RRP</b>		€	<b>405</b>	<b>448</b>	<b>503</b>	<b>546</b>
<b>RRP with IR Controller</b>		€	<b>448</b>	<b>486</b>	<b>536</b>	<b>585</b>

1) According to Eurovent standard. Air: 27 °C DB / 19 °C WB. Water in/out: 7 °C / 12 °C. 2) According to Eurovent standard. Air: 20 °C. Water in/out: 45 °C / 40 °C. 3) Sound pressure considering a local of 100 m<sup>3</sup> a reverberation time of 0.5 seconds and a distance of 1 m.

### Technical focus

- 4 sizes
- Cooling capacity from 1.0 to 3.9 kW
- Heating capacity from 1.4 to 4.1 kW
- Version: 2-pipes, AC fan

### Main features and accessories

- 2 way or 3 way valve ON/OFF
- 3-speed AC fan motor
- Silent unit for optimum customer comfort
- Aesthetic design suitable for residential and hotel applications
- Compatible with IR controller (supplied with IR versions)
- Coil with hydrophilic fins to improve the condensate flow


### Operating limits

Entering water temperature	From 5 to 60 °C
Indoor air temperature	From 6 to 40 °C





## Smart fan coils



Built-in advanced thermostat.

			PAW-AAIR-200-2	PAW-AAIR-700-2	PAW-AAIR-900-2
Total cooling capacity	Lo/Med/Hi	W	0.2/0.3/0.6	0.8/1.0/1.2	1.2/1.5/1.7
Sensible cooling capacity	Lo/Med/Hi	W	0.2/0.3/0.5	0.6/0.9/1.1	1.1/1.4/1.6
Water flow	Lo/Med/Hi	kg/h	40.0/59.0/95.0	129.0/178.0/207.0	198.0/261.0/300.0
Water pressure drop	Lo/Med/Hi	kPa	0.4/2.0/2.9	1.0/2.0/2.0	6.0/9.0/12.0
Inlet water temperature		°C	10	10	10
Outlet water temperature		°C	15	15	15
Inlet air temperature		°C	27.0	27.0	27.0
Outlet air temperature	Lo/Med/Hi	°C	15.0/17.0/18.0	14.0/16.0/17.0	16.0/17.0/18.0
Relative humidity of inlet air		%	47	47	47
Total heating capacity	Lo/Med/Hi	W	0.2/0.5/0.6	0.7/1.0/1.2	0.9/1.4/1.7
Water flow	Lo/Med/Hi	kg/h	37.3/80.8/98.0	121.8/177.5/204.3	152.4/244.2/292.9
Water pressure drop	Lo/Med/Hi	kPa	0.4/2.0/2.9	0.3/0.8/1.0	0.5/1.6/2.2
Inlet water temperature		°C	35	35	35
Outlet water temperature		°C	30	30	30
Inlet air temperature		°C	19.0	19.0	19.0
Outlet air temperature	Lo/Med/Hi	°C	38.9/32.0/30.0	33.3/31.8/30.6	30.2/31.1/30.6
Air flow	Lo/Med/Hi	m <sup>3</sup> /min	0.9/1.9/2.7	2.6/4.2/5.3	4.1/6.1/7.7
Maximum input power	Lo/Med/Hi	W	7.0/9.0/13.0	14.0/18.0/22.0	16.0/20.0/24.0
Sound pressure	Lo/Med/Hi	dB(A)	23/33/40	24/36/42	25/36/44
Dimension (HxWxD)		mm	735x579x129	935x579x129	1135x579x129
Net weight		kg	17	20	23
3 Ways valve included			Yes	Yes	Yes
Touch screen thermostat			Yes	Yes	Yes
RRP		€	682	741	885

Accessories	RRP €
PAW-AAIR-LEGS-1 Kits of 2 legs to protect the water pipings	53

Accessories	RRP €
PAW-AAIR-RHCABLE Motor connection cable for units with hydraulic connections on the right	24

\* Smart fan coils is produced by Innova.


### Stylish floor-standing fan coils with advanced controller

The slimline of Smart fan coils delivers high efficiency climate control.

With a depth of just under 13cm they are at the cutting edge of the market. Blending easily into the home, Smart fan coil's elegant design and product refinements are clear to see in every detail.


Exceptional ventilation efficiency means the motor uses considerably less energy (low wattage). The fan speed is continuously modulated by the temperature controller with proportional integral logic, with undoubted advantages for regulating the temperature and humidity in summer mode.

With standard cast radiators.



Water at 65 °C needed.

With Smart fan coil.



Water at 35 °C needed.

### Technical focus

- 4 operation modes (auto, silent, night-time and maximum ventilation speed)
- Exclusive design
- Extremely compact (only 12.9cm deep)
- Cooling and dehumidification functions possible (drain is needed)
- 3-way valve included (no overflow valve needed on the

- installation if more than 3 units installed)
- Touch screen thermostat

All temperature curves and capacity are available on [www.panasonicproclub.com](http://www.panasonicproclub.com)

# Wired controllers for AC and EC fan coils

## Advanced wired remote controller (AC)



### PAW-FC-RC1

This advanced controller provides a higher level of comfort in heating. The sensor can be used as a water flow sensor, stopping the fan when the water temperature is low, avoiding cold drafts in winter.

### Features:

- For 2-pipe and 4-pipe, AC fan
- Change Over function (cold draft prevention)
- Room thermostat
- 3 outputs, 230 V relays for fan control
- 2 outputs, 230 V relays for heating / cooling control
- Connection to BMS - Modbus RTU slave
- 1 DI for presence detection (key card switch)
- 1 AI for sensor

## Wired remote controller (EC)



### PAW-FC-907TC

Stylish and sophisticated design with backlit LCD display, is suitable for installation within a wide variety of locations such as office, hotel and residential applications. By connecting the controller to the range of EC fan coils, the user can take advantage of the improved performance, higher levels of efficiency and thus improved energy savings.

### Features:

- For 2-pipe and 4-pipe, EC fan
- Back lit LCD screen with touch control
- Adjustable range EC fan control
- Economiser
- Connection to BMS via Modbus
- 1 DI for presence detection (key card switch)

## Wired remote controller (AC)



### PAW-FC-903TC

Feature rich and perfectly adapted to control AC fan coils, the PAW-FC-903TC is the ideal addition for any fan coil. With intuitive user interface provided by the push button control and large LCD display, it will fit seamlessly with almost any location.

### Features:

- For 2-pipe, AC fan
- Back lit LCD screen
- 3 speed control relay, for fan
- Economizer

## Built-in controller for Floor-standing (AC)







### PAW-FC-RCFS

Built-in basic controller fan floor-standing units , for 2-pipe and 4-pipe, AC fan.



# Fan coil accessories

## Remote controllers

			
<b>Wired remote controller for fan coil.</b>	<b>Advanced wired remote controller for fan coil.</b>	<b>Optional wired remote controller for EC fan.</b>	<b>Built-in controller for Floor-standing (AC).</b>
PAW-FC-903TC 85 €	PAW-FC-RC1 96 €	PAW-FC-907TC 252 €	PAW-FC-RCFS 110 €

## Fan coil ceiling, floor-standing and ducted valve accessories

<b>2 way valve + drain pan for 2-pipe ceiling, floor-standing and ducted models 010-060.</b>	<b>2 way valve + drain pan for 2-pipe ceiling, floor-standing and ducted models 070-080.</b>	<b>2 way valve + drain pan for 2-pipe ducted model F040.</b>
PAW-FC-2WY-11/55-1 67 €	PAW-FC-2WY-65/90-1 76 €	PAW-FC-2WY-F040 86 €
<b>3 way valve + drain pan for 2-pipe ceiling, floor-standing and ducted models 010-060.</b>	<b>3 way valve + drain pan for 2-pipe ceiling, floor-standing and ducted models and 070-080.</b>	<b>3 way valve + drain pan for 2-pipe ducted model F040.</b>
PAW-FC-3WY-11/55-1 97 €	PAW-FC-3WY-65/90-1 111 €	PAW-FC-3WY-F040 141 €
<b>2 way valve + drain pan for 4-pipe ceiling, floor-standing and ducted models 010-060.</b>	<b>2 way valve + drain pan for 4-pipe ceiling, floor-standing and ducted models 070-080.</b>	<b>2 way valve + drain pan for 4-pipe ducted model F040.</b>
PAW-FC4-2WY-010 118 €	PAW-FC4-2WY-070 128 €	PAW-FC4-2WY-F040 151 €
<b>3 way valve + drain pan for 4-pipe ducted, ceiling and floor-standing model 010.</b>	<b>3 way valve + drain pan for 4-pipe ceiling, floor-standing and ducted models 020-060.</b>	<b>3 way valve + drain pan for 4-pipe ceiling, floor-standing and ducted models 070-080.</b>
PAW-FC4-3WY-010 192 €	PAW-FC4-3WY-020 192 €	PAW-FC4-3WY-070 235 €
<b>3 way valve + drain pan for 4-pipe ducted model F040</b>		
PAW-FC4-3WY-F040 267 €		

## Fan coil high static ducted valve accessories

<b>2 way valve + drain pan for 2-pipe high static ducted models E070.</b>	<b>2 way valve + drain pan for 2-pipe high static ducted models E150-E180.</b>	<b>2 way valve + drain pan for 2-pipe high static ducted models E210-E240.</b>
PAW-FC2-2WY-E070 165 €	PAW-FC-2WY-150 166 €	PAW-FC2-2WY-E210 235 €
<b>3 way valve + drain pan for 2-pipe high static ducted models E070.</b>	<b>3 way valve + drain pan for 2-pipe high static ducted models E150-E180.</b>	<b>3 way valve + drain pan for 2-pipe high static ducted models E210-E240.</b>
PAW-FC2-3WY-E070 293 €	PAW-FC-3WY-150 293 €	PAW-FC2-3WY-E210 368 €
<b>2 way valve + drain pan for 4-pipe high static ducted model E070.</b>	<b>2 way valve + drain pan for 4-pipe high static ducted models E150-E180.</b>	<b>2 way valve + drain pan for 4-pipe high static ducted models E210-E240.</b>
PAW-FC4-2WY-E070 236 €	PAW-FC4-2WY-E150 244 €	PAW-FC4-2WY-E210 297 €
<b>3 way valve + drain pan for 4-pipe high static ducted model E070.</b>	<b>3 way valve + drain pan for 4-pipe high static ducted models E150-E180.</b>	<b>3 way valve + drain pan for 4-pipe high static ducted models E210-E240.</b>
PAW-FC4-3WY-E070 404 €	PAW-FC4-3WY-E150 404 €	PAW-FC4-3WY-E210 463 €

## Fan coil cassette valve accessories

<b>2 way valve + drain pan for 2-pipe cassette models U020-U040.</b>	<b>2 way valve + drain pan for 2-pipe cassette models U050-U070.</b>	<b>3 way valve + drain pan for 2-pipe cassette models U020-U040.</b>	<b>3 way valve + drain pan for 2-pipe cassette models U050-U070.</b>
PAW-FC2-2WY-U020 191 €	PAW-FC2-2WY-U050 191 €	PAW-FC2-3WY-U020 191 €	PAW-FC2-3WY-U050 191 €
<b>2 way valve + drain pan for 4-pipe cassette models U020-U040.</b>	<b>2 way valve + drain pan for 4-pipe cassette models U050-U070.</b>	<b>3 way valve + drain pan for 4-pipe cassette models U020-U040.</b>	<b>3 way valve + drain pan for 4-pipe cassette models U050-U070.</b>
PAW-FC4-2WY-U020 319 €	PAW-FC4-2WY-U050 319 €	PAW-FC4-3WY-U020 319 €	PAW-FC4-3WY-U050 319 €

## Fan coil wall-mounted valve accessories

<b>2 way valve + drain pan for 2-pipe wall-mounted K007-K022.</b>	<b>3 way valve + drain pan for 2-pipe wall-mounted k007-K022.</b>
PAW-FC2-2WY-K007 78 €	PAW-FC2-3WY-K007 126 €





## Panasonic condensing units with natural refrigerant

Panasonic's CR Series of CO<sub>2</sub> condensing units provide the ideal solution for supermarkets, convenience stores and gas stations.

Keeping food always fresh at right temperature in showcases or cold rooms is a very critical point.

And one of the biggest challenges for those retailers has been the expensive effects of refrigeration breakdowns which can result in costly product wastage.

Choose the green solution by Panasonic → 218

CO<sub>2</sub> Condensing units → 219



# Choose the green solution by Panasonic

## Why CO<sub>2</sub>?: Natural refrigerant

EU F-Gas Regulation is a key priority for European countries. It ensures compliance with the Kigali Amendment supporting international climate commitments on greenhouse gases and leading the global transition to climate-friendly HFC-free technologies. Carbon dioxide (R-744) is regaining its place in the refrigeration world. Driven by environmental concerns, legislation is requiring increased adoption of 'alternative' refrigerants, of which CO<sub>2</sub> is one.

The following table shows how well R744 (CO<sub>2</sub>) performs regarding environmental impact and safety.

ODP (Ozone Depletion Potential) = 0 - GWP (Global Warming Potential) = 1					
	Next generation refrigerant			Current refrigerant	
	CO <sub>2</sub>	Ammonia	Isobutane	R410A	R404A
ODP	0	0	0	0	0
GWP	1	0	4	2090	3920
Flammability	Non flammable	Light flammable	Flammable	Non flammable	Non flammable
Toxicity	No	Yes	No	No	No

## CO<sub>2</sub> transcritical condensing units CR Series

- Set-points at medium or low temperature available depending on applications
- High COP at high ambient temperature thanks to Panasonic's 2-stage compression CO<sub>2</sub> rotary compressor
- Compact and extremely quiet
- Transfer pressure control for stable expansion valve control in showcases (1000VF8 and 1000VF8A models only)

\* SEPR values has been tested at 3-part laboratory.

CR Series	Low temperature	Medium temperature	ET (Evaporation Temperature) Set points range
OCU-CR200VF5	✓	✓	-45 ~ -5 °C
OCU-CR400VF8	—	✓	-20 ~ -5 °C
OCU-CR1000VF8	—	✓	-20 ~ -5 °C
OCU-CR1000VF8A	✓	✓	-45 ~ -5 °C

## 16 kW MT/LT Type (1000VF8A)

### Both MT and LT options.

Maximum cooling capacity.

MT: Up to 16 kW.

LT: Up to 8 kW.

### Flexible installation.

- Maximum piping length: 100 m
- High external static pressure: 58Pa
- Up scales tank 12 L

This 12 L tank keeps inside extra amount of refrigerant when the system stops.

Also helping installers by making wider tolerance from optimum charge.

## Modbus compatible with monitoring system

Panasonic CO<sub>2</sub> condensing unit CR Series can be supervised by major monitoring system such as CAREL, Eliwell and Danfoss. Monitoring system ensures the recording, monitoring and reporting of temperature conditions etc... of entire CO<sub>2</sub> condensing units system at shops.

MT/LT TYPE  
200VF5  
4 kW / 2 kW


MT TYPE  
400VF8  
7,5 kW

MT TYPE  
1000VF8 - 15 kW

MT/LT TYPE  
1000VF8A  
16 kW / 8 kW


**3,83**  
SEPR COOLING\*

**1,92**  
SEPR FREEZING\*




930 mm

900 mm




948 mm

1143 mm



## Saving installation time with Plug & Play kit

To ensure a quick and easy install of the product, Panasonic has designed a one box solution that includes the condensing unit, a panel pre-programmed controller, electronic expansion and all required sensors in addition to providing easy to understand instructions.



**Plug & Play kit**

Electronic expansion for superheat control.

Intelligent controller programmed specially for storage rooms and showcases.

**Model code: PAW-CO2-PANEL**

## Monitoring system



Standard boss & boss-mini



AK-SM Series



TelevisGo

## CO<sub>2</sub> Condensing units

Please contact Panasonic for RRP.




Standard model			OCU-CR200VF5	OCU-CR400VF8	OCU-CR1000VF8	OCU-CR1000VF8A
PRV inclusive model			OCU-CR200VF5-PRV	OCU-CR400VF8-PRV	OCU-CR1000VF8-PRV	OCU-CR1000VF8A-PRV
Anti corrosion coating model			OCU-CR200VF5-SL	OCU-CR400VF8-SL	OCU-CR1000VF8-SL	OCU-CR1000VF8A-SL
Type (MT: medium temp. LT: low temp.)			MT (4 kW) / LT (2 kW)	MT (7,5 kW)	MT (15 kW)	MT(16 kW) / LT (8 kW)
Power supply	Voltage	V	220/230/240	380/400/415	380/400/415	380/400/415
	Phase		Single phase	Three phase	Three phase	Three phase
	Frequency	Hz	50	50	50	50
Cooling capacity at ET -10 °C AT 32 °C		kW	3,70	7,10	14,00	15,10
Cooling capacity at ET -35 °C AT 32 °C		kW	1,80	—	—	8,00
Evaporator connection			Multiple	Multiple	Multiple	Multiple
Evaporation temperature	Min ~ Max	°C	-45 ~ -5	-20 ~ -5	-20 ~ -5	-45 ~ -5
Ambient temperature	Min ~ Max	°C	-15 ~ +43	-15 ~ +43	-15 ~ +43	-15 ~ +43
Refrigerant			R744	R744	R744	R744
Design pressure liquid line		Mpa	12	8	8	8
Design pressure suction line		Mpa	8	8	8	8
User system external alarm. Digital input. Non-voltage contact			Yes	Yes	Yes	Yes
Liquid tube electromagnetic valve		Vac	220/230/240	380/400/415	220/230/240	220/230/240
Showcase operation ON/OFF signal. Digital input. Non-voltage contact			Yes	Yes	Yes	Yes
Modbus communication line (RS485)		Ports	2	2	2	2
Compressor type			2- stage rotary	2- stage rotary	2- stage rotary	2- stage rotary
Dimension		H x W x D	mm 930 x 900 x 437	948 x 1143 x 609	1941 x 890 x 890	1941 x 890 x 890
Net weight		Kg	70	136	293	320
Pipe diameter	Suction pipe	Inch (mm)	3/8 (9,52)	1/2 (12,70)	3/4 (19,05)	3/4 (19,05)
	Liquid pipe	Inch (mm)	1/4 (6,35)	3/8 (9,52)	5/8 (15,88)	5/8 (15,88)
Length of connection piping		m	25	50	100 <sup>1)</sup>	100 <sup>1)</sup>
Standard performance	Ambient temperature	°C	32	32	32	32
	Evaporating temperature	°C	-10	-35	-10	-10
	Cooling capacity	kW	3,70	1,80	7,10	14,00
	Power consumption	kW	1,79	1,65	4,00	8,20
	Nominal load ampere	A	7,94	7,26	6,14	12,60
	Sound pressure level	dB(A)	35,5 <sup>2)</sup>	35,5 <sup>2)</sup>	33 <sup>3)</sup>	36,0 <sup>4)</sup>
PED		CAT	I	II	II	II
Air flow		m <sup>3</sup> /min	54	59	220	220
External static pressure		Pa	17	50	58	58
Heat recovery port			—	Yes	—	Yes
<b>Necessary accessories</b>						
Drier filter liquid line, diameter 6,35 mm		<b>D-152T</b>	Yes (included: delivered with the unit)	Yes (included: delivered with the unit)	—	—
Drier filter liquid line, diameter 15,88 mm		<b>D-155T</b>	—	—	Yes (included: delivered with the unit)	Yes (included: delivered with the unit)
Suction filter, diameter 19,05 mm (outer diameter welding)		<b>S-008T</b>	—	Yes (included: delivered with the unit)	Yes (included: delivered with the unit)	Yes (included: delivered with the unit)












Accessories	
<b>PAW-CO2-PANEL</b>	Room and superheat control including both panel + expansion valve
<b>SPK-TU125</b>	Tube connector adaptor for vacuum and service
<b>CZ-CO2LBR0500</b>	Lubrication oil PZ-68S (0,5 L)


Spare parts for service and maintenance	
<b>80203517115003</b>	Lubrication oil PZ-68S (4 L)
<b>80203513180000</b>	Filter dryer D-152T (type CO-082-S)
<b>80203513179000</b>	Filter dryer D-155T (type CO-085-S)


1) PZ-68S (refrigeration oil) must be added if >50 m. 2) ET-10 °C, 65 S-1, 10 m from product. 3) ET-10 °C, 80 S-1, 10 m from product. 4) ET -10 °C, 60 S-1, 10 m from product.





## Energy saving


-  Refrigerant gas R32 Our heat pumps containing the refrigerant R32 show a drastic reduction in the value of Global Warming Potential (GWP).
-  Better efficiency and Value for medium temperature applications. Energy efficiency class up to A++ in a scale from A+++ to D.
-  Better efficiency and Value for low temperature applications. Energy efficiency class up to A+++ in a scale from A+++ to D.
-  Exceptional Seasonal Cooling Efficiency based on the new ErP regulation. Higher SEER ratings mean greater efficiency - year-round cooling savings!
-  Exceptional Seasonal Heating Efficiency based on the new ErP regulation. Higher SCOP ratings mean greater efficiency - year-round heating savings!
-  Domestic Econavi. Sunlight Sensor technology can detect and reduce the waste of energy by optimising air conditioner operation according to room conditions. With just one touch of a button, you can save energy.
-  Commercial Econavi. Intelligent Human Activity Sensor and new Sunlight Sensor technologies that can detect and reduces the waste of energy by optimising air conditioner operation according to room conditions. With just one touch of a button, you can save energy.
-  Inverter Plus System classification highlights Panasonic's highest performing systems.
-  Inverter. The Inverter range provides greater efficiency and comfort. Provides more precise temperature control, without highs and lows, and keeps the ambient temperature constant with lower energy consumption and a significant reduction in noise and vibration levels.
-  Panasonic R2 Rotary Compressor. Designed to withstand extreme conditions, it delivers high performance and efficiency.
-  High efficiency compressor. Compressors that operate with a wider Hz range realize a more efficient operation throughout the year. For Big PACi Series.


 All inverter compressors. Multiple large-capacity all inverter compressors (more than 14 HP). Two independently controlled inverter compressors achieve high efficiency. Redesigned components in the body provide performance improvement especially in the rated cooling condition and EER performance.


 High efficiency models performs higher COP than standard units and standard combinations.


 ECO G technology offers the best in energy efficiency. ECO G gas VRF is specially designed for buildings where the electricity is restricted or CO<sub>2</sub> emissions must be reduced.

 Natural CO<sub>2</sub> / R744. R744 refrigerant provides higher energy saving and lower CO<sub>2</sub> emission compared to R404A. Zero ODP and GWP=1 means natural substance.


 High seasonal efficiency in cooling mode. SEER follows COMMISSION REGULATION (EU) No 2016/2281.


 High seasonal efficiency in heating mode. SCOP follows COMMISSION REGULATION (EU) No 813/2013.


 ECOi-W Series are compliant with ErP regulation. SEER follows COMMISSION REGULATION (EU) No 2016/2281. SCOP follows COMMISSION REGULATION (EU) No 813/2013.


 EC motor green ventilation. Range of fan coil with improved efficiency with optional EC fan motor.


## High performance and indoor air quality


 nanoe™ X. Technology with the benefits of hydroxyl radicals has the capacity to inhibit pollutants, viruses, and bacteria to clean and deodorise.


 PM2,5 filter. Particulate matter (PM2,5) can be found suspended in the air, including dust, dirt, smoke and liquid droplets. This filter can catch PM2,5 particles including hazardous pollutants as well as house dust and pollen.


 Dust Collection Filter. This filter collects and retains particles suspended in the air, resulting in cleaner air in the room.


 Super Quiet. With Super Quiet technology our devices are quieter than a library (30 dB(A)).


 Super quiet. Extra quiet operation is available as standard (with sizes 20 - 40, 140 - 210).


 Fine control helps prevent a rapid decrease in room humidity while maintaining the set temperature. Maintains an RH\* up to 10 % higher than cooling operation (\*RH: Relative Humidity). Ideal when sleeping with the air conditioner on.


 Mild Dry. By intermittent control of compressor and indoor unit's fan, "Mild Dry" gives you comfort. It realizes efficient dehumidification according to room temperature.


 More comfort with Aerowings. Direct air flow to the ceiling, creating a shower cooling effect with built-in twin flap.


 Static pressure up to 7 mmAq. Low static pressure hide-away RAC with selectable static pressure up to 7 mmAq.


 Filter included. Hide-away with filter included.


 Summer House. This innovative function keeps the house at 8/10 or 8/15 °C to avoid freezing pipes during the winter. This function is beneficial for summer or weekend homes.

 Bluefin. Panasonic has extended the life of its condensers with an original anti-rust coating.

 Large fan provides larger air flow rate and very quiet operation at low speed.

 DC fan: Safe and precise.

 Automatic fan operation. Convenient microprocessor control automatically adjusts fan speed to High, Medium or Low, corresponding to room sensor and maintains comfortable air flow throughout the room.

 Self-diagnosing function. By using electronic control valves past warnings are stored. This makes it easier to diagnose malfunctions, reducing service labour and therefore costs.



AUTO-FLAP CONTROL

Comfortable auto-flap control. When the unit is first turned on, flap position is automatically adjusted in accordance with the cooling or heating operation.



AUTOMATIC RESTART

Automatic restart. Automatic restart function for power failure. Even when power failure occurs, preset programmed operation can be reactivated once power is resumed.



AIR SWEEP

Air Sweep. The air sweep function moves the flap up and down in the air outlet, directing air in a "sweeping" motion around the room and providing comfort in every corner.



BUILT-IN DRAIN PUMP

Built-in drain pump. Maximum head 50cm (or 75cm for U type) from the bottom of the unit.



COOLING MODE

Down to -10 °C in cooling mode. The air conditioner works in cooling mode when the outdoor temperature of -10 °C.



HEATING MODE

Down to -15 °C in heating mode. The air conditioner works in heat pump mode when the outdoor temperature is as low as -15 °C.



OPERATION RANGE

-20 °C operation range. The PRO-HT Tanks work with an outdoor temperature is as low as -20 °C.



COOLING MODE

Cooling with outdoor temperature up to 52 °C. The ECOi EX system works in cooling mode with performance data at outdoor temperature up to 52 °C.



AMBIENT TEMPERATURE

Operation range up to 43 °C. The system operates up to 43 °C, allowing for installation in various locations.



ANTI CORROSION COATING

Anti corrosion coating. Selectable fin type with or without an anti corrosion coating. The anti corrosion coating prevents salt damage for a longer lifespan.



HEAT RECOVERY PORT

Heat recovery port. The heat recovery port is available to cut running costs as optional. By utilizing exhausted heat generated by refrigeration to the energy source for heating.



R22/R410A RENEWAL

R410A/R22 renewal. The Panasonic renewal system allows good quality existing R410A or R22 pipe work to be re-used whilst installing new high efficiency R32 systems.



R22 RENEWAL

R22 renewal. The Panasonic renewal system allows good quality existing R22 pipe work to be re-used whilst installing new high efficiency R410A systems.

## High connectivity



ADVANCED CONTROL

Advanced control. Remote controller with full dotted 3,5" wide back light screen. Menu with 17 available languages easy to use for installer and user. Included on J and H Generation.



INTEGRATION TO P-LINK

Domestic integration to P-Link - CZ-CAPRA1. Can connect RAC range to P-Link. Full control is now possible.



OPTIONAL WI-FI

Internet control. A next generation system providing user-friendly remote control of air conditioning or heat pump units from everywhere, using a simple Android™ or iOS smartphone, tablet or PC via the internet.



BMS CONNECTIVITY

Connectivity. The communication port can be integrated into the indoor unit and provides easy connection to, and control of, your Panasonic heat pump to your home or building management system.



PANASONIC AC SMART CLOUD

Panasonic AC Smart Cloud. The AC Smart Cloud from Panasonic allows you to have complete control of all your installations. In a simple click, receive status updates from all your units in real-time, preventing breakdowns and optimizing costs.



MCS Certificate number: MCS HP0086\*.  
Keymark: Check all our certified heat pumps on: [www.heatpumpkeymark.com](http://www.heatpumpkeymark.com).

\* Not all products certified. As the certification process is on-going and the list of certified products constantly changing, please check for latest details on the official websites.

## PACi Fault Codes

Alarm Code	Alarm Meaning
E01	Remote Controller Reception Error
E02	Remote Controller Transmission Error
E03	Error in Indoor Unit Receiving Signal from Remote Controller (central)
E04	Error in Indoor Unit Receiving Signal from the Outdoor Unit
E05	Error in Indoor Unit Transmitting Signal to the Outdoor Unit
E06	Outdoor Unit Failed to Receive Serial Communication Signals from Indoor Unit
E08	Duplicate Indoor Unit Address Settings Error
E09	More Than One Remote Controller Set to Main Error
E12	Automatic Address Setting Start is Prohibited while Auto-address Setting in Progress.
E14	Main Unit duplication in Simultaneous-operation Multi Control (detected outdoor unit)
E15	Automatic Address Alarm (The total capacity of indoor units is too low.)
E16	Automatic Address Alarm (The total capacity of indoor units is too high or the number of indoor units is two or more.)
E18	Faulty Communication in Group Control Wiring
E20	Connection Problem of Indoor/Outdoor Units.
F04	Compressor Discharge Temperature Sensor (TD) Trouble
F06	Inlet Temperature Sensor (C1) in Heat Exchanger Trouble
F07	Intermediate Temperature Sensor (C2) in Heat Exchanger Trouble
F08	Outdoor Air Temperature Sensor (T0) Trouble
F12	Compressor Inlet Suction Temperature Sensor (TS) Trouble
F31	Outdoor Unit Nonvolatile Memory (EEPROM) Trouble
H01	Primary (input) Overcurrent Detected
H02	PAM Trouble
H03	Primary Current CT Sensor (current sensor) Failure
H31	HIC Trouble
L04	Outdoor Unit Address Duplication
L10	Outdoor Unit Capacity not Set or Invalid
L13	Indoor Unit Type Setting Error
L18	4-way Valve Operation Failure
P03	Compressor Discharge Temperature Trouble
P04	High Pressure Trouble
P05	AC Power Supply Trouble
P13	Alarm Valve Open
P14	O2 Sensor Detect
P15	Insufficient Gas Level Detected
P16	Compressor Overcurrent Trouble
P22	Outdoor Unit Fan Motor Trouble
P29	Lack of INV compressor wiring, INV compressor actuation failure (including locked), DCCT failure
P31	Group Control Error

### ECOi 3 Pipe Fault Codes


Alarm Code	Alarm Meaning
E01	"Error in receiving serial communication signal. (Signal from main indoor unit in case of group control) Ex: Auto address is not completed."
E02	Error in transmitting serial communication signal.
E03	Indoor unit is detecting error signal from remote controller (and system controller).
E04	"Error in receiving serial communication signal. When turning on the power supply, the number of connected indoor units does not correspond to the number set. (Except R.C. address is "0.")"
E06	Error of the main outdoor unit in receiving serial communication signal from the indoor unit.
E08	Indoor unit address setting is duplicated.
E09	Remote controller address connector (RCU. ADR) is duplicated. (Duplication of main remote controller)
E12	"Starting auto address setting is prohibited. This alarm message shows that the auto address connector CN30 is shorted while other RC line is executing auto address operation."
E18	Error of main indoor unit in receiving serial communication signal from sub indoor units.
E15	Error in auto address setting. (Number of connected indoor units is less than the number set.)
E16	Error in auto address setting. (Number of connected indoor units is more than the number set.)
E20	No indoor unit is connected during auto address setting.
E24	Main outdoor unit is detecting error signal from sub outdoor unit.
E25	Error of outdoor unit address setting.
E26	The number of connected main and sub outdoor units do not correspond to the number set at main outdoor unit PCB.
E27	Improper wiring between main outdoor unit and sub-unit.
E29	Error of sub outdoor unit in receiving serial communication signal from main outdoor unit.
E30	Serial transmission failure of outdoor unit.
E31	Communication failure with MDC
L02	This alarm message shows when an indoor unit for multiple-use is not connected to the outdoor unit.
L03	Duplication of main indoor unit address setting in group control.
L05	Duplicated indoor unit priority (priority indoor unit).
L06	Duplicated indoor unit priority (non-priority indoor unit) and outdoor unit.
L07	Group control wiring is connected to individual control indoor unit.
L08	Indoor unit address is not set.
L09	Capacity code of indoor unit is not set.
L04	Duplication of outdoor R.C. address setting.
L10	Capacity code of outdoor unit is not set.
L11	Incorrect wiring of remote group control wiring (in case of shared solenoid valve kit)
L17	Mis-matched connection of outdoor units that have different kinds of refrigerant.
F01	Indoor coil temp. sensor (E1)
F02	Indoor coil temp. sensor (E2)
F03	Indoor coil temp. sensor (E3)
F10	Indoor suction air (room) temp. sensor (TA)
F11	Indoor discharge air temp. sensor (BL)
F04	Comp. No. 1 discharge gas temp. sensor (DISCH1)
F05	Comp. No. 2 discharge gas temp. sensor (DISCH2)
F06	Outdoor No. 1 coil gas temp. sensor (EXG1)

## ECOi 3 Pipe Fault Codes

Alarm Code	Alarm Meaning
F07	Outdoor No. 1 coil liquid temp. sensor (EXL1)
F08	Outdoor air temp. sensor (TO)
F12	Compressor intake temperature sensor (SCT)
F14	Temp. sensor at refrigerant gas outlet of dual-tube (SCG)
F16	High pressure sensor failure. High pressure trouble.
F17	Low-pressure sensor failure
F23	Outdoor No. 2 coil gas temp. sensor (EXG2)
F24	Outdoor No. 2 coil liquid temp. sensor (EXL2)
P01	Thermal protector in indoor unit fan motor is activated.
P09	Improper wiring connections of ceiling panel.
P10	Float switch is activated.
P11	Faulty drain pump. Drain pump locked.
P12	Operation of protective function of fan inverter.
P14	O2 sensor (detects low oxygen level) activated
P02	Compressor thermal protector is activated. Power supply voltage is unusual. (The voltage is more than 260 V or less than 160 V between L and N phase.)
P03	Incorrect discharge temperature. (Comp. No. 1)
P04	High pressure switch is activated.
P05	Negative (defective) phase.
P16	DCCT overcurrent
P17	Incorrect discharge temperature. (Comp. No. 2)
P22	Outdoor unit fan motor is unusual.
P29	Inverter for compressor is unusual. (DC compressor does not operate.)
P31	When alarm message in other indoor units occurs in case of group control, unalarmed state of indoor units are inoperative.
F29	EEPROM on indoor unit PCB failure
F31	EEPROM on the main or sub outdoor unit PCB has failed.
H01	Compressor No. 1 current trouble (overcurrent)
H03	Current is not detected when comp. No. 1 is ON.
H05	Compressor No. 1 discharge temp. sensor disconnected
H11	Compressor No. 2 current trouble (overcurrent)
H12	Compressor No. 2 current trouble (locked)
H13	Compressor No. 2 CT sensor disconnected or short circuit
H15	Compressor No. 2 discharge temp. sensor disconnected
H06	Low pressure switch is activated.
H08	Comp. No. 1 oil sensor
H27	Comp. No. 2 oil sensor
H31	IPM trip (IPM current or temperature)




## Notes

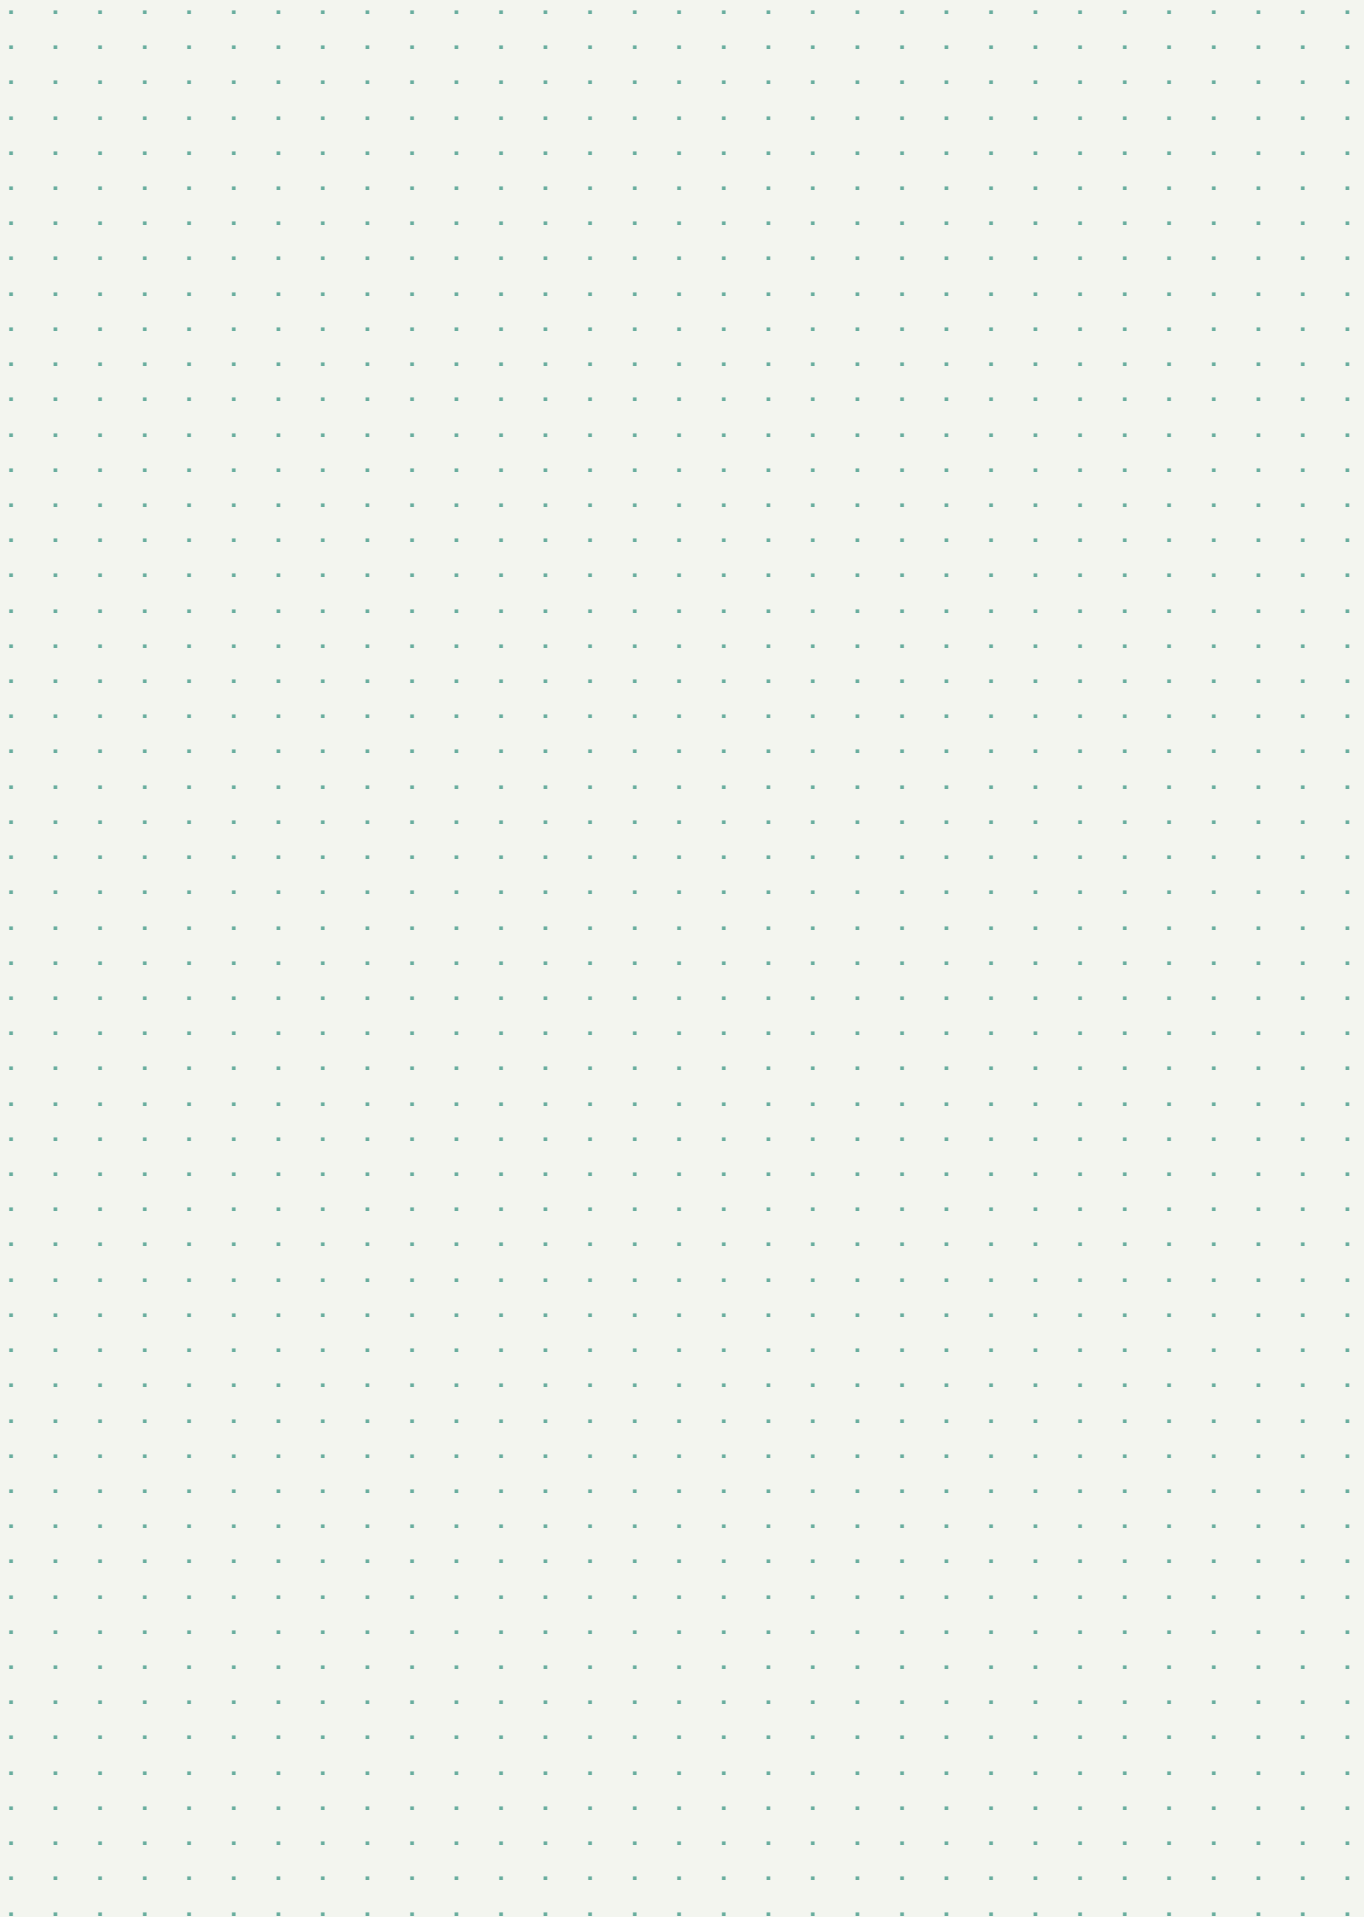

# Notes

A large grid of small dots for taking notes, consisting of 20 columns and 30 rows.

## Notes

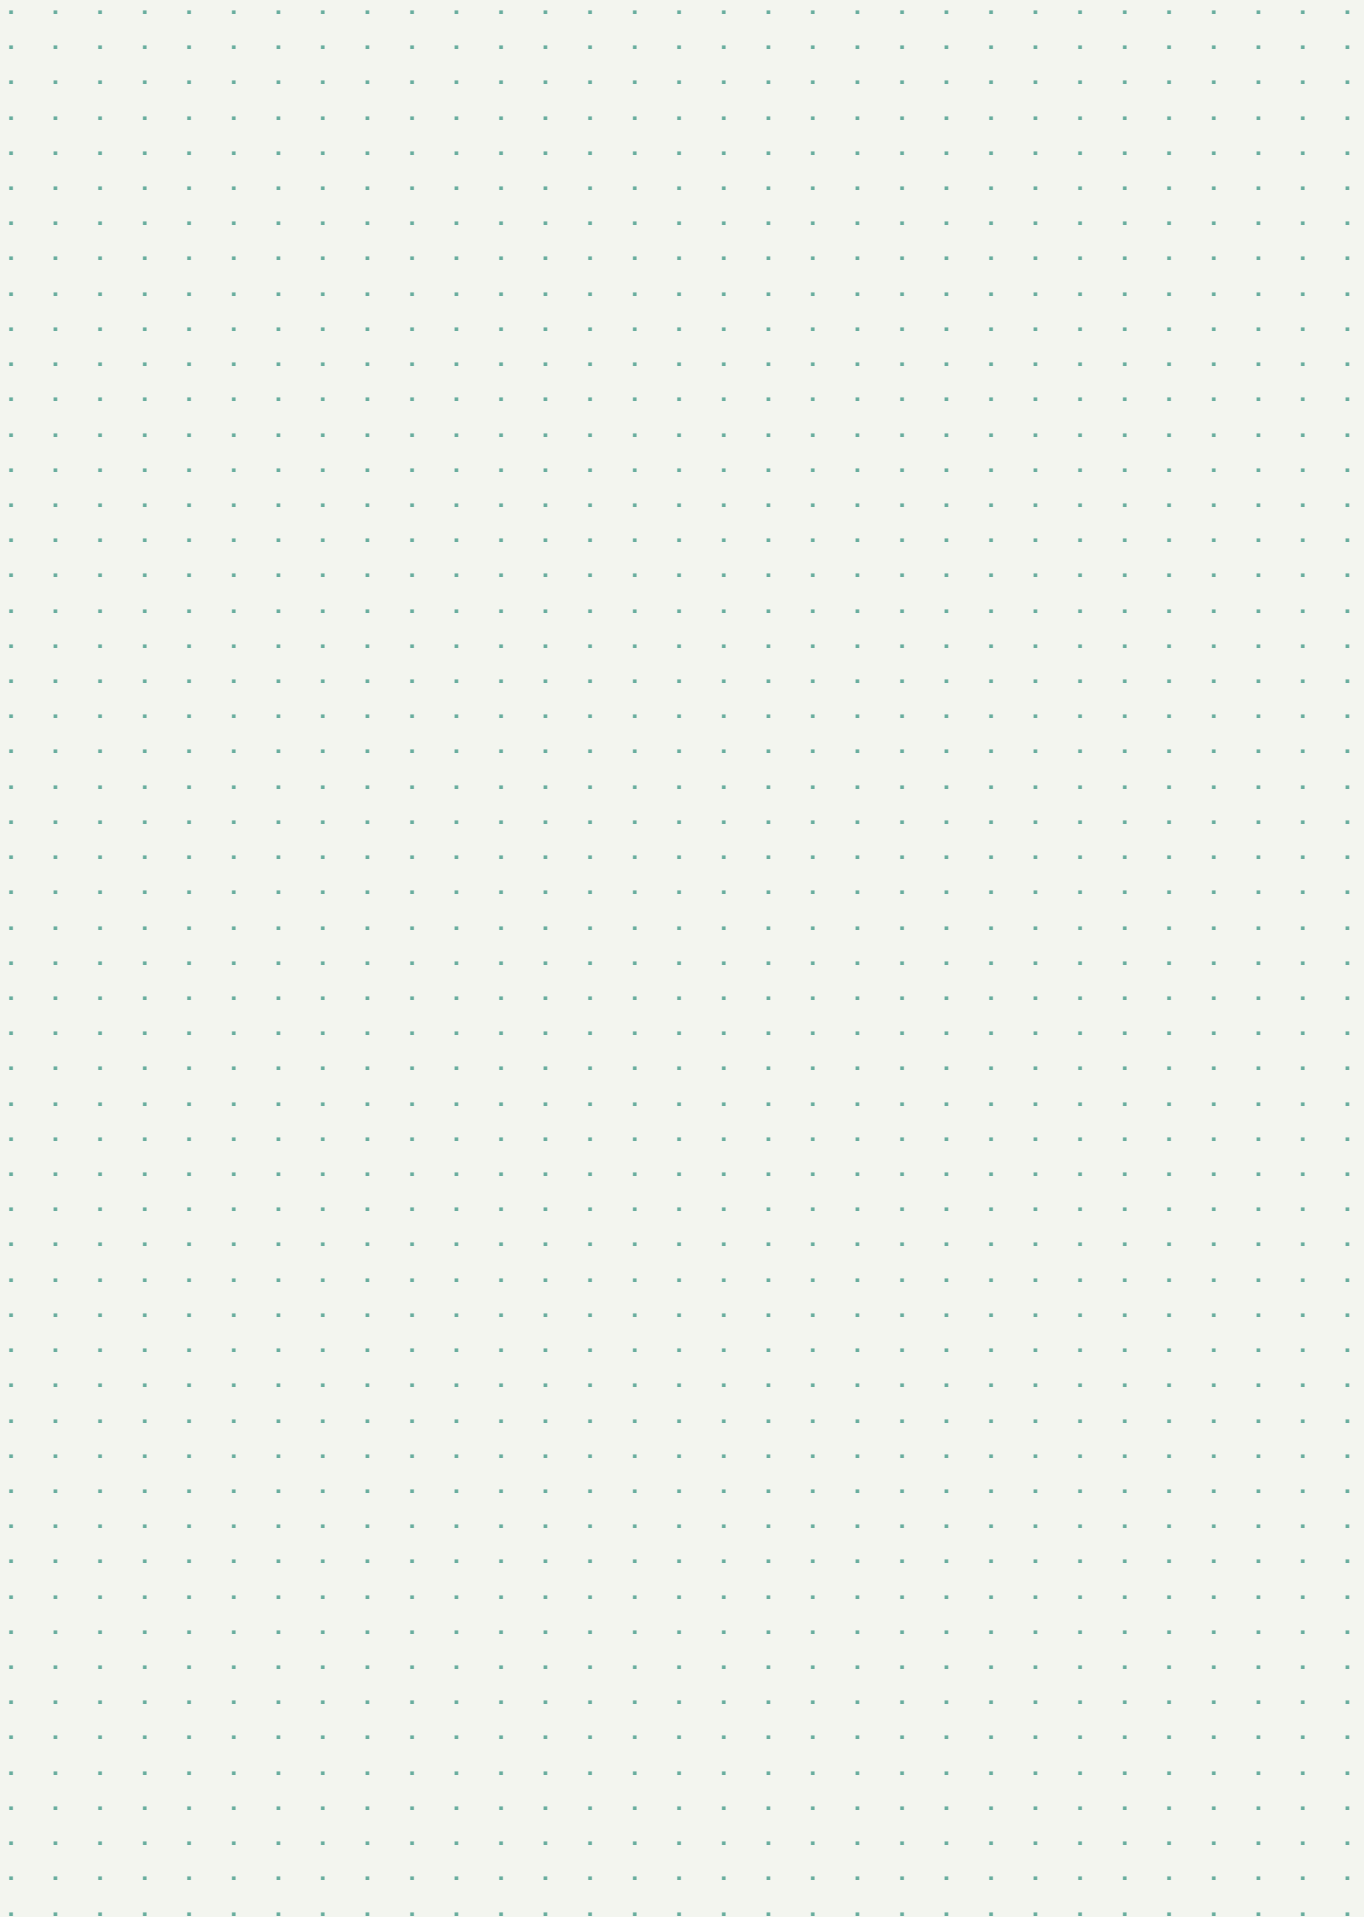





[www.aircon.panasonic.eu](http://www.aircon.panasonic.eu)

heating & cooling solutions

Due to the ongoing innovation of our products, the specifications of this catalogue are valid barring typographic errors, and may be subject to minor modifications by the manufacturer without prior warning in order to improve the product. The total or partial reproduction of this catalogue is prohibited without the express authorisation of Panasonic Marketing Europe GmbH.

# Panasonic®

To find out how Panasonic cares for you,  
log on to: [www.aircon.panasonic.eu/IE\\_en/](http://www.aircon.panasonic.eu/IE_en/)

+353 (0)1 4195313  
+353 (0) 876005031

Panasonic Ireland.  
A branch of Panasonic Marketing Europe GmbH  
Unit 1, The Courtyard, Kilcarbery Business Park  
Nangor Road, Dublin 22



Do not add or replace refrigerant other than the specified type. Manufacturer is not responsible for the damage and deterioration in safety due to usage of the other refrigerant.  
The outdoor units in this catalogue contains fluorinated greenhouse gases with a GWP higher than 150.

