



Adapts to your home

This Aquarea range is extremely flexible. Selecting from a wide range of capacities, from 3kW to 9kW, you can find lower initial investment and lower operational cost options. If you have a well insulated home, why install oversized equipment that will cost more and will have higher running costs?

The Aquarea range fully adapts the system to the needs of your home, whether it is a new build or a refurbishment. It is able to reach up to 60°C water outlet and allows a degree of flexibility in installation thanks to the large piping length of up to 50m between indoor and outdoor (see table each model limitations).



Energy saving means money savings

Aquarea is a smart choice for saving in heating.
Using Air to Water heat pump technology, Aquarea is highly efficient and environmentally friendly.
The heat pump is considered a 'green' choice as the heat energy is taken from the environment, making it a sustainable option. Aquarea units produce outstanding results. They are able to reach A+++ within the range of A+++ to D in heating and A+ in the range of A+ to F in domestic hot water, all leading to large savings in electricity bills.



More comfort

The Aquarea Heat Pump is able to precisely control the temperature thanks to reliable Panasonic Inverter Compressors. Even in adverse weather conditions (-20°C), Aquarea warms your home effectively and efficiently. Aquarea can also cool space in summer and bring hot water all year round, offering different modes to give the ultimate comfort.

Contributes to a decarbonised society

In European households, 79%* of energy consumption comes from heating and producing domestic hot water. By converting heat energy in the air into household warmth, highly efficient Aquarea technology helps reduce CO2 emissions and environmental impact, compared to conventional boilers and electric heaters.

Protecting the world of today means protecting the children of tomorrow. That's why we are committed to offering solutions that provide comfort and help us fulfil our responsibility to the environment.

^{*} ec.europa.eu/eurostat



Why Panasonic?


Panasonic has more than 60 years of Heat Pump experience, having produced an exceptional amount of compressors. Quality is what Panasonic stands for and this is a key factor for succeeding in the European market.

As a member of the European Heat Pump Association, the production of Aquarea in Europe and maintaining high security protocols in European servers for the Aquarea Smart Cloud, makes Panasonic a trusted heating partner.




Technology to save energy

Aquarea captures heat energy from the ambient air and transfers it to heat the water needed to warm your home for domestic hot water and even to cool the house if wished. This technology works even when outdoor temperatures are extremely low. With Aquarea up to 80% of the heat energy required is taken from the ambient air.

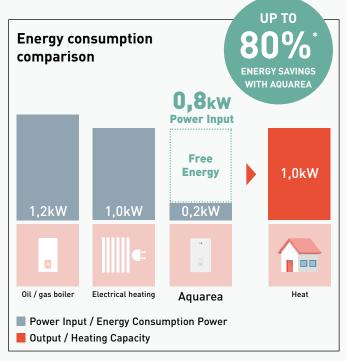

^{*} Rating conditions: Heating: Inside air temperature: 20°C Dry Bulb / Outside air temperature: 7°C Dry Bulb / 6°C Wet Bulb. Conditions: Water input temperature: 30°C Water output temperature: 35°C

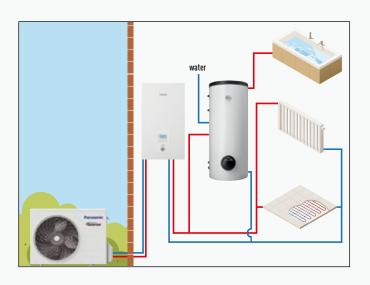

Technology for comfort

The Aquarea range provide you the maximum comfort at the lowest running costs. It is able to reach up to 60°C water outlet even in adverse weather conditions Aquarea can also cool space in summer and bring hot water all year round, offering different modes to give the ultimate comfort.



Panasonic created a night mode to reduce the noise when it's needed. Special attention has been given to noise levels.



Technology for the future

R32 Refrigerant Gas: A 'small' change that changes everything

Panasonic recommends R32 because it is a more environmentally friendly solution. Compared to R22 and R410A, R32 has a very low potential impact on the depletion of the ozone layer and global warming.

1. Installation innovation


• This refrigerant is 100% pure, which makes it easier to recycle and reuse

2. Environmental innovation

- · Zero impact on the ozone layer
- · 75% Less impact on global warming vs R410A

3. Economic and energy consumption innovation

- · Lower cost and greater savings
- · Higher energy efficiency than R410A

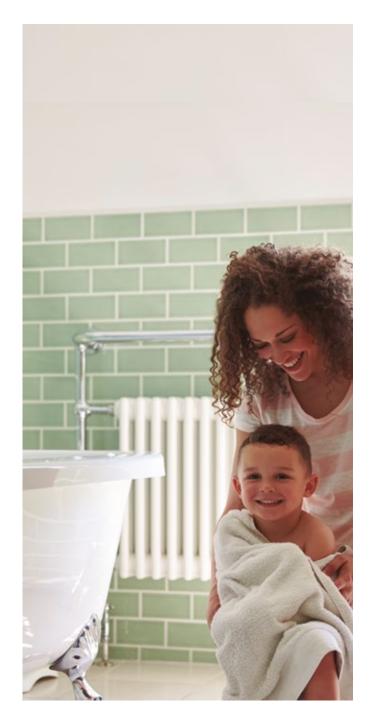



COMBINE AQUAREA BIBLOC WITH A HIGH EFFICIENCY TANK FOR HIGHER ENERGY SAVINGS.

Stainless Steel Tank.


Panasonic "A" Class Stainless Tank in capacities 192 and 280L. These models are anode free and do not require any maintenance.

Heat up domestic hot water for free with Aquarea + PV panels

Aquarea J Generation can synchronize with PV panels by using an additional PCB. With this optional interface, Aquarea demand is adapting all moment with the PV panel production, in order to optimize the use of the energy. This innovative algorithm balances the heat pump's consumption and the in-house comfort, based on the outside temperature, the PV panel production and the energy demand of the building.



Panasonic

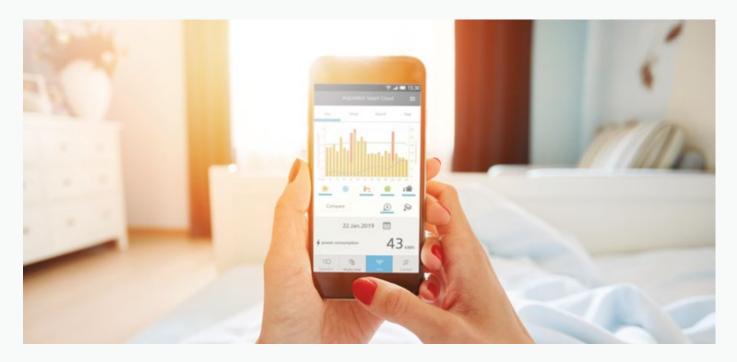

AQUAREA SMART CLOUD: THE MOST ADVANCED HEATING CONTROL FOR TODAY AND FOR THE FUTURE.









Aguarea Smart Cloud for end users

Easy and powerful energy management

The Aquarea Smart Cloud is much more than a simple thermostat for switching a heating device ON or OFF. It is a powerful and intuitive service for remotely controlling the full range of heating and hot water functions, including monitoring energy consumption.

How does it works?

Connect Aquarea J and H Generation system to the cloud using wireless LAN or a wired LAN Network. The user connects to the Cloud portal to remotely operate all unit functions and can also permit partners to access customised functions for remote maintenance and monitoring.

Aquarea Smart Cloud works with



Aquarea Comfort Cloud connected to IFTTT is planned to be available in Autumn 2019

Aguarea Service Cloud for installers and maintenance

The real remote maintenance made simple: The Aguarea Service Cloud allows installers to remotely take care of their customer's heating system, saving time and money. It also shortens the response time, increasing customer satisfaction.

Advanced functions for remote maintenance with professional screens:

- · Global view at a glance
- · Error log history
- · Full unit information
- · Statistics always available
- · Most settings available



^{*} User interface image may change without notification.

New Aquarea High Performance Bi-bloc J Generation Single Phase. Heating and Cooling - SDC • R32 Gas

- · Super efficient in the 3,2kW!
- · Very high energy savings A+++
- · Simple installation & maintenance
- \cdot Special software for low consumption homes with minimum output temperature: 20°C
- · Works at temperatures as low as -20°C
- · Automatic Air purge valve
- · Display of the compressor frequency







Heating capacity / COP [A +7°C, W 35°C]		Single Phase (Power to indoor)					
Heating capacity / COP (A +7°C, W 55°C)	Kit			KIT-WC03J3E5	KIT-WC05J3E5	KIT-WC07J3E5	KIT-WC09J3E5
Heating capacity / COP A + 2°C, W 35°C WW / COP 3,20/3,64 4,20/3,18 6,85/3,41 7,00	Heating capacity / COP (A +7°C, W	V 35°C)	kW / COP	3,20/5,33	5,00/5,00	7,00/4,76	9,00/4,48
Heating capacity / COP A+2°C, W 55°C kW / COP 3,20/2,19 4,10/1,99 6,20/2,21 6,30/	Heating capacity / COP (A +7°C, W	V 55°C)	kW / COP	3,20/2,81	5,00/2,72	7,00/2,82	8,95/2,78
Heating capacity / COP [A -7°C, W 35°C]	Heating capacity / COP (A +2°C, V	V 35°C)	kW / COP	3,20/3,64	4,20/3,18	6,85/3,41	7,00/3,40
Heating capacity / COP (A -7°C, W 55°C)	Heating capacity / COP (A +2°C, V	V 55°C)	kW / COP	3,20/2,19	4,10/1,99	6,20/2,21	6,30/2,16
Cooling capacity / EER [A 35°C, W 7°C] kW / EER 3,20/3,52 4,50/3,00 6,70/3,03 8,20/ Cooling capacity / EER [A 35°C, W 18°C] kW / EER 3,20/4,85 4,80/4,29 6,70/4,72 —/ Seasonal energy efficiency - Heating Average Climate [W35°C / W55°C] SCOP 5,07/3,47 5,07/3,47 4,90/3,32 4,90/ Energy Class Heating Average Climate [W35°C / W55°C] A+++ to D A+++/A++ A+++/A+ A+++/A+ A++/A+ A++/A+ <t< td=""><td>Heating capacity / COP (A -7°C, W</td><td>V 35°C)</td><td>kW / COP</td><td>3,30/2,80</td><td>4,20/2,59</td><td>5,60/2,87</td><td>6,12/2,78</td></t<>	Heating capacity / COP (A -7°C, W	V 35°C)	kW / COP	3,30/2,80	4,20/2,59	5,60/2,87	6,12/2,78
Cooling capacity / EER [A 35°C, W 18°C] kW / EER 3,20/4,85 4,80/4,29 6,70/4,72 — / − / − / − / − − − − − − − − − − − − − − − − − − − −	Heating capacity / COP (A -7°C, W	V 55°C)	kW / COP	3,20/1,79	3,55/1,71	5,25/1,94	5,90/1,93
Cooling capacity / EER (A 35°C, W 18°C) kW / EER 3,20/4,85 4,80/4,29 6,70/4,72 — / Seasonal energy efficiency - Heating Average Climate (W35°C / W55°C) ETA % 200/136 200/136 193/130 193/13 193/13 193/13 <t< td=""><td>Cooling capacity / EER (A 35°C, W</td><td>/ 7°C)</td><td>kW / EER</td><td>3,20/3,52</td><td>4,50/3,00</td><td>6,70/3,03</td><td>8,20/2,72</td></t<>	Cooling capacity / EER (A 35°C, W	/ 7°C)	kW / EER	3,20/3,52	4,50/3,00	6,70/3,03	8,20/2,72
Seasonal energy efficiency - Heating Average Climate (W35°C / W55°C) ETA % SOOP			kW / EER	3,20/4,85	4,80/4,29	6,70/4,72	-/-
M35°C / WS5°C SCOP 5,07/3,47 5,07/3,47 4,90/3,32 4,90/5			ETA %	200/136	200/136	193/130	193/130
Seasonal energy efficiency - Heating Warm Climate (W35°C / W55°C) ETA % (245/165) 245/165 227/160 227/1803 257/59 57/59 57/59 57/59 57/59 48+++ kb D A++++ ka+++ A+++/A+++ A+++/A+++ A+++/A+++ A+++/A++ A++/A+		ang / wor age ournate	SCOP	5,07/3,47	5,07/3,47	4,90/3,32	4,90/3,32
Seasonal energy efficiency - Heating Warm Climate (W35°C / W55°C) ETA % (245/165) 245/165 227/160 227/1803 257/59 57/59 57/59 57/59 57/59 48+++ kb D A++++ ka+++ A+++/A+++ A+++/A+++ A+++/A+++ A+++/A++ A++/A+	Energy Class Heating Average Cli	imate (W35°C / W55°C)	A+++ to D				A+++/A++
W35°C / W55°C SCOP 6,20/4,20 6,20/4,20 5,75/4,07 5,75/Energy Class Heating Warm Climate [W35°C / W55°C]			ETA %	245/165	245/165	227/160	227/160
Energy Class Heating Warm Climate [W35°C / W55°C]		Heating Warm Climate		· · · · · · · · · · · · · · · · · · ·	· · · · · · · · · · · · · · · · · · ·	·	5,75/4,07
Seasonal energy efficiency - Heating Cold Climate ETA % 157/110 157/110 164/116 164/16 164/16 164/16 165°C 165°C 165°C 165°C 165°C 164°C 165°C 164°C 165°C 164°C	Energy Class Heating Warm Clim	ate (W35°C / W55°C)	A+++ to D				A+++/A+++
SCOP 4,00/2,83 4,00/2,83 4,18/2,98	- · · · · · · · · · · · · · · · · · · ·			· · · · · · · · · · · · · · · · · · ·	· · · · · · · · · · · · · · · · · · ·	· · · · · · · · · · · · · · · · · · ·	164/116
Energy Class Heating Cold Climate (W35°C / W55°C)		neating Cota Climate		· · · · · · · · · · · · · · · · · · ·	· · · · · · · · · · · · · · · · · · ·		4,18/2,98
MH-SDC0305J3E5 MH-SDC0305J3E5 MH-SDC0707J3E5 MH							A++/A+
Sound pressure Heat / Cool dB(A) 28/28 28/28 30/30 30/D Dimension HxWx D mm 892x500x340 R82x50x340 892x500x340 R82x50x340 892x500x340 R92x50x340 R92x50x3				· · · · · · · · · · · · · · · · · · ·	· · · · · · · · · · · · · · · · · · ·		WH-SDC0709J3E5
Dimension Hx Wx D mm 892 x 500 x 340		at / Cool	dB(A)				30/31
Net weight Kg	<u> </u>	· · · · · · · · · · · · · · · · · · ·	mm	892 x 500 x 340	892 x 500 x 340	892 x 500 x 340	892 x 500 x 340
Water pipe connector Inch R1¼			ka	42	42		42
Number of speeds					R 11/4		R 11/4
A class pump Input power (Min/Max) W -/- -/	Number of speeds			_	_	_	_
Heating water flow [∆T=5 K. 35°C] L/min 9,2 14,3 20,1 25 Capacity of integrated electric heater kW 3 4 7 7 7 7 7 7 7 7 7 7 7 7 9 5 5 5 5	A class pump —	· · · · · · · · · · · · · · · · · · ·	W	-/-	-/-	-/-	-/-
Capacity of integrated electric heater kW 3 3 3 3 Recommended fuse A -/-			L/min	9.2	14.3	20.1	25,8
Recommended fuse A -/-			•	· · · · · · · · · · · · · · · · · · ·			3
Recommended cable size, supply 1 / 2 mm² -/- 5 55 <t< td=""><td></td><td></td><td>Α</td><td>-/-</td><td>-/-</td><td>-/-</td><td>-/-</td></t<>			Α	-/-	-/-	-/-	-/-
Outdoor unit WH-UD03JE5 WH-UD05JE5 WH-UD07JE5 PHOD07 PHOD07 PHOTO ITS STORT ITS WH-UD07JE5 WH-UD07JE5 WH-UD07JE5 WH-UD07JE5 PHOTO ITS STORT ITS <		1/2	mm²	_/_	_/_		-/-
Sound power full load Heat / Cool dB 60/61 64/64 68/67 69/ 09/ 09/ 09/ 09/ 09/ 09/ 09/ 09/ 09/ 0				WH-UD03JE5	WH-UD05JE5	WH-UD07JE5	WH-UD09JE5-1
Dimension H x W x D mm 622 x 824 x 298 622 x 824 x 298 795 x 875 x 320 795 x 875 x 875 x 320 Net weight kg 37 37 61 6 Refrigerant (R32) / CO2 Eq. kg / T 0,9/0,608 0,9/0,608 1,27/0,857 1,27/ Pipe diameter Liquid / Gas Inch (mm) 1/4 (6,35) / 1/2 (12,70) 1/4 (6,35) / 1/2 (12,70) 1/4 (6,35) / 5/8 (15,88) 1/4 (6,35) / 5/8 (15,88) 1/4 (6,35) / 5/8 (15,88) 3 ~ 25 3 ~ 25 3 ~ 50 3 ~ 25 Elevation difference (in/out) m 20 20 30 3	Sound power at Quiet Mode 3 (A -	+7°C, W 55°C)	dB	55	55	59	59
$ \begin{array}{c ccccccccccccccccccccccccccccccccccc$	Sound power full load Hea	at / Cool	dB	60/61	64/64	68/67	69/69
Refrigerant (R32) / CO ₂ Eq. kg / T 0,9/0,608 0,9/0,608 1,27/0,857 1,27/ Pipe diameter Liquid / Gas Inch (mm) 1/4 (6,35) / 1/2 (12,70) 1/4 (6,35) / 1/2 (12,70) 1/4 (6,35) / 5/8 (15,88) 1/4 (6,35) / 5/8 (15,88) 1/4 (6,35) / 3/2 (12,70) 3 ~ 25 3 ~ 50 3 ~ 25 3 ~ 50 3 ~ 3 3 25 3 ~ 50 3 ~ 3 3		· ·			. , .		795 x 875 x 320
Refrigerant (R32) / CO ₂ Eq. kg / T 0,9/0,608 0,9/0,608 1,27/0,857 1,27/ Pipe diameter Liquid / Gas Inch (mm) 1/4 (6,35)/1/2 (12,70) 1/4 (6,35)/1/2 (12,70) 1/4 (6,35)/5/8 (15,88) 1/4 (6,35)/5/8 (15,8	Net weight		ka	37	37	61	61
Pipe diameter Liquid / Gas Inch (mm) 1/4 (6,35) / 1/2 (12,70) 1/4 (6,35) / 1/2 (12,70) 1/4 (6,35) / 5/8 (15,88) 1/4							1,27/0,857
Pipe length range m 3~25 3~25 3~50 3~ Elevation difference (in/out) m 20 20 30 3		ıid / Gas			.,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,		1/4(6,35)/5/8(15,88
Elevation difference (in/out) m 20 20 30 3							3~50
							30
i po tongui ioi daantonat gao iii ii io io io ii ii ii ii ii ii ii i							10
Additional gas amount g/m 20 20 25 2	Additional gas amount						25
J		door amhient					-20~+35
1	<u> </u>						20~60/5~20

Accessories	
PAW-TD20C1E5	Tank 200L - Stainless steel
PAW-TD30C1E5	Tank 300L - Stainless steel
PAW-3WYVLV-SI	External 3 way valve
CZ-NV1	3 way valve Kit for inside of hydrokit

Accessories	
CZ-NS4P	Additional functions PCB
PAW-BTANK50L-1	Buffer tank 50L
CZ-TAW1	Aquarea Smart Cloud for remote control and maintenance through wireless or wired LAN
PAW-A2W-RTWIRED	Room thermostat

EER and COP calculation is based in accordance to EN14511. Sound pressure measured at 1m from the outdoor unit and at 1,5m height.

MCS Certificate number: MCS HP0086.

^{*} Not all products are certified, as the certification process is on-going and the list of certified products constantly changing, please check details on the official websites http://www.microgenerationcertification.org/consumers/product-search

AQUAREA

Aguarea High Performance: Energy saving

Aquarea High Performance delivers outstanding efficiency in heating and domestic hot water. It is easy to maintain thanks to the built-in devices such as the water filter, water flow sensor and connectivity to the Smart Cloud remote service. It is also able to operate as low as -23°C.

5,33

60°C

HOT WATER SUPPLY

WATER PUMP

AUTO SPEED

FrP 55°C Scale from A+++ to D

FrP 35°C Scale from A+++ to D

EASY MAINTENANCE

EASY MAINTENANCE





















Refrigerant gas R32. The systems using R32 refrigerant are more environmentally friendly than other refrigerants like R22 and R410A. — Inverter compressor provides more precise temperature control and keeps the ambient temperature constant with lower energy consumption and quieter operation. — DHW. With Aquarea you can also heat your domestic hot water at a very low cost with the optional hot water cylinder. — Water filter with magnet. Easy access & fast clip technology for J Generation. — Reaches water outlet temperature up to 60°C — Water stop valve. — Water flow sensor Renovation. Our Aquarea Heat Pumps can be connected to an existing or new boiler for optimum comfort even at very low outdoor temperatures.

For even greater efficiency, our Aquarea Heat Pumps can be connected to photovoltaic solar panels with an optional kit. — Advanced control. Remote controller with full dotted 3,5" wide back light screen. Menu with 17 available languages easy to use for installer and user. Included on J Generation. — Internet control (Optional). A next generation system providing a user-friendly remote controller of air conditioning or Heat Pump units from everywhere, using a simple Android or iOS smartphone, tablet or PC via internet. — Connectivity. The communication port can be integrated into the indoor unit and provides easy connection to, and control of, your Panasonic Heat Pump to your home or building management system. — GOOD DESIGN AWARD 2017: Indoor units All in One and Bi-bloc awarded with the prestigious Good Design Award 2017.

Other accessories for Aquarea:



High efficient radiators for heating and cooling



Versatile and efficient fan coil for heating and cooling



Heat Pump + HIT Photovoltaic solar panel

Panasonic

To find out how Panasonic cares for you, log on to www.aircon.panasonic.eu/IE_en/

- +353 (0)1 4195313
- +353 (0) 876005031

Heating & Cooling Solutions Panasonic Ireland. A branch of Panasonic Marketing Europe GmbH Unit 1, The Courtyard, Kilcarbery Business Park, Nangor Road, Dublin 22

heating & cooling solutions











