



Panasonic

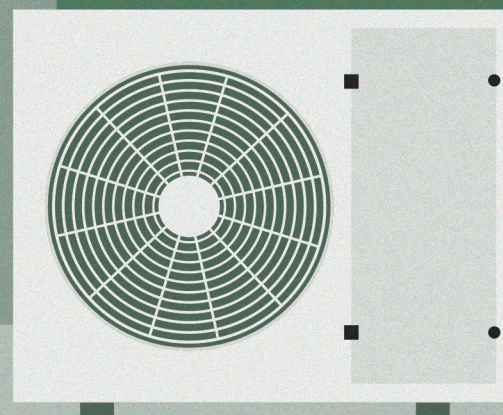


REFRIGERATION CONDENSING UNITS 2025 / 2026

PANASONIC TOTAL SOLUTION

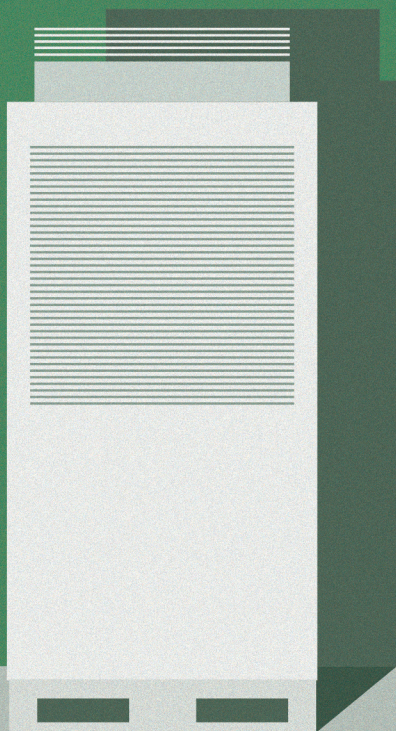

iCQ₂RE / iCOOL

heating & cooling solutions

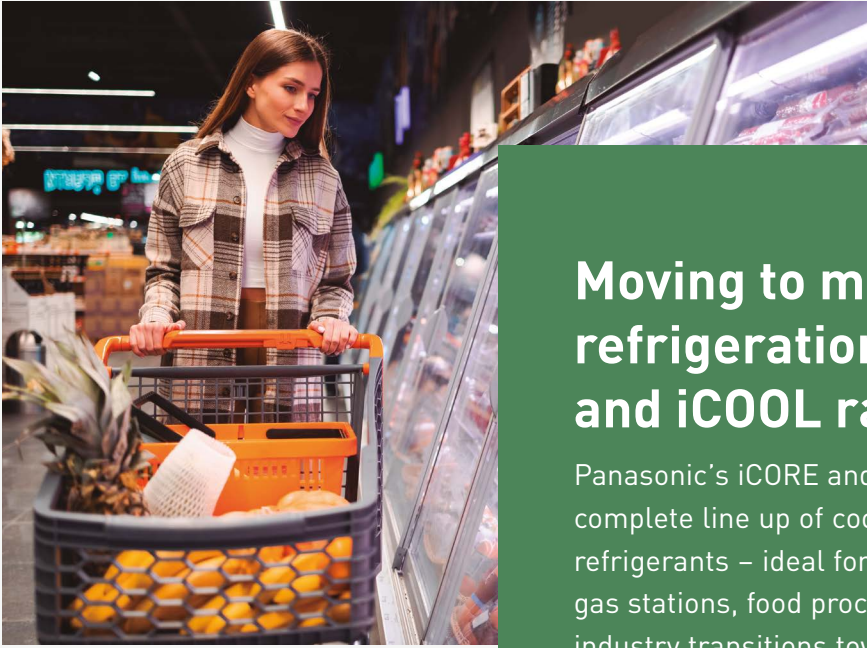

Moving to more sustainable refrigeration solutions – iCORE and iCOOL ranges

Panasonic's iCORE and iCOOL condensing units offer a complete line up of cooling solutions using CO₂, HFO, and HFC refrigerants – ideal for retail stores, supermarkets, HoReCa, gas stations, food processing, and cold storage. As the industry transitions toward greener technologies, Panasonic provides systems that address both immediate needs and long-term goals in energy efficiency and enhanced environmental responsibility.

iCORE / iCOOL





Refrigeration engineered for excellence → 2

Solution with high energy saving → 4

iCORE range – Naturally efficient cooling → 6

A more sustainable refrigeration systems in your food retail → 8

The safe refrigeration systems for your healthcare business → 9

iCORE OCU-CR CO₂ Series → 10

Technology by Panasonic → 12

Control and connectivity → 14

iCORE OCU/SCU-CRC Custom-fit CO₂ Series → 18

High pressure fan ready solution for
iCORE OCU/SCU-CRC Custom-fit CO₂ Series → 22

Customisation options for
iCORE OCU/SCU-CRC Custom-fit CO₂ Series → 23

iCORE product specifications and capacity tables

iCORE OCU-CR CO₂ Series · R744 → 16

iCORE OCU/SCU-CRC Custom-fit CO₂ Series · R744 → 20

Accessories and control – iCORE → 24

iCOOL range – Inverter solutions for today and tomorrow → 26

iCOOL SE Series → 28

iCOOL OCU/SCU Series → 32

iCOOL LCU/WCU Series → 40

iCOOL product specifications and capacity tables

iCOOL SE Series
· R448A / R449A / R134a / R513A / R454C / R455A → 29

iCOOL OCU/SCU Series · R448A / R449A / R134a / R513A → 34

iCOOL LCU Series (remote compressor base)
· R448A / R449A / R134a / R513A → 42

iCOOL WCU Series (water cooled condensing units)
· R448A / R449A / R134a / R513A → 44

Refrigeration engineered for excellence

A step toward more sustainable cooling solutions.



Panasonic introduces its most extensive and versatile commercial refrigeration range to date. This milestone reflects a significant strategic evolution.

The world keeps moving. So must cooling. Meet our refrigeration portfolio.

Complete line of cooling solutions using CO₂, HFO and HFC refrigerants.

R744
CO₂

R448A

R449A

R134a

R513A


R454C

R455A


Panasonic unveils iCORE and iCOOL refrigeration ranges.

The portfolio introduces two distinct product ranges, designed to provide commercial refrigeration to a wide range of applications including retail stores, supermarkets, HoReCa sector, gas stations and cold storage applications:

iCORE

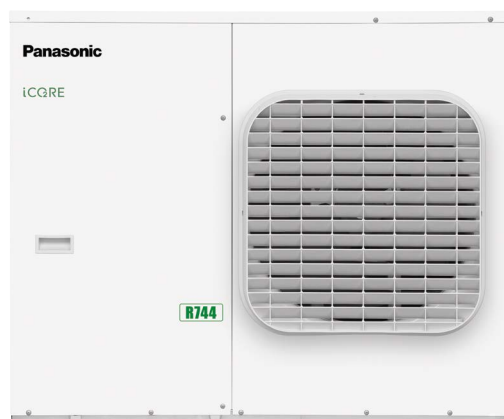

iCOOL

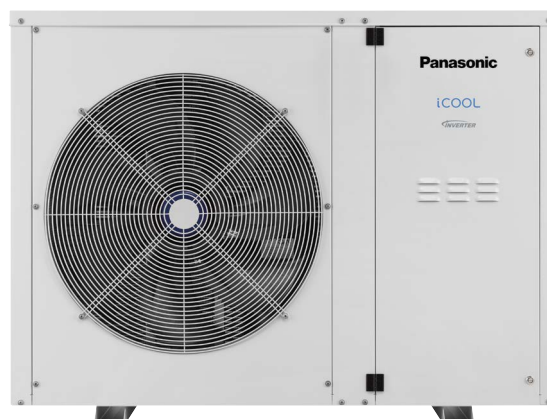

iCORE

Move to natural refrigerants.

Panasonic's flagship range of CO₂ condensing units, representing the core of future-proof, natural refrigerant technology.

The iCORE range offers a broad selection of cooling capacities, offering up to 29 kW for medium temperature applications, and up to 15 kW for low temperature requirements.

iCOOL

Reduce your energy bills with advanced Inverter technology.

A comprehensive range of inverter HFC and A2L-ready solutions, designed to meet today's market needs while supporting the transition to lower-GWP refrigerants. The iCOOL range covers a wide spectrum of cooling capacities – up to 42 kW for medium temperature applications, and up to 14 kW for low temperature needs.

These brands reflect Panasonic's dual commitment: first, to lead the transition to more sustainable refrigerants; and second, to deliver long-term energy savings and lower electricity bills through advanced inverter technology.


High energy saving solutions

Panasonic's iCORE and iCOOL ranges of condensing units offer a reliable solution for a wide range of applications, including convenience stores, supermarket, gas stations and cold rooms.



Showcases.


Convenience stores, supermarkets, gas stations.

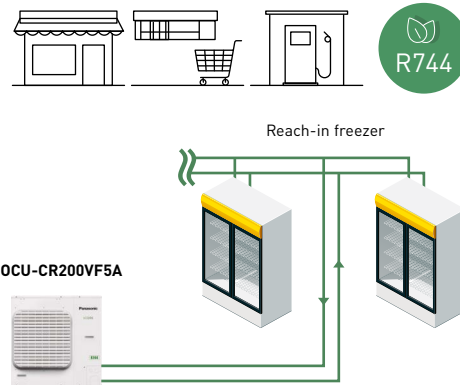

Cold room application to keep food fresh

Multiple installation capabilities. Unparalleled flexibility:

- Food retail applications (convenience store, supermarkets, gas stations)
- Food service applications (restaurants, canteens, schools)
- Non-food applications (warehousing, industrial storage, healthcare)

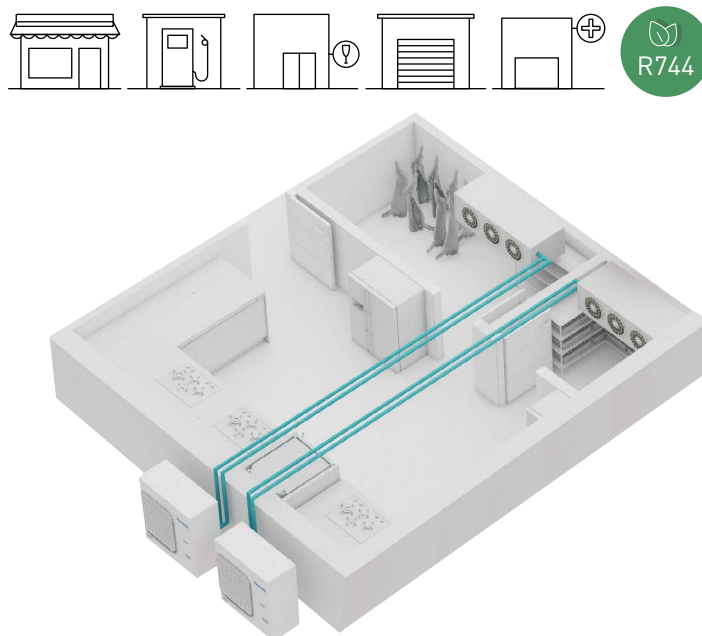

iCORE and iCOOL cold room application integrated with Panasonic PACi NX Series high temperature

Panasonic offers various solutions for cold rooms by combining a wide range of products.


Integrated with PACi NX Series, it allows for flexible design and installation.



1 Condensing units – iCORE and iCOOL ranges for refrigerated room.



2 PACi NX Series for cooling rooms between 8 °C WB and 24 °C WB.

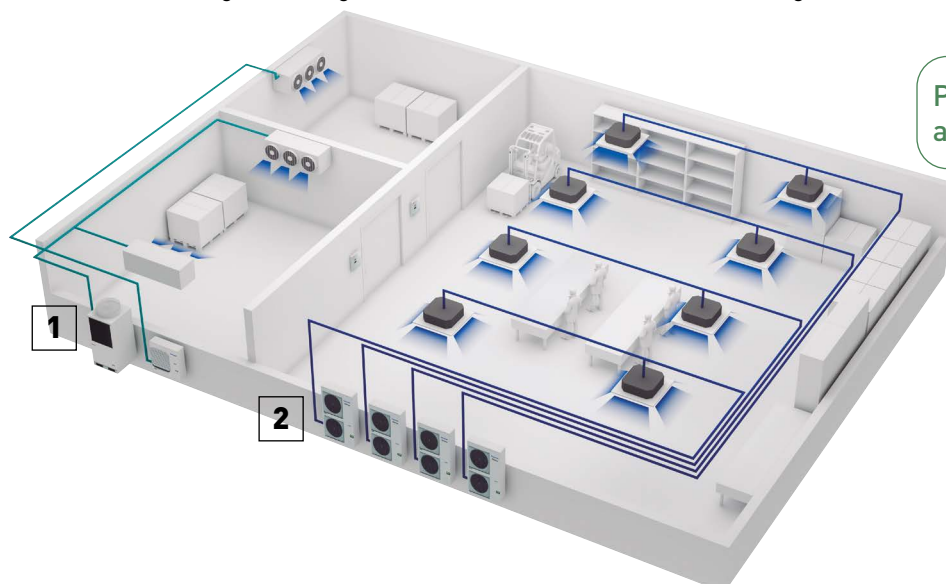

iCORE range – Naturally efficient cooling

iCORE

Panasonic's iCORE range is a new generation of CO₂ condensing units, built on sustainability, energy efficiency, and flexibility. Using CO₂ – a natural refrigerant – iCORE supports today's environmental goals while delivering reliable, high-performance cooling.

iCORE range – CO₂ condensing units

OCU-CR CO ₂ Series						OCU-CRC Custom-fit CO ₂ Series			SCU-CRC Custom-fit CO ₂ Series
MT/LT type	MT type	MT/LT type	MT type	MT/LT type	MT/LT type	MT/LT type	MT/LT type	MT type	MT/LT type
									
OCU-CR200VF5A	OCU-CR400VF8	OCU-CR400VF8A	OCU-CR1000VF8	OCU-CR1000VF8A	OCU-CR2000VF8A	OCU-CRC060A08	OCU-CRC150A08	OCU-CRC210M08	SCU-CRC150A08
Capacity range (kW)									
4 (MT) / 2 (LT)	7	8 (MT) / 4 (LT)	14	15 (MT) / 8 (LT)	29 (MT) / 15 (LT)	6 (MT) / 3 (LT)	15 (MT) / 7 (LT)	21	15 (MT) / 7 (LT)
Medium temperature									
Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Low temperature									
Yes	No	Yes	No	Yes	Yes	Yes	Yes	No	Yes
ET (evaporation temperature) set points range (°C)									
-45 ~ -5 °C	-20 ~ -5 °C	-45 ~ -5 °C	-20 ~ -5 °C	-45 ~ -5 °C	-45 ~ -5 °C	-35 ~ -5 °C	-35 ~ 0 °C	-20 ~ -5 °C	-35 ~ 0 °C
Room size example (m ²)*									
40 (MT) / 10 (LT)	80	80 (MT) / 20 (LT)	200	200 (MT) / 50 (LT)	300 (MT) / 75 (LT)	60 (MT) / 15 (LT)	200 (MT) / 45 (LT)	250	200 (MT) / 45 (LT)

* Room size is reference. Please contact to authorised Panasonic dealer for calculation.

The range includes the OCU-CR CO₂ Series – value-packed units designed for the evolving, eco-conscious market and the OCU/SCU-CRC Custom Fit CO₂ Series, offering factory-integrated, and fully tested options for faster installation and reduced on-site labour. iCORE is the core of an efficient, future-ready refrigeration system which combines ecological responsibility with practical performance to meet a wide range of market needs.

iCORE OCU-CR CO₂ Series · R744.


From 4 to 29 kW MT and
from 2 to 15 kW LT.



R744

iCORE OCU/SCU-CRC Custom-fit CO₂ Series · R744.

From 6 to 21 kW MT and
from 3 to 7 kW LT.



R744

Choose a greener solution by Panasonic.

iCORE range – CO₂ condensing units for medium and low temperature refrigeration applications, tailored for demanding needs.

System reliability and precise temperature control are critical to maintaining product quality and ensuring food safety for end customers. Panasonic's solutions are also designed for high energy efficiency, helping businesses reduce operational costs while supporting their environmental responsibilities.

Why CO₂? Natural refrigerant


It ensures compliance with the Kigali Amendment supporting international climate commitments on greenhouse gases and leading the global transition to climate-friendly HFC-free technologies. CO₂ (R744) is regaining its place in the refrigeration world. Driven by environmental concerns, legislation now requires increased adoption of 'alternative' refrigerants, such as CO₂. CO₂ is an environmentally-friendly solution, with zero ODP (Ozone Depletion Potential) and "GWP" (Global Warming Potential) of one which means it's classed as a natural substance in the atmosphere.

In Europe a step-by-step HFC reduction has been in place since the F-Gas regulation was introduced in 2015. Countries all over the world have actively been preparing to enact the necessary domestic legislation to implement the agreement to reduce the use of HFCs. Panasonic is now able to provide a solution in Europe with CO₂ refrigeration systems to prevent global warming and to support environment-friendly retail operations. The following table shows how well R744 (CO₂) performs regarding environmental impact and safety.

ODP (Ozone Depletion Potential) = 0 - GWP (Global Warming Potential) = 1

	Next generation refrigerant			Current refrigerant	
	CO ₂	Ammonia	Isobutane	R410A	R404A
ODP	0	0	0	0	0
GWP	1	0	4	2090	3920
Flammability	Non flammable	Light flammable	Flammable	Non flammable	Non flammable
Toxicity	No	Yes	No	No	No

Comparison of CO₂ emissions

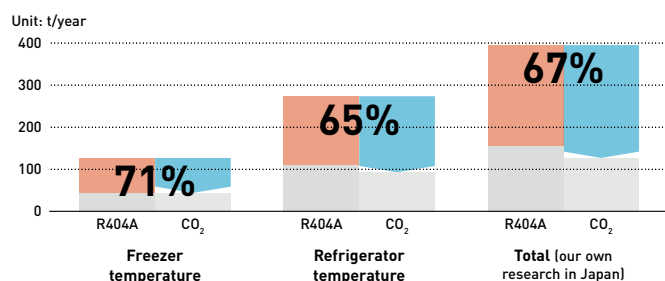

Energy saving
25,4% freezer
16,2% refrigeration

CO₂ emission
67% reduction

Direct influence ¹⁾

Indirect influence ²⁾

1) Direct influence presents the effect of refrigerant leakage comparing R744 (CO₂) with R404A.

2) Indirect influence presents CO₂ emissions linked to power consumption of CO₂ unit and conventional units.


By Panasonic research in Japan. Comparing 6 shops average for R404A Inverter multi condensing unit.

A more sustainable refrigeration system for food retail

CO₂ refrigerant is the choice to curb the carbon footprint of any business organisation, especially to food retailers, to whom it brings key advantages.

Panasonic strongly supports your projects to meet customer's request!

* Case study based on iCORE OCU-CR CO₂ Series CO₂ units.

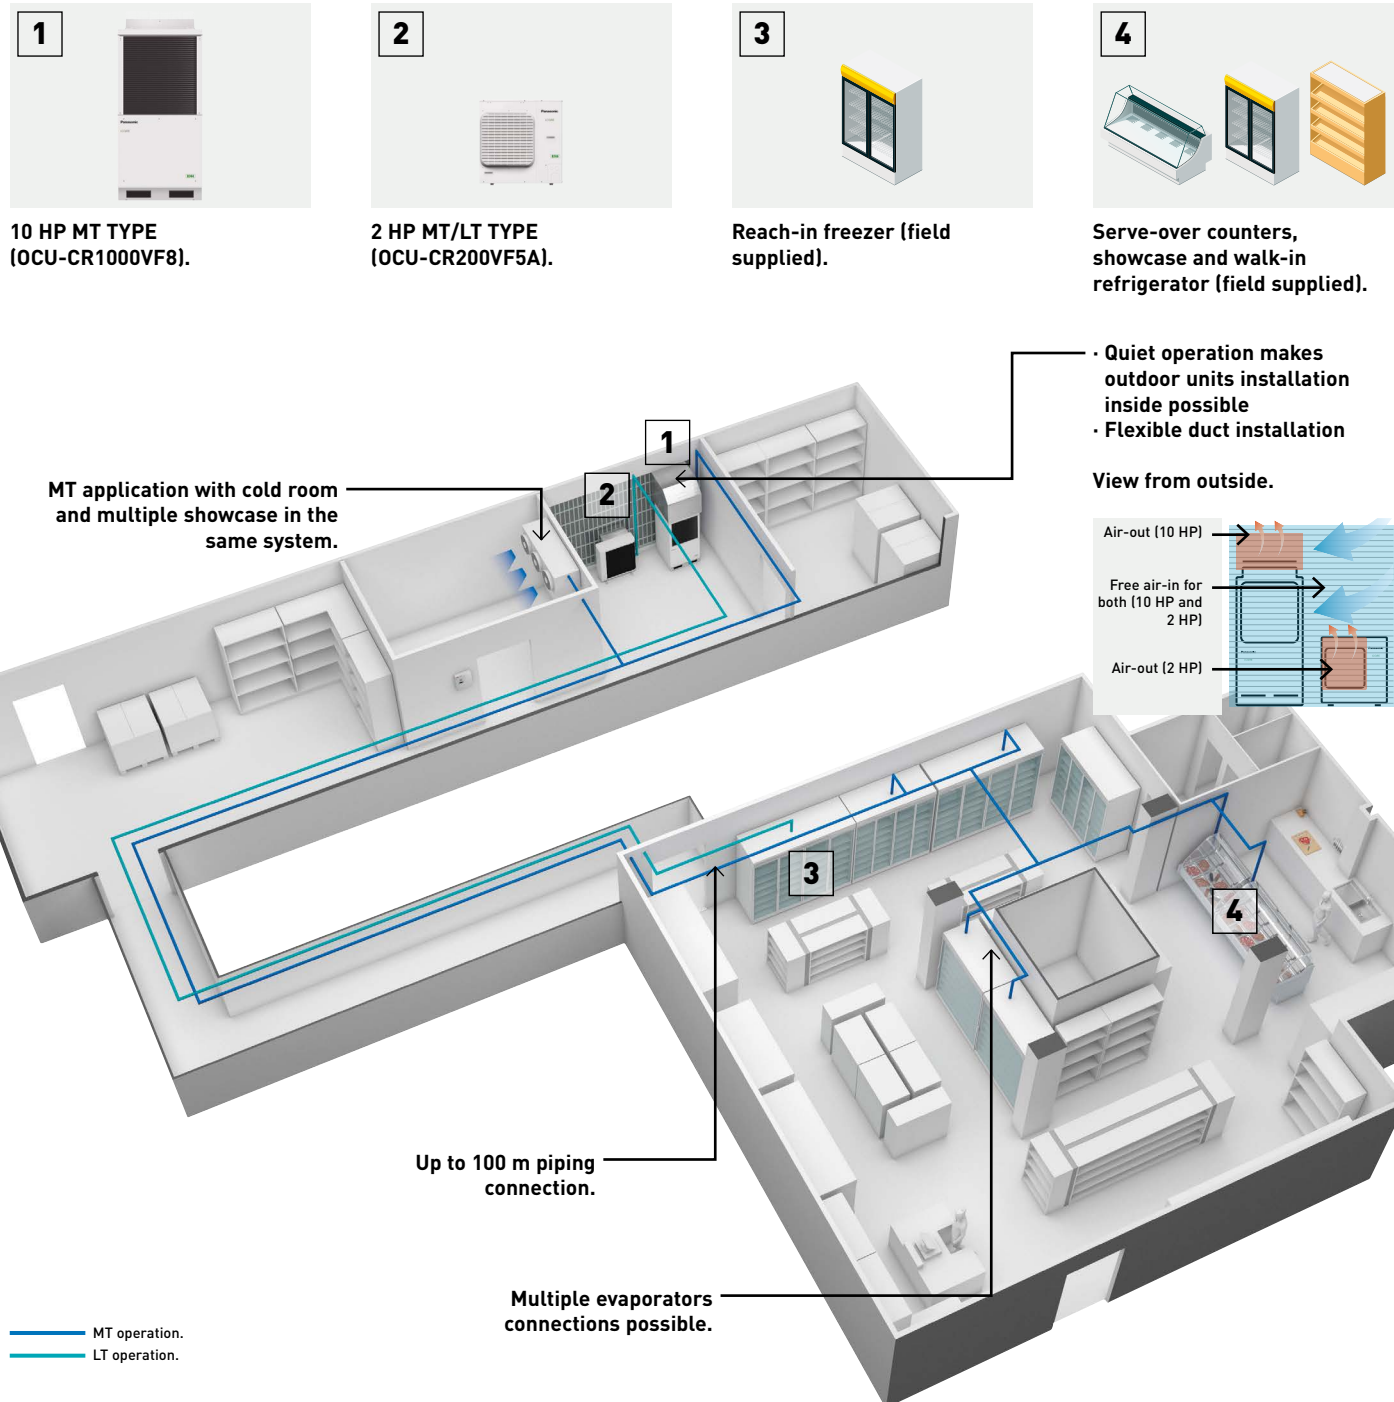

Nolan's Supermarket.

Nolan's Supermarket celebrated its 60th year in business with an extension and full refurbishment which completely overhauled the existing store.

A particular focus of the project was to create a state-of-the-art refrigeration system operating on the 'Zero Ozone Depletion' plus ultralow GWP of 1 natural refrigerant CO₂, and as part of the scheme. Panasonic CO₂ condensing units - iCORE OCU-CR CO₂ Series have been chosen because of the high performance and reliable quality.

The safe refrigeration system for healthcare businesses

There are advantages specially for healthcare business. The project example below shows one of the warehouse in the healthcare laboratory which requires several cold rooms there to keep bio-products safely.


* Case study based on iCORE OCU-CR C0, Series C0, units.



**10 HP LT TYPE
(OCU-CR1000VF8A).**



**10 HP MT TYPE
(OCU-CR1000VF8).**

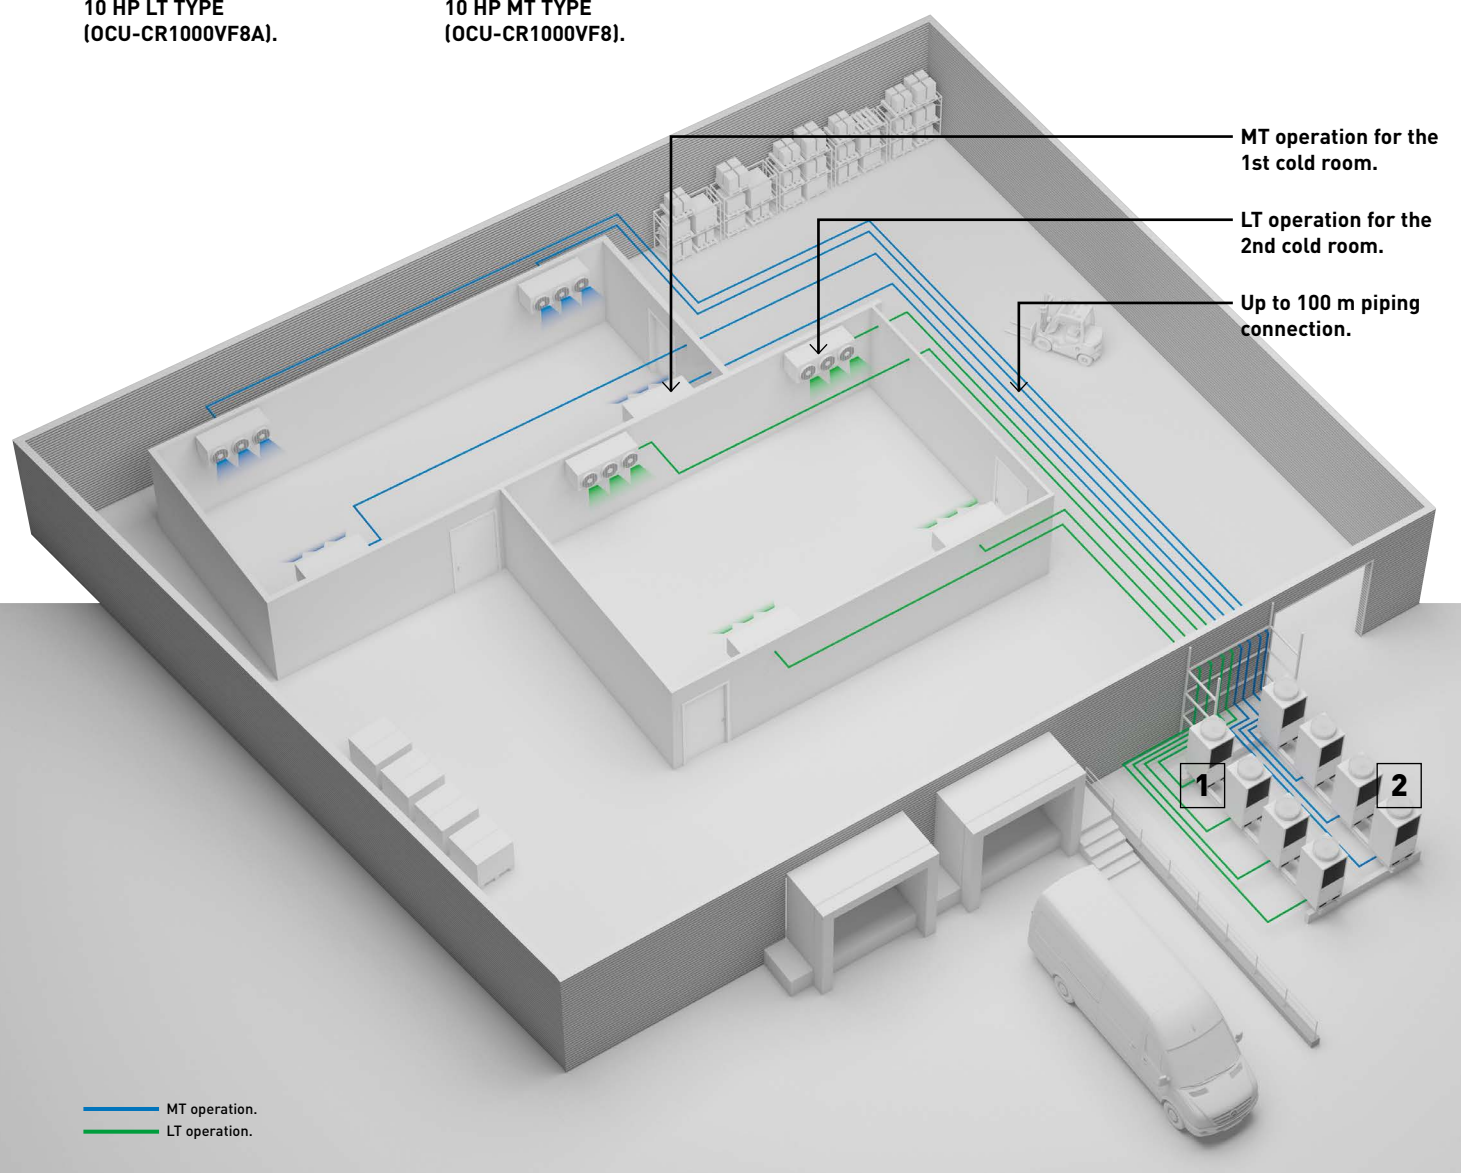

STEMCELL Technologies.

STEMCELL Technologies is a global biotechnology company that develops, manufactures and sells products and provides services that support academic and industrial scientists. Panasonic CO₂ condensing units - iCORE OCU-CR C0, Series have been chosen to fulfill the expectation of environmental-friendly and safety requirements. The products with reliable quality and high performance was also an essential point.

iCORE OCU-CR CO₂ Series

CO₂ transcritical condensing units. iCORE OCU-CR CO₂ Series offer a wide range of refrigeration systems, meeting the specific needs of various commercial applications.



Superior cooling capacity at each evaporating temperature.

CO₂ transcritical condensing units - iCORE OCU-CR CO₂ Series have a high cooling capacity at each set point. The CO₂ 2-stage compressor developed by Panasonic is designed to compress CO₂ refrigerant twice; it reduces the load in operation by half (compared to 1-stage refrigerant compression) and delivers increased durability and reliability.


Units can be programmed to run at low and medium temperatures at initial set-up. These settings can then be modified by turning a simple and user friendly rotary switch to further enhance energy savings.

MT/LT type: 200VF5A - 4 / 2 kW.

3,83 SEPR cooling.
1,92 SEPR freezing.

* SEPR values has been tested at 3-part laboratory.

OCU-CR200VF5A(SL) ¹⁾.
Cooling capacity (kW)

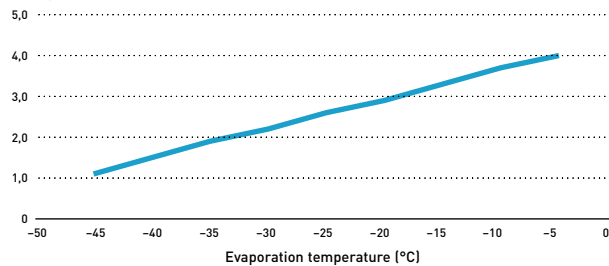


MT type: 400VF8 - 7 kW. MT/LT type: 400VF8A - 8 / 4 kW.

2,45 SEPR cooling.
1,56 SEPR freezing.

* Model 400VF8A.

OCU-CR400VF8(SL) / OCU-CR400VF8A(SL) ²⁾.
Cooling capacity (kW)

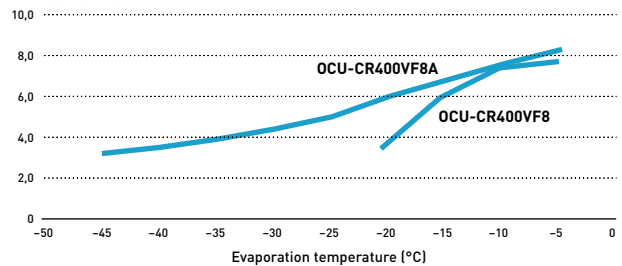


MT type: 1000VF8 - 14 kW. MT/LT type: 1000VF8A - 15 / 8 kW.

2,86 SEPR cooling.
1,49 SEPR freezing.

* Model 1000VF8A.



OCU-CR1000VF8(SL) / OCU-CR1000VF8A(SL) ²⁾.
Cooling capacity (kW)

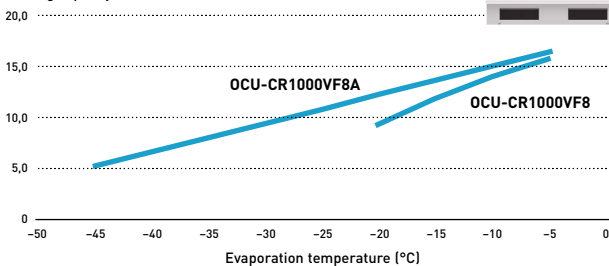

MT/LT type: 2000VF8A - 29 / 15 kW.

3,10 SEPR cooling.
1,64 SEPR freezing.

OCU-CR2000VF8A(SL) ¹⁾.
Cooling capacity (kW)

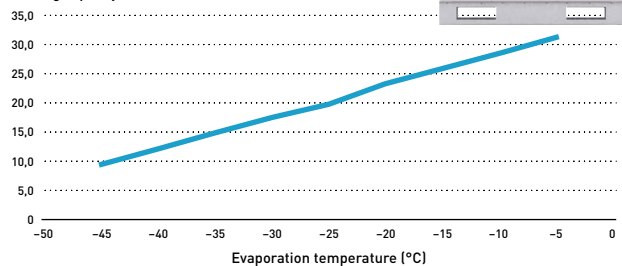

1) Ambient temperature: 32 °C, 230 V, refrigerant: R744, suction gas temperature: 18 °C. 2) Ambient temperature: 32 °C, 400 V, refrigerant: R744, suction gas temperature: 18 °C.

1 Superior efficiency with reliable quality

- Panasonic has combined the 2-stage compressor with the split cycle for increased efficiency
- High seasonal performance. SEPR: Maximum 3,83 in cooling, 1,92 in freezing*
- High COP at high ambient temperature

* 200VF5A.

2 Heat recovery port ¹⁾ as renewable energy

- Maximum 16,7 kW ²⁾ of heating for free
- Optional possibility to get subsidy (depending on location)
- Easy connection process

1) For models 1000VF8A and 2000VF8A. 2) For model 1000VF8A.

3 Flexible installation

- Set-points at medium or low temperature available depending on applications
- Compact unit
- Silent operation
- Long piping length: Maximum 100 m*
- High external static pressure
- Transfer pressure control for stable electric expansion valve control in showcases*

* For models 1000VF8A and 2000VF8A.

Technology by Panasonic

Reliability is our main target. We ensure excellent quality control established by skilled factory team.



iCORE OCU-CR CO₂ Series 20 HP MT/LT model.



The iCORE OCU-CR CO₂ Series now includes 20 HP MT/LT model, a highly efficient multi compressor solution.

- Multi-compressor systems
- Smaller footprint
- Maximum piping length of 100 m
- Cooling capacity can be controlled from 25 to 100% under partial load
- Flexible and precise control capabilities with digital input/output

Energy efficient multi compressors operation.

By distributing the workload between two compressors, the systems operate efficiently, adjusting capacity to match the varying cooling demands. Compressors 1 and 2 alternate every 10 days to ensure even load distribution.

Example of compressor operation.

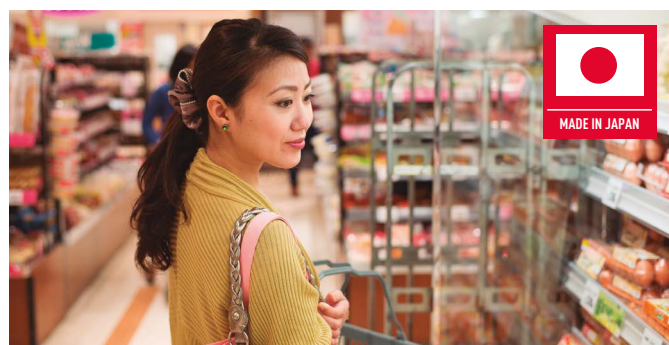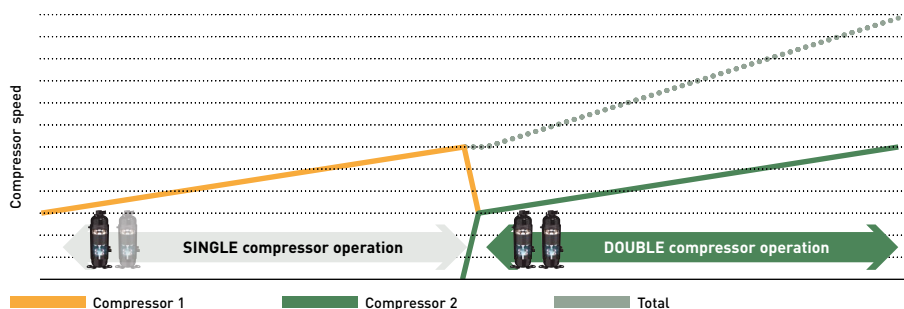

Reliable CO₂ technology by Panasonic

- Reliable quality: Made in Japan
- 19500 units sold and installed in more than 5200 retail operations such as convenience stores and supermarkets in Japan*
- Excellent quality control established by skilled factory team
- Panasonic offers 5 year warranties on compressors and 2 years on components

* As of the end of December 23.

Panasonic's combined technology of the 2-stage compressor with the split cycle.

- Panasonic 2-stage rotary compressor delivering powerful performance for more than 20 years
- Split cycle* enhances cooling effect

* Available for 200VF5A, 400VF8A, 1000VF8A and 2000VF8A models.

** In the case that the standard cycle with 1-stage rotary compressor was compared.


Watch the highlighted technology video.




2-stage rotary compressor




Split cycle



Standard cycle.

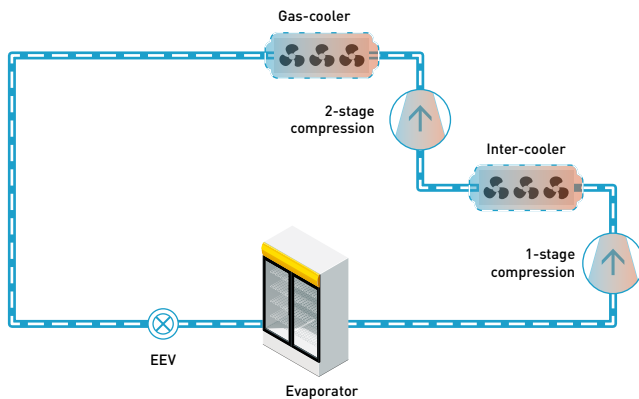

Split cycle.

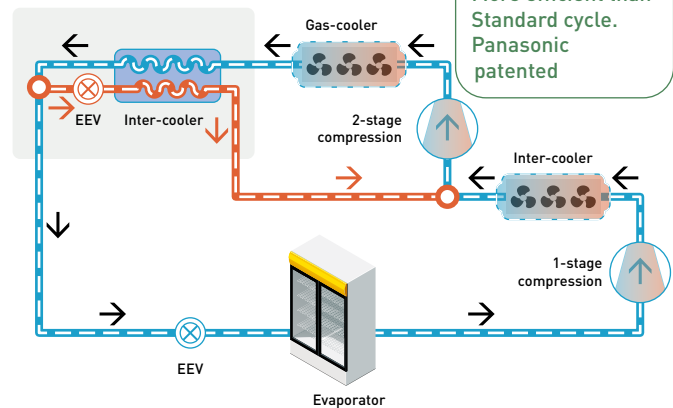

Up to 50%**
More efficient than
Standard cycle.
Panasonic
patented

Heat recovery function for heating


This function offers refrigeration combined with heating all in one system. The ground-breaking solution allows for increased opportunities to cut running costs by utilising the exhausted heat from refrigeration and transferring it to the energy source for heating.

16,7 kW¹⁾
Of hot water
for free

What is heat recovery function?

Solution example.

Heat recovery system can produce both heating and refrigeration.

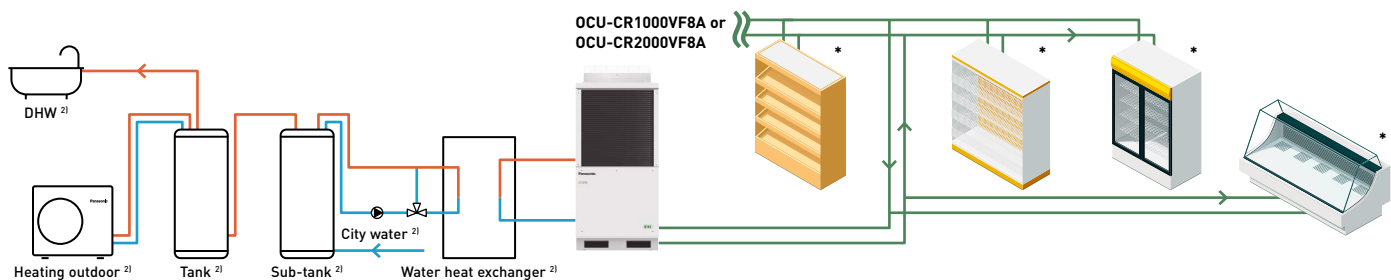

1) Tested with OCU-CR1000VF8A. Under the condition: ambient temperature 32 °C, evaporation temperature -10 °C. 100% Partial load. 2) Local supply.


* Controllers: PAW-C02-PANEL-C or local supply.

Refrigeration designer available in Panasonic PRO Club.

This simple design tool supports engineers, installers, and technicians in making a quick calculation for commercial refrigeration systems.

- Evaporation temperature selection
- Cooling capacity calculator
- Refrigerant pipe calculation
- Electric expansion valves calculation
- Refrigerant amount calculation

Ready to works on all devices, computers, tablets and smartphones!!

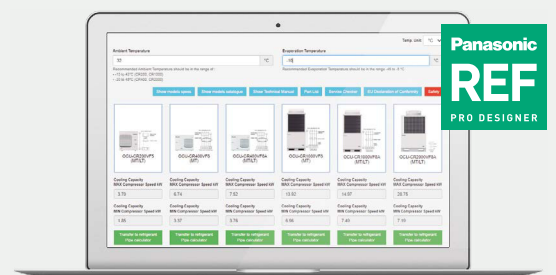

PRO Club

www.panasonicproclub.com or
connect simply with your smartphone
to the PRO Club using this QR



Control and connectivity

Panasonic CO₂ condensing units, iCORE OCU-CR CO₂ Series, can be optimised with Panel-C intelligent controllers and a service checkers for professionals. They can be easily integrated with major monitoring systems.



Modbus compatibility with monitoring system

Panasonic CO₂ condensing units - iCORE OCU-CR CO₂ Series can be supervised by major monitoring systems such as CAREL, Eliwell, COPELAND, Danfoss, RDM and Pego. Monitoring systems ensures the recording, monitoring and reporting of temperature conditions etc... of entire CO₂ condensing units - iCORE OCU-CR CO₂ Series system at shops.

Monitoring system



Standard boss & boss-mini



AK-SM Series*



TelevisGo

Copeland Controls



Xweb



DMTOUCH



TeleNET

* M2M1-10 gateway (Model code: FDS021) is required in addition to the monitoring system. M2M1-10 gateway is a local supply.

Control panel and electric expansion valves

Panel-C, an intelligent controller with a compact chassis. This controller has the smart program especially for showcases and cold rooms. Electric expansion valves (EEVs) are ready with 8 different sizes to meet precisely the field demand and it's delivered with Panel-C as a kit.

Intelligent controller with compact chassis. Panel-C.

- MPXPRO control fully pre-programmed for MT and LT on the same panel
- Compact structure size: 300 x 220 x 120 mm
- Necessary cables, EEV stator, temperature and pressure probes as standard equipment
- Ultracap technology as standard equipment for emergency EEV's closing in the event of mains power failure
- Smart defrost functions, advanced superheat control, light and showcase curtain management, etc
- Own display user terminal plus keypad for programming, built-in switching power supply, Modbus, etc
- Management of HACCP alarms

Electric expansion valves (EEVs) line-up.

- EEV's E2V-CW with 3/8" ODF copper fittings for high pressure applications (CO₂)
- Operation refrigerant temperature: -40 T 70 °C
- Maximum operating pressure for all the models 03, 05, 09, 11, 14, 18, 24 and 30 (MOP) 140 bar
- Maximum operating pressure difference for 03, 05, 09, 11, 14, 18, (MOPD) 120 bar, 24 (MOPD) 85 bar, and 30 (MOPD) 90 bar
- Bipolar stator hermetic IP69K as standard equipment (supplied on panel)
- Mechanical strainer as standard equipment (500 mm mesh)
- Equipercetile control particularly effective at partial load with reliable operation even after 1,2 billion steps

* Please refer the model references in page 24.



CO₂ service checker

PAW-CO2-CHECKER

The service checker is a useful tool which supports your technical tasks on the field such as commissioning, maintenance and troubleshooting for Panasonic CO₂ condensing units - iCORE OCU-CR CO₂ Series.

Main features:

- Reading and recording variable technical parameters
- Main technical parameters available*: pressures, temperatures, opening of expansion valves, states of solenoid valves, rotational speeds of the gas-cooler fan motor, frequency and compressor's current, etc.
- Setting change of operating values possible
- 2D graph visualisation for the detailed analysis
- Monitoring an alarm status, for example the status of the compressor oil level, etc.

* Please check all the parameters available in the manual.


To use it, is necessary to download free Device Manager software from the Eliwell website:

Visit: <https://www.eliwell.com/en/Family/DeviceManager.html> using this QR.

Eliwell product name: Device Manager 100. Eliwell part number: DMP1000002000.



eliwell
by Schneider Electric

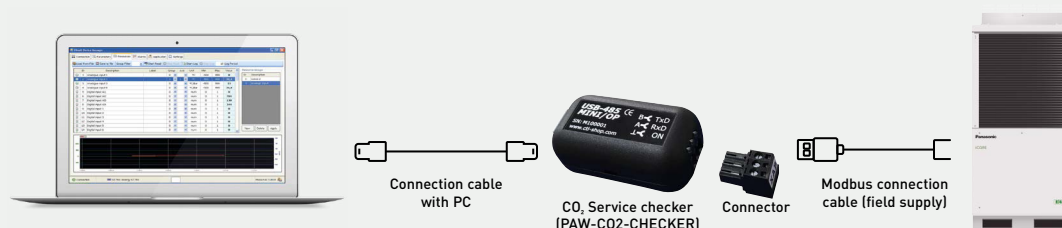

iCORE OCU-CR CO₂ Series · R744

Specifications and capacity tables.



Model	OCU-CR200VF5A		OCU-CR400VF8		OCU-CR400VF8A		OCU-CR1000VF8		OCU-CR1000VF8A		OCU-CR2000VF8A	
Outdoor with PRV fitted	OCU-CR200VF5A-PRV		OCU-CR400VF8-PRV		OCU-CR400VF8A-PRV		OCU-CR1000VF8-PRV		OCU-CR1000VF8A-PRV		OCU-CR2000VF8A-PRV	
Compressor	Single compressor		Single compressor		Single compressor		Single compressor		Single compressor		Tandem compressor	
Refrigerants	R744		R744		R744		R744		R744		R744	
PED category	I		II		II		II		II		II	
Application and nominal cooling capacity	MT/LT (kW)	MT (4) / LT (2)	MT (7)		MT (8) / LT (4)		MT (14)		MT (15) / LT (8)		MT (29) / LT (15)	
Power supply	Voltage	V	220 - 230 - 240		380 - 400 - 415		380 - 400 - 415		380 - 400 - 415		380 - 400 - 415	
	Phase		Single phase		Three phase		Three phase		Three phase		Three phase	
	Frequency	Hz	50		50		50		50		50	
SEPR cooling at ET -10 °C AT 32 °C			3,83		3,17		3,20		2,62		2,86	
SEPR freezing at ET -35 °C AT 32 °C			1,92		—		1,73		—		1,49	
Annual electricity consumption at ET -10 °C AT 32 °C		kWh/a	6797		13384		14488		32815		32409	
Annual electricity consumption at ET -35 °C AT 32 °C		kWh/a	8021		—		16255		—		39985	
Evaporator connection			Multiple		Multiple		Multiple		Multiple		Multiple	
Evaporation temperature	Min ~ Max	°C	-45 ~ -5		-20 ~ -5		-45 ~ -5		-45 ~ -5		-45 ~ -5	
Ambient temperature	Min ~ Max	°C	-20 ~ +43		-20 ~ +45		-20 ~ +45		-20 ~ +43		-20 ~ +45	
PS line	Suction	bar	120		80		80		80		80	
	Liquid	bar	80		80		80		80		80	
User system external alarm. Non-voltage contact			Yes		Yes		Yes		Yes		Yes	
Liquid tube electromagnetic valve output		Vac	220 - 230 - 240		220 - 230 - 240		220 - 230 - 240		220 - 230 - 240		—	
Showcase operation ON / OFF signal. Digital input. Non-voltage contact			Yes		Yes		Yes		Yes		Yes	
Modbus communication line (RS485)		Ports	Yes		Yes		Yes		Yes		Yes	
Compressor type			2- stage rotary		2- stage rotary		2- stage rotary		2- stage rotary		2- stage rotary	
Dimension	W x H x D	mm	900 x 930 x 437		1143 x 948 x 609		1143 x 948 x 609		890 x 1941 x 890		890 x 1941 x 890	
Weight		Kg	70		136		149		293		320	
Connections ¹⁾	Suction	Inch (mm)	3/8 (9,52)		1/2 (12,70)		1/2 (12,70)		3/4 (19,05)		3/4 (19,05)	
	Liquid	Inch (mm)	1/4 (6,35)		3/8 (9,52)		3/8 (9,52)		5/8 (15,88)		5/8 (15,88)	
Maximum recommended pipe distance		m	25		50 ²⁾		50 ²⁾		100 ²⁾		100 ²⁾	
Air flow		m ³ /min	54		59		59		220		220	
External static pressure		Pa	17		50		50		58		58	
Performance - additional data	Ambient temperature	°C	32		32		32		32		32	
	Evaporating temperature	°C	-10 -35		-10 -35		-10 -35		-10 -35		-10 -35	
	Nominal load ampere	A	7,94	7,26	6,14	7,2	6,2	12,6	12,6	11,6	24,31	20,49
	Sound level	dB(A)	35,5 ³⁾	35,5 ³⁾	33,0 ⁴⁾	36,1 ⁴⁾	36,1 ⁴⁾	36,0 ³⁾	36,0 ³⁾	36,0 ³⁾	42,0 ³⁾	42,0 ³⁾
Necessary accessories												
Drier filter liquid line, Ø6,35 mm		D-152T / DCY-P12	Yes (included)		—		—		Yes (included)		Yes (included)	
Drier filter liquid line, Ø15,88 mm		D-155T / DCY-P8	—		Yes (included)		Yes (included)		—		Yes (included)	
Suction filter, Ø19,05 mm (outer Ø welding)		S-008T1 / S-006T	—		Yes (included)		Yes (included)		Yes (included)		Yes (included)	

1) These diameters correspond to the output of the unit. The required diameter must be calculated with Refrigeration designer available on PRO Club. 2) PZ-68S (refrigeration oil) must be added according to Refrigeration designer available on PRO Club. 3) ET -10 °C, 65 S-1, 10 m from product. 4) ET -10 °C, 80 S-1, 10 m from product.



45 °C AMBIENT TEMPERATURE: For OCU-CR400VF8(SL), OCU-CR400VF8A(SL) and OCU-CR2000VF8A(SL).



MT/LT	Cooling capacity at				R744						
	ET				-45 °C	-35 °C	-30 °C	-25 °C	-15 °C	-10 °C	-5 °C
OCU-CR200VF5A OCU-CR200VF5A-PRV	AT	32 °C	Min - Max	kW	0,7 - 1,2	1,1 - 1,9	1,3 - 2,3	1,5 - 2,6	1,9 - 3,3	2,1 - 3,7	2,3 - 4,0
		38 °C	Min - Max	kW	0,6 - 1,1	1,0 - 1,8	1,2 - 2,1	1,4 - 2,5	1,8 - 3,1	2,0 - 3,5	2,2 - 3,8
		43 °C	Min - Max	kW	0,6 - 1,0	0,9 - 1,6	1,1 - 2,0	1,3 - 2,3	1,6 - 2,9	1,8 - 3,2	2,0 - 3,5

MT	Cooling capacity at				R744						
	ET				—	—	—	—	-15 °C	-10 °C	-5 °C
OCU-CR400VF8 OCU-CR400VF8-PRV	AT	32 °C	Min - Max	kW	—	—	—	—	2,9 - 5,9	3,4 - 6,9	3,7 - 7,4
		38 °C	Min - Max	kW	—	—	—	—	2,7 - 5,3	3,1 - 6,2	3,3 - 6,7
		43 °C	Min - Max	kW	—	—	—	—	2,3 - 4,6	2,7 - 5,4	2,9 - 5,8

MT/LT	Cooling capacity at				R744						
	ET				-45 °C	-35 °C	-30 °C	-25 °C	-15 °C	-10 °C	-5 °C
OCU-CR400VF8A OCU-CR400VF8A-PRV	AT	32 °C	Min - Max	kW	1,7 - 3,3	1,9 - 3,8	2,2 - 4,4	2,6 - 5,1	3,4 - 6,7	3,8 - 7,5	4,1 - 7,4
		38 °C	Min - Max	kW	1,5 - 3,1	1,7 - 3,5	2,0 - 4,0	2,3 - 4,7	3,1 - 6,2	3,5 - 6,1	3,8 - 5,6
		43 °C	Min - Max	kW	1,4 - 2,7	1,5 - 3,1	1,8 - 3,6	2,1 - 4,2	2,8 - 5,0	3,2 - 4,7	3,4 - 4,2

MT	Cooling capacity at				R744						
	ET				—	—	—	—	-15 °C	-10 °C	-5 °C
OCU-CR1000VF8 OCU-CR1000VF8-PRV	AT	32 °C	Min - Max	kW	—	—	—	—	5,8 - 11,6	6,8 - 13,5	7,4 - 14,8
		38 °C	Min - Max	kW	—	—	—	—	4,9 - 9,9	5,8 - 11,6	6,4 - 12,8
		43 °C	Min - Max	kW	—	—	—	—	3,6 - 7,3	4,4 - 8,8	4,9 - 9,7

MT/LT	Cooling capacity at				R744						
	ET				-45 °C	-35 °C	-30 °C	-25 °C	-15 °C	-10 °C	-5 °C
OCU-CR1000VF8A OCU-CR1000VF8A-PRV	AT	32 °C	Min - Max	kW	2,6 - 5,1	3,8 - 7,6	4,5 - 9,1	5,3 - 10,5	6,7 - 13,5	7,5 - 14,9	8,1 - 16,2
		38 °C	Min - Max	kW	2,3 - 4,7	3,5 - 7,1	4,2 - 8,4	4,9 - 9,8	6,3 - 12,7	7,0 - 14,0	7,6 - 15,3
		43 °C	Min - Max	kW	2,0 - 4,0	3,1 - 6,2	3,8 - 7,5	4,4 - 8,8	5,8 - 11,5	6,4 - 12,8	7,0 - 14,0

MT/LT	Cooling capacity at				R744						
	ET				-45 °C	-35 °C	-30 °C	-25 °C	-15 °C	-10 °C	-5 °C
OCU-CR2000VF8A OCU-CR2000VF8A-PRV	AT	32 °C	Min - Max	kW	2,6 - 9,7	3,8 - 14,6	4,6 - 17,4	5,3 - 20,2	6,8 - 25,9	7,5 - 28,7	8,2 - 31,3
		38 °C	Min - Max	kW	2,4 - 9,2	3,6 - 13,9	4,3 - 16,4	5,0 - 19,1	6,4 - 24,6	7,1 - 27,1	7,8 - 29,6
		43 °C	Min - Max	kW	2,3 - 8,6	3,4 - 12,9	4,0 - 15,4	4,7 - 18,0	6,1 - 23,1	6,7 - 25,6	7,3 - 27,9

iCORE OCU/SCU-CRC Custom-fit CO₂ Series



A complement to Panasonic's existing R744 units offering maintenance friendly solutions and customisation features.



MT/LT type:
OCU-CRC060A08

6 kW (MT).
3 kW (LT).



MT/LT type:
OCU-CRC150A08

15 kW (MT).
7 kW (LT).



MT type:
OCU-CRC210M08

21 kW (MT).



MT/LT type:
SCU-CRC150A08

15 kW (MT).
7 kW (LT).



Smart interface
(local wireless access).



Service door + panel with
service valve connections.



Quick-change compressor
skid. Based on plate and
elastic hoses connections,
decreasing the vibrations
and noise.



Front wall integrated
manometers.

Refrigeration factory in Europe.


Wrocław, Poland.

Equipped with a dedicated in-house R&D team focused on advancing refrigeration technologies, the site will also house its training hub and a state-of-the-art refrigeration laboratory, set to open in early 2026. With localised production and a streamlined supply chain, the factory will enable significantly shorter delivery lead times across Europe.



iCORE OCU/SCU-CRC Custom-fit CO₂ Series · R744

Specifications and capacity tables.

New
2025

Model			OCU-CRC060A08	OCU-CRC150A08	OCU-CRC210M08	SCU-CRC150A08
Compressor			Single compressor	Single compressor	Single compressor	Single compressor
Refrigerants			R744	R744	R744	R744
PED category			II	II	III	II
Application and nominal cooling capacity		MT/LT (kW)	MT (6) / LT (3)	MT (15) / LT (7)	MT (21)	MT (15) / LT (7)
Power supply	Voltage	V	380 - 420	380 - 420	380 - 420	380 - 420
	Phase		Three phase	Three phase	Three phase	Three phase
	Frequency	Hz	50	50	50	50
SEPR cooling at ET -10 °C AT 32 °C			2,78	3,07	3,00	3,07
SEPR freezing at ET -35 °C AT 32 °C			—	1,64	—	1,64
Annual electricity consumption at ET -10 °C AT 32 °C		kWh/a	13371	30019	42050	30019
Annual electricity consumption at ET -35 °C AT 32 °C		kWh/a	17883	33650	—	33650
Evaporator connection			Multiple	Multiple	Multiple	Multiple
Evaporation temperature	Min ~ Max	°C	-35 ~ -5	-35 ~ -0	-20 ~ -5	-35 ~ 0
Ambient temperature	Min ~ Max	°C	-20 ~ 43	-20 ~ 43	-20 ~ 43	-20 ~ 43
PS line	Suction	bar	80	80	80	80
	Liquid	bar	80	80	90	80
User system external alarm. Non-voltage contact			Yes	Yes	Yes	Yes
Liquid tube electromagnetic valve output		Vac	—	—	—	—
Showcase operation ON / OFF signal. Digital output. Non-voltage contact			Yes	Yes	Yes	Yes
Modbus communication line (RS485)		Ports	Accessory	Accessory	Accessory	Accessory
Compressor type			2- stage rotary	2- stage rotary	2- stage rotary	2- stage rotary
Dimensions	W x H x D	mm	1426 x 1100 x 541	1426 x 1516 x 541	1600 x 1600 x 908	1326 x 1724 x 790
Weight		kg	200	290	390	300
Connections	Suction	Inch (mm)	3/8 (9,52)	1/2 (12,70)	5/8 (15,88)	1/2 (12,70)
	Liquid	Inch (mm)	3/8 (9,52)	1/2 (12,70)	1/2 (12,70)	1/2 (12,70)
Maximum recommended pipe distance		m	40	50	50	50
Air flow		m³/h	1x5700	2x4600	2x7500	1x8200
External static pressure		Pa	N/A	N/A	N/A	120
Performance - additional data	Nominal operating current at ET -10 °C MT / -30 °C LT AT 32 °C and 230 - 400 V 50 Hz	A	9,4	18,3	26,9	20,6
	Maximum operating current (in the most loaded phase at 230 - 400 V 50 Hz)	A	11,2	23,4	30,1	26,0
	Sound level at 10 m	dB(A)	41,5	40,4	52,6	55,0



MT/LT	Cooling capacity at				R744					
	ET				-35 °C	-30 °C	-25 °C	-15 °C	-10 °C	-5 °C
OCU-CRC060A08	AT	32 °C	Min - Max	kW	1,2 - 3,0	1,4 - 3,5	1,7 - 4,0	2,3 - 5,3	2,7 - 6,0	3,0 - 6,7
		38 °C	Min - Max	kW	1,0 - 2,8	1,2 - 3,2	1,5 - 3,8	2,0 - 4,9	2,3 - 5,5	2,6 - 6,0
		43 °C	Min - Max	kW	0,9 - 2,4	1,1 - 2,9	1,3 - 3,4	1,8 - 4,4	2,0 - 4,8	2,3 - 5,3


MT/LT	Cooling capacity at				R744					
	ET				-35 °C	-30 °C	-25 °C	-15 °C	-10 °C	-5 °C
OCU-CRC150A08	AT	32 °C	Min - Max	kW	3,0 - 7,3	3,7 - 8,7	4,3 - 10,2	5,9 - 13,5	6,8 - 15,2	7,7 - 16,8
		38 °C	Min - Max	kW	2,9 - 7,0	3,3 - 8,3	3,9 - 9,6	5,2 - 12,6	6,0 - 14,0	6,8 - 15,4
		43 °C	Min - Max	kW	— - —	3,3 - 7,8	3,8 - 9,0	4,8 - 11,5	5,5 - 12,8	6,2 - 13,9

MT	Cooling capacity at					R744				
	ET					—	—	—	-15 °C	-10 °C
OCU-CRC210M08	AT	32 °C	Min - Max	kW	—	—	—	5,1 - 18,6	6,0 - 20,6	6,9 - 22,8
		38 °C	Min - Max	kW	—	—	—	4,7 - 17,2	5,4 - 18,6	5,8 - 19,7
		43 °C	Min - Max	kW	—	—	—	3,2 - 15,5	3,5 - 15,9	3,3 - 15,8

MT/LT	Cooling capacity at				R744					
	ET				-35 °C	-30 °C	-25 °C	-15 °C	-10 °C	-5 °C
SCU-CRC150A08	AT	32 °C	Min - Max	kW	3,0 - 7,3	3,7 - 8,7	4,3 - 10,2	5,9 - 13,5	6,8 - 15,2	7,7 - 16,8
		38 °C	Min - Max	kW	2,9 - 7,0	3,3 - 8,3	3,9 - 9,6	5,2 - 12,6	6,0 - 14,0	6,8 - 15,4
		43 °C	Min - Max	kW	— - —	3,3 - 7,8	3,8 - 9,0	4,8 - 11,5	5,5 - 12,8	6,2 - 13,9

Refrigeration designer.

This simple design tool supports engineers, installers, and technicians to make a quick calculation for commercial refrigeration systems:
<http://www.panasonicproclub.com>

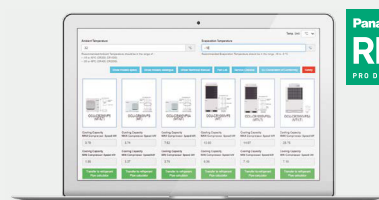

High pressure fan ready solution for iCORE SCU-CRC Custom-fit CO₂ Series


SCU-CRC150A08 model with high pressure fan for indoor mounting.



A Plug & Play solution designed specifically for indoor installations. This compact unit helps minimise installation time and reduce overall costs compared to central systems with remote condensers.


The high pressure fan feature for indoor mounting (factory-assembled customised option: stronger fan + special flange to connect the air duct to take out the hot air outside the building) is available when ordering a basic model, which is designed for indoor mounting.

Special high pressure fan with 0-90° adjustable angle flange.
Choose the most convenient way to connect your exhaust duct on field.

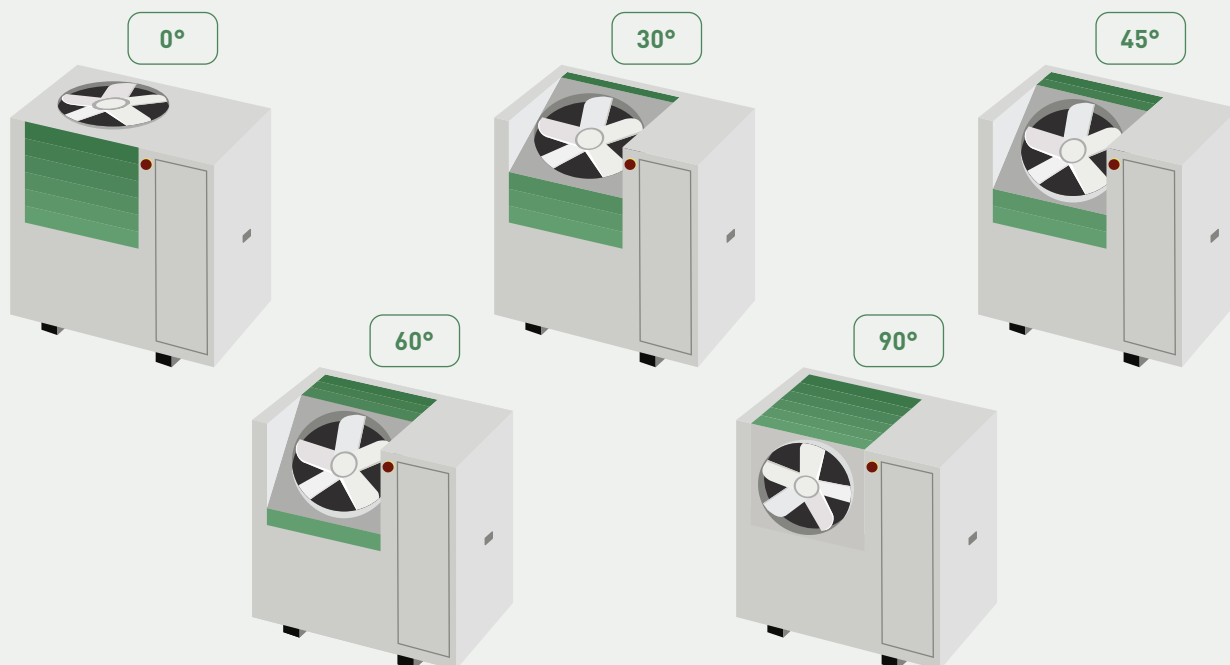

Refrigeration designer.

This simple design tool supports engineers, installers, and technicians to make a quick calculation for commercial refrigeration systems:
<http://www.panasonicproclub.com>

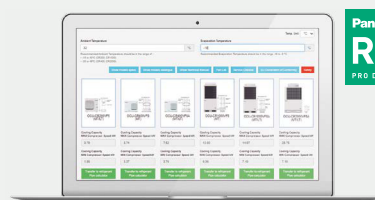



Customisation options for iCORE OCU/SCU-CRC Custom-fit CO₂ Series

This series offers customisable models to meet customer requirements.



- Factory pre-assembled options (customisation options), tested and ready-to-use options list – cutting installation time and reducing labour costs
- Up to 3 customisation options selectable*


* Available configurations vary by series.

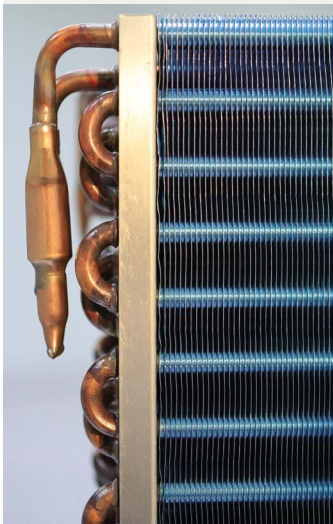


Coating.



Heat recovery.



High pressure fan.



Pressure relief valve (PRV) suction.

Base model code	Customisation options (maximum 3 per single model)				Example final code with customisation
	Coating	Heat recovery	High pressure fan	PRV suction	
	C	D	P	S	
OCU-CRC060A08	✓	—	✓	—	OCU-CRC060A08-CP
OCU-CRC150A08	✓	✓	—	✓	OCU-CRC150A08-CDS

Accessories and control – iCORE

Control panels and electric expansion valves for OCU-CR and OCU-CRC units



Control panel (Panel-C) with electric expansion valves (EEV) included.

Panel-C includes MPXPRO control, stator, probes, etc.

EEV size E2V03CWAC0.	EEV size E2V05CWAC0.	EEV size E2V09CWAC0.	EEV size E2V11CWAC0.	EEV size E2V14CWAC0.	EEV size E2V18CWAC0.	EEV size E2V24CWAC0.	EEV size E3V30CWM00.
-----	-----	-----	-----	-----	-----	-----	-----
KIT-C02-PANEL-C-03	KIT-C02-PANEL-C-05	KIT-C02-PANEL-C-09	KIT-C02-PANEL-C-11	KIT-C02-PANEL-C-14	KIT-C02-PANEL-C-18	KIT-C02-PANEL-C-24	KIT-C02-PANEL-C-30

Cold room management via condensing unit interface - Options 1-2-3 + Cold room display. Available for OCU-CRC units

Option 1



Room board for ExV control connection kit*.

* Allows to connect Carel, Danfoss and Saginomiya EEV (exact models specified in manual).

CZ-C02-EXV-KIT

Option 2



Room board for ExV control connection kit, with cables, sensors and EEV.

EEV size EEV-E2V03.	EEV size EEV-E2V05.	EEV size EEV-E2V09.	EEV size EEV-E2V11.	EEV size EEV-E2V14.	EEV size EEV-E2V18.	EEV size EEV-E2V24.	EEV size EEV-E2V30.
-----	-----	-----	-----	-----	-----	-----	-----
CZ-C02-EXV-KIT-03	CZ-C02-EXV-KIT-05	CZ-C02-EXV-KIT-09	CZ-C02-EXV-KIT-11	CZ-C02-EXV-KIT-14	CZ-C02-EXV-KIT-18	CZ-C02-EXV-KIT-24	CZ-C02-EXV-KIT-30

Cold room display



Wall-mounted LED display. To be combined with option 1 and option 2.

CZ-C02-DISPLAY

CO₂ service checker. Available for OCU-CR units



CO₂ service checker for commissioning, maintenance and troubleshooting.

PAW-C02-CHECKER

External CO₂ receivers. Available for OCU-CRC units



External CO₂ receiver, 24 L 80 bar, Housed (up to 8 kg additional refrigerant volume). Delivered with proper insulation.





CZ-C02-R24L-H




External CO₂ receiver, 24 L 80 bar, ECO (up to 8 kg additional refrigerant volume). Delivered with proper insulation.

CZ-C02-R24L-E

Accessories (model-specific compatibility - see individual descriptions)

 Service adaptor for vacuum and service (HP and LP port). Available for OCU-CR units*. * 2 pcs. are recommended for OCU-CR2000VF8A. ----- SPK-TU125	 Lubrication oil PZ-68S (0,5L) for OCU-CR and OCU-CRC units*. * You can find the PZ-68S oil "Safety Sheet" in the SAFETY section of our pipe selection software, available on our PRO Club platform. ----- CZ-CO2LBROL500	 Pressure release valve (PRV) 3/8" (9,52) NPT x G 1/2" (12,70) Pset= 80,0 bar (PRV for suction line all units* or PRV for liquid receiver for OCU-CR400VF8(A), OCU-CR1000VF8(A) and OCU-CR2000VF8A). * For OCU-CRC units a suction PRV is available also as customisation option. ----- PAW-CO2-PRV80	Pressure release valve (PRV) 3/8" (9,52) NPT x G 1/2" (12,70) Pset= 120,0 bar (PRV for liquid receiver, for OCU-CR200VF5A). ----- PAW-CO2-PRV120		
 Sight glass, 130 bar, 1/4" (6,35) ODS. For OCU-CR and OCU-CRC units. ----- PAW-SGT-GLASS-1/4	Sight glass, 130 bar, 3/8" (9,52) ODS. For OCU-CR and OCU-CRC units. ----- PAW-SGT-GLASS-3/8	Sight glass, 130 bar, 1/2" (12,70) ODS. For OCU-CR and OCU-CRC units. ----- PAW-SGT-GLASS-1/2	Sight glass, 130 bar, 5/8" (15,88) - 16 mm ODS. For OCU-CR and OCU-CRC units. ----- PAW-SGT-GLASS-5/8	Sight glass, 130 bar, 3/4" (19,05) ODS. For OCU-CR and OCU-CRC units. ----- PAW-SGT-GLASS-3/4	 Changeover valve, 3/8" (9,52) NPT x 3/8" (9,52) NPT. For OCU-CR and OCU-CRC units. ----- PAW-CO2-CHANGE-0
 Racord 3/8" (9,52) NPT x 3/8" (9,52) ODS (for K65 pipe connection). For OCU-CR and OCU-CRC units. ----- PAW-CO2-RACORD-3/8	Racord 3/8" (9,52) NPT x 1/2" (12,70) ODS (for K65 pipe connection). For OCU-CR and OCU-CRC units. ----- PAW-CO2-RACORD-1/2	Racord 3/8" (9,52) NPT x 5/8" (15,88) ODS (for K65 pipe connection). For OCU-CR and OCU-CRC units. ----- PAW-CO2-RACORD-5/8	Racord, 3/8" (9,52) NPT x 3/4" (19,05) ODS (for K65 pipe connection). For OCU-CR and OCU-CRC units. ----- PAW-CO2-RACORD-3/4		

Spare parts for service and maintenance (model-specific compatibility - see individual descriptions)

 S-006T suction filter, 3/4" (19,05) (outer Ø welding) for OCU-CR400VF8(A) and OCU-CRC060A08*. * Sample image – actual product appearance may vary. ----- 80203514142000	 S-008T1 suction filter, 3/4" (19,05) (outer Ø welding) for OCU-CR1000VF8(A), OCU-CR2000VF8A, OCU-CRC150A08 and SCU-CRC150A08. ----- 80203514139000 [1]	 D-155T filter dryer, 5/8" (15,88) (in Ø welding) (type CO-085-S) for OCU-CR1000VF8(A) and OCU-CR2000VF8A. ----- 80203513180000 [2]	
 DCY-P8 165 S filter dryer, 5/8" (16,10) (in Ø welding) for OCU-CR1000VF8(A) and OCU-CR2000VF8A. ----- 80203513187000 [3]	 D-152T filter dryer, 1/4" (6,35) (in Ø welding) (type CO-082-S) for OCU-CR200VF5A and OCU-CR400VF8(A). ----- 80203513179000 [4]	 DCY-P8 093S filter dryer, 3/8" (9,60) (in Ø welding) for OCU-CR400VF8(A). ----- 80203513190000	 DCY-P12 092 S filter dryer, 1/4" (6,40) (in Ø welding) for OCU-CR200VF5A. ----- 80203513186000 [5]

Compatibility relationship: [2] and [3] are compatible; [4] and [5] are compatible; [2] and [4] until end of stock.


iCOOL range – Inverter solutions for today and tomorrow

iCOOL

Panasonic's iCOOL range is built on flexibility and performance. iCOOL range units operate with HFO and HFC refrigerants – including next-generation A2L options with low Global Warming Potential (GWP) – providing a reliable bridge between today's needs and tomorrow's environmental goals.



Designed for high energy efficiency, each unit helps reduce operational costs and environmental impact while ensuring reliable, high-performance operation. iCOOL range is the smart choice for a market in transition – delivering future-ready innovation without compromising the needs of today.



Easy online selection.



Easy installation.



Easy commissioning.



Easy maintenance.



Low noise.



Ambient temperature up to 43 °C.

1 Easy Selection

- Online selection software
- Support to select the best HFC or A2L solution for any application

4 Easy commissioning

- Less than 3 minutes
- Local language assistance
- 100% functionally tested

2 Easy installation

- Lightweight units
- Integrated options from factory
- Refrigeration design
- Flexible and fast delivery

5 Advanced control

- Simple user interface
- Smooth start and stop function
- Working envelope control
- Oil return function

3 Easy maintenance

- Easy access to all components
- ModBus ready

iCOOL is the modular solution of Inverter condensing unit that saves you time during installation and commissioning, as the unit is factory customised to your needs.

Thanks to its large modulation capacity and its multi-refrigerant compliance, it can be used for any commercial refrigeration application providing service down to a minimum of 500 W for a single evaporator. With a very simple user interface, low energy consumption, fast commissioning and easy maintenance, iCOOL is the perfect solution for convenience stores, restaurant cold rooms, fuel stations, food stores, milk cooling and ice making equipment.



iCOOL SE Series

Inverter technology at the cost of ON / OFF.



iCOOL SE Series - Simple Engineering solution.

From 2,5 to 10,0 kW MT and from 1,2 to 3,0 kW LT.

Easy to install, with a simplified commissioning process. Inverter technology has never been this easy.

Save time and operation cost with our energy-efficient units based on Inverter compressors.

- Similar investment cost and significant energy savings vs. on-off technology
- Full BLDC Inverter technology
- Dedicated PLC controller
- Low noise operation
- Suitable for multi-evaporator applications (MT models)
- Designed and manufactured in Europe



Upgrade* of the existing range of iCOOL SE Series units to meet the A2L requirements. Inverter technology at the cost of on-off. Simple engineering solution.

- Multi-refrigerant compatibility (install today with HFC, retrofit to A2L after the new F-gas ban dates)
- A2L safety components (additional compressor's compartment ventilation fan + differential air-pressure switch + isolated e-box)

A2L refrigerants are a class of low Global Warming Potential (GWP) gases that serve as alternatives to traditional HFCs, offering mild flammability and low toxicity.

* Currently under development.

A2L is lower flammability and lower toxicity



iCOOL SE Series · R448A / R449A / R134a / R513A / R454C / R455A

Specifications and capacity tables.

New
2025




Model			OCU-KRE025M05	OCU-KRE045M05	OCU-KRE070M05	OCU-LRC100M08	
Compressor			Single compressor	Single compressor	Single compressor	Single compressor	
Compatible refrigerants			R448A, R449A, R134a, R513A	R448A, R449A, R134a, R513A	R448A, R449A, R134a, R513A	R448A, R449A, R134a, R513A, R454C, R455A	
PED category			I	I	I	I	
Application and nominal cooling capacity		MT/LT (kW)	MT (2,5)	MT (4,5)	MT (6,5)	MT (10,0)	
SEPR cooling at ET -10 °C AT 32 °C (R448A-OCU-K, R455A-OCU-L)			—	—	3,80	3,61	
SEPR freezing at ET -35 °C AT 32 °C (R448A)			—	—	—	—	
Annual electricity consumption at ET -10 °C AT 32 °C (R448A-OCU-K, R455A-OCU-L)		kWh/a	—	—	10749	16708	
Annual electricity consumption at ET -35 °C AT 32 °C (R448A)		kWh/a	—	—	—	—	
COP at ET -10°C, AT 32 °C (R448A)			1,88	1,89	—	—	
COP at ET -35°C, AT 32 °C (R448A)			—	—	—	—	
Nominal operating current at ET -10 °C MT / -30 °C LT AT 32 °C and 230 - 400 V 50 Hz		A	6,7	11,9	14,7	8,7	
Maximum operating current (in the most loaded phase at 230 - 400 V 50 Hz)		A	7,9	13,5	17,4	11,7	
Maximum power consumption		kW	1,6	2,8	3,6	5,2	
Dimensions WxHxD		mm	1000 x 605 x 450	1000 x 605 x 450	1100 x 805 x 450	1286 x 858 x 471	
Weight		kg	70	70	80	170	
Sound level at 10 m		dB(A)	42,5	42,5	42,5	39,0	
Condenser	Fans x diameter	mm	1x450	1x450	1x500	1x710	
	Air flow	m³/h	3600	3600	5200	6700	
	Fan power supply	V / ph / Hz	220 - 240/1/50	220 - 240/1/50	220 - 240/1/50	220 - 277/1/50	
	Fan power consumption	W	170	170	230	280	
	Nominal fan amperage	A	1,4	1,4	2,1	1,2	
Compressor	Model		C-6RVN63LOB	C-7RVN113LOB	C-7RVN153LOB	C-8RZ420L4AAL	
	Volumetric flow		m³/h	0,6 - 4,1	1,25 - 7,5	1,7 - 10,4	2,3 - 15,1
	Rotation range		rps	30 - 90	30 - 90	30 - 90	30 - 100
	Current	Full load amperage	A	4	7,6	9,4	7,6
		Peak current limit / Locked rotor amperage	A	15/—	25/—	25/—	25/—
	Oil type			FV68S	FV68S	FV68S	FV68S (PVE)
	Oil compressor charge		dm³	0,6	0,7	0,7	1,35 + 0,6
	Crankcase heater power consumption		W	35	35	35	35
Connections	Suction	Inch	1/2	5/8	3/4	7/8	
	Liquid		3/8	3/8	3/8	1/2	
Liquid receiver		dm³	3,9	3,9	5,3	10,0	
CU power supply	Voltage		V / ph / Hz	220 - 240/1/50	220 - 240/1/50	220 - 240/1/50	3x400/50 PE+N (TN-S)
	Recommended minimum cable cross-section		mm²	3x2,5	3x2,5	3x2,5	5x4,0
	Recommended minimum protection			C16	C20	C20	C25
Maximum recommended pipe distance		m	30	30	30	40	
Maximum height distance	Evaporator above	m	7	7	7	12	
	Evaporator below	m	7	7	7	12	
Which pipes needs to be insulated		Suction / liquid / both	Suction	Suction	Suction	Suction	
Recommended insulation thickness		mm	13	13	13	13	
Maximum quantity of evaporators connected		Qty.	3	3	3	7	
Evaporation temperature		Min ~ Max °C	-15 ~ 0	-15 ~ 0	-15 ~ 0	-15 ~ 5	
Ambient temperature		Min ~ Max °C	-20 ~ 43	-20 ~ 43	-20 ~ 43	-20 ~ 43	



iCOOL SE Series · R448A / R449A

Specifications and capacity tables.

New
2025



Model			OCU-KRE012L05	OCU-KRE022L05	OCU-KRE030L05
Compressor			Single compressor	Single compressor	Single compressor
Compatible refrigerants			R448A, R449A	R448A, R449A	R448A, R449A
PED category			I	I	I
Application and nominal cooling capacity		MT/LT (kW)	LT (1,2)	LT (2,2)	LT (2,9)
SEPR cooling at ET -10 °C AT 32 °C (R448A-OCU-K, R455A-OCU-L)			—	—	—
SEPR freezing at ET -35 °C AT 32 °C (R448A)			—	—	2,14
Annual electricity consumption at ET -10 °C AT 32 °C (R448A-OCU-K, R455A-OCU-L)		kWh/a	—	—	—
Annual electricity consumption at ET -35 °C AT 32 °C (R448A)		kWh/a	—	—	8475
COP at ET -10°C, AT 32 °C (R448A)			—	—	—
COP at ET -35°C, AT 32 °C (R448A)			0,95	0,98	—
Nominal operating current at ET -10 °C MT / -30 °C LT AT 32 °C and 230 - 400 V 50 Hz		A	5,5	9,5	12,4
Maximum operating current (in the most loaded phase at 230 - 400 V 50 Hz)		A	7,2	12,7	17
Maximum power consumption		kW	1,4	2,6	3,6
Dimensions		W x H x D	mm	1000 x 605 x 450	1000 x 605 x 450
Weight		kg	70	70	80
Sound level at 10 m		dB(A)	42,5	42,5	42,5
Condenser	Fans x diameter	mm	1x450	1x450	1x450
	Air flow	m³/h	3600	3600	3600
	Fan power supply	V / ph / Hz	220 - 240 / 1 / 50	220 - 240 / 1 / 50	220 - 240 / 1 / 50
	Fan power consumption	W	170	170	170
	Nominal fan amperage	A	1,4	1,4	1,4
Compressor	Model		C-6RVN63L0B	C-7RVN113L0B	C-7RVN153L0B
	Volumetric flow		m³/h	0,6 - 4,1	1,25 - 7,5
	Rotation range		rps	30 - 90	30 - 90
	Current	Full load amperage	A	3,6	7,1
		Peak current limit / Locked rotor amperage	A	15 / —	25 / —
	Oil type		FV68S	FV68S	FV68S
	Oil compressor charge		dm³	0,6	0,7
	Crankcase heater power consumption		W	35	35
Connections	Suction	Inch	1/2	5/8	3/4
	Liquid		3/8	3/8	3/8
Liquid receiver		dm³	3,9	3,9	3,9
CU power supply	Voltage	V / ph / Hz	220 - 240 / 1 / 50	220 - 240 / 1 / 50	220 - 240 / 1 / 50
	Recommended minimum cable cross-section		mm²	3x2,5	3x2,5
	Recommended minimum protection			C16	C20
Maximum recommended pipe distance		m	20	20	20
Maximum height distance	Evaporator above	m	7	7	7
	Evaporator below	m	7	7	7
Which pipes needs to be insulated		Suction / liquid / both	Suction	Suction	Suction
Recommended insulation thickness		mm	19	19	19
Maximum quantity of evaporators connected		Qty.	3	3	3
Evaporation temperature		Min - Max °C	-35 - -15	-35 - -15	-35 - -15
Ambient temperature		Min - Max °C	-20 - 43	-20 - 43	-20 - 43

Accessories for iCOOL SE Series.

Compressor oil FV68S 2 L. CZ-HFC-FV68SL2



Compressor oil FV32S 2 L. CZ-HFC-FV32SL2



MT	Cooling capacity at				R449A*/R448A*			R134a*/R513A*		
	ET				-15 °C	-10 °C	-5 °C	-15 °C	-10 °C	-5 °C
OCU-KRE025M05	AT	32 °C	Min - Max	kW	0,7 - 2,1	0,8 - 2,6	1,0 - 3,0	0,4 - 1,2	0,5 - 1,5	0,6 - 1,8
		38 °C	Min - Max	kW	0,6 - 2,0	0,8 - 2,4	0,9 - 2,7	0,3 - 1,1	0,4 - 1,3	0,5 - 1,7
		43 °C	Min - Max	kW	0,6 - 1,8	0,7 - 2,0	0,8 - 2,2	0,3 - 1,0	0,4 - 1,2	0,5 - 1,5

MT	Cooling capacity at				R449A*/R448A*			R134a*/R513A*		
	ET				-15 °C	-10 °C	-5 °C	-15 °C	-10 °C	-5 °C
OCU-KRE045M05	AT	32 °C	Min - Max	kW	1,3 - 3,9	1,6 - 4,6	1,9 - 5,4	0,7 - 2,2	0,9 - 2,7	1,1 - 3,4
		38 °C	Min - Max	kW	1,2 - 3,7	1,5 - 4,1	1,8 - 4,6	0,6 - 2,0	0,8 - 2,5	1,0 - 3,1
		43 °C	Min - Max	kW	1,2 - 3,0	1,4 - 3,1	1,7 - 3,4	0,6 - 1,8	0,7 - 2,3	0,9 - 2,8

MT	Cooling capacity at				R449A*/R448A*			R134a*/R513A*		
	ET				-15 °C	-10 °C	-5 °C	-15 °C	-10 °C	-5 °C
OCU-KRE070M05	AT	32 °C	Min - Max	kW	1,9 - 5,5	2,3 - 6,6	2,8 - 7,6	0,9 - 3,1	1,2 - 3,9	1,5 - 4,8
		38 °C	Min - Max	kW	1,8 - 5,0	2,2 - 6,0	2,6 - 6,8	0,9 - 2,8	1,1 - 3,5	1,4 - 4,4
		43 °C	Min - Max	kW	1,7 - 4,6	2,0 - 5,3	2,4 - 5,9	0,8 - 2,6	1,0 - 3,3	1,3 - 4,0

MT	Cooling capacity at				R449A*/R448A*			R134a*/R513A*			R455A/R454C*		
	ET				-15 °C	-10 °C	-5 °C	-15 °C	-10 °C	-5 °C	-15 °C	-10 °C	-5 °C
OCU-LRC100M08	AT	32 °C	Min - Max	kW	1,9 - 8,0	2,3 - 9,5	2,7 - 11,2	0,8 - 4,0	1,0 - 5,3	1,4 - 6,7	1,9 - 8,4	2,3 - 9,8	2,7 - 11,2
		38 °C	Min - Max	kW	1,8 - 7,3	2,1 - 8,8	2,5 - 10,4	0,8 - 3,9	1,0 - 4,9	1,3 - 6,1	1,8 - 7,8	2,1 - 9,1	2,5 - 10,4
		43 °C	Min - Max	kW	1,6 - 6,8	2,0 - 8,2	2,4 - 9,6	0,8 - 3,6	1,0 - 4,5	1,3 - 5,5	1,6 - 7,3	2,0 - 8,5	2,4 - 9,8

LT	Cooling capacity at				R449A/R448A		
	ET				-35 °C	-30 °C	-25 °C
OCU-KRE012L05	AT	32 °C	Min - Max	kW	0,3 - 1,0	0,4 - 1,2	0,5 - 1,5
		38 °C	Min - Max	kW	0,3 - 0,9	0,3 - 1,1	0,4 - 1,4
		43 °C	Min - Max	kW	0,2 - 0,8	0,3 - 1,0	0,4 - 1,3


LT	Cooling capacity at				R449A/R448A		
	ET				-35 °C	-30 °C	-25 °C
OCU-KRE022L05	AT	32 °C	Min - Max	kW	0,6 - 1,8	0,7 - 2,2	0,9 - 2,8
		38 °C	Min - Max	kW	0,5 - 1,6	0,7 - 2,0	0,8 - 2,5
		43 °C	Min - Max	kW	0,5 - 1,5	0,6 - 1,9	0,8 - 2,3

LT	Cooling capacity at				R449A/R448A		
	ET				-35 °C	-30 °C	-25 °C
OCU-KRE030L05	AT	32 °C	Min - Max	kW	0,8 - 2,4	1,0 - 2,9	1,3 - 3,6
		38 °C	Min - Max	kW	0,7 - 2,2	0,9 - 2,7	1,2 - 3,3
		43 °C	Min - Max	kW	0,7 - 2,0	0,9 - 2,4	1,1 - 3,0

* Data for R449A/R448A, R134a/R513A and R454C regarding the OCU-LRC100M08 are tentative. For more detailed information, please contact Panasonic.

Refrigeration designer.

This simple design tool supports engineers, installers, and technicians to make a quick calculation for commercial refrigeration systems:
<http://www.panasonicproclub.com>

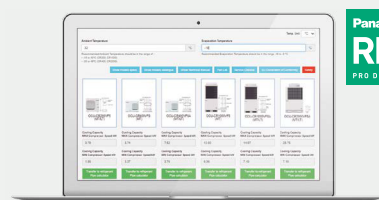

iCOOL OCU/SCU Series


The opportunity to reach a broader audience by entering the Condensing Units (CDUs) market, which CO₂ has not yet covered.



MT/LT type: iCOOL OCU/SCU Series.

From 3,5 to 42,0 kW.


Recognising that HFC/HFO systems still represent the majority of demand in the European refrigeration market, the line-up is designed to support current needs while also enabling a smooth transition for those seeking more environmentally friendly alternatives. The iCOOL range addresses this directly, supporting continued use of HFCs and introducing A2L-ready feature, offering customers a flexible, future-proof solution that bridges today's realities with tomorrow's requirements.

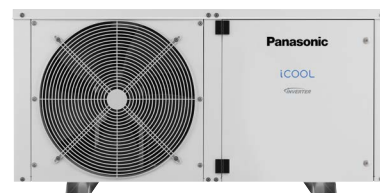

- Complete capacity range of compact CDUs for multi-evaporator applications
- Significant energy savings vs. ON / OFF
- Low noise units with special silent features: Inverter compressor, EC fan and 6-face soundproof insulation of the compressor compartment
- Customisation options – fully tested and factory mounted

Customisation options for iCOOL OCU/SCU Series

The range offers customisable models that meet customer requirements.

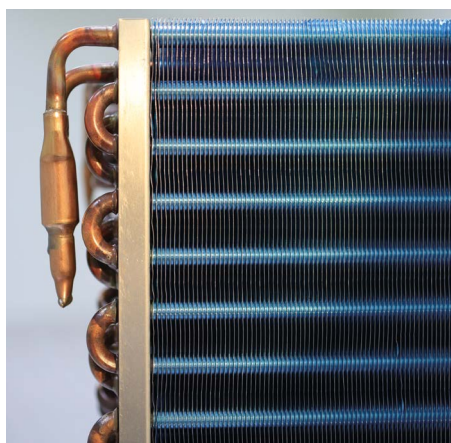

Coating.



Heat recovery.



High pressure fan.

Base model code	Customisation options (maximum 3 per single model)			Example final code with customisation
	Coating	Heat recovery	High pressure fan	
	C	D	P	
OCU-KRC045M08	✓	✓	✓	OCU-KRC045M08-CDP
OCU-KRC070M08	✓	✓	✓	OCU-KRC070M08-CDP
OCU-KRC100M08	✓	✓	✓	OCU-KRC100M08-CDP

iCOOL OCU Series · R448A / R449A / R134a / R513A

Specifications and capacity tables.

New
2025

Model			OCU-KRC045M08	OCU-KRC070M08	OCU-KRC100M08	OCU-KSC120M08	OCU-KSC150M08	
Compressor			Single compressor	Single compressor	Single compressor	Single compressor	Single compressor	
Compatible refrigerants			R448A, R449A, R134a, R513A	R448A, R449A, R134a, R513A	R448A, R449A, R134a, R513A	R448A, R449A, R134a, R513A	R448A, R449A, R134a, R513A	
PED category			I	II	II	II	II	
Application and nominal cooling capacity		MT/LT (kW)	MT (4,5)	MT (7,0)	MT (9,0)	MT (12,0)	MT (15,0)	
SEPR cooling at ET -10 °C AT 32 °C			3,28	3,60	4,29	3,48	3,87	
SEPR freezing at ET -35 °C AT 32 °C			—	—	—	—	—	
Annual electricity consumption at ET -10 °C AT 32 °C		kWh/a	9070	12324	13347	20141	23139	
Annual electricity consumption at ET -35 °C AT 32 °C		kWh/a	—	—	—	—	—	
Nominal operating current at ET -10 °C MT / -30 °C LT AT 32 °C and 230 - 400 V 50 Hz		A	5,0	6,9	7,2	14,8	15,2	
Maximum operating current (in the most loaded phase at 230 - 400 V 50 Hz)		A	7,2	10,1	9,8	20,5	22,6	
Maximum power consumption		kW	3,7	5,6	5,4	9,3	10,1	
Dimensions		W x H x D	mm	1106 x 559 x 461	1140 x 758 x 439	1280 x 963 x 439	1322 x 1493 x 475	
Weight		kg	94	110	140	175	231	
Sound level at 10 m		dB(A)	39,0	40,0	41,0	40,0	44,0	
Condenser	Fans x diameter	mm	1x450	1x630	1x630	1x710	2x630	
	Air flow	m³/h	3850	6150	6150	6920	11150	
	Fan static pressure	Pa	N/A	N/A	N/A	N/A	N/A	
	Fan power supply	V / ph / Hz	200 - 277 / 1 / 50	200 - 277 / 1 / 50	200 - 277 / 1 / 50	200 - 277 / 1 / 50	200 - 277 / 1 / 50	
	Fan power consumption	W	170	220	220	280	2x230	
	Nominal fan amperage	A	1,4	1,2	1,2	1,2	2x1	
Compressor	Model		C-7RVN113L0A	C-7RZ320L4ABL	C-8RZ420L4AAL	C-SBS180H00B	C-SBVN373L0B	
	Volumetric flow	m³/h	1,25 - 7,5	1,7 - 10,4	3,0 - 13,6	5,8 - 19,2	9,2 - 24,6	
	Rotation range	rps	15 - 90	15 - 90	20 - 90	32 - 100	30 - 80	
	Current	Full load amperage	A	5,8	8,7	8,8	15,8	16,9
		Peak current limit / Locked rotor amperage	A	17,8 / —	19,2 / —	31,9 / —	40 / —	46 / —
	Oil type		FV68S (PVE)	FV68S (PVE)	FV68S (PVE)	FV68S (PVE)	FV68S (PVE)	
	Crankcase heater power consumption	W	35	40	35	70	90	
Oil charge		dm³	0,7+0,4	0,7+0,4	1,35+0,4	2,0+0,4	2,0+0,6	
Connections	Suction	Inch	5/8	3/4	7/8	7/8	1 1/8	
	Liquid	Inch	3/8	3/8	1/2	1/2	5/8	
Liquid receiver		dm³	3,9	7,1	10,0	10	15	
CU power supply	Voltage	V / Hz	3x400/50 PE+N (TN-S)	3x400/50 PE+N (TN-S)	3x400/50 PE+N (TN-S)	3x400/50 PE+N (TN-S)	3x400/50 PE+N (TN-S)	
	Recommended minimum cable cross-section	mm²	5x2,5	5x2,5	5x2,5	5x4,0	5x6,0	
	Recommended minimum protection		C16	C16	C20	C25	C32	
Maximum recommended pipe distance		m	40	40	40	40	50	
Maximum height distance	Evaporator above	m	12	12	12	12	12	
	Evaporator below	m	12	12	12	12	12	
Which pipes needs to be insulated		Suction / liquid / both	Suction	Suction	Suction	Suction	Suction	
Recommended insulation thickness		mm	13	13	13	13	13	
Maximum quantity of evaporators connected		Qty.	5	5	7	7	7	
Evaporation temperature		Min – Max °C	-15~5	-15~5	-15~10	-15~10	-15~10	
Ambient temperature		Min – Max °C	-20~43	-20~43	-20~43	-20~43	-20~43	


New
2025

Model			OCU-KSC160M08	OCU-KSC190M08	OCU-KSC240M08	OCU-KSC280M08	OCU-KSC400M08	OCU-KSC420M08
Compressor			Tandem compressor	Tandem compressor	Tandem compressor	Tandem compressor	Tandem compressor	Tandem compressor
Compatible refrigerants			R448A, R449A, R134a, R513A	R448A, R449A, R134a, R513A	R448A, R449A, R134a, R513A	R448A, R449A, R134a, R513A	R448A, R449A, R134a, R513A	R448A, R449A, R134a, R513A
PED category			II	II	II	II	II	II
Application and nominal cooling capacity		MT/LT (kW)	MT (16,0)	MT (19,0)	MT (24,0)	MT (28,0)	MT (40,0)	MT (42,0)
SEPR cooling at ET -10 °C AT 32 °C			3,61	3,39	4,31	4,27	3,61	3,52
SEPR freezing at ET -35 °C AT 32 °C			—	—	—	—	—	—
Annual electricity consumption at ET -10 °C AT 32 °C		kWh/a	27903	33985	34316	39329	67049	73046
Annual electricity consumption at ET -35 °C AT 32 °C		kWh/a	—	—	—	—	—	—
Nominal operating current at ET -10 °C MT / -30 °C LT AT 32 °C and 230-400 V 50 Hz	A		21,3	26,3	25,9	30,5	40,0	43,9
Maximum operating current (in the most loaded phase at 230-400 V 50 Hz)	A		27,9	32,3	34,8	40,4	53,8	57,3
Maximum power consumption	kW		14	17,1	17,4	20,9	28,5	31,4
Dimensions	W x H x D	mm	1521 x 1493 x 475	1521 x 1493 x 475	1528 x 1488 x 879	1528 x 1488 x 879	1670 x 1695 x 1090	1670 x 1695 x 1090
Weight		kg	283	285	397	426	520	520
Sound level at 10 m		dB(A)	44,0	44,0	44,0	44,0	43,0	43,0
Condenser	Fans x diameter	mm	2x630	2x630	2x630	2x630	1x800	1x800
	Air flow	m³/h	11150	11150	12600	12600	21000	21000
	Fan static pressure	Pa	N/A	N/A	N/A	N/A	160	160
	Fan power supply	V / ph / Hz	200-277/1/50	200-277/1/50	200-240/1/50	200-277/1/50	380-400/3/50	380-400/3/50
	Fan power consumption	W	2x230	2x230	2x230	2x230	1950	1950
	Nominal fan amperage	A	2x1	2x1	2x1	2x1	2,8	2,8
Compressor	Model		C-SBS180H00B/C-SBN303H8G	C-SBS180H00B/C-SBN453H8G	C-SBVN373L0B/C-SBN453H8G	C-SBVN373L0B/C-SCN603H8T	4CC149NA04/C-SCN753H8T	4CC149NA04/C-SCN903H8T
	Volumetric flow	m³/h	5,8-17,4/11,6	5,8-17,4/14,7	7,7-24,6/14,7	7,7-24,6/23,6	10,7-39,3/30,3	10,7-39,3/36,2
	Rotation range	rps	32-90	32-90	31-80	31-80	21-75	21-75
	Full load amperage	A	14,7/8,0	15,2/11,9	17,2/11,9	18,4/16,0	26,0/19,4	25,8/23,2
	Current	Peak current limit / Locked rotor amperage	A	34/48	34/66	46/66	46/80	52/96
	Oil type		FV68S (PVE)	FV68S (PVE)	FV68S (PVE)	FV68S (PVE)	FV68S (PVE)	FV68S (PVE)
	Crankcase heater power consumption	W	2x70	2x70	40	2x90	2x90	2x90
Oil charge		dm³	2,0+1,7+2x0,4	2,0+1,7+2x0,4	2,0+1,7+2x0,6	2,0+2,8+2x0,6	2x2,8+2,0	2x2,8+2,0
Connections	Suction	Inch	1 1/8	1 1/8	1 3/8	1 3/8	1 5/8	1 5/8
	Liquid	Inch	5/8	5/8	7/8	7/8	7/8	7/8
Liquid receiver		dm³	15	15	15	15	30	30
CU power supply	Voltage	V / Hz	3x400/50 PE+N (TN-S)	3x400/50 PE+N (TN-S)	3x400/50 PE+N (TN-S)	3x400/50 PE+N (TN-S)	3x400/50 PE+N (TN-S)	3x400/50 PE+N (TN-S)
	Recommended minimum cable cross-section	mm²	5x6,0	5x10,0	5x10,0	5x10,0	5x16,0	5x16,0
	Recommended minimum protection		C32	C40	C40	C50	C63	C63
Maximum recommended pipe distance		m	50	50	70	70	70	70
Maximum height distance	Evaporator above	m	12	12	12	12	12	12
	Evaporator below	m	12	12	12	12	12	12
Which pipes needs to be insulated	Suction / liquid / both		Suction	Suction	Suction	Suction	Suction	Suction
Recommended insulation thickness		mm	13	13	13	13	13	13
Maximum quantity of evaporators connected		Qty.	10	10	10	10	20	20
Evaporation temperature	Min ~ Max	°C	-15 ~ 10	-15 ~ 10	-15 ~ 10	-15 ~ 10	-15 ~ 10	-15 ~ 10
Ambient temperature	Min ~ Max	°C	-20 ~ 43	-20 ~ 43	-20 ~ 43	-20 ~ 43	-20 ~ 43	-20 ~ 43



iCOOL OCU Series · R448A / R449A

Specifications and capacity tables.

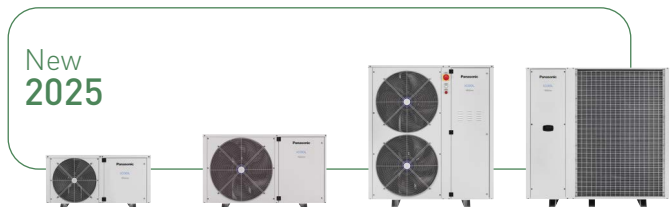

Model			OCU-KRC035L08	OCU-KRC050L08	OCU-KSC090L08	OCU-KSC140L08	
Compressor			Single compressor	Single compressor	Single compressor	Tandem compressor	
Compatible refrigerants			R448A, R449A	R448A, R449A	R448A, R449A	R448A, R449A	
PED category			I	II	II	II	
Application and nominal cooling capacity		MT/LT (kW)	LT [3,5]	LT [5,0]	LT [9,0]	LT [14,0]	
SEPR cooling at ET -10 °C AT 32 °C			—	—	—	—	
SEPR freezing at ET -35 °C AT 32 °C			1,76	1,83	1,65	—	
Annual electricity consumption at ET -10 °C AT 32 °C		kWh/a	—	—	—	—	
Annual electricity consumption at ET -35 °C AT 32 °C		kWh/a	10630	18315	33998	—	
Nominal operating current at ET -10 °C MT / -30 °C LT AT 32 °C and 230 - 400 V 50 Hz		A	5,9	10,1	20,7	32,9	
Maximum operating current (in the most loaded phase at 230 - 400 V 50 Hz)		A	7,9	12,8	29,9	43	
Maximum power consumption		kW	4,1	7,2	13,6	21	
Dimensions		W x H x D	mm	1105 x 559 x 466	1289 x 758 x 439	1322 x 1493 x 475	
Weight		kg	96	132	286	460	
Sound level at 10 m		dB(A)	39,0	44,0	44,0	44,0	
Condenser	Fans x diameter	mm	1x450	1x630	2x630	2x630	
	Air flow	m³/h	3850	6150	11150	12600	
	Fan static pressure	Pa	N/A	N/A	N/A	N/A	
	Fan power supply	V / ph / Hz	200 - 277 / 1/50	200 - 277 / 1/50	200 - 277 / 1/50	200 - 277 / 1/50	
	Fan power consumption	W	170	220	2x230	2x230	
	Nominal fan amperage	A	1,4	1,2	2x1	2x1	
Compressor	Model		C-7RZ320L4ABL	C-9RZ580L4AAL	ACC144NA03	ACC144NA03/ C-SCN603L8H	
	Volumetric flow		m³/h	1,7 - 10,4	5,2 - 18,7	10,0 - 37,6	
	Rotation range		rps	15 - 90	25 - 90	25 - 72	
	Current	Full load amperage	A	6,4	10	22,9	21,6 / 14,8
		Peak current limit / Locked rotor amperage	A	19,2 / —	28,4 / —	46 / —	46 / 90
	Oil type		FV68S (PVE)	FV68S (PVE)	FV32S (PVE)	FV32S (PVE)	
	Crankcase heater power consumption		W	35	35	90	2x90
Oil charge		dm³	0,7+0,4	2,1+0,4	2,5+0,4	2x2,5+2x0,6	
Connections	Suction	Inch	7/8	7/8	1 1/8	1 3/8	
	Liquid	Inch	3/8	3/8	5/8	7/8	
Liquid receiver		dm³	3,9	7,1	15	15	
CU power supply	Voltage	V / Hz	3x400/50 PE+N (TN-S)	3x400/50 PE+N (TN-S)	3x400/50 PE+N (TN-S)	3x400/50 PE+N (TN-S)	
	Recommended minimum cable cross-section		mm²	5x2,5	5x2,5	5x6,0	
	Recommended minimum protection			C16	C20	C32	
Maximum recommended pipe distance		m	40	40	40	50	
Maximum height distance	Evaporator above	m	12	12	12	12	
	Evaporator below	m	12	12	12	12	
Which pipes needs to be insulated		Suction / liquid / both	Suction	Suction	Suction	Suction	
Recommended insulation thickness		mm	19	19	19	19	
Maximum quantity of evaporators connected		Qty.	5	5	5	7	
Evaporation temperature		Min ~ Max °C	-35 ~ -15	-35 ~ -15	-35 ~ -10	-35 ~ -10	
Ambient temperature		Min ~ Max °C	-20 ~ 43	-20 ~ 43	-20 ~ 43	-20 ~ 43	

Accessories for iCOOL OCU Series.

Compressor oil FV68S 2 L.
CZ-HFC-FV68SL2Compressor oil FV32S 2 L.
CZ-HFC-FV32SL2

iCOOL SCU Series · R448A / R449A / R134a / R513A

Specifications and capacity tables.

New
2025

Model			SCU-KSC160M08	SCU-KSC190M08	SCU-KSC090L08
Compressor			Tandem compressor	Tandem compressor	Single compressor
Compatible refrigerants			R448A, R449A, R134a, R513A	R448A, R449A, R134a, R513A	R448A, R449A
PED category			II	II	II
Application and nominal cooling capacity		MT/LT (kW)	MT (16,0)	MT (19,0)	LT (9,0)
SEPR cooling at ET -10 °C AT 32 °C			3,14	3,19	—
SEPR freezing at ET -35 °C AT 32 °C			—	—	—
Annual electricity consumption at ET -10 °C AT 32 °C		kWh/a	31411	35312	—
Annual electricity consumption at ET -35 °C AT 32 °C		kWh/a	—	—	—
Nominal operating current at ET -10 °C MT / -30 °C LT AT 32 °C and 230 - 400 V 50 Hz		A	23,6	28,7	23,0
Maximum operating current (in the most loaded phase at 230 - 400 V 50 Hz)		A	30,5	34,9	32,5
Maximum power consumption		kW	14,6	17,7	14,1
Dimensions		W x H x D	mm	1327 x 1558 x 745	1327 x 1558 x 745
Weight		kg	342	344	325
Sound level at 10 m		dB(A)	55,0	55,0	55,0
Condenser	Fans x diameter	mm	1x560	1x560	1x560
	Air flow	m³/h	9000	9000	9000
	Fan static pressure	Pa	120	80	120
	Fan power supply	V / ph / Hz	200 - 277 / 1/50	200 - 277 / 1/50	200 - 277 / 1/50
	Fan power consumption	W	1050	1050	1050
	Nominal fan amperage	A	4,6	4,6	4,6
Compressor	Model		C-SBS180H00B/ C-SBN303H8G	C-SBS180H00B/ C-SBN453H8G	ACC144NA03
	Volumetric flow		m³/h	5,8 - 17,4 / 11,6	10,0 - 37,6
	Rotation range		rps	32 - 90	25 - 72
	Current	Full load amperage	A	14,7 / 8,0	22,9
		Peak current limit / Locked rotor amperage	A	34 / 48	46 / —
	Oil type		FV68S (PVE)	FV68S (PVE)	FV32S (PVE)
Crankcase heater power consumption		W	2x70	2x70	90
Oil charge		dm³	2,0 + 1,7 + 2x0,4	2,0 + 1,7 + 2x0,4	2,5 + 0,4
Connections	Suction	Inch	1 1/8	1 1/8	1 1/8
	Liquid	Inch	5/8	5/8	5/8
Liquid receiver		dm³	15	15	15
CU power supply	Voltage		V / Hz	3x400/50 PE+N (TN-S)	3x400/50 PE+N (TN-S)
	Recommended minimum cable cross-section		mm²	5x6,0	5x10,0
	Recommended minimum protection			C32	C40
Maximum recommended pipe distance		m	50	50	40
Maximum height distance	Evaporator above	m	12	12	12
	Evaporator below	m	12	12	12
Which pipes needs to be insulated		Suction / liquid / both	Suction	Suction	Suction
Recommended insulation thickness		mm	13	13	19
Maximum quantity of evaporators connected		Qty.	10	10	5
Evaporation temperature		Min ~ Max °C	-15 ~ 10	-15 ~ 10	-35 ~ -10
Ambient temperature		Min ~ Max °C	-20 ~ 43	-20 ~ 43	-20 ~ 43

Accessories for iCOOL SCU Series.

Compressor oil FV68S 2 L.
CZ-HFC-FV68SL2Compressor oil FV32S 2 L.
CZ-HFC-FV32SL2

iCOOL OCU/SCU Series · R448A / R449A / R134a / R513A

Specifications and capacity tables.

MT	Cooling capacity at				R449A/R448A			R134a/R513A		
	ET				-15 °C	-10 °C	-5 °C	-15 °C	-10 °C	-5 °C
OCU-KRC045M08	AT	32 °C	Min - Max	kW	0,6 - 3,9	0,8 - 4,7	0,9 - 5,7	— — —	0,5 - 3,4	0,6 - 4,0
		38 °C	Min - Max	kW	0,6 - 3,8	0,8 - 4,6	0,9 - 5,6	— — —	0,5 - 3,2	0,5 - 3,7
		43 °C	Min - Max	kW	0,6 - 3,8	0,7 - 4,6	0,9 - 5,6	— — —	0,4 - 2,9	0,5 - 3,4

MT	Cooling capacity at				R449A/R448A			R134a/R513A		
	ET				-15 °C	-10 °C	-5 °C	-15 °C	-10 °C	-5 °C
OCU-KRC070M08	AT	32 °C	Min - Max	kW	1,0 - 6,1	1,2 - 7,2	1,4 - 8,4	— — —	0,8 - 4,1	1,0 - 4,9
		38 °C	Min - Max	kW	0,9 - 6,0	1,2 - 7,1	1,4 - 8,3	— — —	0,8 - 3,8	0,9 - 4,5
		43 °C	Min - Max	kW	0,9 - 6,0	1,1 - 7,1	1,4 - 8,3	— — —	0,7 - 3,5	0,9 - 4,2

MT	Cooling capacity at				R449A/R448A			R134a/R513A		
	ET				-15 °C	-10 °C	-5 °C	-15 °C	-10 °C	-5 °C
OCU-KRC100M08	AT	32 °C	Min - Max	kW	1,8 - 7,9	2,2 - 9,4	2,6 - 11,1	1,1 - 4,8	1,3 - 5,8	1,6 - 7,0
		38 °C	Min - Max	kW	1,7 - 7,2	2,0 - 8,7	2,4 - 10,2	1,0 - 4,4	1,2 - 5,4	1,5 - 6,6
		43 °C	Min - Max	kW	1,5 - 6,7	1,9 - 8,0	2,3 - 9,5	0,9 - 4,1	1,1 - 5,1	1,4 - 6,1

MT	Cooling capacity at				R449A/R448A			R134a/R513A		
	ET				-15 °C	-10 °C	-5 °C	-15 °C	-10 °C	-5 °C
OCU-KSC120M08	AT	32 °C	Min - Max	kW	2,4 - 9,8	3,0 - 11,9	3,7 - 14,3	1,6 - 5,5	2,1 - 6,8	2,6 - 8,3
		38 °C	Min - Max	kW	2,1 - 9,0	2,7 - 10,8	3,4 - 13,1	1,5 - 5,1	1,9 - 6,3	2,4 - 7,8
		43 °C	Min - Max	kW	2,0 - 8,5	2,5 - 10,3	3,1 - 12,5	1,4 - 4,8	1,8 - 6,0	2,2 - 7,3

MT	Cooling capacity at				R449A/R448A			R134a/R513A		
	ET				-15 °C	-10 °C	-5 °C	-15 °C	-10 °C	-5 °C
OCU-KSC150M08	AT	32 °C	Min - Max	kW	3,4 - 12,1	4,2 - 14,7	5,2 - 17,6	2,1 - 8,4	2,5 - 10,0	3,0 - 12,0
		38 °C	Min - Max	kW	3,1 - 10,8	3,8 - 13,0	4,7 - 15,6	1,9 - 7,6	2,3 - 9,1	2,8 - 11,0
		43 °C	Min - Max	kW	2,8 - 9,7	3,5 - 11,8	4,3 - 14,2	1,7 - 7,0	2,1 - 8,5	2,6 - 10,2

MT	Cooling capacity at				R449A/R448A			R134a/R513A		
	ET				-15 °C	-10 °C	-5 °C	-15 °C	-10 °C	-5 °C
OCU-KSC160M08	AT	32 °C	Min - Max	kW	2,3 - 13,2	2,9 - 16,3	3,6 - 19,8	1,7 - 9,0	2,2 - 10,9	2,8 - 13,2
		38 °C	Min - Max	kW	2,0 - 11,8	2,6 - 14,6	3,2 - 17,9	1,6 - 8,3	2,0 - 10,1	2,6 - 12,3
		43 °C	Min - Max	kW	1,9 - 10,7	2,4 - 13,3	3,0 - 16,4	1,5 - 7,8	1,9 - 9,5	2,4 - 11,5

MT	Cooling capacity at				R449A/R448A			R134a/R513A		
	ET				-15 °C	-10 °C	-5 °C	-15 °C	-10 °C	-5 °C
OCU-KSC190M08	AT	32 °C	Min - Max	kW	2,3 - 15,2	2,9 - 18,7	3,6 - 22,7	1,7 - 10,7	2,2 - 13,1	2,8 - 15,6
		38 °C	Min - Max	kW	2,1 - 13,5	2,6 - 16,7	3,2 - 20,5	— — —	2,0 - 11,9	2,6 - 14,6
		43 °C	Min - Max	kW	— — —	2,4 - 15,2	3,0 - 18,8	— — —	1,9 - 11,5	2,4 - 14,5

MT	Cooling capacity at				R449A/R448A			R134a/R513A		
	ET				-15 °C	-10 °C	-5 °C	-15 °C	-10 °C	-5 °C
OCU-KSC240M08	AT	32 °C	Min - Max	kW	3,4 - 19,8	4,3 - 24,2	5,3 - 29,3	2,7 - 14,4	3,2 - 17,2	3,9 - 20,5
		38 °C	Min - Max	kW	3,1 - 17,5	3,9 - 21,5	4,8 - 26,2	2,4 - 13,0	3,0 - 15,7	3,6 - 18,8
		43 °C	Min - Max	kW	2,9 - 15,7	3,5 - 19,5	4,4 - 23,8	2,2 - 12,0	2,7 - 14,5	3,3 - 17,5

MT	Cooling capacity at				R449A/R448A			R134a/R513A		
	ET				-15 °C	-10 °C	-5 °C	-15 °C	-10 °C	-5 °C
OCU-KSC280M08	AT	32 °C	Min - Max	kW	3,3 - 17,5	4,3 - 27,5	5,3 - 32,8	2,7 - 16,4	3,2 - 19,5	3,9 - 23,3
		38 °C	Min - Max	kW	3,1 - 20,6	3,9 - 24,7	4,8 - 29,5	2,4 - 14,9	3,0 - 17,8	3,6 - 21,4
		43 °C	Min - Max	kW	— — —	3,5 - 22,6	4,4 - 27,0	— — —	2,7 - 16,5	3,3 - 20,0

MT	Cooling capacity at				R449A/R448A			R134a/R513A		
	ET				-15 °C	-10 °C	-5 °C	-15 °C	-10 °C	-5 °C
OCU-KSC400M08	AT	32 °C	Min - Max	kW	5,0 - 32,9	6,5 - 39,7	8,4 - 48,0	2,8 - 19,6	3,5 - 23,9	4,3 - 29,0
		38 °C	Min - Max	kW	4,8 - 30,1	5,9 - 36,3	7,5 - 43,7	2,5 - 18,0	3,1 - 22,0	3,9 - 26,6
		43 °C	Min - Max	kW	4,4 - 28,0	5,4 - 33,6	6,7 - 40,4	2,2 - 16,8	2,8 - 20,4	3,5 - 24,7

MT	Cooling capacity at				R449A/R448A			R134a/R513A		
	ET				-15 °C	-10 °C	-5 °C	-15 °C	-10 °C	-5 °C
OCU-KSC420M08	AT	32 °C	Min - Max	kW	5,0 - 35,0	6,5 - 42,2	8,4 - 50,7	2,8 - 20,7	3,5 - 25,3	4,3 - 30,7
		38 °C	Min - Max	kW	4,8 - 32,0	5,9 - 38,5	7,5 - 46,3	2,5 - 19,1	3,1 - 23,2	3,9 - 28,2
		43 °C	Min - Max	kW	4,4 - 30,0	5,4 - 35,7	6,7 - 42,8	2,2 - 17,8	2,8 - 21,6	3,5 - 26,2

LT	Cooling capacity at				R449A/R448A		
	ET				-35 °C	-30 °C	-25 °C
OCU-KRC035L08	AT	32 °C	Min - Max	kW	0,4 - 2,8	0,5 - 3,5	0,7 - 4,2
		38 °C	Min - Max	kW	0,4 - 2,8	0,5 - 3,4	0,6 - 4,1
		43 °C	Min - Max	kW	0,4 - 2,7	0,5 - 3,3	0,6 - 4,0

LT	Cooling capacity at				R449A/R448A		
	ET				-35 °C	-30 °C	-25 °C
OCU-KRC050L08	AT	32 °C	Min - Max	kW	1,2 - 4,4	1,5 - 5,4	1,9 - 6,6
		38 °C	Min - Max	kW	1,1 - 4,0	1,4 - 4,9	1,7 - 6,0
		43 °C	Min - Max	kW	1,0 - 3,6	1,3 - 4,5	1,6 - 5,4

LT	Cooling capacity at				R449A/R448A		
	ET				-35 °C	-30 °C	-25 °C
OCU-KSC090L08	AT	32 °C	Min - Max	kW	1,7 - 6,8	2,2 - 8,5	2,8 - 10,6
		38 °C	Min - Max	kW	1,4 - 6,3	1,9 - 7,9	2,5 - 10,0
		43 °C	Min - Max	kW	1,2 - 5,9	1,6 - 7,4	2,2 - 9,3

LT	Cooling capacity at				R449A/R448A		
	ET				-35 °C	-30 °C	-25 °C
OCU-KSC140L08	AT	32 °C	Min - Max	kW	1,7 - 11,6	2,2 - 14,2	2,8 - 17,5
		38 °C	Min - Max	kW	1,4 - 10,5	1,9 - 13,0	2,5 - 16,1
		43 °C	Min - Max	kW	1,2 - 9,7	1,6 - 12,1	2,2 - 15,0


MT	Cooling capacity at				R449A/R448A			R134a/R513A		
	ET				-15 °C	-10 °C	-5 °C	-15 °C	-10 °C	-5 °C
SCU-KSC160M08	AT	32 °C	Min - Max	kW	2,3 - 13,2	2,9 - 16,3	3,6 - 19,8	1,7 - 8,9	2,2 - 10,8	2,8 - 13,1
		38 °C	Min - Max	kW	2,1 - 11,8	2,6 - 14,6	3,2 - 17,9	1,6 - 8,2	2,0 - 10,0	2,6 - 12,2
		43 °C	Min - Max	kW	1,9 - 10,7	2,4 - 13,3	3,0 - 16,4	— — —	1,9 - 9,4	2,4 - 11,4

MT	Cooling capacity at				R449A/R448A			R134a/R513A		
	ET				-15 °C	-10 °C	-5 °C	-15 °C	-10 °C	-5 °C
SCU-KSC190M08	AT	32 °C	Min - Max	kW	2,3 - 15,2	2,9 - 18,7	3,6 - 22,7	1,7 - 10,7	2,2 - 13,1	2,8 - 15,6
		38 °C	Min - Max	kW	2,1 - 13,5	2,6 - 16,7	3,2 - 20,5	— — —	2,0 - 11,9	2,6 - 14,6
		43 °C	Min - Max	kW	— — —	2,4 - 15,2	3,0 - 18,8	— — —	1,9 - 11,5	2,4 - 14,5

LT	Cooling capacity at				R449A/R448A		
	ET				-35 °C	-30 °C	-25 °C
SCU-KSC090L08	AT	32 °C	Min - Max	kW	1,7 - 6,8	2,2 - 8,5	2,8 - 10,6
		38 °C	Min - Max	kW	1,4 - 6,3	1,9 - 7,9	2,5 - 9,9
		43 °C	Min - Max	kW	1,2 - 5,9	1,6 - 7,4	2,2 - 9,3

Refrigeration designer.

This simple design tool supports engineers, installers, and technicians to make a quick calculation for commercial refrigeration systems:
<http://www.panasonicproclub.com>

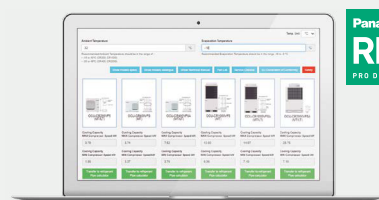

iCOOL LCU/WCU Series

The variation of iCOOL to meet demanding installation environment requirements.



iCOOL LCU Series MT/LT type.**Remote compressor base.**

MT: From 5,1 to 38 kW.

LT: From 2 to 8,7 kW.

**iCOOL WCU Series MT/LT type.****Water cooled condensing units**

MT: From 5,1 to 38 kW.

LT: From 2 to 8,7 kW.



A customisation option with a soundproof insulated housing is available for both the LCU and WCU Series



Noise reduction
(indoor installation).





No space pollution
(city-centres focus).



Available with water cooled condenser
option, for shorter installations and
heat reclaim benefits.

Example installation type:

Inverter units dedicated for indoor mounting.

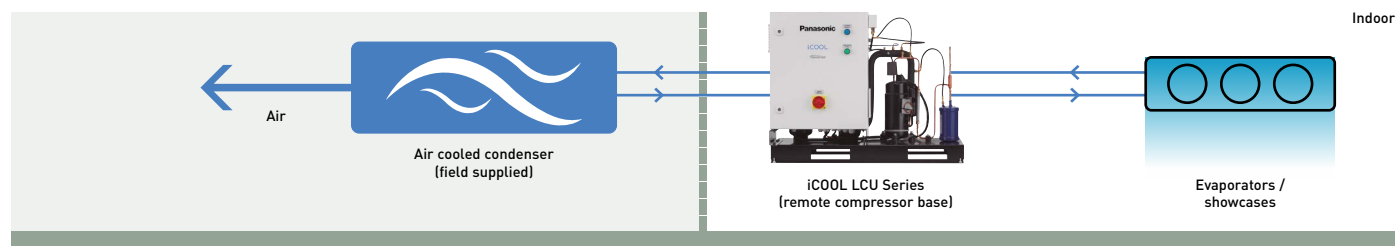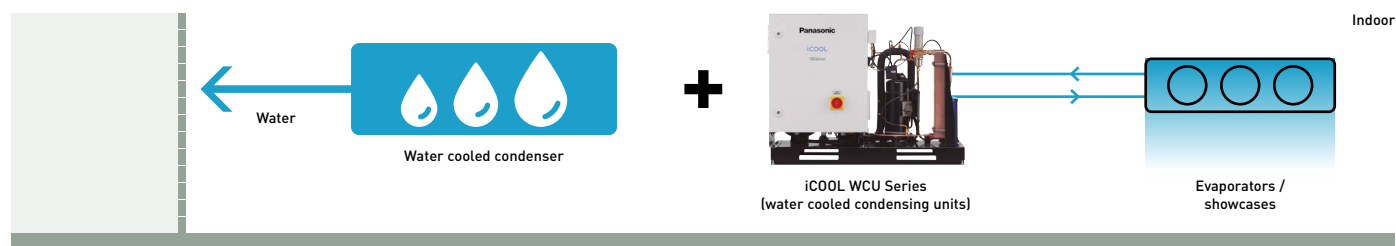**or**


High performance inverter compressor base or compressor set for large, medium, and small commercial installations. Designed for mid-high or low temperature applications. Equipped with hermetic scroll or rotary compressor. Perfect for low noise and city centre applications.

iCOOL LCU Series (remote compressor base) · R448A / R449A / R134a / R513A

Specifications and capacity tables.

New
2025

Model			LCU-KRC045M08	LCU-KRC070M08	LCU-KSC100M08	LCU-KSC160M08	LCU-KSC190M08	
Compressor			Single compressor	Single compressor	Single compressor	Tandem compressor	Tandem compressor	
Compatible refrigerants			R448A, R449A, R134a, R513A	R448A, R449A, R134a, R513A	R448A, R449A, R134a, R513A	R448A, R449A, R134a, R513A	R448A, R449A, R134a, R513A	
PED category			I	II	II	II	II	
Application and nominal cooling capacity		MT/LT (kW)	MT (5,1)	MT (7,2)	MT (10,0)	MT (16,3)	MT (19,6)	
Nominal operating current at ET -10 °C MT / -30 °C LT AT 32 °C and 400 V 50 Hz		A	4,9	7,5	12,1	19,5	24,5	
Maximum operating current (in the most loaded phase at 400 V 50 Hz)		A	7,5	11,4	17,9	25,9	30,3	
Maximum power consumption		kW	3,5	5,4	8,4	13,6	16,7	
Dimensions	W x H x D	mm	1000 x 705 x 530	1000 x 772 x 507	1200 x 775 x 561	1300 x 874 x 662	1300 x 874 x 662	
Weight		kg	85	89	124	209	211	
Sound level at 10 m		dB(A)	39,0	42,0	54,0	54,0	54,0	
Compressor	Model		C-7RVN113L0A	C-7RZ320L4ABL	C-SBS180H00B	C-SBS180H00B/ C-SBN303H8G	C-SBS180H00B/ C-SBN453H8G	
	Volumetric flow		m³/h	1,25 - 7,5	1,7 - 10,4	5,8 - 17,4	5,8 - 17,4 / 11,6	5,8 - 17,4 / 14,7
	Rotation range		rps	15-90	15-90	32-90	32-90	32-90
	Current	Full load amperage	A	5,8	8,7	14,7	14,7 / 8,0	15,2 / 11,9
		Peak current limit/Locked rotor amperage	A	11,2/ —	15/ —	34/ —	34/ 48	34/ 66
	Oil type			FV68S (PVE)	FV68S (PVE)	FV68S (PVE)	FV68S (PVE)	FV68S (PVE)
	Crankcase heater power consumption		W	35	40	70	2x70	2x70
Oil charge		dm³	0,7+0,4	0,7+0,4	2,0+0,4	2,0+1,7+2x0,4	2,0+1,7+2x0,4	
Connections	Suction	Inch	5/8	3/4	7/8	1 1/8	1 1/8	
	Liquid	Inch	3/8	3/8	1/2	5/8	5/8	
Liquid receiver		dm³	3,9	7,1	10,0	14	14	
CU power supply	Voltage		V / Hz	3x400/50 PE+N (TN-S)	3x400/50 PE+N (TN-S)	3x400/50 PE+N (TN-S)	3x400/50 PE+N (TN-S)	
	Recommended minimum cable cross-section		mm²	5x2,5	5x2,5	5x4,0	5x6,0	5x10,0
	Recommended minimum protection			C16	C16	C25	C32	C40
Maximum recommended pipe distance		m	40	40	40	50	50	
Maximum height distance	Evaporator above	m	12	12	12	12	12	
	Evaporator below	m	12	12	12	12	12	
Which pipes needs to be insulated		Suction / liquid / both	Suction	Suction	Suction	Suction	Suction	
Recommended insulation thickness		mm	13	13	13	13	13	
Maximum quantity of evaporators connected		Qty.	5	5	7	10	10	
Evaporation temperature		Min ~ Max	°C	-15~ 5	-15~ 5	-15~ 10	-15~ 10	-15~ 10
Ambient temperature		Min ~ Max	°C	-20~ 43	-20~ 43	-20~ 43	-20~ 43	-20~ 43

New
2025

Model			LCU-KSC280M08	LCU-KSC400M08	LCU-KRC020L08	LCU-KRC035L08	LCU-KRC050L08	LCU-KSC090L08	
Compressor			Tandem compressor	Tandem compressor	Single compressor	Single compressor	Single compressor	Single compressor	
Compatible refrigerants			R448A, R449A, R134a, R513A	R448A, R449A, R134a, R513A	R448A, R449A	R448A, R449A	R448A, R449A	R448A, R449A	
PED category			II	II	II	I	II	II	
Application and nominal cooling capacity			MT/LT (kW)	MT (27,7)	MT (38,0)	LT (2,0)	LT (3,0)	LT (5,4)	LT (8,7)
Nominal operating current at ET -10 °C MT / -30 °C LT AT 32 °C and 400 V 50 Hz			A	28,7	36,9	3,9	6,1	11,7	18,9
Maximum operating current (in the most loaded phase at 400 V 50 Hz)			A	38,4	51	5,7	8,4	14,9	27,9
Maximum power consumption			kW	20,4	26,6	2,7	3,9	7,0	13,1
Dimensions W x H x D			mm	1650 x 975 x 649	1860 x 975 x 890	1000 x 705 x 530	1000 x 705 x 530	1000 x 772 x 536	1300 x 705 x 530
Weight			kg	301	380	85	85	132	159
Sound level at 10 m			dB(A)	52,0	55,0	39,0	42,0	50,0	55,0
Compressor	Model			C-SBVN373L0B/ C-SCN603H8T	4CC149NA04/ C-SCN753H8T	C-7RVN113L0A	C-7RZ320L4ABL	C-9RZ580L4AAL	ACC144NA03
	Volumetric flow		m³/h	7,7 - 24,6 / 23,6	10,7 - 39,3/30,3	1,25 - 7,5	1,7 - 10,4	5,2 - 18,7	10,0 - 37,6
	Rotation range		rps	31-80	21-75	15-90	15-90	25-90	25-72
	Current	Full load amperage	A	18,4 / 16,0	26,0 / 19,4	4,4	6,4	10	22,9
		Peak current limit/Locked rotor amperage	A	46/80	52/96	11,2/—	15/—	28/—	46/—
	Oil type			FV68S (PVE)	FV68S (PVE)	FV68S (PVE)	FV68S (PVE)	FV68S (PVE)	FV32S (PVE)
	Crankcase heater power consumption		W	2x90	2x90	35	35	35	2x90
Oil charge			dm³	2,0+2,8+2x0,6	2x2,8+2,0	0,7+0,4	0,7+0,4	2,1+0,4	2,5+0,4
Connections	Suction	Inch	1 3/8	1 5/8	5/8	7/8	7/8	1 1/8	
	Liquid	Inch	7/8	7/8	3/8	3/8	3/8	5/8	
Liquid receiver			dm³	14	30	3,9	3,9	7,1	14
CU power supply	Voltage		V / Hz	3x400/50 PE+N (TN-S)	3x400/50 PE+N (TN-S)	3x400/50 PE+N (TN-S)	3x400/50 PE+N (TN-S)	3x400/50 PE+N (TN-S)	3x400/50 PE+N (TN-S)
	Recommended minimum cable cross-section		mm²	5x10,0	5x16,0	5x2,5	5x2,5	5x4,0	5x6,0
	Recommended minimum protection			C50	C63	C16	C16	C25	C32
Maximum recommended pipe distance			m	70	70	40	40	40	40
Maximum height distance	Evaporator above	m	12	12	12	12	12	12	
	Evaporator below	m	12	12	12	12	12	12	
Which pipes needs to be insulated			Suction / liquid / both	Suction	Suction	Suction	Suction	Suction	
Recommended insulation thickness			mm	13	13	13	19	19	19
Maximum quantity of evaporators connected			Qty.	10	20	5	5	5	5
Evaporation temperature Min ~ Max			°C	-15 ~ 10	-15 ~ 10	-35 ~ 5	-35 ~ -15	-35 ~ -15	-35 ~ -10
Ambient temperature Min ~ Max			°C	-20 ~ 43	-20 ~ 43	-20 ~ 43	-20 ~ 43	-20 ~ 43	-20 ~ 43

Accessories for iCOOL LCU Series.

Compressor oil FV68S 2 L.
CZ-HFC-FV68SL2Compressor oil FV32S 2 L.
CZ-HFC-FV32SL2

iCOOL WCU Series (water cooled condensing units) - R448A / R449A / R134a / R513A

Specifications and capacity tables.

Model			WCU-KRC045M08	WCU-KRC070M08	WCU-KSC100M08	WCU-KSC160M08	WCU-KSC190M08	
Compressor			Single compressor	Single compressor	Single compressor	Tandem compressor	Tandem compressor	
Compatible refrigerants			R448A, R449A, R134a, R513A	R448A, R449A, R134a, R513A	R448A, R449A, R134a, R513A	R448A, R449A, R134a, R513A	R448A, R449A, R134a, R513A	
PED category			I	I	II	II	II	
Application and nominal cooling capacity		MT/LT (kW)	MT (5,1)	MT (7,2)	MT (10,0)	MT (16,3)	MT (19,6)	
Nominal operating current at ET -10 °C MT/-30 °C LT AT 32 °C and 400 V 50 Hz		A	4,9	7,5	12,1	19,5	24,5	
Maximum operating current (in the most loaded phase at 400 V 50 Hz)		A	7,5	11,4	17,9	25,9	30,3	
Maximum power consumption		kW	3,5	5,4	8,4	13,6	16,7	
Dimensions	WxHxD	mm	1000x705x530	1000x772x507	1200x775x561	1300x874x662	1300x874x662	
Weight		kg	90	94	134	219	221	
Sound level at 10 m		dB(A)	39,0	42,0	54,0	54,0	54,0	
Compressor	Model		C-7RVN113L0A	C-7RZ320L4ABL	C-SBS180H00B	C-SBS180H00B/ C-SBN303H8G	C-SBS180H00B/ C-SBN453H8G	
	Volumetric flow	m³/h	1,25 - 7,5	1,7 - 10,4	5,8 - 17,4	5,8 - 17,4 / 11,6	5,8 - 17,4 / 14,7	
	Rotation range	rps	15 - 90	15 - 90	32 - 90	32 - 90	32 - 90	
	Current	Full load amperage	A	5,8	8,7	14,7	14,7/8,0	15,2/11,9
		Peak current limit / Locked rotor amperage	A	11,2/—	15/—	34/—	34/48	34/66
	Oil type		FV68S (PVE)	FV68S (PVE)	FV68S (PVE)	FV68S (PVE)	FV68S (PVE)	
	Crankcase heater power consumption		W	35	40	70	2x70	2x70
Oil charge		dm³	0,7+0,4	0,7+0,4	2,0+0,4	2,0+1,7+2x0,4	2,0+1,7+2x0,4	
Connections	Suction	Inch	5/8	3/4	7/8	1 1/8	1 1/8	
	Liquid	Inch	3/8	3/8	1/2	5/8	5/8	
Liquid receiver		dm³	3,9	7,1	10,0	14	14	
CU power supply	Voltage	V / Hz	3x400/50 PE+N (TN-S)	3x400/50 PE+N (TN-S)	3x400/50 PE+N (TN-S)	3x400/50 PE+N (TN-S)	3x400/50 PE+N (TN-S)	
	Recommended minimum cable cross-section	mm²	5x2,5	5x2,5	5x4,0	5x6,0	5x10,0	
	Recommended minimum protection			C16	C16	C25	C32	C40
Maximum recommended pipe distance		m	40	40	40	50	50	
Maximum height distance	Evaporator above	m	12	12	12	12	12	
	Evaporator below	m	12	12	12	12	12	
Which pipes needs to be insulated		Suction / liquid / both	Suction	Suction	Suction	Suction	Suction	
Recommended insulation thickness		mm	13	13	13	13	13	
Maximum quantity of evaporators connected		Qty.	5	5	7	10	10	
Evaporation temperature		Min ~ Max °C	-15~5	-15~5	-15~10	-15~10	-15~10	
Ambient temperature		Min ~ Max °C	-20~43	-20~43	-20~43	-20~43	-20~43	
Plate heat exchanger connections	Inlet	Inch	1/2	1/2	1	1	1	
	Outlet	Inch	3/4	3/4	1/2	1	1	

New
2025

Model			WCU-KSC280M08	WCU-KSC400M08	WCU-KRC020L08	WCU-KRC035L08	WCU-KRC050L08	WCU-KSC090L08	
Compressor			Tandem compressor	Tandem compressor	Single compressor	Single compressor	Single compressor	Single compressor	
Compatible refrigerants			R448A, R449A, R134a, R513A	R448A, R449A, R134a, R513A	R448A, R449A	R448A, R449A	R448A, R449A	R448A, R449A	
PED category			II	II	I	I	I	II	
Application and nominal cooling capacity			MT/LT (kW)	MT (27,7)	MT (38,0)	LT (2,0)	LT (3,0)	LT (5,4)	LT (8,7)
Nominal operating current at ET -10 °C MT/-30 °C LT AT 32 °C and 400 V 50 Hz			A	28,7	36,9	3,9	6,1	11,7	18,9
Maximum operating current (in the most loaded phase at 400 V 50 Hz)			A	38,4	51	5,7	8,4	14,9	27,9
Maximum power consumption			kW	20,4	26,6	2,7	3,9	7,0	13,1
Dimensions		W x H x D	mm	1650x975x649	1860x975x890	1000x705x530	1000x705x530	1000x772x536	1300x705x530
Weight			kg	316	395	92	92	139	169
Sound level at 10 m			dB(A)	52,0	55,0	39,0	42,0	50,0	55,0
Compressor	Model			C-SBVN373L0B/ C-SCN603H8T	4CC149NA04/ C-SCN753H8T	C-7RVN113L0A	C-7RZ320L4ABL	C-9RZ580L4AAL	ACC144NA03
	Volumetric flow		m³/h	7,7 - 24,6 / 23,6	10,7 - 39,3/30,3	1,25 - 7,5	1,7 - 10,4	5,2 - 18,7	10,0 - 37,6
	Rotation range		rps	31 - 80	21 - 75	15 - 90	15 - 90	25 - 90	25 - 72
	Current	Full load amperage	A	18,4/16,0	26,0/19,4	4,4	6,4	10	22,9
		Peak current limit / Locked rotor amperage	A	46/80	52/96	11,2/—	15/—	28/—	46/—
	Oil type			FV68S (PVE)	FV68S (PVE)	FV68S (PVE)	FV68S (PVE)	FV68S (PVE)	FV32S (PVE)
	Crankcase heater power consumption		W	2x90	2x90	35	35	35	2x90
Oil charge			dm³	2,0+2,8+2x0,6	2x2,8+2,0	0,7+0,4	0,7+0,4	2,1+0,4	2,5+0,4
Connections		Suction	Inch	1 3/8	1 5/8	5/8	7/8	7/8	1 1/8
		Liquid	Inch	7/8	7/8	3/8	3/8	3/8	5/8
Liquid receiver			dm³	14	30	3,9	3,9	7,1	14
CU power supply	Voltage		V / Hz	3x400/50 PE+N (TN-S)	3x400/50 PE+N (TN-S)	3x400/50 PE+N (TN-S)	3x400/50 PE+N (TN-S)	3x400/50 PE+N (TN-S)	3x400/50 PE+N (TN-S)
	Recommended minimum cable cross-section		mm²	5x10,0	5x16,0	5x2,5	5x2,5	5x4,0	5x6,0
	Recommended minimum protection			C50	C63	C16	C16	C25	C32
Maximum recommended pipe distance			m	70	70	40	40	40	40
Maximum height distance		Evaporator above	m	12	12	12	12	12	12
		Evaporator below	m	12	12	12	12	12	12
Which pipes needs to be insulated		Suction / liquid / both		Suction	Suction	Suction	Suction	Suction	Suction
Recommended insulation thickness			mm	13	13	13	19	19	19
Maximum quantity of evaporators connected			Qty.	10	20	5	5	5	5
Evaporation temperature		Min – Max	°C	-15 ~ 10	-15 ~ 10	-35 ~ 5	-35 ~ -15	-35 ~ -15	-35 ~ -10
Ambient temperature		Min – Max	°C	-20 ~ 43	-20 ~ 43	-20 ~ 43	-20 ~ 43	-20 ~ 43	-20 ~ 43
Plate heat exchanger connections		Inlet	Inch	1 1/2	1 1/2	3/4	1/2	1/2	1
		Outlet	Inch	1	1	3/4	3/4	3/4	1

Accessories for iCOOL WCU Series.

Compressor oil FV68S 2 L. CZ-HFC-FV68SL2



Compressor oil FV32S 2 L. CZ-HFC-FV32SL2



iCOOL LCU/WCU Series · R448A / R449A / R134a / R513A

Specifications and capacity tables.

MT	Cooling capacity at				R449A/R448A			R134a/R513A		
	ET				-15 °C	-10 °C	-5 °C	-15 °C	-10 °C	-5 °C
LCU-KRC045M08	CT	40 °C	Min - Max	kW	0,6 - 4,5	0,7 - 5,4	0,9 - 6,5	0,4 - 2,4	0,5 - 3,0	0,6 - 3,6
		45 °C	Min - Max	kW	0,5 - 4,2	0,7 - 5,1	0,8 - 6,1	0,4 - 2,3	0,5 - 2,8	0,5 - 3,4
		50 °C	Min - Max	kW	0,5 - 3,9	0,6 - 4,7	0,7 - 5,7	0,3 - 2,1	0,4 - 2,6	0,5 - 3,2

MT	Cooling capacity at				R449A/R448A			R134a/R513A		
	ET				-15 °C	-10 °C	-5 °C	-15 °C	-10 °C	-5 °C
LCU-KRC070M08	CT	40 °C	Min - Max	kW	0,9 - 6,4	1,1 - 7,7	1,3 - 9,3	0,5 - 3,4	0,6 - 4,2	0,7 - 5,1
		45 °C	Min - Max	kW	0,8 - 5,9	1,0 - 7,2	1,2 - 8,7	0,5 - 3,2	0,6 - 3,9	0,7 - 4,8
		50 °C	Min - Max	kW	0,7 - 5,5	0,9 - 6,7	1,1 - 8,1	0,5 - 2,9	0,5 - 3,6	0,6 - 4,5

MT	Cooling capacity at				R449A/R448A			R134a/R513A		
	ET				-15 °C	-10 °C	-5 °C	-15 °C	-10 °C	-5 °C
LCU-KSC100M08	CT	40 °C	Min - Max	kW	1,9 - 8,8	2,8 - 11,1	3,8 - 13,9	1,8 - 4,9	2,2 - 6,1	2,7 - 7,6
		45 °C	Min - Max	kW	1,4 - 7,7	2,3 - 10,0	3,3 - 12,7	1,6 - 4,6	2,0 - 5,8	2,5 - 7,2
		50 °C	Min - Max	kW	0,8 - 6,7	1,9 - 9,0	2,9 - 11,6	1,5 - 4,3	1,9 - 5,4	2,3 - 6,8

MT	Cooling capacity at				R449A/R448A			R134a/R513A		
	ET				-15 °C	-10 °C	-5 °C	-15 °C	-10 °C	-5 °C
LCU-KSC160M08	CT	40 °C	Min - Max	kW	1,9 - 14,2	2,8 - 18,1	3,8 - 22,8	1,8 - 8,8	2,2 - 10,8	2,7 - 13,3
		45 °C	Min - Max	kW	1,4 - 12,6	2,3 - 16,3	3,3 - 20,8	1,6 - 8,2	2,0 - 10,1	2,5 - 12,5
		50 °C	Min - Max	kW	0,8 - 11,1	1,9 - 14,7	2,9 - 19,0	1,5 - 7,7	1,9 - 9,5	2,3 - 11,7

MT	Cooling capacity at				R449A/R448A			R134a/R513A		
	ET				-15 °C	-10 °C	-5 °C	-15 °C	-10 °C	-5 °C
LCU-KSC190M08	CT	40 °C	Min - Max	kW	1,9 - 17,0	2,8 - 21,8	3,8 - 27,4	1,8 - 10,9	2,2 - 13,3	2,7 - 16,3
		45 °C	Min - Max	kW	1,4 - 15,1	2,3 - 19,6	3,3 - 25,0	1,6 - 10,1	2,0 - 12,4	2,5 - 15,3
		50 °C	Min - Max	kW	0,8 - 13,3	1,9 - 17,7	2,9 - 22,8	1,5 - 9,4	1,9 - 11,6	2,3 - 14,3

MT	Cooling capacity at				R449A/R448A			R134a/R513A		
	ET				-15 °C	-10 °C	-5 °C	-15 °C	-10 °C	-5 °C
LCU-KSC280M08	CT	40 °C	Min - Max	kW	4,0 - 24,5	5,0 - 30,5	6,2 - 37,9	2,0 - 15,9	2,6 - 19,9	3,3 - 24,8
		45 °C	Min - Max	kW	3,7 - 22,4	4,6 - 27,7	5,7 - 34,4	1,7 - 14,6	2,3 - 18,1	2,9 - 22,5
		50 °C	Min - Max	kW	3,3 - 20,4	4,2 - 25,2	5,2 - 31,2	1,5 - 13,3	2,0 - 16,4	2,6 - 20,4

MT	Cooling capacity at				R449A/R448A			R134a/R513A		
	ET				-15 °C	-10 °C	-5 °C	-15 °C	-10 °C	-5 °C
LCU-KSC400M08	CT	40 °C	Min - Max	kW	4,7 - 33,3	5,1 - 41,0	7,4 - 50,7	2,9 - 23,5	3,6 - 29,0	4,5 - 35,7
		45 °C	Min - Max	kW	4,4 - 30,9	5,4 - 38,0	6,7 - 46,8	2,7 - 21,7	3,4 - 26,7	4,2 - 32,8
		50 °C	Min - Max	kW	3,8 - 28,7	4,9 - 35,2	6,1 - 43,2	2,5 - 20,0	3,1 - 24,5	3,9 - 30,1

LT	Cooling capacity at				R449A/R448A			R134a/R513A		
	ET				-35 °C	-30 °C	-25 °C	-35 °C	-30 °C	-25 °C
LCU-KRC020L08	CT	40 °C	Min - Max	kW	0,2 - 1,7	0,3 - 2,2	0,4 - 2,8	0,2 - 1,7	0,3 - 2,2	0,4 - 2,8
		45 °C	Min - Max	kW	0,2 - 1,6	0,3 - 2,0	0,3 - 2,6	0,2 - 1,6	0,3 - 2,0	0,3 - 2,6
		50 °C	Min - Max	kW	— — —	0,2 - 1,8	0,3 - 2,3	— — —	0,2 - 1,8	0,3 - 2,3

LT	Cooling capacity at				R449A/R448A			R134a/R513A		
	ET				-35 °C	-30 °C	-25 °C	-35 °C	-30 °C	-25 °C
LCU-KRC035L08	CT	40 °C	Min - Max	kW	0,3 - 2,6	0,4 - 3,3	0,5 - 4,1	0,3 - 2,6	0,4 - 3,3	0,5 - 4,1
		45 °C	Min - Max	kW	0,3 - 2,4	0,4 - 3,0	0,5 - 3,8	0,3 - 2,4	0,4 - 3,0	0,5 - 3,8
		50 °C	Min - Max	kW	— — —	0,3 - 2,8	0,4 - 3,5	— — —	0,3 - 2,8	0,4 - 3,5

LT	Cooling capacity at				R449A/R448A			R134a/R513A		
	ET				-35 °C	-30 °C	-25 °C	-35 °C	-30 °C	-25 °C
LCU-KRC050L08	CT	40 °C	Min - Max	kW	1,1 - 4,6	1,4 - 5,8	1,7 - 7,3	1,1 - 4,6	1,4 - 5,8	1,7 - 7,3
		45 °C	Min - Max	kW	1,0 - 4,3	1,3 - 5,4	1,6 - 6,8	1,0 - 4,3	1,3 - 5,4	1,6 - 6,8
		50 °C	Min - Max	kW	— — —	1,2 - 5,0	1,5 - 6,3	— — —	1,2 - 5,0	1,5 - 6,3

LT	Cooling capacity at				R449A/R448A			R134a/R513A		
	ET				-35 °C	-30 °C	-25 °C	-35 °C	-30 °C	-25 °C
LCU-KSC090L08	CT	40 °C	Min - Max	kW	2,0 - 7,3	2,6 - 9,1	3,3 - 11,4	2,0 - 7,3	2,6 - 9,1	3,3 - 11,4
		45 °C	Min - Max	kW	1,8 - 6,9	2,3 - 8,7	3,0 - 10,9	1,8 - 6,9	2,3 - 8,7	3,0 - 10,9
		50 °C	Min - Max	kW	— — —	2,0 - 8,3	2,6 - 10,3	— — —	2,0 - 8,3	2,6 - 10,3

* ET: Evaporation Temperature. CT: Condensing Temperature.

MT	Cooling capacity at					R449A/R448A			R134a/R513A		
	ET					-15 °C	-10 °C	-5 °C	-15 °C	-10 °C	-5 °C
WCU-KRC045M08	WT	15 °C	30 °C	Min - Max	kW	0,7 - 5,2	0,9 - 6,3	1,0 - 7,4	0,4 - 2,6	0,5 - 3,2	0,6 - 4,0
		30 °C	40 °C	Min - Max	kW	0,6 - 4,5	0,7 - 5,4	0,9 - 6,5	0,4 - 2,4	0,5 - 3,0	0,6 - 3,6
		40 °C	50 °C	Min - Max	kW	0,5 - 3,9	0,6 - 4,7	0,7 - 5,7	0,3 - 2,1	0,4 - 2,6	0,5 - 3,2

MT	Cooling capacity at					R449A/R448A			R134a/R513A		
	ET					-15 °C	-10 °C	-5 °C	-15 °C	-10 °C	-5 °C
WCU-KRC070M08	WT	15 °C	30 °C	Min - Max	kW	1,1 - 7,4	1,3 - 8,9	1,6 - 10,5	0,5 - 3,7	0,6 - 4,5	0,7 - 5,5
		30 °C	40 °C	Min - Max	kW	0,9 - 6,3	1,1 - 7,7	1,3 - 9,3	0,5 - 3,4	0,6 - 4,2	0,7 - 5,1
		40 °C	50 °C	Min - Max	kW	0,7 - 5,5	0,9 - 6,7	1,1 - 8,1	0,5 - 2,9	0,5 - 3,6	0,6 - 4,5

MT	Cooling capacity at					R449A/R448A			R134a/R513A		
	ET					-15 °C	-10 °C	-5 °C	-15 °C	-10 °C	-5 °C
WCU-KSC100M08	WT	15 °C	30 °C	Min - Max	kW	3,3 - 11,2	4,0 - 13,7	4,8 - 16,6	2,1 - 5,5	2,6 - 6,8	3,2 - 8,5
		30 °C	40 °C	Min - Max	kW	1,9 - 8,8	2,8 - 11,1	3,8 - 13,9	1,8 - 4,9	2,2 - 6,1	2,7 - 7,6
		40 °C	50 °C	Min - Max	kW	0,8 - 6,7	1,9 - 9,0	2,9 - 11,6	1,5 - 4,3	1,9 - 5,4	2,3 - 6,8

MT	Cooling capacity at					R449A/R448A			R134a/R513A		
	ET					-15 °C	-10 °C	-5 °C	-15 °C	-10 °C	-5 °C
WCU-KSC160M08	WT	15 °C	30 °C	Min - Max	kW	3,3 - 17,9	4,0 - 22,2	4,8 - 27,2	2,1 - 10,1	2,6 - 12,4	3,2 - 15,1
		30 °C	40 °C	Min - Max	kW	1,9 - 14,2	2,8 - 18,1	3,8 - 22,8	1,8 - 8,8	2,2 - 10,8	2,7 - 13,3
		40 °C	50 °C	Min - Max	kW	0,8 - 11,1	1,9 - 14,7	2,9 - 19,0	1,5 - 7,7	1,9 - 9,5	2,3 - 11,7

MT	Cooling capacity at					R449A/R448A			R134a/R513A		
	ET					-15 °C	-10 °C	-5 °C	-15 °C	-10 °C	-5 °C
WCU-KSC190M08	WT	15 °C	30 °C	Min - Max	kW	3,3 - 21,4	4,0 - 26,6	4,8 - 32,7	2,1 - 12,5	2,6 - 15,2	3,2 - 18,6
		30 °C	40 °C	Min - Max	kW	1,9 - 17,0	2,8 - 21,8	3,8 - 27,4	1,8 - 10,9	2,2 - 13,3	2,7 - 16,3
		40 °C	50 °C	Min - Max	kW	0,8 - 13,3	1,9 - 17,7	2,9 - 22,8	1,5 - 9,4	1,9 - 11,6	2,3 - 14,3

MT	Cooling capacity at					R449A/R448A			R134a/R513A		
	ET					-15 °C	-10 °C	-5 °C	-15 °C	-10 °C	-5 °C
WCU-KSC280M08	WT	15 °C	30 °C	Min - Max	kW	4,7 - 29,2	5,9 - 36,9	7,4 - 46,0	2,5 - 18,8	3,3 - 23,8	4,1 - 29,9
		30 °C	40 °C	Min - Max	kW	4,0 - 24,5	5,0 - 30,5	6,2 - 37,9	2,0 - 15,9	2,6 - 19,9	3,3 - 24,8
		40 °C	50 °C	Min - Max	kW	3,3 - 20,4	4,2 - 25,2	5,2 - 31,2	1,5 - 13,3	2,0 - 16,4	2,6 - 20,4

MT	Cooling capacity at					R449A/R448A			R134a/R513A		
	ET					-15 °C	-10 °C	-5 °C	-15 °C	-10 °C	-5 °C
WCU-KSC400M08	WT	15 °C	30 °C	Min - Max	kW	5,1 - 38,3	6,8 - 47,7	9,2 - 59,4	3,3 - 27,4	4,2 - 34,0	5,2 - 42,0
		30 °C	40 °C	Min - Max	kW	4,7 - 33,3	5,9 - 41,0	7,4 - 50,7	2,9 - 23,5	3,6 - 29,0	4,5 - 35,7
		40 °C	50 °C	Min - Max	kW	3,8 - 28,7	4,9 - 35,2	6,1 - 43,2	2,5 - 20,0	3,1 - 24,5	3,9 - 30,1

LT	Cooling capacity at					R449A/R448A			R134a/R513A		
	ET					-35 °C	-30 °C	-25 °C	-35 °C	-30 °C	-25 °C
WCU-KRC020L08	WT	15 °C	30 °C	Min - Max	kW	0,3 - 2,2	0,4 - 2,7	0,5 - 3,4	0,3 - 2,2	0,4 - 2,8	0,5 - 3,4
		30 °C	40 °C	Min - Max	kW	0,2 - 1,7	0,3 - 2,2	0,4 - 2,8	0,2 - 1,8	0,3 - 2,3	0,4 - 2,8
		40 °C	50 °C	Min - Max	kW	— — —	0,2 - 1,8	0,3 - 2,3	0,2 - 1,8	0,3 - 2,3	0,4 - 2,8

LT	Cooling capacity at					R449A/R448A			R134a/R513A		
	ET					-35 °C	-30 °C	-25 °C	-35 °C	-30 °C	-25 °C
WCU-KRC035L08	WT	15 °C	30 °C	Min - Max	kW	0,4 - 3,3	0,5 - 4,0	0,7 - 4,9	0,3 - 2,6	0,4 - 3,3	0,5 - 4,1
		30 °C	40 °C	Min - Max	kW	0,3 - 2,6	0,4 - 3,3	0,5 - 4,1	— — —	0,3 - 2,8	0,4 - 3,5
		40 °C	50 °C	Min - Max	kW	— — —	0,3 - 2,8	0,4 - 3,5	— — —	0,3 - 2,8	0,4 - 3,5

LT	Cooling capacity at					R449A/R448A			R134a/R513A		
	ET					-35 °C	-30 °C	-25 °C	-35 °C	-30 °C	-25 °C
WCU-KRC050L08	WT	15 °C	30 °C	Min - Max	kW	1,2 - 5,8	1,5 - 7,1	1,9 - 8,7	1,1 - 4,6	1,4 - 5,8	1,7 - 7,3
		30 °C	40 °C	Min - Max	kW	1,1 - 4,6	1,4 - 5,8	1,7 - 7,3	— — —	1,2 - 5,0	1,5 - 6,3
		40 °C	50 °C	Min - Max	kW	— — —	1,2 - 5,0	1,5 - 6,3	— — —	1,2 - 5,0	1,5 - 6,3

LT	Cooling capacity at					R449A/R448A			R134a/R513A		
	ET					-35 °C	-30 °C	-25 °C	-35 °C	-30 °C	-25 °C
WCU-KSC090L08	WT	15 °C	30 °C	Min - Max	kW	2,6 - 8,2	3,3 - 10,1	4,2 - 12,6	2,0 - 7,3	2,6 - 9,1	3,3 - 11,4
		30 °C	40 °C	Min - Max	kW	2,0 - 7,3	2,6 - 9,1	3,3 - 11,4	— — —	2,0 - 8,3	2,6 - 10,3
		40 °C	50 °C	Min - Max	kW	— — —	2,0 - 8,3	2,6 - 10,3	— — —	2,0 - 8,3	2,6 - 10,3

* ET: Evaporating Temperature. WT: Water (or glycol) Inlet Temperature. CT: Condensing Temperature.

Panasonic[®]

To find out how Panasonic cares for you,
log on to: www.refrigeration.panasonic.eu

Panasonic Marketing Europe GmbH
Panasonic Heating & Ventilation Air-conditioning Europe
Hagenauer Strasse 43, 65203 Wiesbaden, Germany



Do not add or replace refrigerant other than the specified type. Manufacturer is not responsible for the damage and deterioration in safety due to usage of the other refrigerant.
The outdoor units in this catalogue contains fluorinated greenhouse gases with a GWP higher than 150.

