Panasonic

. . .

Ø



AQUAREA ALL IN ONE T-CAP HEAT PUMP

The compact system for extremely low temperatures and real savings at home





heating & cooling solutions



THE PEAK OF COMFORT, EFFICIENCY AND LOW ENERGY COSTS

4 reasons why Aquarea is an ideal solution for your home

Wide range to suit all homes


Aquarea is an innovative low-energy system, designed to provide ideal temperatures and hot water in the home, even with extreme outdoor temperatures. It is highly reliable thanks to the quality of all components, including the compressor, developed and manufactured by Panasonic. With many units to choose from, the Aquarea Range offers a very wide choice to ensure the most appropriate choice for your home - whatever the size.

Heat Pump, 80% of energy for free

Based on Air to Water heat pump technology, Aquarea is highly efficient and environmentally friendly. It captures heat energy from the ambient air and transfers it to heat the water needed to warm your home, for domestic hot water and even to cool the house if wished. In this way, up to 80% of the heat energy required is taken from the ambient air - even in extremely low temperatures. adverse conditions.

Aquarea All in One T-CAP supplies with the same integrated device both domestic hot water and heat for radiators and floor heating even under extreme conditions.



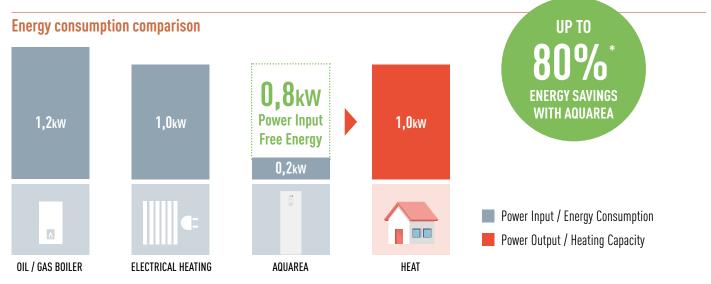

* Rating conditions: Heating: Inside air temperature: 20°C Dry Bub / Outside air temperature: 7°C Dry Bub / 6°C Wet Bubb. Conditions : Water input temperature: 30°C Water output temperature: 35°C


COP

Panasonic's Aquarea range of Heat Pumps deliver major energy savings thanks to its tremendous efficiency even at -20°C.

Aquarea All in One can be connected to a new line up of Aquarea Air super low temperature radiators.

Helps to save you money

Energy cost savings of up to €1100 a year are possible compared to conventional electric heating. Whilst initial investment may be higher than other technologies, running costs are far cheaper and with a short payback period on initial cost. Savings are significant particularly when compared to oil-fired boilers and electric heaters.

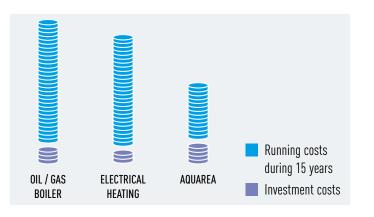

Aquarea T-CAP All in One

Aquarea T-CAP (Total Capacity) All in One is ideal to supply radiators or underfloor heating with temperatures up to 60°C. It also generates domestic hot water and stores it inside the high efficiency stainless steel 185 liter stainless steel built-in tank. Piping connections are at the bottom, keeping the space above the unit free for use. The wide range from 9kW to 16kW, fully adapts the system to the needs of



Aquarea T-CAP: Extreme weather and savings

Aquarea T-CAP (Total Capacity) delivers outstanding efficiency in heating and also in domestic hot water. Specially designed to work under severe outdoor conditions, brings full capacity at -20°C and ensures constant capacity down to -15°C. The unit is ready to work down to -28°C.



Aquarea Smart Cloud

Full control of your system via smartphone when connected with the Aquarea Smart Cloud

It enables the monitoring, evaluation and optimisation of in-house and water temperatures or energy consumption anywhere anytime. Another plus: remote service maintenance by your service provider to detect potential failures or to fix potential issues remotely, reducing response time and disruption to a minimum.







Aquarea All in One H Generation T-CAP Bi-bloc Single Phase. Heating and Cooling

Aquarea All in One H Gener	ation T-CAP	Single Phase (Power to indoor)					
Kit			KIT-AXC9HE5	KIT-AXC12HE5			
Heating capacity at +7°C (he	eating water at 35°C)	kW	9,00	12,00			
COP at +7°C (heating water	at 35°C)	w/w	4,84	4,74			
Heating capacity at +2°C (he	eating water at 35°C)	kW	9,00	12,00			
COP at +2°C (heating water	at 35°C)	w/w	3,59	3,44			
Heating capacity at -7°C (he	ating water at 35°C)	kW	9,00	12,00			
COP at -7°C (heating water	at 35°C)	W/W	2,85	2,72			
Cooling capacity at 35°C (co	oling water at 7/12°C)	kW	7,00	10,00			
EER at 35°C (cooling water	at 7/12°C)	W/W	3,17	2,81			
Energy Efficiency Class at 3	5°C1 / at 55°C1 / at 55°C	for DHW ²	A++ / A++ / A	A++ / A++ / A			
System label 35°C / 55°C³		A+++ / A++	A+++ / A++				
Indoor unit		WH-ADC1216H6E5	WH-ADC1216H6E5				
Sound pressure	Heating / Cooling	dB(A)	33 / 33	33 / 33			
Dimensions* / Net Weight*	ensions* / Net Weight* H x W x D		1.800 x 598 x 717 / 124	1.800 x 598 x 717 / 1			
Heating water flow (∆T=5 K.	35°C)	l/min	25,8	34,4			
Capacity of integrated elect	ric heater	kW	6	6			
Water volume		L	185	185			
Maximum water temperatu	re	°C	65	65			
Material inside tank			Stainless steel	Stainless steel			
Outdoor Unit		WH-UX09HE5	WH-UX12HE5				
Sound pressure	Heating / Cooling	dB(A)	51 / 49	52 / 50			
Sound power level	Heating / Cooling	dB	68 / 67	69 / 68			
Dimensions / Weight	mensions / Weight H x W x D		1.340 x 900 x 320 / 101	1.340 x 900 x 320 / 10			
Refrigerant (R410A)		kg / TCO ₂ Eq.	2,85 / 5,951	2,85 / 5,951			
Operation range	Outdoor ambient	°C	-28 ~ +35	-28 ~ +35			
Water outlet	Heating / Cooling	°C	25 ~ 60 / 5 ~ 20	25 ~ 60 / 5 ~ 20			





WH-UX09HF5 WH-UX12HE5

COP classification is at 230V only in accordance with EU directive 2003/32/EC. Sound pressure measured at 1m from the outdoor unit and at 1,5m height. Heating sound pressure measured at +7°C (heating water at 55°C). Performance in agreement with EN14511. Insulated tested under EN12897. 1) Scale from G to A++. 2) Scale from G to A. 3) System label with controller, scale from D to A+++. * Tentative data.

🔆 GOOD DESIGN AWARD 2017

GOOD DESIGN AWARD 2017: Indoor units All in One and Bi-bloc H Generation awarded the prestigious Good Design Award 2017.

A++ () ErP 55°C		A A DHW 55°C		A CLASS WATER PUMP AUTO SPEED	-20°C full capacity t-cap	WATER AT 60°C FLOW TEMPERATURE	Check	-28°C	UNITER FILTER	CHECK VALVE	₹∰≋	BOILER CONNECTION	ADVANCED CONTROL		BMS CONNECTIVITY
Better Efficienc & Value, For medium temperature applications. Aquarea systems meets ErP regulation as A++.	temperature applications. Aquarea systems meets	& Value. For low temperature applications. Aquarea systems meets ErP regulation as A.	system provides energy savings of up to 30% compared to non Inverter models. Both	class water pump. H Generation with auto speed, and	can perform full nominal capacity even at temperaturas as	traditional high- temperature radiators, the Aquarea HT solution is the most	DHW. With Aquarea you can also heat your domestic hot water at a very low cost with the optional hot water cylinder.	mode. The Heat Pumps work in Heat Pump mode	Water filter (easy access & fast clip technology) for H Generation.	Check valve built in.	Water Flow Sensor included on H Generation.	Renovation. Our Aquarea Heat Pumps can be connected to an existing or new boiler for optimum comfort even at very low outdoor temperatures.	New remote controller with full dotted 3.5" wide back light screen. Menu with 10 available languages easy to use for installer and user. Included on H Generation.	Internet Control is a next generation system providing a user-friendly remote controller of air conditioning or Heat Pump units from everywhere, using a simple Android or iOS smartphone, tablet or PC via internet.	integrated into the indoor unit and provides easy connection to, and control

SG Ready: Thanks to Aquarea HPM, Aquarea range (Bi-bloc and Mono-bloc) is holding the SG Ready Label (Smart Grid Ready Label), given by Bundesverband Wärmepumpe (German Heat Pump Association). This Label shows the real capacity of Aquare to be connected in an intelligent grid control. MCS Certificate number: MCS HP0086.*



Panasonic

Due to be agoing immontion of our protect. He specifications of this catalogue are aid barring typegaptic errors, and may be subject to immor modifications by the manufacturer whould prior maning in order to impose the product. The late of partial reproduction of this catalogue is prohibited without the serves activation of Parasani Barketing Europe Bark.

To find out how Panasonic cares for you, log on to: www.aircon.panasonic.co.uk

Heating & Cooling Solutions Panasonic Appliances Air Conditioning Europe (PAPAEU) Panasonic UK, a branch of Panasonic Marketing Europe GmbH Maxis 2, Western Road, Bracknell, Berkshire, RG12 1RT

heating & cooling solutions