





ELECTRICAL SCHEMES

Wall Mounted Kits 1x1

Indoor unit



Outdoor unit




Attention: Wall Mounted Etherea have different connection terminals



Single Phase
Power Source
230V / 50Hz



Infrared remote controller
(included in the delivery)

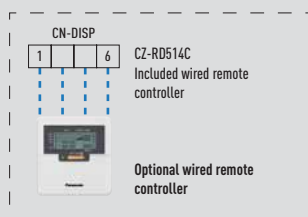

Power source to indoor or outdoor depending on model, see table.

Wall Mounted Heatcharge VZ R32

Indoor unit	Power source	Recommended fuse	Connection indoor / outdoor	Outdoor unit
CS-VZ9SKE	230V (Outdoor)	16A	4 x 1,5mm ²	CU-VZ9SKE
CS-VZ12SKE	230V (Outdoor)	16A	4 x 1,5mm ²	CU-VZ12SKE

Wall Mounted Etherea Silver / Pure White Matt R32

Indoor unit	Power source	Recommended fuse	Connection indoor / outdoor	Outdoor unit
CS-XZ20VKEW / CS-Z20VKEW	230V (Indoor)	16A	4 x 1,5mm ²	CU-Z20VKE
CS-XZ25VKEW / CS-Z25VKEW	230V (Indoor)	16A	4 x 1,5mm ²	CU-Z25VKE
CS-XZ35VKEW / CS-Z35VKEW	230V (Indoor)	16A	4 x 1,5mm ²	CU-Z35VKE
— / CS-Z42VKEW	230V (Indoor)	16A	4 x 2,5mm ²	CU-Z42VKE
CS-XZ50VKEW / CS-Z50VKEW	230V (Indoor)	16A	4 x 2,5mm ²	CU-Z50VKE
— / CS-Z71VKEW	230V (Indoor)	20A	4 x 2,5mm ²	CU-Z71VKE

Wall Mounted TZ Compact Style R32

Indoor unit	Power source	Recommended fuse	Connection indoor / outdoor	Outdoor unit
CS-TZ20TKEW-1	230V (Outdoor)	16A	4 x 1,5mm ²	CU-TZ20TKE-1
CS-TZ25TKEW-1	230V (Outdoor)	16A	4 x 1,5mm ²	CU-TZ25TKE-1
CS-TZ35TKEW-1	230V (Outdoor)	16A	4 x 1,5mm ²	CU-TZ35TKE-1
CS-TZ42TKEW-1	230V (Outdoor)	16A	4 x 1,5mm ²	CU-TZ42TKE-1
CS-TZ50TKEW	230V (Outdoor)	16A	4 x 2,5mm ²	CU-TZ50TKE
CS-TZ60TKEW	230V (Outdoor)	20A	4 x 2,5mm ²	CU-TZ60TKE
CS-TZ71TKEW	230V (Outdoor)	20A	4 x 2,5mm ²	CU-TZ71TKE

Wall Mounted RZ Compact Style R32

Indoor unit	Power source	Recommended fuse	Connection indoor / outdoor	Outdoor unit
CS-RZ20VKEW	230V (Outdoor)	16A	4 x 1,5mm ²	CU-RZ20VKE
CS-RZ25VKEW	230V (Outdoor)	16A	4 x 1,5mm ²	CU-RZ25VKE
CS-RZ35VKEW	230V (Outdoor)	16A	4 x 1,5mm ²	CU-RZ35VKE
CS-RZ42VKEW	230V (Outdoor)	16A	4 x 1,5mm ²	CU-RZ42VKE
CS-RZ50VKEW	230V (Outdoor)	16A	4 x 2,5mm ²	CU-RZ50VKE
CS-RZ60VKEW	230V (Outdoor)	20A	4 x 2,5mm ²	CU-RZ60VKE
CS-RZ71VKEW	230V (Outdoor)	20A	4 x 2,5mm ²	CU-RZ71VKE

Wall Mounted FZ Type Standard R32

Indoor unit	Power source	Recommended fuse	Connection indoor / outdoor	Outdoor unit
CS-FZ25UKE	230V (Indoor)	16A	4 x 1,5mm ²	CU-FZ25UKE
CS-FZ35UKE	230V (Indoor)	16A	4 x 1,5mm ²	CU-FZ35UKE
CS-FZ50UKE	230V (Indoor)	16A	4 x 2,5mm ²	CU-FZ50UKE
CS-FZ60UKE	230V (Indoor)	—	—	CU-FZ60UKE

Wall Mounted UZ Type Standard R32

Indoor unit	Power source	Recommended fuse	Connection indoor / outdoor	Outdoor unit
CS-UZ25VKE	230V (Indoor)	16A	4 x 1,5mm ²	CU-UZ25VKE
CS-UZ35VKE	230V (Indoor)	16A	4 x 1,5mm ²	CU-UZ35VKE
CS-UZ50VKE	230V (Indoor)	16A	4 x 1,5mm ²	CU-UZ50VKE

Wall Mounted PZ Type Standard R32

Indoor unit	Power source	Recommended fuse	Connection indoor / outdoor	Outdoor unit
CS-PZ25VKE	230V (Indoor)	16A	4 x 1,5mm ²	CU-PZ25VKE
CS-PZ35VKE	230V (Indoor)	16A	4 x 1,5mm ²	CU-PZ35VKE
CS-PZ50VKE	230V (Indoor)	16A	4 x 1,5mm ²	CU-PZ50VKE

Wall Mounted DZ Type Standard R32

Indoor unit	Power source	Recommended fuse	Connection indoor / outdoor	Outdoor unit
CS-DZ25VKE	230V (Indoor)	16A	4 x 1,5mm ²	CU-DZ25VKE
CS-DZ35VKE	230V (Indoor)	16A	4 x 1,5mm ²	CU-DZ35VKE
CS-DZ50VKE	230V (Indoor)	16A	4 x 1,5mm ²	CU-DZ50VKE

Wall Mounted Etherea Silver / Matt Pearl White R410A

Indoor unit	Power source	Recommended fuse	Connection indoor / outdoor	Outdoor unit
CS-XE7SKEW / CS-E7SKEW-M	230V (Indoor)	16A	4 x 1,5mm ²	CU-E7SKE
CS-XE9SKEW / CS-E9SKEW-M	230V (Indoor)	16A	4 x 1,5mm ²	CU-E9SKE
CS-XE12SKEW / CS-E12SKEW-M	230V (Indoor)	16A	4 x 1,5mm ²	CU-E12SKE
— / CS-E15SKEW-M	230V (Indoor)	16A	4 x 1,5mm ²	CU-E15SKE
CS-XE18SKEW / CS-E18SKEW-M	230V (Indoor)	16A	4 x 2,5mm ²	CU-E18SKE

Wall Mounted TE Compact Style R410A

Indoor unit	Power source	Recommended fuse	Connection indoor / outdoor	Outdoor unit
CS-TE20TKEW	230V (Outdoor)	16A	4 x 1,5mm ²	CU-TE20TKE
CS-TE25TKEW	230V (Outdoor)	16A	4 x 1,5mm ²	CU-TE25TKE
CS-TE35TKEW	230V (Outdoor)	16A	4 x 1,5mm ²	CU-TE35TKE
CS-TE42TKEW	230V (Outdoor)	16A	4 x 1,5mm ²	CU-TE42TKE
CS-TE50TKEW	230V (Outdoor)	16A	4 x 1,5mm ²	CU-TE50TKE
CS-TE60TKEW	230V (Outdoor)	16A	4 x 1,5mm ²	CU-TE60TKE

Wall Mounted FE Type Standard R410A

Indoor unit	Power source	Recommended fuse	Connection indoor / outdoor	Outdoor unit
CS-FE25UKE	230V (Indoor)	16A	4 x 1,5mm ²	CU-FE25UKE
CS-FE35UKE	230V (Indoor)	16A	4 x 1,5mm ²	CU-FE35UKE
CS-FE50UKE	230V (Indoor)	16A	4 x 1,5mm ²	CU-FE50UKE


Wall Mounted BE Type Standard R410A

Indoor unit	Power source	Recommended fuse	Connection indoor / outdoor	Outdoor unit
CS-BE25TKE-1	230V (Indoor)	16A	4 x 1,5mm ²	CU-BE25TKE-1
CS-BE35TKE-1	230V (Indoor)	16A	4 x 1,5mm ²	CU-BE35TKE-1
CS-BE50TKE	230V (Indoor)	16A	4 x 1,5mm ²	CU-BE50TKE

Wall Mounted DE Type Standard R410A

Indoor unit	Power source	Recommended fuse	Connection indoor / outdoor	Outdoor unit
CS-DE25TKE-1	230V (Outdoor)	16A	4 x 1,5mm ²	CU-DE25TKE-1
CS-DE35TKE-1	230V (Outdoor)	16A	4 x 1,5mm ²	CU-DE35TKE-1
CS-DE50TKE	230V (Outdoor)	16A	4 x 1,5mm ²	CU-DE50TKE

Wall Mounted Professional Kits 1x1

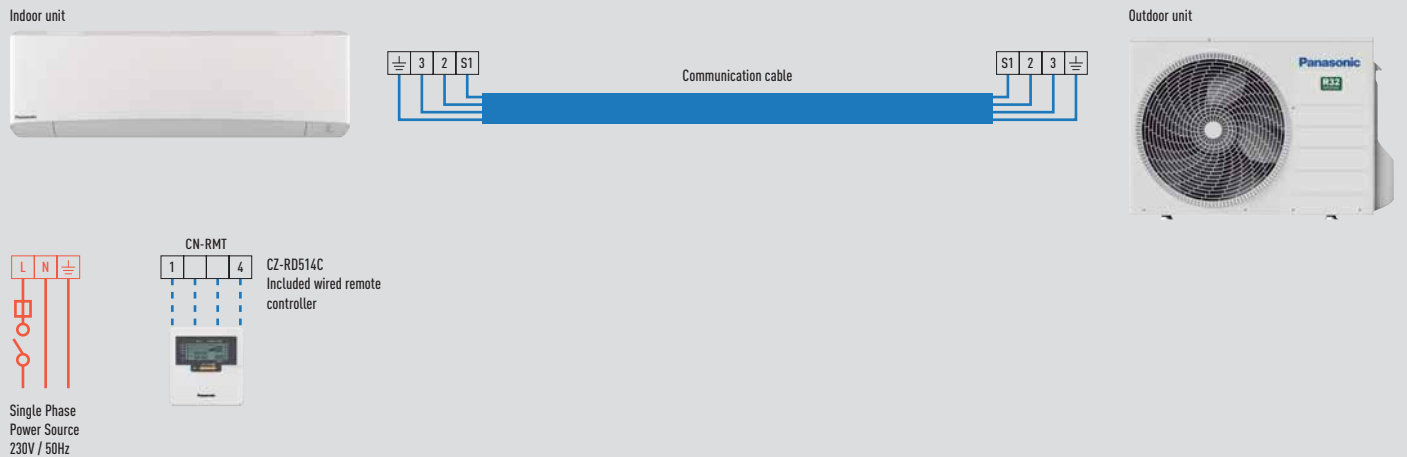


Wall Mounted Professional -20°C R32

Indoor unit	Power source	Recommended fuse	Connection indoor / outdoor	Outdoor unit
CS-Z25TKEA	230V (Indoor)	16A	4 x 1,5mm ²	CU-Z25TKEA
CS-Z35TKEA	230V (Indoor)	16A	4 x 1,5mm ²	CU-Z35TKEA
CS-Z42TKEA	230V (Indoor)	16A	4 x 1,5mm ²	CU-Z42TKEA
CS-Z50TKEA	230V (Indoor)	16A	4 x 2,5mm ²	CU-Z50TKEA
CS-Z71TKEA	230V (Indoor)	20A	4 x 2,5mm ²	CU-Z71TKEA

Wall Mounted Professional -20°C R410A

Indoor unit	Power source	Recommended fuse	Connection indoor / outdoor	Outdoor unit
CS-E9PKEA	230V (Indoor)	16A	4 x 1,5mm ²	CU-E9PKEA
CS-E12PKEA	230V (Indoor)	16A	4 x 1,5mm ²	CU-E12PKEA
CS-E15PKEA	230V (Indoor)	16A	4 x 1,5mm ²	CU-E15PKEA
CS-E18PKEA	230V (Indoor)	16A	4 x 2,5mm ²	CU-E18PKEA

Floor Console Kits 1x1

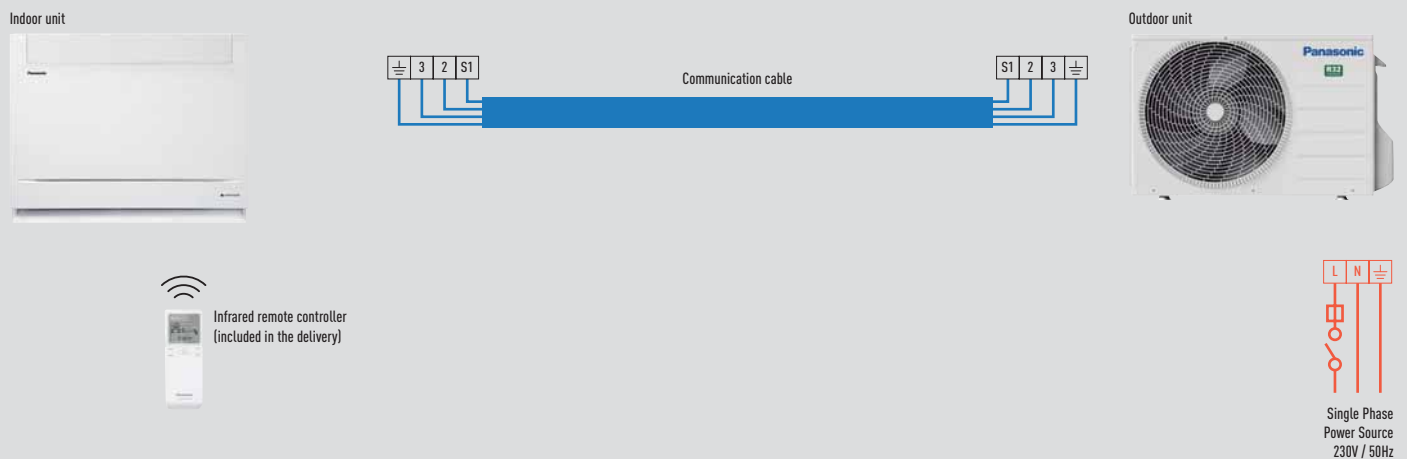

Floor Console Type R32



Indoor unit	Power source	Recommended fuse	Connection indoor / outdoor	Outdoor unit
CS-Z25UFEAW	230V (Outdoor)	16A	3 x 1,5mm ²	CU-Z25UBEA
CS-Z35UFEAW	230V (Outdoor)	16A	3 x 1,5mm ²	CU-Z35UBEA
CS-Z50UFEAW	230V (Outdoor)	16A	3 x 2,5mm ²	CU-Z50UBEA

Floor Console Type R410A

Indoor unit	Power source	Recommended fuse	Connection indoor / outdoor	Outdoor unit
CS-E9GFEW	230V (Outdoor)	16A	3 x 1,5mm ²	CU-E9PFE
CS-E12GFEW	230V (Outdoor)	16A	3 x 1,5mm ²	CU-E12PFE
CS-E18GFEW	230V (Outdoor)	16A	3 x 2,5mm ²	CU-E18PFE

4 Way 60x60 Cassette Kits 1x1

Indoor unit

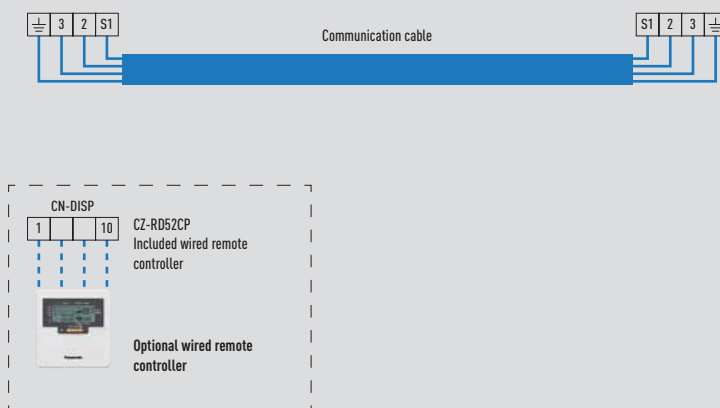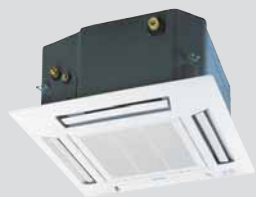

Outdoor unit



Single Phase
Power Source
230V / 50Hz

4 Way 60x60 Cassette R32


Indoor unit	Power source	Recommended fuse	Connection indoor / outdoor	Outdoor unit
CS-Z25UB4EAW	230V (Outdoor)	16A	—	CU-Z25UBEA
CS-Z35UB4EAW	230V (Outdoor)	16A	—	CU-Z35UBEA
CS-Z50UB4EAW	230V (Outdoor)	16A	—	CU-Z50UBEA
CS-Z60UB4EAW	230V (Outdoor)	16A	—	CU-Z60UBEA

4 Way 60x60 Cassette R410A

Indoor unit	Power source	Recommended fuse	Connection indoor / outdoor	Outdoor unit
CS-E9PB4EA	230V (Outdoor)	16A	4 x 1,5 - 2,5	CU-E9PB4EA
CS-E12PB4EA	230V (Outdoor)	16A	4 x 1,5 - 2,5	CU-E12PB4EA
CS-E18RB4EAW	230V (Outdoor)	16A	4 x 1,5 - 2,5	CU-E18RBEA
CS-E21RB4EAW	230V (Outdoor)	16A	4 x 1,5 - 2,5	CU-E21RBEA

Low Static Pressure Hide Away Kits 1x1

Indoor unit



Outdoor unit



Single Phase
Power Source
230V / 50Hz


Low Static Pressure Hide Away R32

Indoor unit	Power source	Recommended fuse	Connection indoor / outdoor	Outdoor unit
CS-Z25UD3EAW	230V (Outdoor)	16A	4 x 1,5 - 2,5	CU-Z25UBEA
CS-Z35UD3EAW	230V (Outdoor)	16A	4 x 1,5 - 2,5	CU-Z35UBEA
CS-Z50UD3EAW	230V (Outdoor)	16A	4 x 1,5 - 2,5	CU-Z50UBEA
CS-Z60UD3EAW	230V (Outdoor)	—	—	CU-Z60UBEA

Low Static Pressure Hide Away R410A

Indoor unit	Power source	Recommended fuse	Connection indoor / outdoor	Outdoor unit
CS-E9PD3EA	230V (Outdoor)	16A	4 x 1,5 - 2,5	CU-E9PD3EA
CS-E12OD3EAW	230V (Outdoor)	16A	4 x 1,5 - 2,5	CU-E12OD3EA
CS-E18RD3EAW	230V (Outdoor)	16A	4 x 1,5 - 2,5	CU-E18RBEA

Free Multi System 2 Rooms

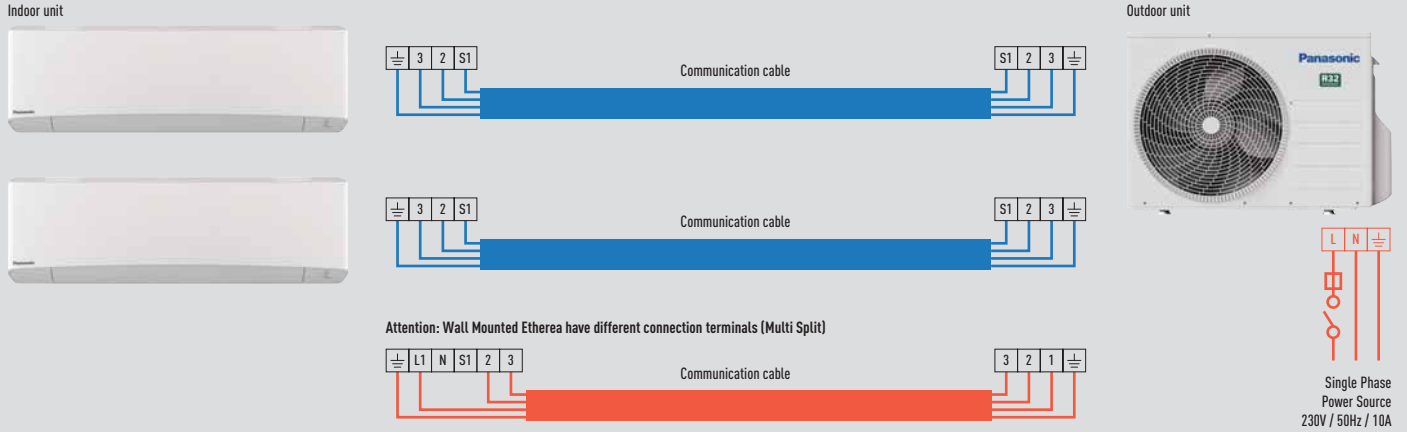


Free Multi System R32

Outdoor unit	Power source	Recommended fuse	Connection indoor / outdoor
CU-2Z35TBE	230V	16A	2,5mm ²
CU-2Z41TBE	230V	16A	2,5mm ²
CU-2Z50TBE	230V	16A	2,5mm ²
CU-2TZ41TBE	230V	—	—
CU-2TZ50TBE	230V	—	—

Free Multi System R410A

Outdoor unit	Power source	Recommended fuse	Connection indoor / outdoor
CU-2E12SBE	230V	16A	2,5mm ²
CU-2E15SBE	230V	16A	2,5mm ²
CU-2E18SBE	230V	16A	2,5mm ²
CU-2RE15SBE	230V	—	—
CU-2RE18SBE	230V	—	—

Free Multi System 3 Rooms

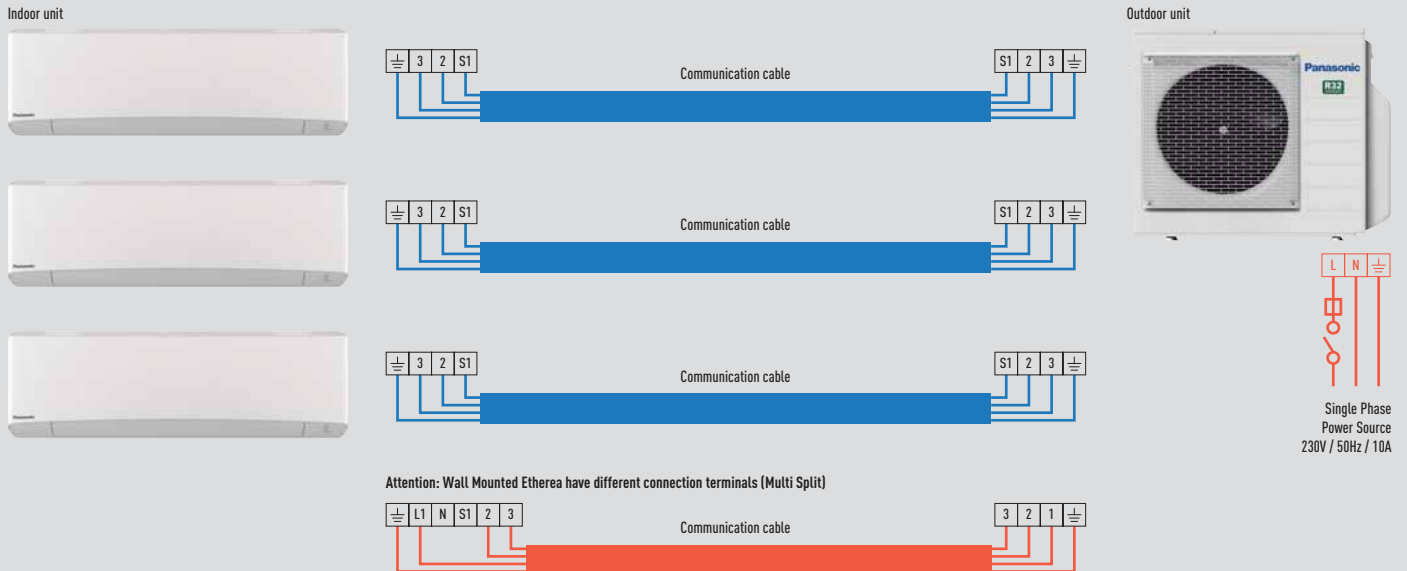

Free Multi System R32


Outdoor unit	Power source	Recommended fuse	Connection indoor / outdoor
CU-3Z52TBE	230V	16A	2,5mm ²
CU-3Z68TBE	230V	16A	2,5mm ²
CU-3TZ52TBE	230V	—	—

Free Multi System R410A


Outdoor unit	Power source	Recommended fuse	Connection indoor / outdoor
CU-3E18PBE	230V	16A	2,5mm ²
CU-3E23SBE	230V	16A	2,5mm ²
CU-3RE18SBE	230V	—	—

Free Multi System 4 Rooms

Indoor unit

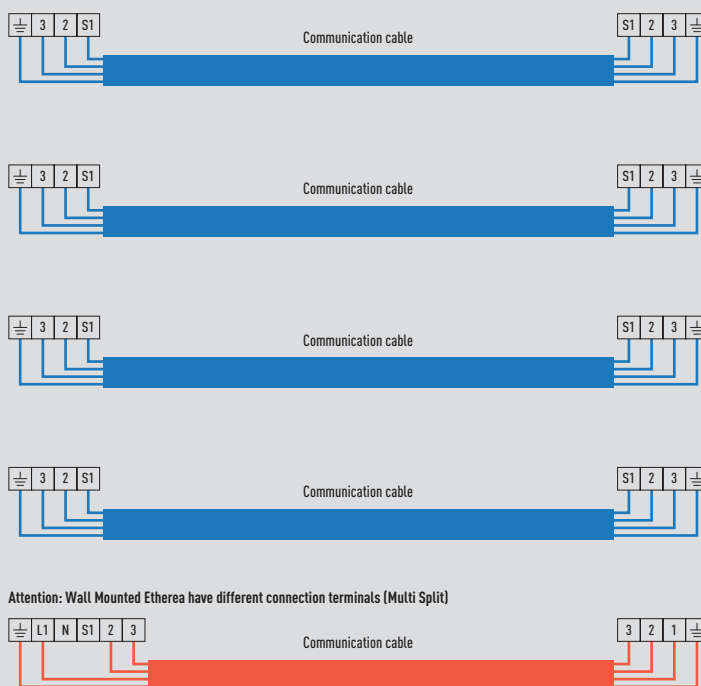

Outdoor unit

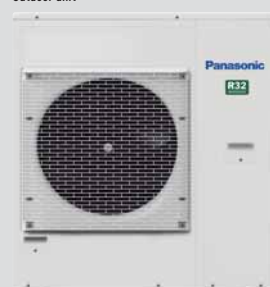

Single Phase Power Source
230V / 50Hz / 10A

Free Multi System R32


Outdoor unit	Power source	Recommended fuse	Connection indoor / outdoor
CU-4Z68TBE	230V	20A	2,5mm ²
CU-4Z80TBE	230V	20A	2,5mm ²

Free Multi System R410A


Outdoor unit	Power source	Recommended fuse	Connection indoor / outdoor
CU-4EZ3PBE	230V	20A	2,5mm ²
CU-4E27PBE	230V	20A	2,5mm ²

Free Multi System 5 Rooms

Indoor unit

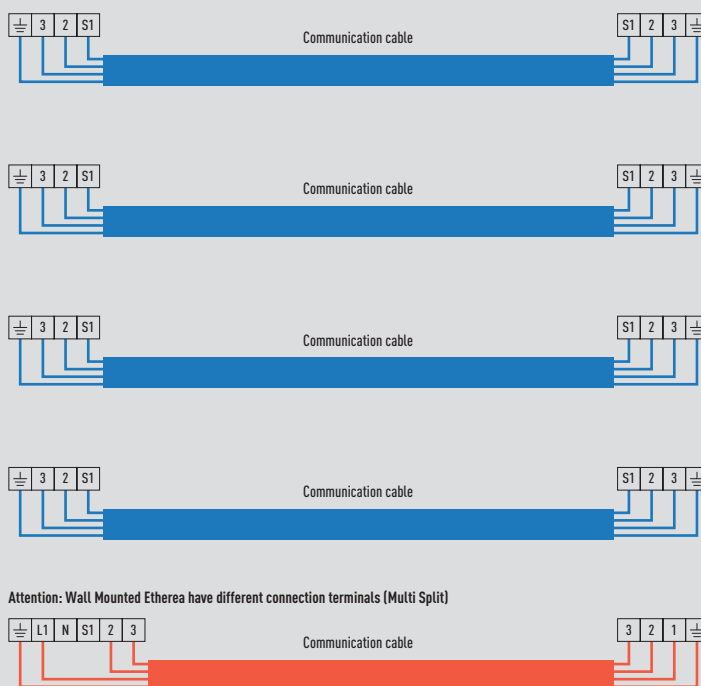

Outdoor unit

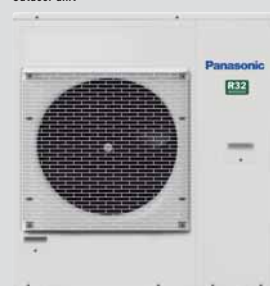

Single Phase Power Source
230V / 50Hz / 10A


Free Multi System R32

Outdoor unit	Power source	Recommended fuse	Connection indoor / outdoor
CU-5Z90TBE	230V	25A	3,5mm ²

Free Multi System R410A

Outdoor unit	Power source	Recommended fuse	Connection indoor / outdoor
CU-5E34PBE	230V	25A	3,5mm ²

PACi Wall Mounted Kits 1x1

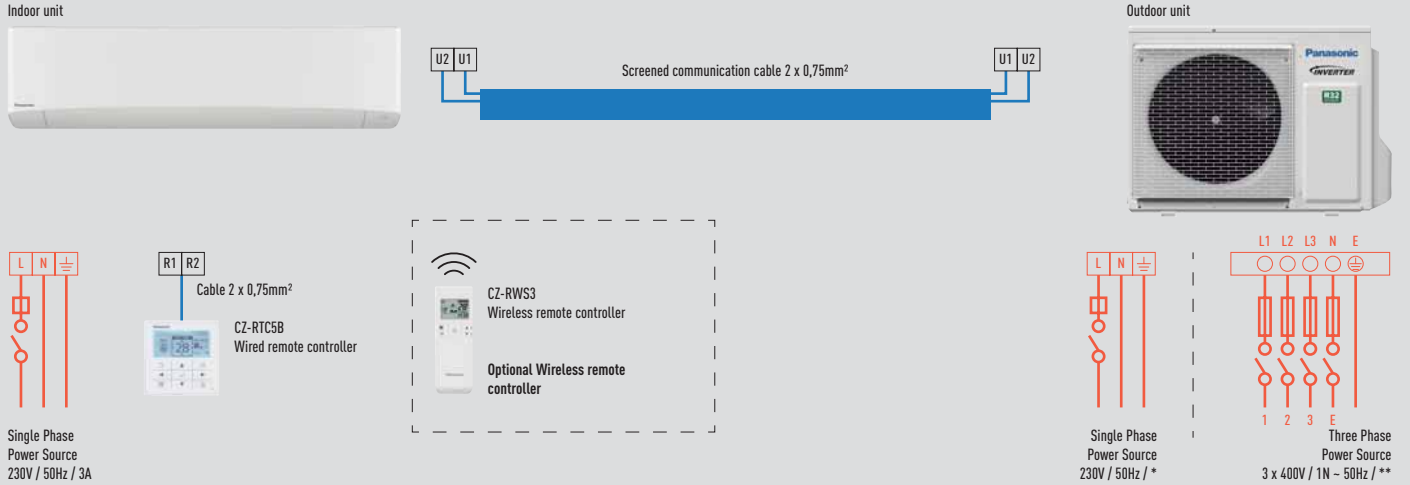


Single Phase

Indoor unit	Power source	R32			R410A		
		Outdoor unit	Power source	Circuit breaker*	Outdoor unit	Power source	Circuit breaker*
S-36PK2E5B	220 / 230 / 240V	U-36PZH2E5	220 / 230 / 240V	16A	U-36PE2E5A	16A	
S-50PK2E5B		U-50PZH2E5		16A	U-50PE2E5A	16A	
S-60PK2E5B		U-60PZH2E5		20A	U-60PE2E5A	20A	
S-71PK2E5B		U-71PZH2E5		20A	U-71PE1E5A	20A	
S-100PK2E5B		U-100PZH2E5		30A	U-100PE1E5A	30A	
S-60PK2E5B		U-60PZ2E5		20A	U-60PEY2E5	20A	
S-71PK2E5B		U-71PZ2E5		20A	U-71PEY2E5	20A	
S-100PK2E5B		U-100PZ2E5		30A	U-100PEY1E5	30A	

Three Phase

Indoor unit	Power source	R32			R410A		
		Outdoor unit	Power source	Circuit breaker**	Outdoor unit	Power source	Circuit breaker**
S-71PK2E5B	220 / 230 / 240V	U-71PZH2E8	380 / 400 / 415V	10A	U-71PE1E8A	10A	
S-100PK2E5B		U-100PZH2E8		10A	U-100PE1E8A	10A	
S-100PK2E5B		U-100PZ2E8		10A	U-100PEY1E8	10A	

PACi 4 Way 60x60 Cassette Kits 1x1

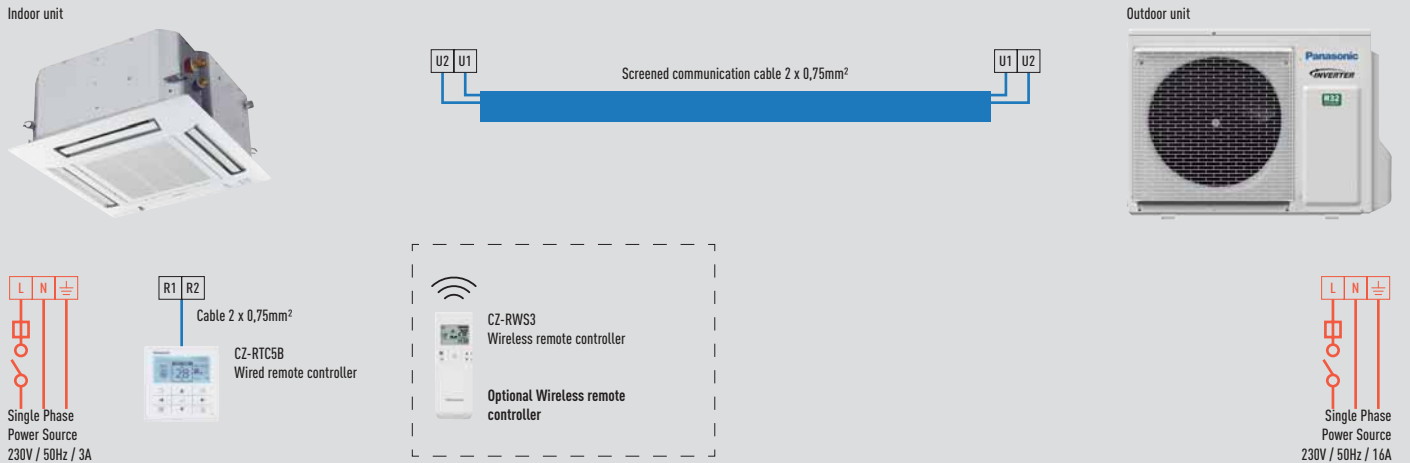

Single Phase





Indoor unit	Power source	R32			R410A		
		Outdoor unit	Power source	Circuit breaker	Outdoor unit	Power source	Circuit breaker
S-36PY2E5B	220 / 230 / 240V	U-36PZH2E5	220 / 230 / 240V	16A	U-36PE2E5A	16A	
S-50PY2E5B		U-50PZH2E5		16A	U-50PE2E5A	16A	

BIG PACi High Static Pressure Hide Away 20,00-25,00kW Kits 1x1

Indoor unit



Outdoor unit

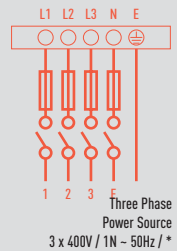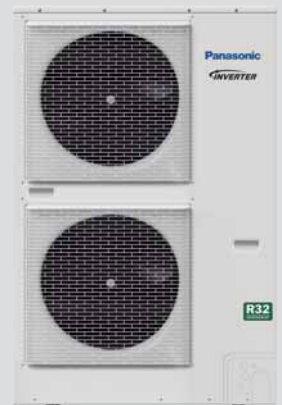

Three Phase



R32		R410A	
Indoor unit	Power source	Outdoor unit	Power source
S-200PE3E5B	220 / 230 / 240V	U-200PZH2E8	380 / 400 / 415V
S-250PE3E5B		U-250PZH2E8	
Indoor unit	Power source	Outdoor unit	Power source

PACi 4 Way 90x90 Cassette Kits 1x1

Indoor unit



Outdoor unit




Single Phase

R32		R410A	
Indoor unit	Power source	Outdoor unit	Power source
S-36PU2E5B	220 / 230 / 240V	U-36PZH2E5	220 / 230 / 240V
S-50PU2E5B		U-50PZH2E5	
S-60PU2E5B		U-60PZH2E5	
S-71PU2E5B		U-71PZH2E5	
S-100PU2E5B		U-100PZH2E5	
S-125PU2E5B		U-125PZH2E5	
S-140PU2E5B		U-140PZH2E5	
S-60PU2E5B		U-60PZ2E5	
S-71PU2E5B		U-71PZ2E5	
S-100PU2E5B		U-100PZ2E5	
S-125PU2E5B		U-125PZ2E5	
S-140PU2E5B		U-140PZ2E5	

Three Phase

R32		R410A	
Indoor unit	Power source	Outdoor unit	Power source
S-71PU2E5B	220 / 230 / 240V	U-71PZH2E8	380 / 400 / 415V
S-100PU2E5B		U-100PZH2E8	
S-125PU2E5B		U-125PZH2E8	
S-140PU2E5B		U-140PZH2E8	
S-100PU2E5B		U-100PZ2E8	
S-125PU2E5B		U-125PZ2E8	
S-140PU2E5B		U-140PZ2E8	

PACi Ceiling Kits 1x1

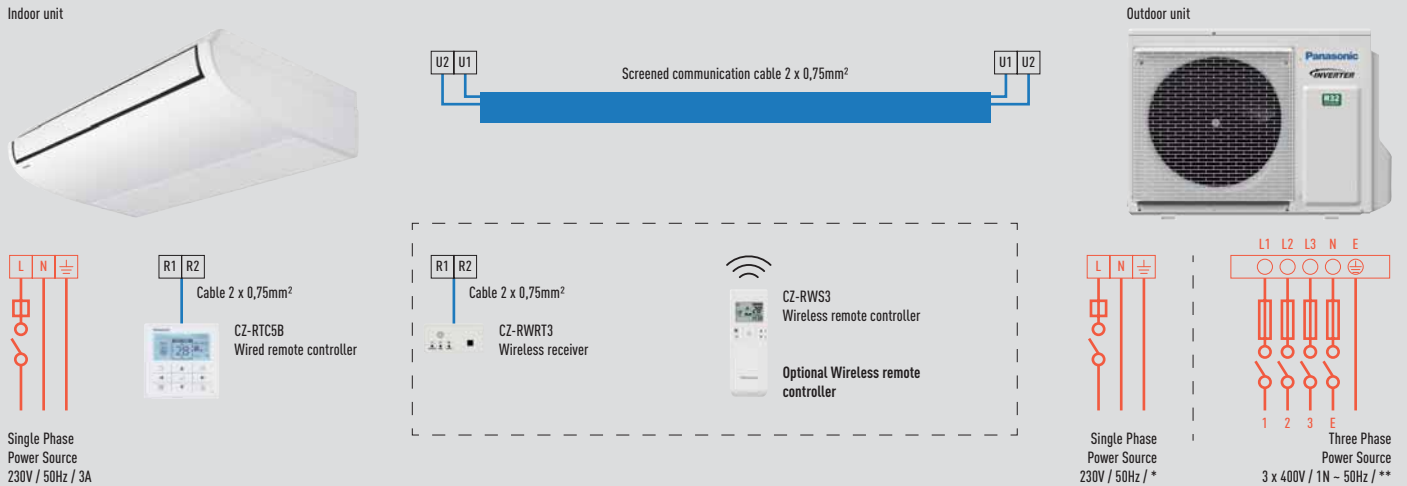


Single Phase

Indoor unit	Power source	R32			R410A		
		Outdoor unit	Power source	Circuit breaker*	Outdoor unit	Power source	Circuit breaker*
S-36PT2E5B	220 / 230 / 240V	U-36PZH2E5	220 / 230 / 240V	16A	U-36PE2E5A	16A	
S-50PT2E5B		U-50PZH2E5		16A	U-50PE2E5A	16A	
S-60PT2E5B		U-60PZH2E5		20A	U-60PE2E5A	20A	
S-71PT2E5B		U-71PZH2E5		20A	U-71PE1E5A	20A	
S-100PT2E5B		U-100PZH2E5		30A	U-100PE1E5A	30A	
S-125PT2E5B		U-125PZH2E5		30A	U-125PE1E5A	220 / 230 / 240V	30A
S-140PT2E5B		U-140PZH2E5		30A	U-140PE1E5A	40A	
S-60PT2E5B		U-60PZ2E5		20A	U-60PEY2E5	20A	
S-71PT2E5B		U-71PZ2E5		20A	U-71PEY2E5	20A	
S-100PT2E5B		U-100PZ2E5		30A	U-100PEY1E5	30A	
S-125PT2E5B		U-125PZ2E5		30A	U-125PEY1E5	30A	
S-140PT2E5B		U-140PZ2E5		40A			

Three Phase

Indoor unit	Power source	R32			R410A		
		Outdoor unit	Power source	Circuit breaker**	Outdoor unit	Power source	Circuit breaker**
S-71PT2E5B	220 / 230 / 240V	U-71PZH2E8	380 / 400 / 415V	10A	U-71PE1E8A	10A	
S-100PT2E5B		U-100PZH2E8		10A	U-100PE1E8A	10A	
S-125PT2E5B		U-125PZH2E8		16A	U-125PE1E8A	16A	
S-140PT2E5B		U-140PZH2E8		16A	U-140PE1E8A	380 / 400 / 415V	16A
S-100PT2E5B		U-100PZ2E8		10A	U-100PEY1E8	10A	
S-125PT2E5B		U-125PZ2E8		16A	U-125PEY1E8	16A	
S-140PT2E5B		U-140PZ2E8		16A	U-140PEY1E8	16A	

PACi Hide Away Kits 1x1

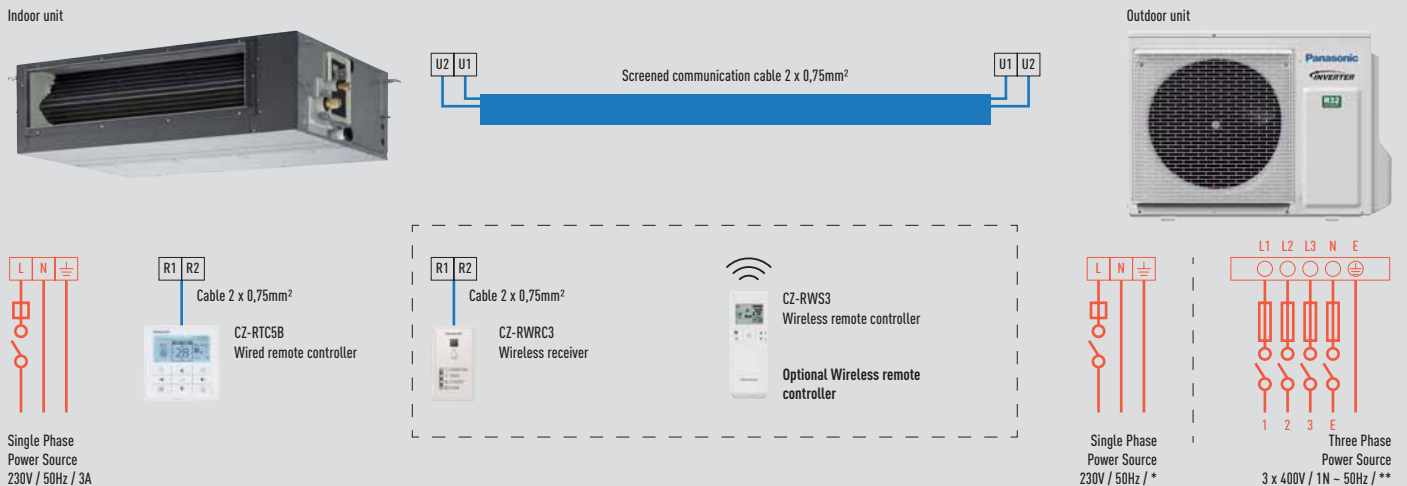


Single Phase

High Static indoor unit	Low Static indoor unit	Power source	R32			R410A		
			Outdoor unit	Power source	Circuit breaker*	Outdoor unit	Power source	Circuit breaker*
S-36PF1E5B	S-36PN1E5B	220 / 230 / 240V	U-36PZH2E5	220 / 230 / 240V	16A	U-36PE2E5A	16A	
S-50PF1E5B	S-50PN1E5B		U-50PZH2E5		16A	U-50PE2E5A	16A	
S-60PF1E5B	S-60PN1E5B		U-60PZH2E5		20A	U-60PE2E5A	20A	
S-71PF1E5B	S-71PN1E5B		U-71PZH2E5		20A	U-71PE1E5A	20A	
S-100PF1E5B	S-100PN1E5B		U-100PZH2E5		30A	U-100PE1E5A	30A	
S-125PF1E5B	S-125PN1E5B		U-125PZH2E5		30A	U-125PE1E5A	220 / 230 / 240V	30A
S-140PF1E5B	S-140PN1E5B		U-140PZH2E5		30A	U-140PE1E5A	40A	
S-60PF1E5B	S-60PN1E5B		U-60PZ2E5		20A	U-60PEY2E5	20A	
S-71PF1E5B	S-71PN1E5B		U-71PZ2E5		20A	U-71PEY2E5	20A	
S-100PF1E5B	S-100PN1E5B		U-100PZ2E5		30A	U-100PEY1E5	30A	
S-125PF1E5B	S-125PN1E5B		U-125PZ2E5		30A	U-125PEY1E5	30A	
S-140PF1E5B	S-140PN1E5B		U-140PZ2E5		40A			

Three Phase

High Static indoor unit	Low Static indoor unit	Power source	R32			R410A		
			Outdoor unit	Power source	Circuit breaker**	Outdoor unit	Power source	Circuit breaker**
S-71PF1E5B	S-71PN1E5B	220 / 230 / 240V	U-71PZH2E8	380 / 400 / 415V	10A	U-71PE1E8A	10A	
S-100PF1E5B	S-100PN1E5B		U-100PZH2E8		10A	U-100PE1E8A	10A	
S-125PF1E5B	S-125PN1E5B		U-125PZH2E8		16A	U-125PE1E8A	16A	
S-140PF1E5B	S-140PN1E5B		U-140PZH2E8		16A	U-140PE1E8A	380 / 400 / 415V	16A
S-100PF1E5B	S-100PN1E5B		U-100PZ2E8		10A	U-100PEY1E8	10A	
S-125PF1E5B	S-125PN1E5B		U-125PZ2E8		16A	U-125PEY1E8	16A	
S-140PF1E5B	S-140PN1E5B		U-140PZ2E8		16A	U-140PEY1E8	16A	

PACi Twin System

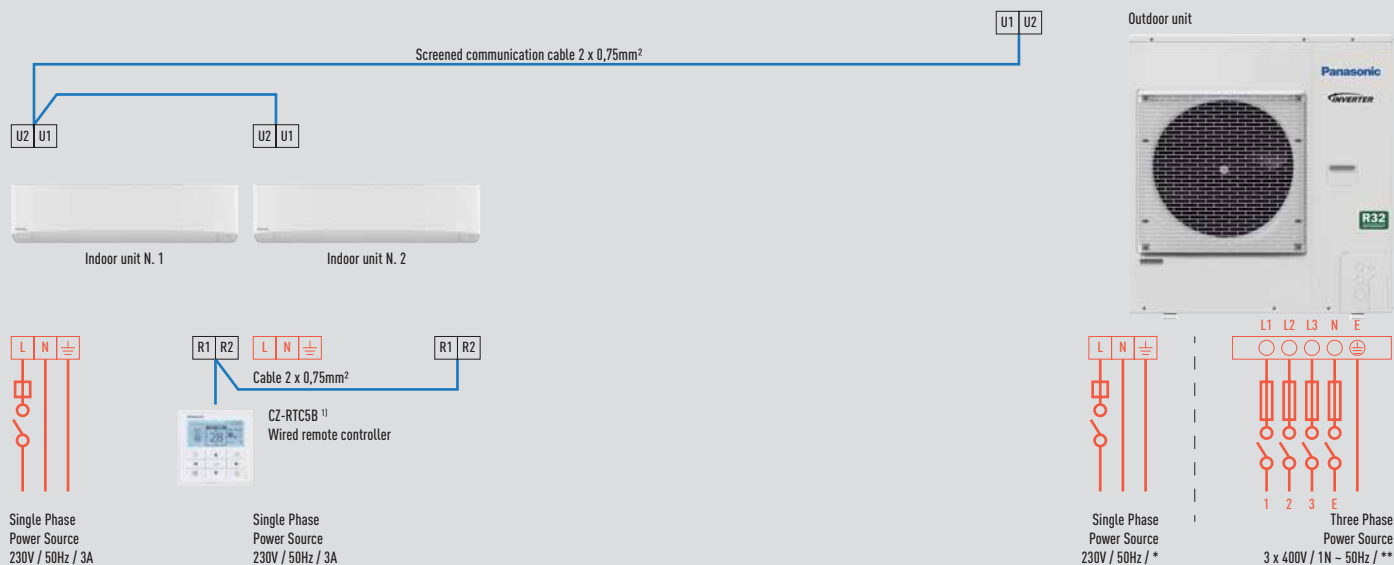

Single Phase


R32 Outdoor unit	Power source	Circuit breaker*	R410A Outdoor unit	Power source	Circuit breaker*
U-71PZH2E5	220 / 230 / 240V	20A	U-71PE1E5A	220 / 230 / 240V	20A
U-100PZH2E5		30A	U-100PE1E5A		30A
U-125PZH2E5		30A	U-125PE1E5A		30A
U-140PZH2E5		30A	U-140PE1E5A		40A
U-71PZ2E5		20A	U-100PE1E5		30A
U-100PZ2E5		30A	U-125PE1E5		30A
U-125PZ2E5		30A			
U-140PZ2E5		30A			

1) Optional wireless remote controller is also possible. Wireless receivers may be required depending on indoor units.

Three Phase

R32 Outdoor unit	Power source	Circuit breaker**	R410A Outdoor unit	Power source	Circuit breaker**
U-71PZH2E8	380 / 400 / 415V	10A	U-71PE1E8A	380 / 400 / 415V	10A
U-100PZH2E8		10A	U-100PE1E8A		10A
U-125PZH2E8		16A	U-125PE1E8A		16A
U-140PZH2E8		16A	U-140PE1E8A		16A
U-200PZH2E8		16A	U-200PE2E8A		16A
U-250PZH2E8		25A	U-250PE2E8A		25A
U-100PZ2E8		10A	U-100PE1E8		10A
U-125PZ2E8		16A	U-125PE1E8		16A
U-140PZ2E8		16A	U-140PE1E8		16A

PACi Triple System

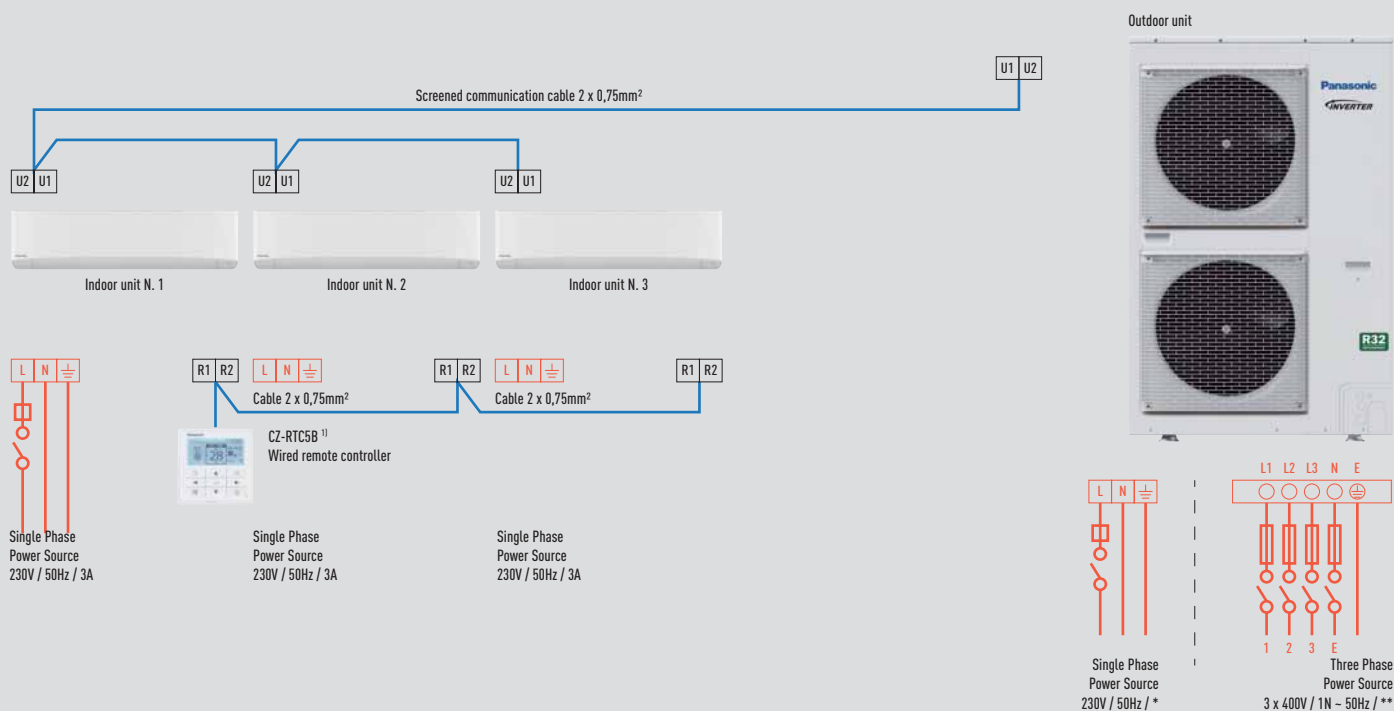

Single Phase


R32 Outdoor unit	Power source	Circuit breaker*	R410A Outdoor unit	Power source	Circuit breaker*
U-100PZH2E5	220 / 230 / 240V	30A	U-100PE1E5A	220 / 230 / 240V	30A
U-125PZH2E5		30A	U-125PE1E5A		30A
U-140PZH2E5		30A	U-140PE1E5A		40A

1) Optional wireless remote controller is also possible. Wireless receivers may be required depending on indoor units.

Three Phase

R32 Outdoor unit	Power source	Circuit breaker**	R410A Outdoor unit	Power source	Circuit breaker**
U-100PZH2E8	380 / 400 / 415V	10A	U-100PE1E8A	380 / 400 / 415V	10A
U-125PZH2E8		16A	U-125PE1E8A		16A
U-140PZH2E8		16A	U-140PE1E8A		16A
U-200PZH2E8	16A		U-200PE2E8A	16A	

PACi Double-Twin System

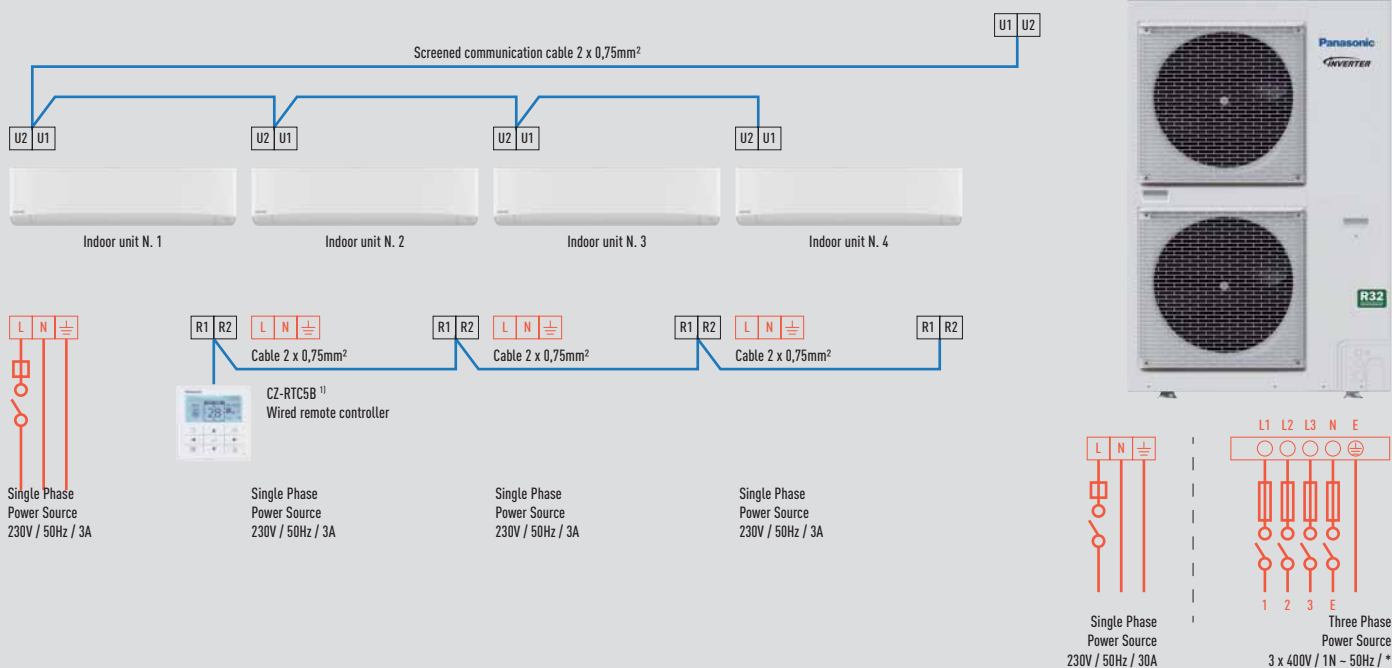

Single Phase


R32			R410A		
Outdoor unit	Power source	Circuit breaker	Outdoor unit	Power source	Circuit breaker
U-125PZH2E5	220 / 230 / 240V	30A	U-125PE1E5A	220 / 230 / 240V	30A

1) Optional wireless remote controller is also possible. Wireless receivers may be required depending on indoor units.

Three Phase

R32			R410A		
Outdoor unit	Power source	Circuit breaker*	Outdoor unit	Power source	Circuit breaker*
U-125PZH2E8		16A	U-125PE1E8A		16A
U-200PZH2E8	380 / 400 / 415V	16A	U-200PE2E8A	380 / 400 / 415V	16A
U-250PZH2E8		25A	U-250PE2E8A		25A

Mini ECOi Series

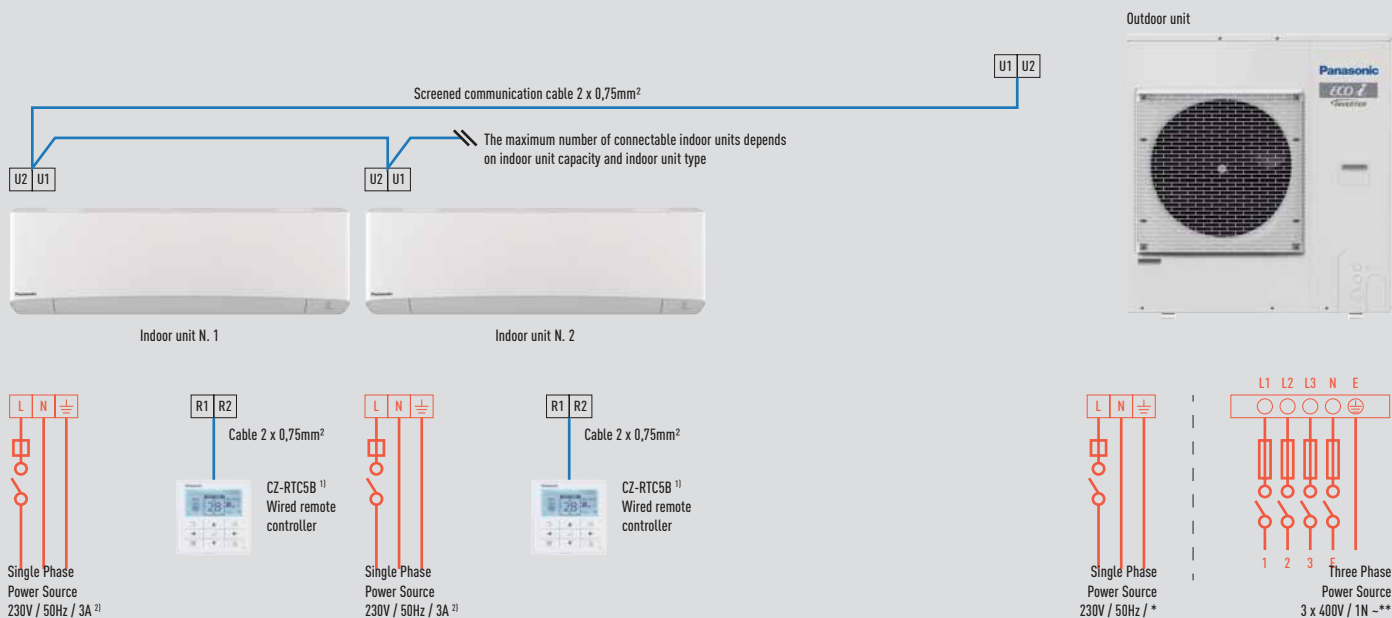

Single Phase


Outdoor unit	Power source	Circuit breaker*
U-4LE2E5		20A
U-5LE2E5	220 / 230 / 240V	25A
U-6LE2E5		30A

1) Wireless remote controller is also possible. Wireless receivers may be required depending on indoor units.
2) 10A for single indoor connection to S-224ME2E5 / S-280ME2E5, in combination with U-8LE1E8 / U-10LE1E8.

Three Phase

Outdoor unit	Power source	Circuit breaker**
U-4LE2E8		10A
U-5LE2E8		16A
U-6LE2E8	380 / 400 / 415V	16A
U-8LE1E8		16A
U-10LE1E8		20A

ECOi EX and ECO G Series

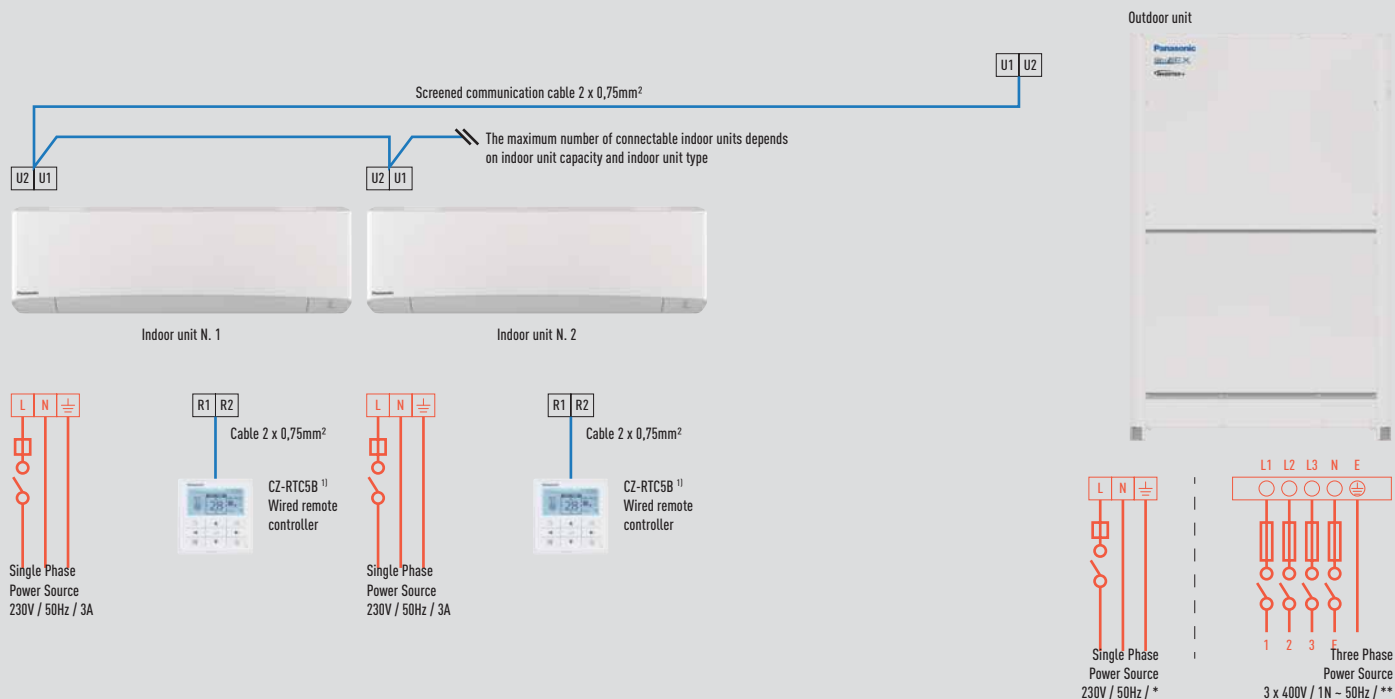

ECOi EX Series


2-Pipe			3-Pipe		
Outdoor unit	Power source	Circuit breaker**	Outdoor unit	Power source	Circuit breaker**
U-8ME2E8		16A	U-8MF3E8		16A
U-10ME2E8		16A	U-10MF3E8		20A
U-12ME2E8		20A	U-12MF3E8	380 / 400 / 415V	25A
U-14ME2E8	380 / 400 / 415V	25A	U-14MF3E8		40A
U-16ME2E8		30A	U-16MF3E8		30A
U-18ME2E8		40A			
U-20ME2E8		40A			

ECO G Series

2-Pipe			3-Pipe		
Outdoor unit	Power source	Circuit breaker*	Outdoor unit	Power source	Circuit breaker*
U-16GE3E5		16A	U-16GF3E5		16A
U-20GE3E5	220 / 230 / 240V	16A	U-20GF3E5	220 / 230 / 240V	16A
U-25GE3E5		16A	U-25GF3E5		16A
U-30GE3E5		16A			

1) Wireless remote controller is also possible. Wireless receivers may be required depending on indoor units.

Hybrid GHP/EHP

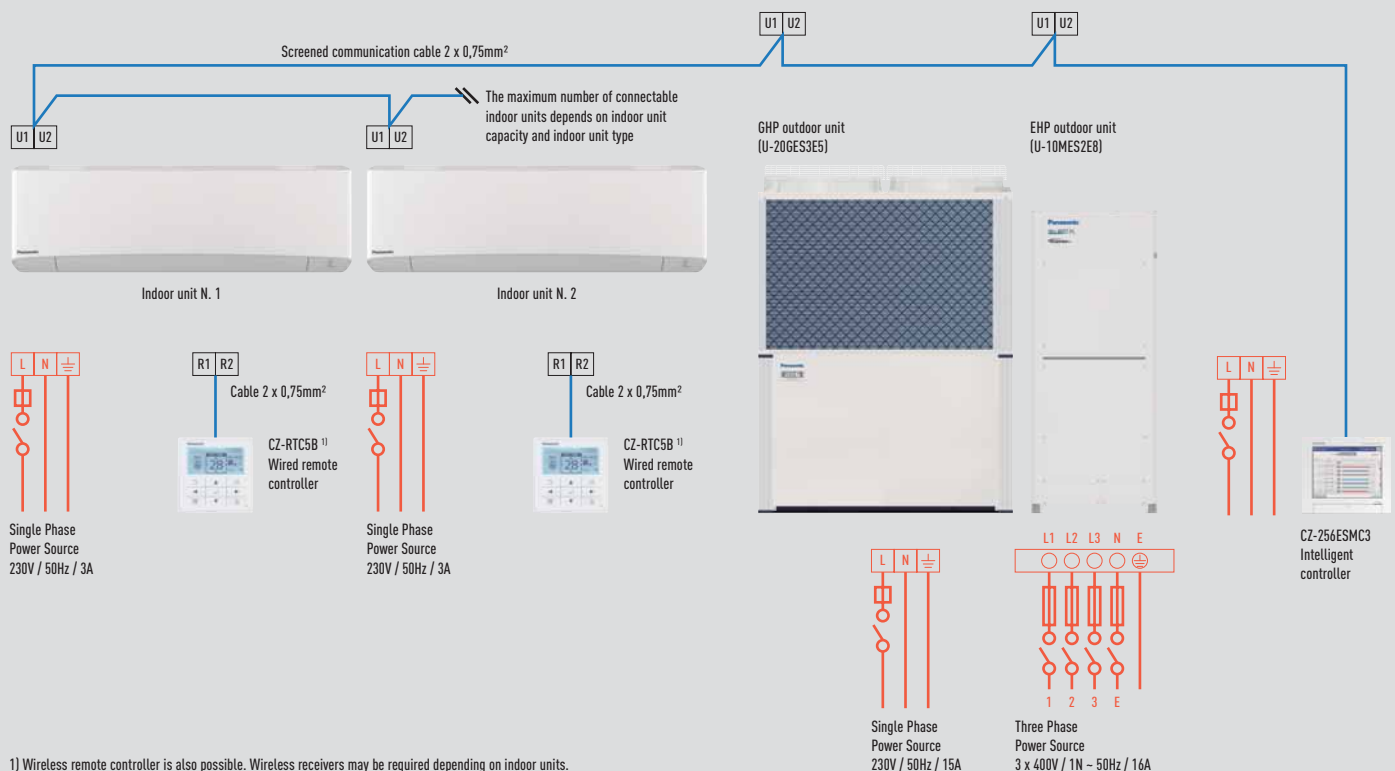

1) Wireless remote controller is also possible. Wireless receivers may be required depending on indoor units.